



# 4-Channel, 12-Bit, 40MSPS Analog-to-Digital Converter with Serial LVDS Interface

#### **FEATURES**

- Maximum Sample Rate: 40MSPS
- 12-Bit Resolution
- No Missing Codes
- Total Power Dissipation: Internal Reference: 584mW External Reference: 518mW
- CMOS Technology
- Simultaneous Sample-and-Hold
- 70.5dBFS SNR at 10MHz IF
- 3.3V Digital/Analog Supply
- Serialized LVDS Outputs
- Integrated Frame and Bit Patterns
- Option to Double LVDS Clock Output Currents
- Four Current Modes for LVDS
- Pin- and Format-Compatible Family
- HTQFP-64 PowerPAD™ Package

#### **APPLICATIONS**

- Portable Ultrasound Systems
- Tape Drives
- Test Equipment
- Optical Networking
- Communications

#### DESCRIPTION

The ADS5240 is a high-performance, 40MSPS, 4-channel analog-to-digital converter (ADC). Internal references are provided, simplifying system design requirements. Low power consumption allows for the highest of system integration densities. Serial LVDS (low-voltage differential signaling) outputs reduce the number of interface lines and package size.


#### **RELATED PRODUCTS**

MODEL	RESOLUTION (BITS)	SAMPLE RATE (MSPS)	CHANNELS	
ADS5242	12	65	4	

An integrated phase lock loop (PLL) multiplies the incoming ADC sampling clock by a factor of 12. This high-frequency LVDS clock is used in the data serialization and transmission process. The word output of each internal ADC is serialized and transmitted either MSB or LSB first. In addition to the four data outputs, a bit clock and a word clock are also transmitted. The bit clock is at 6x the speed of the sampling clock, whereas the word clock is at the same speed of the sampling clock.

The ADS5240 provides internal references, or can optionally be driven with external references. Best performance can be achieved through the internal reference mode.

The device is available in an HTQFP-64 PowerPAD package and is specified over a -40°C to +85°C operating range.

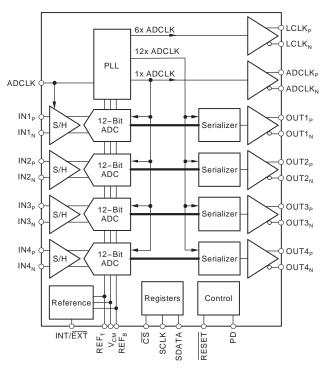



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.





This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### ORDERING INFORMATION<sup>(1)</sup>

PRODUCT	PACKAGE-LEAD <sup>(2)</sup>	PACKAGE DESIGNATOR	SPECIFIED TEMPERATURE RANGE	PACKAGE MARKING	ORDERING NUMBER	TRANSPORT MEDIA, QUANTITY
ADS5240	HTQFP-64	PAP	–40°C to +85°C	ADS5240IPAP	ADS5240IPAP	Tray, 160
AD35240	HIQFF-04	FAF	-40 C to +65 C	AD35240IFAF	ADS5240IPAPT	Tape and Reel, 1000

- (1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- (2) Thermal pad size: 5.29mm × 5.29mm (min), 6.50mm × 6.50mm (max).

#### **ABSOLUTE MAXIMUM RATINGS**(1)

Supply Voltage Range, AVDD	-0.3V to +3.8V
Supply Voltage Range, LVDD	-0.3V to +3.8V
Voltage Between AVSS and LVSS	-0.3V to +0.3V
Voltage Between AVDD and LVDD	-0.3V to +0.3V
Voltage Applied to External REF Pins	-0.3V to +2.4V
All LVDS Data and Clock Outputs	-0.3V to +2.4V
Analog Input Pins (2)	-0.3V to min. [3.3V, (AVDD + 0.3V)]
Digital Input Pins, Set 1 (pins 54, 61-63)	-0.3V to min. [3.9V, (AVDD + 0.3V)] <sup>(3)</sup>
Digital Input Pins, Set 2 (pins 12, 37)	-0.3V to min. [3.9V, (LVDD + 0.3V)] <sup>(3)</sup>
Operating Free-Air Temperature Range, T <sub>A</sub>	-40°C to +85°C
Lead Temperature, 1.6mm (1/16" from case for 10s)	+260°C
Junction Temperature	+105°C
Storage Temperature Range	-65°C to +150°C

- (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not supported.
- (2) The dc voltage applied on the input pins should not go below –0.3V. Also, the dc voltage should be limited to the lower of either 3.3V or (AVDD + 0.3V). If the input can go higher than +3.3V, then a resistor greater than or equal to 25Ω should be added in series with each of the input pins. Also, the duty cycle of the overshoot beyond +3.3V should be limited. The overshoot duty cycle can be defined either as a percentage of the time of overshoot over a clock period, or over the entire device lifetime. For a peak voltage between +3.3V and +3.5V, a duty cycle up to 10% is acceptable. For a peak voltage between +3.5V and +3.7V, the overshoot duty cycle should not exceed 1%. Any overshoot beyond +3.7V should be restricted to less than 0.1% duty cycle, and never exceed +3.9V.
- (3) It is recommended to use a series resistor of  $1k\Omega$  or greater if the digital input pins are tied to AVDD or LVDD.

Submit Documentation Feedback

www.ti.com

#### RECOMMENDED OPERATING CONDITIONS

		ADS5240		
	MIN	TYP	MAX	UNITS
SUPPLIES AND REFERENCES				
Analog Supply Voltage, AVDD	3.0	3.3	3.6	V
Output Driver Supply Voltage, LVDD	3.0	3.3	3.6	V
REF <sub>T</sub> — External Reference Mode	1.825	1.95	2.0	V
REF <sub>B</sub> — External Reference Mode	0.9	0.95	1.075	V
REFCM = $(REF_T + REF_B)/2 - External Reference Mode^{(1)}$		V <sub>CM</sub> ± 50mV		V
Reference = (REF <sub>T</sub> - REF <sub>B</sub> ) - External Reference Mode	0.75	1.0	1.1	V
Analog Input Common-Mode Range <sup>(1)</sup>		V <sub>CM</sub> ± 50mV		V
CLOCK INPUT AND OUTPUTS				
ADCLK Input Sample Rate (low-voltage TTL)	20		40	MSPS
ADCLK Duty Cycle	45	50	55	%
Low-Level Voltage Clock Input			0.6	V
High-Level Voltage Clock Input	2.2			V
ADCLK <sub>P</sub> and ADCLK <sub>N</sub> Outputs (LVDS)	20		40	MHz
LCLK <sub>P</sub> and LCLK <sub>N</sub> Outputs (LVDS) (2)	120		240	MHz
Operating Free-Air Temperature, T <sub>A</sub>	-40		+85	°C
Thermal Characteristics:				
$ heta_{JA}$		20.4		°C/W
$ heta_{\sf JC}$		14.5		°C/W

<sup>(1)</sup> These voltages need to be set to 1.45V  $\pm$  50mV if they are derived independent of V<sub>CM</sub>. (2) 6  $\times$  ADCLK.



#### **ELECTRICAL CHARACTERISTICS**

 $T_{MIN} = -40$ °C and  $T_{MAX} = +85$ °C. Typical values are at  $T_A = +25$ °C, clock frequency = maximum specified, 50% clock duty cycle, AVDD = 3.3V, LVDD = 3.3V, transformer coupled inputs, -1dBFS,  $I_{SET} = 56.2$ k $\Omega$ , internal voltage reference, and LVDS buffer current at 3.5mA per channel, unless otherwise noted. All values are applicable after the device has been reset.

				ADS5240			
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS	
DC ACC	URACY						
	No Missing Codes			Tested			
DNL	Differential Nonlinearity	$f_{IN} = 5MHz$	-0.9	±0.4	+0.9	LSB	
INL	Integral Nonlinearity	$f_{IN} = 5MHz$	-2.0	±0.75	+2.0	LSB	
	Offset Error <sup>(1)</sup>		-0.75	±0.2	+0.75	%FS	
	Offset Temperature Coefficient			14		ppm/°C	
	Fixed Attenuation in Channel (2)			1.5		%FS	
	Fixed Attenuation Matching Across Channels			0.01	0.2	dB	
	Gain Error/Reference Error <sup>(3)</sup>	VREF <sub>T</sub> – VREF <sub>B</sub>	<b>-</b> 5	±1.0	+5	%FS	
	Gain Error Temperature Coefficient			±20		ppm/°C	
POWER	REQUIREMENTS <sup>(4)</sup>						
Internal	Reference						
	Power Dissipation	Analog Only (AVDD)		452	495	mW	
		Output Driver (LVDD)		132	155	mW	
	Total Power Dissipation			584	650	mW	
External	Reference						
	Power Dissipation	Analog Only (AVDD)		386		mW	
		Output Driver (LVDD)		132		mW	
	Total Power Dissipation			518		mW	
Total Po	wer-Down	Clock Running		95		mW	
REFERE	NCE VOLTAGES						
$VREF_T$	Reference Top (internal)		1.9	1.95	2.0	V	
VREF <sub>B</sub>	Reference Bottom (internal)		0.9	0.95	1.0	V	
$V_{CM}$	Common-Mode Voltage		1.4	1.45	1.5	V	
	V <sub>CM</sub> Output Current <sup>(5)</sup>	±50mV Change in Voltage		±2.0		mA	
$VREF_T$	Reference Top (external)		1.825	1.95	2.0	V	
VREFB	Reference Bottom (external)		0.9	0.95	1.075	V	
	External Reference Common-Mode			V <sub>CM</sub> ± 50mV	·	V	
	External Reference Input Current <sup>(6)</sup>			0.5		mA	

- (1) Offset error is the deviation of the average code with a -1dBFS coherent sinusoid input from mid-code (2048).
- (2) Fixed attenuation in the channel arises due to a fixed attenuation in the sample-and-hold amplifier. When the differential voltage at the analog input pins are changed from -V<sub>REF</sub> to +V<sub>REF</sub>, the swing of the output code is expected to deviate from the full-scale code (4096LSB) by the extent of this fixed attenuation. NOTE: V<sub>REF</sub> is defined as (VREF<sub>T</sub> VREF<sub>B</sub>).
- (3) The reference voltages are trimmed at production so that (VREF<sub>T</sub> VREF<sub>B</sub>) is within ± 25mV of the ideal value of 1V. This specification does not include fixed attenuation.
- (4) Supply current can be calculated from dividing the power dissipation by the supply voltage of 3.3V.
- (5) V<sub>CM</sub> provides the common-mode current for the inputs of all four channels when the inputs are ac-coupled. The V<sub>CM</sub> output current specified is the additional drive of the V<sub>CM</sub> buffer if loaded externally.
- (6) Average current drawn from the reference pins in the external reference mode.

www.ti.com

#### **ELECTRICAL CHARACTERISTICS (continued)**

 $T_{MIN} = -40^{\circ}\text{C}$  and  $T_{MAX} = +85^{\circ}\text{C}$ . Typical values are at  $T_{A} = +25^{\circ}\text{C}$ , clock frequency = maximum specified, 50% clock duty cycle, AVDD = 3.3V, LVDD = 3.3V, transformer coupled inputs, -1dBFS,  $I_{SET} = 56.2\text{k}\Omega$ , internal voltage reference, and LVDS buffer current at 3.5mA per channel, unless otherwise noted. All values are applicable after the device has been reset.

			ADS5240			
PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS	
ANALOG INPUT						
Differential Input Capacitance			4.0		pF	
Analog Input Common-Mode Range			V <sub>CM</sub> ± 50		mV	
Differential Input Voltage Range	Internal Reference		2.03		$V_{PP}$	
	External Reference	2.03 ×	(VREF <sub>T</sub> – V	REF <sub>B</sub> )	$V_{PP}$	
Voltage Overhead Recovery Time <sup>(7)</sup>			3.0		CLK Cycles	
Input Bandwidth	–3dBFS, 25Ω Series Resistances		300		MHz	
DIGITAL DATA INPUTS						
V <sub>IH</sub> High-Level Input Voltage		2.2			V	
V <sub>IL</sub> Low-Level Input Voltage				0.6	V	
C <sub>IN</sub> Input Capacitance			3.0		pF	
DIGITAL DATA OUTPUTS						
Data Format		Stra	ight Offset B	inary		
Data Bit Rate		240		480	Mbps	
SERIAL INTERFACE						
SCLK Serial Clock Input Frequency				20	MHz	

<sup>(7)</sup> A differential ON/OFF pulse is applied to the ADC input. The differential amplitude of the pulse in its ON (high) state is twice the full-scale range of the ADC, while the differential amplitude of the pulse in its OFF (low) state is zero. The overload recovery time of the ADC is measured as the time required by the ADC output code to settle within 1% of full-scale, as measured from its mid-code value when the pulse is switched from ON (high) to OFF (low).

#### REFERENCE SELECTION

MODE	INT/EXT	DESCRIPTION
Internal Reference; FSR = 2.03V <sub>PP</sub>	1	Default with internal pull-up.
External Reference; $FSR = 2.03 \times (VREF_T - VREF_B)$	0	Internal reference is powered down. The common-mode voltage of the external reference should be within 50mV of $V_{CM}$ . $V_{CM}$ is derived from the internal bandgap voltage.

Copyright © 2004–2009, Texas Instruments Incorporated

Submit Documentation Feedback



#### **AC CHARACTERISTICS**

 $T_{MIN} = -40^{\circ}\text{C}$  and  $T_{MAX} = +85^{\circ}\text{C}$ . Typical values are at  $T_{A} = +25^{\circ}\text{C}$ , clock frequency = maximum specified, 50% clock duty cycle, AVDD = 3.3V, LVDD = 3.3V, -1dBFS,  $I_{SET} = 56.2\text{k}\Omega$ , internal voltage reference, and LVDS buffer current at 3.5mA per channel, unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
DYNAMIC CHARACTERISTICS					
	f <sub>IN</sub> = 1MHz		87		dBc
SFDR Spurious-Free Dynamic Range	$f_{IN} = 5MHz$	78	85		dBc
	f <sub>IN</sub> = 10MHz		85		dBc
	f <sub>IN</sub> = 1MHz		95		dBc
HD <sub>2</sub> 2nd-Order Harmonic Distortion	$f_{IN} = 5MHz$	85	95		dBc
	f <sub>IN</sub> = 10MHz		90		dBc
	f <sub>IN</sub> = 1MHz		87		dBc
HD <sub>3</sub> 3rd-Order Harmonic Distortion	$f_{IN} = 5MHz$	78	85		dBc
	f <sub>IN</sub> = 10MHz		85		dBc
	f <sub>IN</sub> = 1MHz		70.5		dBFS
SNR Signal-to-Noise Ratio	$f_{IN} = 5MHz$	68	70.5		dBFS
	f <sub>IN</sub> = 10MHz		70		dBFS
	f <sub>IN</sub> = 1MHz		70		dBFS
SINAD Signal-to-Noise and Distortion	$f_{IN} = 5MHz$	67	70		dBFS
	f <sub>IN</sub> = 10MHz		69.5		dBFS
ENOB Effective Number of Bits	f <sub>IN</sub> = 5MHz		11.3		Bits
Crosstalk	5MHz Full-Scale Signal Applied to 3 Channels; Measurement Taken on the Channel with No Input Signal		-90		dBc
IMD3 Two-Tone, Third-Order	f <sub>1</sub> = 9.5MHz at -7dBFS		-88		dBc
Intermodulation Distortion	$f_2 = 10.2MHz$ at $-7dBFS$		-00		

www.ti.com

#### LVDS DIGITAL DATA AND CLOCK OUTPUTS

Test conditions at  $I_O = 3.5 mA$ ,  $R_{LOAD} = 100\Omega$ , and  $C_{LOAD} = 6 pF$ .  $I_O$  refers to the current setting for the LVDS buffer.  $R_{LOAD}$  is the differential load resistance between the LVDS pair.  $C_{LOAD}$  is the effective single-ended load capacitance between each of the LVDS pins and ground.  $C_{LOAD}$  includes the receiver input parasitics as well as the routing parasitics. Measurements are done with a transmission line of  $100\Omega$  characteristic impedance between the device and the load. All LVDS specifications are characterized, but not tested at production. LCLKOUT refers to (LCLK $_P$  – LCLK $_N$ ); ADCLKOUT refers to (ADCLK $_P$  – ADCLK $_N$ ); DATA OUT refers to (OUT $_P$  – OUT $_N$ ); and ADCLK refers to the input sampling clock.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
DC SPECIFICATIONS <sup>(1)</sup>					
V <sub>OH</sub> Output Voltage High, OUT <sub>P</sub> or OUT <sub>N</sub>	$R_{LOAD} = 100\Omega \pm 1\%$ ; See LVDS Timing Diagram, Page 8	1265	1365	1465	mV
$V_{OL}$ Output Voltage Low, $OUT_P$ or $OUT_N$	$R_{LOAD} = 100\Omega \pm 1\%$	940	1040	1140	mV
V <sub>OD</sub>   Output Differential Voltage	$R_{LOAD} = 100\Omega \pm 1\%$	275	325	375	mV
V <sub>OS</sub> Output Offset Voltage (2)	$R_{LOAD} = 100\Omega \pm 1\%$ ; See LVDS Timing Diagram, Page 8	1.1	1.2	1.3	V
R <sub>O</sub> Output Impedance, Differential	Normal Operation		13		kΩ
R <sub>O</sub> Output Impedance, Differential	Power-Down		20		kΩ
C <sub>O</sub> Output Capacitance (3)			4		pF
$ \Delta V_{OD} $ Change in $ V_{OD} $ Between 0 and 1	$R_{LOAD} = 100\Omega \pm 1\%$			10	mV
$\Delta V_{OS}$ Change Between 0 and 1	$R_{LOAD} = 100\Omega \pm 1\%$			25	mV
ISOUT Output Short-Circuit Current	Drivers Shorted to Ground			40	mA
ISOUT <sub>NP</sub> Output Current	Drivers Shorted Together			12	mA
DRIVER AC SPECIFICATIONS					
ADCLKOUT Clock Duty Cycle <sup>(4)</sup>		45	50	55	%
LCLKOUT Duty Cycle (4)		44	50	56	%
Data Setup Time (5) (6)		0.7			ns
Data Hold Time <sup>(6)(7)</sup>		0.61			ns
LVDS Outputs Rise/Fall Time (8)	I <sub>O</sub> = 2.5mA		400		ps
	I <sub>O</sub> = 3.5mA	180	300	500	ps
	I <sub>O</sub> = 4.5mA		230		ps
	I <sub>O</sub> = 6.0mA		180		ps
LCLKOUT Rising Edge to ADCLKOUT Rising Edge (9)		0.74	1.04	1.34	ns
ADCLKOUT Rising Edge to LCLKOUT Falling Edge <sup>(9)</sup>		0.74	1.04	1.34	ns
ADCLKOUT Rising Edge to DATA OUT Transition (9)		-0.35	0	+0.35	ns

- (1) The dc specifications refer to the condition where the LVDS outputs are not switching, but are permanently at a valid logic level 0 or 1.
- (2) V<sub>OS</sub> refers to the common-mode of OUT<sub>P</sub> and OUT<sub>N</sub>.
- (3) Output capacitance inside the device, from either OUT<sub>P</sub> or OUT<sub>N</sub> to ground.
- (4) Measured between zero crossings.
- (5) DATA OUT (OUT<sub>P</sub> OUT<sub>N</sub>) crossing zero to LCLKOUT (LCLK<sub>P</sub> LCLK<sub>N</sub>) crossing zero.
- (6) Data setup and hold time accounts for data-dependent skews, channel-to-channel mismatches, as well as effects of clock jitter within the device.
- (7) LCLKOUT crossing zero to DATA OUT crossing zero.
- (8) Measured from -100mV to +100mV on the differential output for rise time, and +100mV to -100mV for fall time.
- (9) Measured between zero crossings.

#### **SWITCHING CHARACTERISTICS**

 $T_{MIN} = -40^{\circ}\text{C}$  and  $T_{MAX} = +85^{\circ}\text{C}$ . Typical values are at  $T_A = +25^{\circ}\text{C}$ , clock frequency = maximum specified, 50% clock duty cycle, AVDD = 3.3V, LVDD = 3.3V, -1dBFS,  $I_{SET} = 56.2\text{k}\Omega$ , internal voltage reference, and LVDS buffer current at 3.5mA per channel, unless otherwise noted.


	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SWITCHING SPI	ECIFICATIONS					
	t <sub>SAMPLE</sub>		25		50	ns
t <sub>D</sub> (A)	Aperture Delay <sup>(1)</sup>		2	4	6.5	ns
	Aperture Jitter (uncertainty)			1		ps
t <sub>D</sub> (pipeline)	Latency			6.5		Cycles
t <sub>PROP</sub>	Propagation Delay <sup>(2)</sup>		3	4.8	6.5	ns

- (1) Rising edge of ADCLK to actual instant when data is sampled within the ADC.
- (2) Falling edge of ADCLK to zero-crossing of rising edge of ADCLKOUT.


Submit Documentation Feedback



#### LVDS TIMING DIAGRAM (PER ADC CHANNEL)

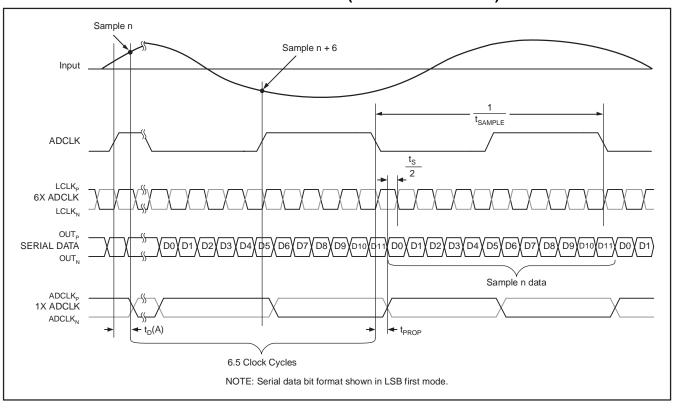


#### RECOMMENDED POWER-UP SEQUENCING AND RESET TIMING

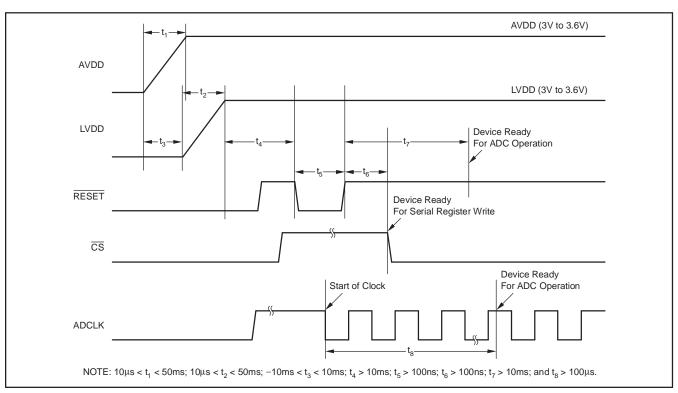




### LVDS TIMING DIAGRAM (PER ADC CHANNEL) (continued)

#### **POWER-DOWN TIMING**

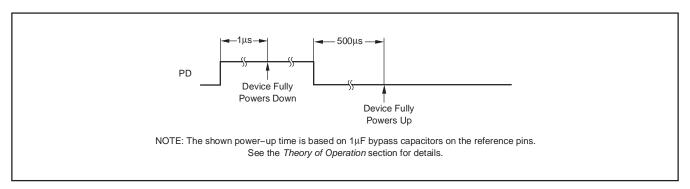

#### **SERIAL INTERFACE TIMING**

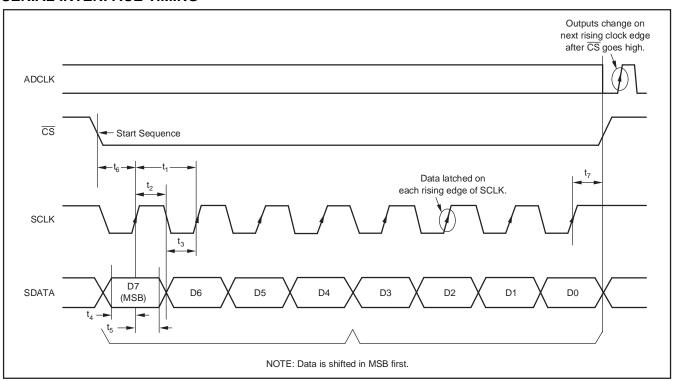

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
t <sub>1</sub>	Serial CLK Period	50			ns
t <sub>2</sub>	Serial CLK High Time	20			ns
t <sub>3</sub>	Serial CLK Low Time	20			ns
t <sub>4</sub>	Minimum Data Setup Time	5			ns
t <sub>5</sub>	Minimum Data Hold Time	5			ns
t <sub>6</sub>	CS Fall to SCLK Rise	8			ns
t <sub>7</sub>	SCLK Rise to CS Rise	8			ns



#### **SERIAL INTERFACE REGISTERS**

	ADDI	RESS			DA	TA		DESCRIPTION	REMARKS
D7	D6	D5	D4	D3	D2	D1	D0		
0	0	0	0					LVDS BUFFERS (Register 0)	All Data Outputs
				0	0			Normal ADC Output	(default after reset)
				0	1			Deskew Pattern	
				1	0			Sync Pattern	Patterns Get Reversed in MSB First Mode of LVDS
				1	1			Custom Pattern	That wode of EVBO
						0	0	Output Current in LVDS = 3.5mA	(default after reset)
						0	1	Output Current in LVDS = 2.5mA	
						1	0	Output Current in LVDS = 4.5mA	
						1	1	Output Current in LVDS = 6.0mA	
0	0	0	1					CLOCK CURRENT (Register 1)	
				0	X	X	0	Default LVDS Clock Output Current	I <sub>OUT</sub> = 3.5mA (default)
				0	Χ	Χ	1	2x LVDS Clock Output Current <sup>(1)</sup>	$I_{OUT} = 7.0 \text{mA}$
								LSB/MSB MODE (Register 1)	
				0	0	Х	X	LSB First Mode	(default after reset)
				0	1	Χ	Х	MSB First Mode	
0	0	1	0					POWER-DOWN ADC CHANNELS (Register 2)	
				0	1	0	X	D2: Power-Down for Channel 2	Logic 1 = Channel Powered
				0	Χ	0	1	D0: Power-Down for Channel 1	Down
0	0	1	1					POWER-DOWN ADC CHANNELS (Register 3)	
				1	0	Х	0	D3: Power-Down for Channel 4	Logic 1 = Channel Powered
				Χ	0	1	0	D1: Power-Down for Channel 3	Down
								CUSTOM PATTERN (Registers 4–6)	
				D3	D2	D1	D0	Bits for Custom Pattern	See Test Patterns
0	1	0	0	Χ	Х	Х	Х		
0	1	0	1	Χ	X	X	Х		
0	1	1	0	X	Х	Х	X		

<sup>(1)</sup> Output current drive for the two clock LVDS buffers (LCLK<sub>P</sub> and LCLK<sub>N</sub> and ADCLK<sub>P</sub> and ADCLK<sub>N</sub>) is double the output current setting programmed in register 0. The current drive of the data buffers remains the same as the setting in register 0.

#### **TEST PATTERNS**

Serial Output <sup>(1)</sup>	LSB											MSB
ADC Output (2)	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11
Deskew Pattern	1	0	1	0	1	0	1	0	1	0	1	0
Sync Pattern	0	0	0	0	0	0	1	1	1	1	1	1
Custom Pattern (3)	D0(4)	D1(4)	D2(4)	D3(4)	D0(5)	D1(5)	D2(5)	D3(5)	D0(6)	D1(6)	D2(6)	D3(6)


- (1) The serial output stream comes out LSB first by default.
- (2) D11...D0 represent the 12 output bits from the ADC.
- (3) D0(4) represents the content of bit D0 of register 4, D3(6) represents the content of bit D3 of register 6, etc.

10 Submit

www.ti.com



#### **PIN CONFIGURATION**

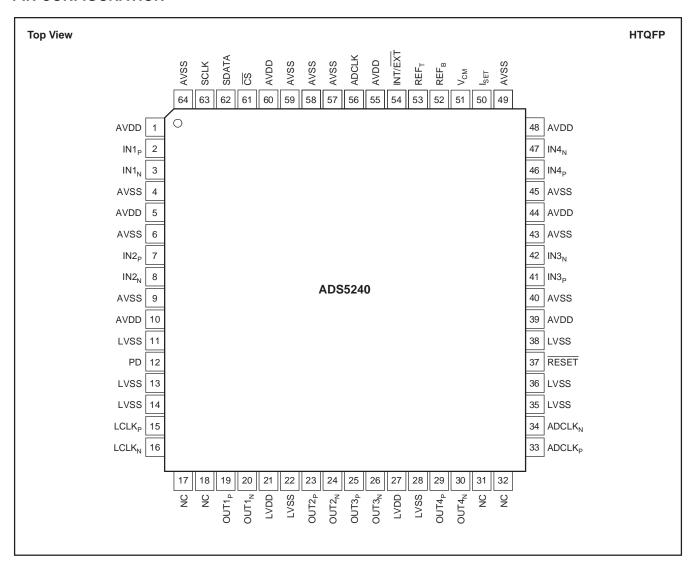



#### **PIN DESCRIPTIONS**

NAME	PIN#	I/O	DESCRIPTION
ADCLK	56	I	Data Converter Clock Input
ADCLK <sub>N</sub>	34	0	Negative LVDS ADC Clock Output
ADCLK <sub>P</sub>	33	0	Positive LVDS ADC Clock Output
AVDD	1, 5, 10, 39, 44, 48, 55, 60	- 1	Analog Power Supply
AVSS	4, 6, 9, 40, 43, 45, 49, 57-59, 64	- 1	Analog Ground
<del>CS</del>	61	- 1	Chip-Select; 0 = Select, 1 = No Select
IN1 <sub>N</sub>	3	- 1	Channel 1 Differential Analog Input Low
IN1 <sub>P</sub>	2	ı	Channel 1 Differential Analog Input High
IN2 <sub>N</sub>	8	- 1	Channel 2 Differential Analog Input Low
IN2 <sub>P</sub>	7	I	Channel 2 Differential Analog Input High
IN3 <sub>N</sub>	42	- 1	Channel 3 Differential Analog Input Low
IN3 <sub>P</sub>	41	ı	Channel 3 Differential Analog Input High
IN4 <sub>N</sub>	47	- 1	Channel 4 Differential Analog Input Low
IN4 <sub>P</sub>	46	ı	Channel 4 Differential Analog Input High
INT/EXT	54	- 1	Internal/External Reference Select; 0 = External, 1 = Internal. Weak pull-up to supply.
I <sub>SET</sub>	50	I/O	Bias Current Setting Resistor of 56.2kΩ to Ground
LCLK <sub>N</sub>	16	0	Negative LVDS Clock
LCLK <sub>P</sub>	15	0	Positive LVDS Clock
LVDD	21, 27	- 1	LVDS Power Supply
LVSS	11, 13, 14, 22, 28, 35, 36, 38	1	LVDS Ground
NC	17, 18, 31, 32	_	No Connection
OUT1 <sub>N</sub>	20	0	Channel 1 Negative LVDS Data Output
OUT1 <sub>P</sub>	19	0	Channel 1 Positive LVDS Data Output
OUT2 <sub>N</sub>	24	0	Channel 2 Negative LVDS Data Output
OUT2 <sub>P</sub>	23	0	Channel 2 Positive LVDS Data Output
OUT3 <sub>N</sub>	26	0	Channel 3 Negative LVDS Data Output
OUT3 <sub>P</sub>	25	0	Channel 3 Positive LVDS Data Output
OUT4 <sub>N</sub>	30	0	Channel 4 Negative LVDS Data Output
OUT4 <sub>P</sub>	29	0	Channel 4 Positive LVDS Data Output
PD	12	- 1	Power-Down; 0 = Normal, 1 = Power-Down. Weak pull-down to ground.
REF <sub>B</sub>	52	I/O	Reference Bottom Voltage (2 $\Omega$ resistor in series with a capacitor $\geq 0.1 \mu F$ to ground)
REF <sub>T</sub>	53	I/O	Reference Top Voltage (2Ω resistor in series with a capacitor ≥ 0.1μF to ground)
RESET	37	ı	Reset to Default; 0 = Reset, 1 = Normal. Weak pull-down to ground.
SCLK	63	- 1	Serial Data Clock
SDATA	62	ı	Serial Data Input
V <sub>CM</sub>	51	0	Common-Mode Output Voltage



#### **DEFINITION OF SPECIFICATIONS**

#### **Analog Bandwidth**

The analog input frequency at which the spectral power of the fundamental frequency (as determined by FFT analysis) is reduced by 3dB.

#### **Aperture Delay**

The delay in time between the rising edge of the input sampling clock and the actual time at which the sampling occurs.

#### **Aperture Uncertainty (Jitter)**

The sample-to-sample variation in aperture delay.

#### **Clock Duty Cycle**

Pulse width high is the minimum amount of time that the ADCLK pulse should be left in logic '1' state to achieve rated performance. Pulse width low is the minimum time that the ADCLK pulse should be left in a low state (logic '0'). At a given clock rate, these specifications define an acceptable clock duty cycle.

#### **Differential Nonlinearity (DNL)**

An ideal ADC exhibits code transitions that are exactly 1 LSB apart. DNL is the deviation of any single LSB transition at the digital output from an ideal 1 LSB step at the analog input. If a device claims to have no missing codes, it means that all possible codes (for a 12-bit converter, 4096 codes) are present over the full operating range.

#### **Effective Number of Bits (ENOB)**

The ENOB is a measure of converter performance as compared to the theoretical limit based on quantization noise.

$$ENOB = \frac{SINAD - 1.76}{6.02}$$

#### Integral Nonlinearity (INL)

INL is the deviation of the transfer function from a reference line measured in fractions of 1 LSB using a best straight line or best fit determined by a least square curve fit. INL is independent from effects of offset, gain or quantization errors.

#### **Maximum Conversion Rate**

The encode rate at which parametric testing is performed. This is the maximum sampling rate where certified operation is given.

#### **Minimum Conversion Rate**

This is the minimum sampling rate where the ADC still works.

#### Signal-to-Noise and Distortion (SINAD)

SINAD is the ratio of the power of the fundamental  $(P_S)$  to the power of all the other spectral components including noise  $(P_N)$  and distortion  $(P_D)$ , but not including dc.

$$SINAD = 10Log_{10} \frac{P_S}{P_N + P_D}$$

SINAD is either given in units of dBc (dB to carrier) when the absolute power of the fundamental is used as the reference, or dBFS (dB to full-scale) when the power of the fundamental is extrapolated to the full-scale range of the converter.

#### Signal-to-Noise Ratio (SNR)

SNR is the ratio of the power of the fundamental  $(P_S)$  to the noise floor power  $(P_N)$ , excluding the power at dc and the first eight harmonics.

$$SNR = 10Log_{10} \frac{P_S}{P_N}$$

SNR is either given in units of dBc (dB to carrier) when the absolute power of the fundamental is used as the reference, or dBFS (dB to full-scale) when the power of the fundamental is extrapolated to the full-scale range of the converter.

#### Spurious-Free Dynamic Range

The ratio of the power of the fundamental to the highest other spectral component (either spur or harmonic). SFDR is typically given in units of dBc (dB to carrier).


# Two-Tone, Third-Order Intermodulation Distortion

Two-tone IMD3 is the ratio of power of the fundamental (at frequencies  $f_1$  and  $f_2$ ) to the power of the worst spectral component of third-order intermodulation distortion at either frequency  $2f_1 - f_2$  or  $2f_2 - f_1$ . IMD3 is either given in units of dBc (dB to carrier) when the absolute power of the fundamental is used as the reference, or dBFS (dB to full-scale) when the power of the fundamental is extrapolated to the full-scale range of the converter.



#### TYPICAL CHARACTERISTICS

 $T_{MIN}$  = -40°C and  $T_{MAX}$  = +85°C. Typical values are at  $T_A$  = +25°C, clock frequency = maximum specified, 50% clock duty cycle, AVDD = 3.3V, LVDD = 3.3V, -1dBFS,  $I_{SET}$  = 56.2k $\Omega$ , internal voltage reference, and LVDS buffer current at 3.5mA per channel, unless otherwise noted.

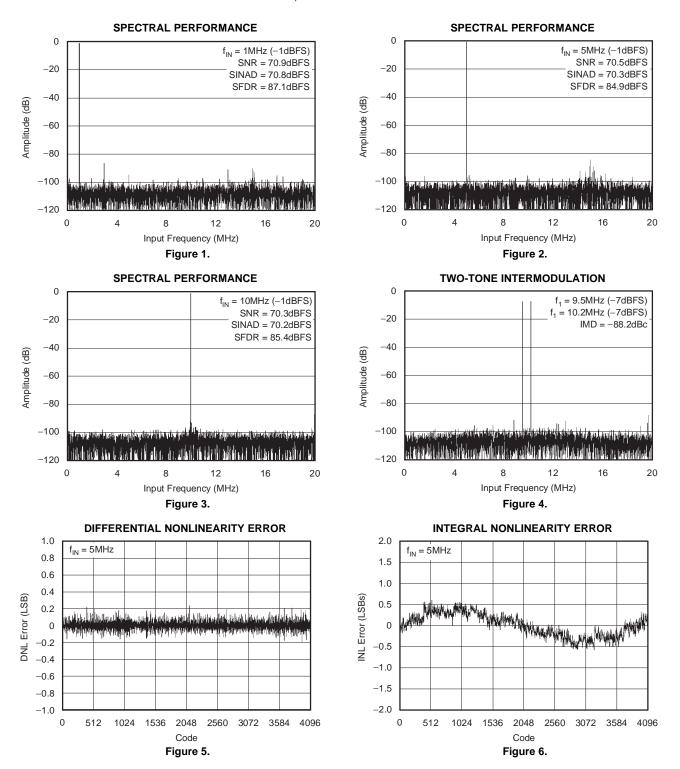





20


25

#### **TYPICAL CHARACTERISTICS (continued)**

 $T_{MIN} = -40$ °C and  $T_{MAX} = +85$ °C. Typical values are at  $T_A = +25$ °C, clock frequency = maximum specified, 50% clock duty cycle, AVDD = 3.3V, LVDD = 3.3V, -1dBFS,  $I_{SET} = 56.2k\Omega$ , internal voltage reference, and LVDS buffer current at 3.5mA per channel, unless otherwise noted.








30


Sample Rate (MSPS)


35

40

45









#### THEORY OF OPERATION

#### **OVERVIEW**

The ADS5240 is a 4-channel, high-speed, CMOS lt consists of а high-performance sample-and-hold circuit at the input, followed by a 12-bit ADC. The 12 bits given out by each channel are serialized and sent out on a single pair of pins in LVDS format. All four channels of the ADS5240 operate from a single clock referred to as ADCLK. The sampling clocks for each of the four channels are generated from the input clock using a carefully matched clock buffer tree. The 12x clock required for the serializer is generated internally from ADCLK using a phase lock loop (PLL). A 6x and a 1x clock are also output in LVDS format along with the data to enable easy data capture. The ADS5240 operates from internally generated reference voltages that are trimmed to ensure matching across multiple devices on a board. This feature eliminates the need for external routing of reference lines and also improves matching of the gain across devices. The nominal values of REF<sub>T</sub> and REF<sub>B</sub> are 1.95V and 0.95V, respectively. These values imply that a differential input of -1V corresponds to the zero code of the ADC, and a differential input of +1V corresponds to the full-scale code (4095 LSB).  $V_{CM}$  (common-mode voltage of REF<sub>T</sub> and REF<sub>B</sub>) is also made available externally through a pin, and is nominally 1.45V.

The ADC employs a pipelined converter architecture consisting of a combination of multi-bit and single-bit internal stages. Each stage feeds its data into the digital error correction logic, ensuring excellent differential linearity and no missing codes at the 12-bit level. The pipeline architecture results in a data latency of 6.5 clock cycles.

The output of the ADC goes to a serializer that operates from a 12x clock generated by the PLL. The 12 data bits from each channel are serialized and sent LSB first. In addition to serializing the data, the serializer also generates a 1x clock and a 6x clock. These clocks are generated in the same way the serialized data is generated, so these clocks maintain perfect synchronization with the data. The data and clock outputs of the serializer are buffered externally using LVDS buffers. Using LVDS buffers to transmit

data externally has multiple advantages, such as a reduced number of output pins (saving routing space on the board), reduced power consumption, and reduced effects of digital noise coupling to the analog circuit inside the ADS5240.

The ADS5240 operates from two sets of supplies and grounds. The analog supply/ground set is denoted as AVDD/AVSS, while the digital set is denoted by LVDD/LVSS.

#### DRIVING THE ANALOG INPUTS

The analog input biasing is shown in Figure 13. The inputs are biased internally using two  $600\Omega$  resistors to enable ac-coupling. A resistor greater than  $20\Omega$  is recommended in series with each input pin.

A 4pF sampling capacitor is used to sample the inputs. The choice of the external ac-coupling capacitor is dictated by the attenuation at the lowest desired input frequency of operation. The attenuation resulting from using a 10nF ac-coupling capacitor is 0.04%.




Figure 13. Analog Input Bias Circuitry

If the input is dc-coupled, then the output common-mode voltage of the circuit driving the ADS5240 should match the  $V_{CM}$  (which is provided as an output pin) to within  $\pm 50 mV.$  It is recommended that the output common-mode of the driving circuit be derived from  $V_{CM}$  provided by the device.



Figure 14 shows a detailed RLC model of the sample-and-hold circuit. The circuit operates in two phases. In the sample phase, the input is sampled on two capacitors that are nominally 4pF. The sampling circuit consists of a low-pass RC filter at the input to filter out noise components that might be differentially coupled on the input pins. The next phase is the hold phase wherein the voltage sampled on the capacitors is transferred (using the amplifier) to a subsequent pipeline ADC stage.

#### **INPUT OVER-VOLTAGE RECOVERY**

The differential full-scale range supported by the ADS5240 is nominally 2.03V. The ADS5240 is specially designed to handle an over-voltage condition where the differential peak-to-peak voltage can exceed up to twice the ADC full-scale range. If the input common-mode is not considerably off from  $V_{CM}$  during overload (less than 300mV around the nominal value of 1.45V), recovery from an

over-voltage pulse input of twice the amplitude of a full-scale pulse is expected to be within three clock cycles when the input switches from overload to zero signal. All of the amplifiers in the SHA and ADC are specially designed for excellent recovery from an overload signal.

In most applications, the ADC inputs are driven with differential sinusoidal inputs. While the pulse-type signal remains at peak overload conditions throughout its HIGH state, the sinusoid signal only attains peak overload intermittently, at its minima and maxima. This condition is much less severe for the ADC input and the recovery of the ADC output (to 1% of full-scale around the expected code). This typically happens within the second clock when the input is driven with a sinusoid of amplitude equal to twice that of the ADC differential full-scale range.

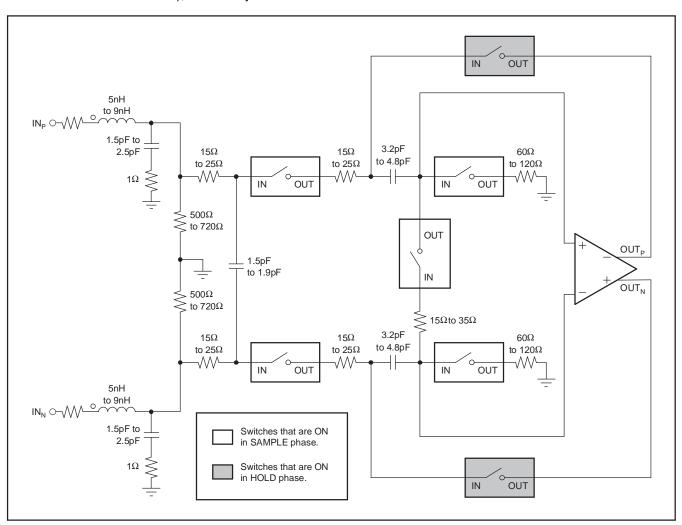


Figure 14. Overall Structure of the Sample-and-Hold Circuit



#### REFERENCE CIRCUIT DESIGN

The digital beam-forming algorithm relies heavily on gain matching across all receiver channels. A typical system would have about 24 quad ADCs on the board. In such a case, it is critical to ensure that the gain is matched, essentially requiring the reference voltages seen by all the ADCs to be the same. Matching references within the four channels of a chip is done by using a single internal reference voltage buffer. Trimming the reference voltages on each chip during production ensures the reference voltages are well matched across different chips.

All bias currents required for the internal operation of the device are set using an external resistor to ground at pin  $I_{SET}.$  Using a  $56.2k\Omega$  resistor on  $I_{SET}$  generates an internal reference current of  $20\mu A.$  This current is mirrored internally to generate the bias current for the internal blocks. Using a larger external resistor at  $I_{SET}$  reduces the reference bias current and thereby scales down the device operating power. However, it is recommended that the external resistor be within 10% of the specified value of  $56.2k\Omega$  so that the internal bias margins for the various blocks are proper.

Buffering the internal bandgap voltage also generates a voltage called  $V_{\text{CM}},$  which is set to the midlevel of  $\text{REF}_{\text{T}}$  and  $\text{REF}_{\text{B}},$  and is accessible on a pin. It is meant as a reference voltage to derive the input common-mode in case the input is directly coupled. It can also be used to derive the reference common-mode voltage in the external reference mode.

When using the internal reference mode, a  $2\Omega$  resistor should be added between the reference pins (REF\_T and REF\_B) and the decoupling capacitor, as shown in Figure 15. If the device is used in the external reference mode, this  $2\Omega$  resistor is not required.




Figure 15. Internal Reference Mode

The device also supports the use of external reference voltages. This mode involves forcing  $REF_T$ 

and REF<sub>B</sub> externally. In this mode, the internal reference buffer is tri-stated. Since the switching current for the four ADCs come from the externally forced references, it is possible for the performance to be slightly less than when the internal references are used. It should be noted that in this mode,  $V_{\text{CM}}$  and  $I_{\text{SET}}$  continue to be generated from the internal bandgap voltage, as in the internal reference mode. It is therefore important to ensure that the common-mode voltage of the externally forced reference voltages matches to within 50mV of  $V_{\text{CM}}$ . The state of the reference voltages during various combinations of PD and INT/EXT is shown in Table 1.

Table 1. State of Reference Voltages for Various Combinations of PD and INT/EXT

PD	0	0	1	1	
INT/EXT	0	0 1		1	
REF <sub>T</sub>	Tri-State	1.95V	Tri-State	Tri-State	
REF <sub>B</sub>	Tri-State	0.95V	Tri-State	Tri-State	
V <sub>CM</sub>	1.45V	1.45V	Tri-State <sup>(1)</sup>	Tri-State <sup>(1)</sup>	

(1) Weak pull-down (approximately  $5k\Omega$ ) to ground.

#### **CLOCKING**

The four channels on the chip operate from a single ADCLK input. To ensure that the aperture delay and iitter are same for all the channels, a clock tree network is used to generate individual sampling clocks to each channel. The clock paths for all the channels are matched from the source point all the way to the sample-and-hold amplifier. This ensures that the performance and timing for all the channels are identical. The use of the clock tree for matching introduces an aperture delay, which is defined as the delay between the rising edge of ADCLK and the actual instant of sampling. The aperture delays for all the channels are matched to the best possible extent. However, a mismatch of  $\pm 20$ ps ( $\pm 3\sigma$ ) could exist between the aperture instants of the four ADCs within the same chip. However, the aperture delays of ADCs across two different chips can be several Another hundred picoseconds apart. critical specification is the aperture jitter that is defined as the uncertainty of the sampling instant. The gates in the clock path are designed to provide an rms litter of approximately 1ps.

Ideally, the input ADCLK should have a 50% duty cycle. However, while routing ADCLK to different components onboard, the duty cycle of the ADCLK reaching the ADS5240 could deviate from 50%. A smaller (or larger) duty cycle reduces the time available for sample or hold phases of each circuit, and is therefore not optimal. For this reason, the internal PLL is used to generate an internal clock that has 50% duty cycle. The input sampling instant,

www.ti.com

however, is determined by the rising edge of the external clock and is not affected by jitter in the PLL. In addition to generating a 50% duty cycle clock for the ADC, the PLL also generates a 12x clock that is used by the serializer to convert the parallel data from the ADC to a serial stream of bits.

The use of the PLL automatically dictates the minimum sample rate to be about 20MSPS. The PLL also requires the input clock to be free-running. If the input clock is momentarily stopped (for a duration of less than 300ns) then the PLL would require approximately  $10\mu s$  to lock back to the input clock frequency.

#### **LVDS BUFFERS**

The LVDS buffer has two current sources, as shown in Figure 16.  $\text{OUT}_{\text{P}}$  and  $\text{OUT}_{\text{N}}$  are loaded externally by a resistive load that is ideally about  $100\Omega.$  Depending on whether the data is 0 or 1, the currents are directed in one direction or the other through the resistor. The LVDS buffer has four current settings. The default current setting is 3.5mA, and provides a differential drop of about  $\pm 350\text{mV}$  across the  $100\Omega$  resistor.

The single-ended output impedance of the LVDS drivers is very high because they are current-source driven. If there are excessive reflections from the receiver, it might be necessary to place a  $100\Omega$  termination resistor across the outputs of the LVDS drivers to minimize the effect of reflections. In such a situation, the output current of the LVDS drivers can be increased to regain the output swing.




Figure 16. LVDS Buffer

The LVDS buffer receives data from a serializer that takes the output data from each channel and serializes it into a single data stream. For a clock frequency of 65MHz, the data rate output of the

serializer is 780Mbps. The data comes out LSB first, with a register programmability that allows it to revert to MSB first. The serializer also transmits a 1x clock and a 6x clock. The 6x clock (denoted as  $LCLK_P/LCLK_N$ ) is meant to synchronize the capture of the LVDS data.

Deskew mode can be enabled as well, using a register setting. This mode gives out a data stream of alternate 0s and 1s and can be used determine the relative delay between the 6x clock and the output data for optimum capture. A 1x clock is also generated by the serializer and transmitted through the LVDS buffer. The 1x clock (referred to as ADCLK<sub>P</sub>/ADCLK<sub>N</sub>) is used to determine the start of the 12-bit data frame. Sync mode (enabled through a register setting) gives out a data of six 0s followed by six 1s. Using this mode, the 1x clock can be used to determine the start of the data frame. In addition to the deskew mode pattern and the sync mode pattern. a custom pattern can be defined by the user and output from the LVDS buffer. The LVDS buffers are tri-stated in the power-down mode. The LVDS outputs are weakly forced to 1.2V through  $10k\Omega$  resistors (from each output pin to 1.2V).

#### **NOISE COUPLING ISSUES**

High-speed mixed signals are sensitive to various types of noise coupling. One of the main sources of noise is the switching noise from the serializer and the output buffers. Maximum care is taken to isolate these noise sources from the sensitive analog blocks. As a starting point, the analog and digital domains of the chip are clearly demarcated. AVDD and AVSS are used to denote the supplies for the analog sections, while LVDD and LVSS are used to denote the digital supplies. Care is taken to ensure that there is minimal interaction between the supply sets within the device. The extent of noise coupled and transmitted from the digital to the analog sections depends on the following:

- 1. The effective inductances of each of the supply/ground sets.
- 2. The isolation between the digital and analog supply/ground sets.

Smaller effective inductance of the supply/ground pins leads to better suppression of the noise. For this reason, multiple pins are used to drive each supply/ground. It is also critical to ensure that the impedances of the supply and ground lines on board are kept to the minimum possible values. Use of ground planes in the board as well as large decoupling capacitors between the supply and ground lines are necessary to get the best possible SNR from the device.



It is recommended that the isolation be maintained on board by using separate supplies to drive AVDD and LVDD, as well as separate ground planes for AVSS and LVSS.

The use of LVDS buffers reduces the injected noise considerably, compared to CMOS buffers. The current in the LVDS buffer is independent of the direction of switching. Also, the low output swing as well as the differential nature of the LVDS buffer results in low-noise coupling.

#### **POWER-DOWN MODE**

The ADS5240 has a power-down pin, referred to as PD. Pulling PD high causes the device to enter the power-down mode. In this mode, the reference and clock circuitry, as well as all the channels, are powered down. Device power consumption drops to less than 100mW in this mode. In power-down mode, the internal buffers driving REF<sub>T</sub> and REF<sub>B</sub> are tri-stated and their outputs are forced to a voltage roughly equal to half of the voltage on AVDD. Speed of recovery from power-down mode depends on the value of the external capacitance on the REF<sub>T</sub> and REF<sub>B</sub> pins. For capacitances on REF<sub>T</sub> and REF<sub>B</sub> less than 1µF, the reference voltages settle to within 1% of their steady-state values in less than 500 µs. Individual channels can also be selectively powered down by programming registers.

The ADS5240 also has an internal circuit that monitors the state of stopped clocks. If ADCLK is stopped for longer than 300ns (or if it runs at a speed less than 3MHz), this monitoring circuit generates a logic signal that puts the device in a partial power-down state. As a result, the power consumption of the device is reduced when ADCLK is stopped. The recovery from such a partial power-down takes approximately  $100\mu s$ ; this is described in Table 2.

#### RESET

After the supplies have stabilized, it is necessary to give the device an active RESET pulse. This results in all internal registers resetting to their default value of 0 (inactive). Without a reset, it is possible that some registers may be in their non-default state on power-up. This may cause the device to malfunction. When a reset is active, the device outputs '0' code on all channels. However, the LVDS output clocks are unaffected by reset.

# LAYOUT OF PCB WITH PowerPAD THERMALLY-ENHANCED PACKAGES

The ADS5240 is housed in a 64-lead PowerPAD thermally-enhanced package. To make optimum use of the thermal efficiencies designed into the PowerPAD package, the printed circuit board (PCB) must be designed with this technology in mind. Please refer to SLMA004 PowerPAD brief PowerPAD Made Easy (refer to our web site at www.ti.com), which addresses the specific considerations required when integrating a PowerPAD package into a PCB design. For more detailed information, including thermal modeling and repair procedures, please see brief SLMA002, PowerPAD technical Thermally-Enhanced Package (www.ti.com).

Interfacing High-Speed LVDS Outputs (SBOA104), an application report discussing the design of a simple deserializer that can deserialize LVDS outputs up to 840Mbps, can also be found on the TI web site (www.ti.com).

# CONNECTING HIGH-SPEED, MULTI-CHANNEL ADCs TO XILINX FPGAS

A separate application note (XAPP774) describing how to connect Tl's high-speed, multi-channel ADCs with serial LVDS outputs to Xilinx FPGAs can be downloaded directly from the Xilinx web site (http://www.xilinx.com).

Table 2. Time Constraints Associated with Device Recovery from Power-Down and Clock Stoppage

DESCRIPTION	TYP	REMARKS
Recovery from power-down mode (PD = 1 to PD = 0).	500μs	Capacitors on REF $_{\!T}$ and REF $_{\!B}$ less than $1\mu F.$
Recovery from momentary clock stoppage ( < 300ns).	10μs	
Recovery from extended clock stoppage ( > 300ns).	100μs	

20 Submit Documentation Feedback



### **Revision History**

#### Changes from Revision D (September 2005) to Revision E

Page

• Updated Absolute Maximum Ratings table: added entries for Digital Input Pins, Set 1 and Set 2 and added footnote 3.... 2

Cł	nanges from Revision C (December 2004) to Revision D	Page
•	Changed component image to have TI logo	1
•	Changed fourth bullet in Features section.	
•	Changed 12th bullet of Features section.	
•	Added fifth bullet to Applications section.	1
•	Changed front page figure.	1
•	Changed first footnote of Ordering Information table.	2
•	Changed Absolute Maximum Ratings table and footnotes	2
•	Changed Recommended Operating Conditions table and footnotes.	3
•	Changed Electrical Characteristics table, conditions, and footnotes.	4
•	Changed Reference Selection table; moved from page 3.	5
•	Changed AC Characteristics conditions.	6
•	Changed ENOB, Crosstalk, and IMD rows of AC Characteristics table.	6
•	Changed LVDS table.	7
•	Changed Switching Characteristics table.	7
•	Changed LVDS timing diagram.	8
•	Changed Reset timing diagram.	8
•	Changed Power-Down timing diagram.	9
•	Deleted Serial Interface table.	9
•	Changed LVDS timing diagram.	9
•	Changed Serial Interface timing diagram and table.	9
•	Changed Serial Interface Registers table.	10
•	Changed Test Patterns table.	10
•	Changed Aperture Delay, Clock Duty Cycle, ENOB, SINAD, SNR, SFDR, and IMD3 sections of <i>Definitions of Specifications</i> section.	13
•	Deleted Nyquist Sampling, Offset Error, Propagation Delay, Temperature Drift, and THD sections of <i>Definition of Specification</i> section.	13
•	Changed Figure 1.	14
•	Changed Figure 2.	14
•	Changed Figure 3.	14
•	Changed Figure 4.	14
•	Changed Figure 9.	15
•	Deleted Figure 12 (Power Dissipation vs Temperature).	15
•	Changed 2V to 1.95V, 1V to 0.95V, and 1.5V to 1.45V in first paragraph of Overview section in Theory of operation	16
•	Changed first paragraph of Driving the Analog Inputs section in Theory of Operation.	16
•	Added second paragraph of Driving the Analog Inputs section in Theory of Operation.	16
•	Changed Figure 14.	16
•	Deleted second and fourth paragraphs of Driving the Analog Inputs section in Theory of Operation.	16
•	Deleted Figure 15 (Input Circuitry) of <i>Driving the Analog Inputs</i> section in Theory of Operation.	16
•	Added fourth paragraph of Driving the Analog Inputs section in Theory of Operation.	17
•	Changed Input Over-Voltage Recovery section in Theory of Operation.	17
•	Added Figure 15 (Overall Structure of the Sample-and-Hold Circuit).	17
•	Changed second sentence of first paragraph of Reference Circuit Design in Theory of Operation.	18
•	Changed third paragraph of Reference Circuit Design in Theory of Operation	18



SBAS326E -			

www.ti.com

	2,100201 00112 2001 11211022 011107111 2000	
•	Changed fourth paragraph of Reference Circuit Design in Theory of Operation.	18
•	Changed Figure 16.	18
•	Added last sentence to fifth paragraph of Reference Circuit Design in Theory of Operation	18
•	Added Table 1	18
•	Changed Clocking section in Theory of Operation.	18
•	Changed LVDS Buffers section in Theory of Operation.	19
•	Changed Power-Down Mode section in Theory of Operation.	
•	Added Table 2	20
•	Deleted Supply Sequence section in Theory of Operation.	20
•	Added Reset section in Theory of Operation.	20
•	Changed third and fourth sentences of first paragraph of Layout of PCB with PowerPAD Thermally-Enhanced Packages section in Theory of Operation.	20
•	Added second paragraph to Layout of PCB with PowerPAD Thermally-Enhanced Packages section in Theory o Operation.	

www.ti.com 11-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
ADS5240IPAP	Active	Production	HTQFP (PAP)   64	160   JEDEC TRAY (10+1)	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	ADS5240IPAP
ADS5240IPAP.A	Active	Production	HTQFP (PAP)   64	160   JEDEC TRAY (10+1)	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	ADS5240IPAP
ADS5240IPAPT	Active	Production	HTQFP (PAP)   64	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	ADS5240IPAP
ADS5240IPAPT.A	Active	Production	HTQFP (PAP)   64	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	ADS5240IPAP
ADS5240IPAPTG4	Active	Production	HTQFP (PAP)   64	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	ADS5240IPAP
ADS5240IPAPTG4.A	Active	Production	HTQFP (PAP)   64	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	ADS5240IPAP

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



### **PACKAGE OPTION ADDENDUM**

www.ti.com 11-Nov-2025

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 15-Jul-2025

#### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ADS5240IPAPT	HTQFP	PAP	64	250	180.0	24.4	13.0	13.0	1.5	16.0	24.0	Q2
ADS5240IPAPTG4	HTQFP	PAP	64	250	180.0	24.4	13.0	13.0	1.5	16.0	24.0	Q2

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 15-Jul-2025



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ADS5240IPAPT	HTQFP	PAP	64	250	213.0	191.0	55.0
ADS5240IPAPTG4	HTQFP	PAP	64	250	213.0	191.0	55.0



www.ti.com 15-Jul-2025

#### **TRAY**



Chamfer on Tray corner indicates Pin 1 orientation of packed units.

#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	Κ0 (μm)	P1 (mm)	CL (mm)	CW (mm)
ADS5240IPAP	PAP	HTQFP	64	160	8 x 20	150	315	135.9	7620	15.2	13.1	13
ADS5240IPAP.A	PAP	HTQFP	64	160	8 x 20	150	315	135.9	7620	15.2	13.1	13


10 x 10, 0.5 mm pitch

QUAD FLATPACK

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



PLASTIC QUAD FLATPACK

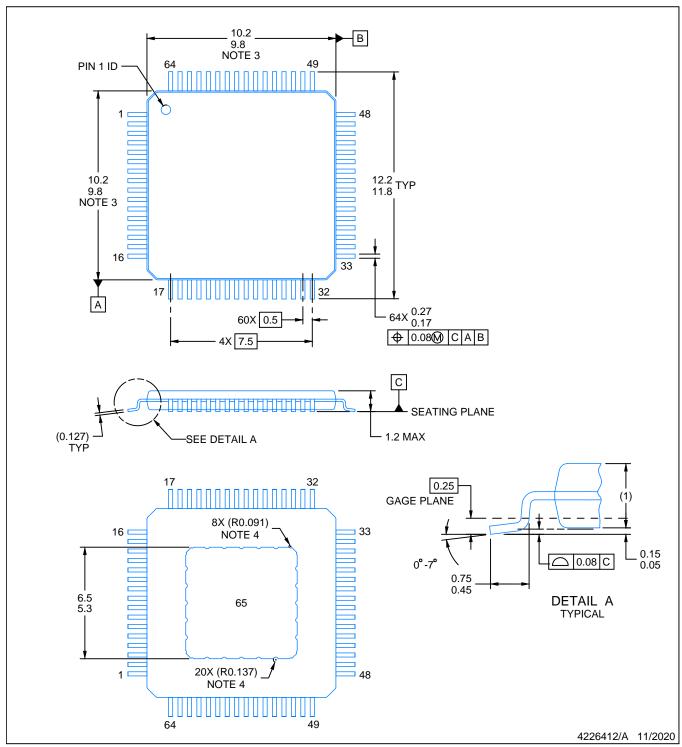


#### NOTES:

PowerPAD is a trademark of Texas Instruments.

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs.
- 4. Strap features may not be present.
- 5. Reference JEDEC registration MS-026.



PLASTIC QUAD FLATPACK

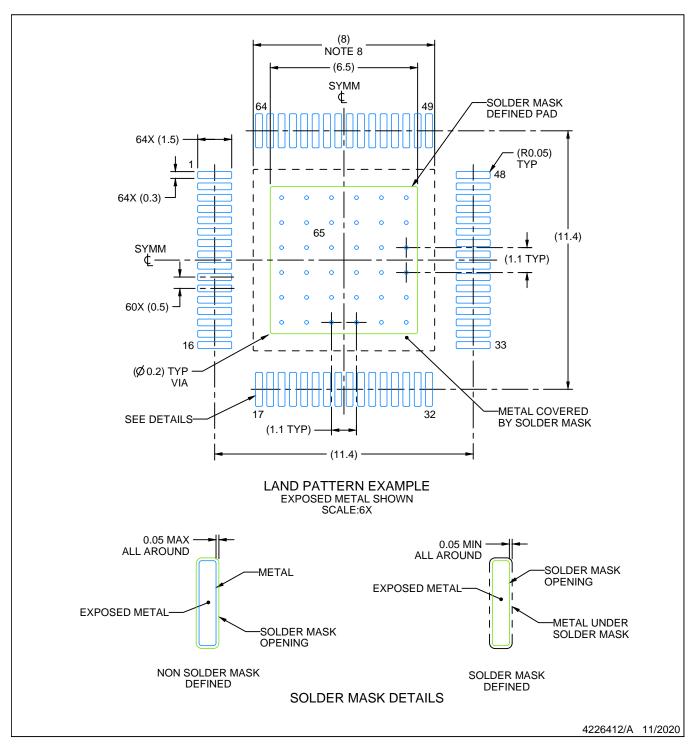


#### NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. This package is designed to be soldered to a thermal pad on the board. See technical brief, Powerpad thermally enhanced package, Texas Instruments Literature No. SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
- 9. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.
- 10. Size of metal pad may vary due to creepage requirement.



PLASTIC QUAD FLATPACK

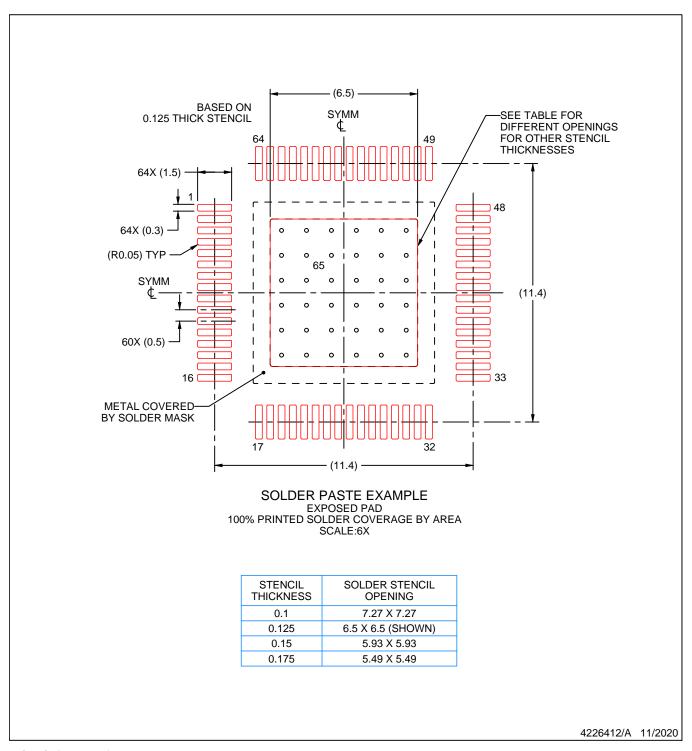

NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025