

SBAS154C - OCTOBER 2000 - REVISED OCTOBER 2002

14-Bit, 10MSPS Self-Calibrating ANALOG-TO-DIGITAL CONVERTER

FEATURES

SELF-CALIBRATING

HIGH SFDR: 85dB at NYQUIST

HIGH SNR: 76dB

LOW POWER: 250mW

DIFFERENTIAL OR SINGLE-ENDED INPUTS

● +3V/+5V LOGIC I/O COMPATIBLE

• FLEXIBLE INPUT RANGE

OVER-RANGE INDICATOR

• INTERNAL OR EXTERNAL REFERENCE

APPLICATIONS


- IF AND BASEBAND DIGITIZATION
- CCD IMAGING SCANNERS
- TEST INSTRUMENTATION
- IR IMAGING

DESCRIPTION

The ADS850 is a high dynamic range, 14-bit Analog-to-Digital Converter (ADC) that utilizes a fully differential input, allowing for either single-ended or differential input interface over varying input spans. This converter features digital error correction techniques ensuring 14-bit linearity and a calibration procedure that corrects for capacitor and gain mismatches. The ADS850 also includes a high-bandwidth track-and-hold that provides excellent spurious performance up to and beyond the Nyquist rate.

The ADS850 provides an internal reference that can be programmed for a 2Vp-p input range for the best spurious performance and ease of driving. Alternatively, the 4Vp-p input range can be used for the lowest input referred noise, offering superior signal-to-noise performance for imaging applications. There is also the capability to set the range between 2Vp-p and 4Vp-p, or to use an external reference. The ADS850 also provides an over-range indicator flag to indicate if the input has exceeded the full-scale input range of the converter.

The low distortion and high signal-to-noise performance provide the extra margin needed for communications, imaging, and test instrumentation applications. The ADS850 is available in a TQFP-48 package.

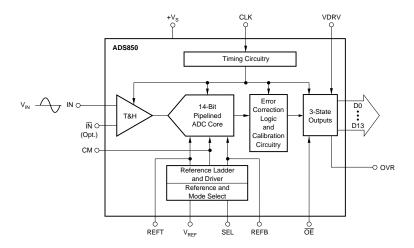



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



ABSOLUTE MAXIMUM RATINGS(1)

| +V _s | +6V |
|---------------------------------|------------------------------------|
| +V _S Analog Input | (-0.3V) to (+V _S +0.3V) |
| Logic Input | (-0.3V) to (+V _c +0.3V) |
| Case Temperature | +100°C |
| Junction Temperature | |
| Storage Temperature | +150°C |

NOTE: (1) Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Exposure to absolute maximum conditions for extended periods may affect device reliability.

DEMO BOARD ORDERING INFORMATION

| PRODUCT | DEMO BOARD |
|---------|-------------|
| ADS850Y | ADS850Y-EVM |

ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PACKAGE/ORDERING INFORMATION

| PRODUCT | PACKAGE-LEAD | PACKAGE DESIGNATOR ⁽¹⁾ | SPECIFIED TEMPERATURE RANGE | PACKAGE MARKING | ORDERING NUMBER | TRANSPORT MEDIA, QUANTITY |
|---------|--------------|--------------------------------------|-----------------------------------|--------------------|---------------------------|--|
| ADS850Y | TQFP-48 | PFB " | –40°C to +85°C | ADS850Y | ADS850Y/250 ADS850Y/2K | Tape and Reel, 250 Tape and Reel, 2000 |

NOTE: (1) For the most current specifications and package information, refer to our web site at www.ti.com.

ELECTRICAL CHARACTERISTICS

At T_A = full specified temperature range, V_S = +5V, specified differential input range = 1.5V to 3.5V, internal reference input, sampling rate = 10MSPS after calibration, and V_{REF} = 2V, unless otherwise specified.

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|---|-------------------|---------------------------|-------------------|-----------------------------|
| RESOLUTION | | | 14 | | Bits |
| SPECIFIED TEMPERATURE RANGE | | | -40 to +85 | | °C |
| CONVERSION CHARACTERISTICS Sample Rate Data Latency | | 10k | 7 | 10M | Samples/s Clk Cycles |
| ANALOG INPUT Single-Ended Input Range Differential Input Range Common-Mode Voltage | $V_{REF} = 1.0$ $V_{REF} = 2.0$ $V_{REF} = 2.0$ | 1.5 0.5 1.5 | 2.5 | 3.5 4.5 3.5 | V V V |
| Input Capacitance Analog Input Bandwidth | -3dBFS Input | | 1 20 270 | | V pF MHz |
| DYNAMIC CHARACTERISTICS Differential Linearity Error (Largest Code Error) f = 4.8MHz No Missing Codes Spurious-Free Dynamic Range(1) | | | ±0.75 Tested | ±1.0 | LSB |
| f = 4.8MHz (-1dB input) f = 4.8MHz (-1dB input) Signal-to-Noise Ratio (SNR) | 4Vp-p 2Vp-p | 75 | 85 82 | | dBFS ⁽²⁾ dBFS |
| f = 4.8MHz (-1dB input) f = 4.8MHz (-1dB input) Signal-to-(Noise + Distortion) (SINAD) | 4Vp-p 2Vp-p | 71 | 76 73 | | dBFS dBFS |
| f = 4.8MHz (-1dB input) f = 4.8MHz (-1dB input) Effective Number of Bits at 4.8MHz ⁽³⁾ Integral Nonlinearity Error | 4Vp-p 2Vp-p | 70 | 75 72 12.2 | | dBFS dBFS Bits |
| f = 4.8MHz Aperture Delay Time Aperture Jitter Overvoltage Recovery Time Full-Scale Step Acquisition Time | 1.5 • FS Input | | ±2.5 1 4 2 50 | ±5.0 | LSB ns ps rms ns |


ELECTRICAL CHARACTERISTICS (Cont.)

At T_A = full specified temperature range, V_S = +5V, specified differential input range = 1.5V to 3.5V, internal reference input, sampling rate = 10MSPS after calibration, and V_{REF} = 2V, unless otherwise specified.

| | | | ADS850Y | | |
|---|----------------------------|-------|----------------------|---------|--------|
| PARAMETER | CONDITIONS | MIN | TYP | TYP MAX | |
| DIGITAL INPUTS | | | | | |
| Logic Family | | +3V/+ | 5V Logic Compatible | e CMOS | |
| Convert Command | Start Conversion | Risi | ng Edge of Convert | Clock | |
| High Level Input Current (V _{IN} = 5V) ⁽⁴⁾ | | | | 100 | μΑ |
| Low Level Input Current (V _{IN} = 0V) | | | | ±10 | μΑ |
| High Level Input Voltage | | +2.0 | | | V |
| Low Level Input Voltage | | | | +1.0 | V |
| Input Capacitance | | | 5 | | pF |
| DIGITAL OUTPUTS | | | | | |
| Logic Family | | +3V/+ | 5V Logic Compatible | e CMOS | V |
| Logic Coding | | | Straight Offset Bina | rv | |
| Low Output Voltage | $(I_{OL} = 50 \mu A)$ | | | 0.1 | V |
| Low Output Voltage | (I _{OL} = 1.6mA) | | | 0.4 | v |
| High Output Voltage | $(I_{OH} = 50\mu\text{A})$ | +4.5 | | 0 | v |
| High Output Voltage | $(I_{OH} = 0.5 \text{mA})$ | +2.4 | | | ľ |
| 3-State Enable Time | OE = LOW | | 20 | 40 | ns |
| 3-State Disable Time | OE = HIGH | | 2 | 10 | ns |
| Output Capacitance | 02 = 111011 | | 5 | 10 | pF |
| ' ' | | | + | | + |
| ACCURACY (4Vp-p Input Range) | At 25°C | | ±0.2 | | %FS |
| Zero Error (Referred to –FS) | At 25 C | | - | | |
| Zero Error Drift (Referred to –FS) Gain Error ⁽⁵⁾ | At 25°C | | ±5 | | ppm/°C |
| | Al 25°C | | ±0.7 | | %FS |
| Gain Error Drift ⁽⁵⁾ | At 25°C | | ±15 | | ppm/°C |
| Gain Error ⁽⁶⁾ | At 25°C | | ±0.042 | | %FS |
| Gain Error Drift ⁽⁶⁾ | | | ±15 | | ppm/°C |
| Power-Supply Rejection of Gain | $\Delta V_S = \pm 5\%$ | | 82 | | dB |
| Reference Input Resistance | A. 0500 | | 1.6 | | kΩ |
| Internal Voltage Reference Tolerance (V _{REF} = 2.0V) ⁽⁷⁾ | At 25°C | | ±13.5mV | | mV |
| Internal Voltage Reference Tolerance (V _{REF} = 1.0V) ⁽⁷⁾ | At 25°C | | ±6mV | | mV |
| POWER-SUPPLY REQUIREMENTS | | | | | |
| Supply Voltage: +V _S | Operating | +4.7 | +5.0 | +5.3 | V |
| Supply Voltage: VDRV | Operating | +2.7 | | +5.3 | V |
| Supply Current: +I _S | Operating | | 53 | | mA |
| Power Dissipation VDRV = 3V | External Reference | | 240 | | mW |
| VDRV = 5V | External Reference | | 245 | | mW |
| VDRV = 3V | Internal Reference | | 250 | 275 | mW |
| VDRV = 5V | Internal Reference | | 255 | | mW |
| | Power-Down | | 20 | | mW |
| Thermal Resistance, θ_{JA} | | | F0 - | | |
| TQFP-48 | | | 56.5 | | °C/W |

NOTES: (1) Spurious-Free Dynamic Range refers to the difference in magnitude between the fundamental and the next largest harmonic. (2) dBFS means dB relative to full scale. (3) Effective number of bits (ENOB) is defined by (SINAD - 1.76)/6.02. (4) Internal 50k Ω pull-down resistor. (5) Includes internal reference. (6) Excludes internal reference tolerance based on ± 1 sigma of distribution.

PIN CONFIGURATION

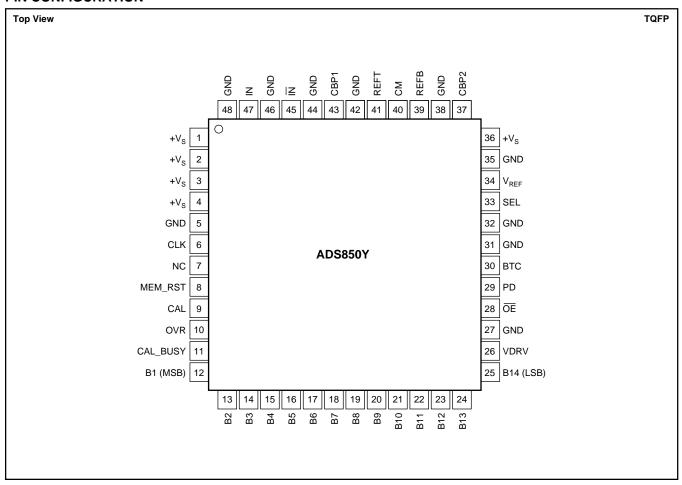


PIN DESCRIPTIONS


| PIN | I/O | DESIGNATOR | DESCRIPTION | PIN | I/O | DESIGNATOR | DESCRIPTION |
|-----|-----|-----------------|--|-----|-----|------------------|--|
| 1 | | +V _S | +5V Supply | 27 | | GND | Ground |
| 2 | | +V _S | +5V Supply | 28 | I | ŌĒ | Output Enable: HI = High Impedance; |
| 3 | | +V _S | +5V Supply | | | | LO = Normal Operation (50kΩ Internal |
| 4 | | +V _S | +5V Supply | | | | Pull-Down Resistor) |
| 5 | | GND | Ground | 29 | - 1 | PD | Power Down: HI = Power Down; LO = Normal |
| 6 | 1 | CLK | Convert Clock Input | | | | Operation (50kΩ Internal Pull-Down Resistor) |
| 7 | | NC | No Connection | 30 | - 1 | BTC | HI = Binary Two's Complement (BTC); |
| 8 | 1 | MEM_RST | Memory Reset. When pulsed HIGH, | | | | LO = Straight Offset Binary (SOB) |
| | | | resets memory to zero. Not intended as | 31 | | GND | Ground |
| | | | a function pin, so should be perma- | 32 | | GND | Ground |
| | | | nently tied to ground. | 33 | | SEL | Input Range Select |
| 9 | 1 | CAL | When Pulsed High, puts ADC into Cali- | 34 | I/O | V _{REF} | Reference Voltage Select |
| | | | bration Mode (2 clock cycles). | 35 | | GND | Ground |
| 10 | | OVR | Over Range Indicator | 36 | | +V _S | +5V Supply |
| 11 | | CAL_BUSY | Indicates in Calibration Mode. | 37 | | CBP2 | Calibration Reference Bypass 2 (0.1µF ce- |
| 12 | 0 | B1 (MSB) | Data Bit 1 (D13) (MSB) | | | | ramic capacitor recommended for decou- |
| 13 | 0 | B2 | Data Bit 2 (D12) | | | | pling.) |
| 14 | 0 | B3 | Data Bit 3 (D11) | 38 | | GND | Ground |
| 15 | 0 | B4 | Data Bit 4 (D10) | 39 | I/O | REFB | Bottom Reference Voltage Bypass |
| 16 | 0 | B5 | Data Bit 5 (D9) | 40 | 0 | CM | Common-Mode Voltage (mid-scale). Not in- |
| 17 | 0 | B6 | Data Bit 6 (D8) | | | | tended for driving a load. |
| 18 | 0 | B7 | Data Bit 7 (D7) | 41 | I/O | REFT | Top Reference Voltage Bypass |
| 19 | 0 | B8 | Data Bit 8 (D6) | 42 | | GND | Ground |
| 20 | 0 | B9 | Data Bit 9 (D5) | 43 | | CBP1 | Calibration Reference Bypass 1 (0.1µF ce- |
| 21 | 0 | B10 | Data Bit 10 (D4) | | | | ramic capacitor recommended for decou- |
| 22 | 0 | B11 | Data Bit 11 (D3) | | | | pling.) |
| 23 | 0 | B12 | Data Bit 12 (D2) | 44 | | GND | Ground |
| 24 | 0 | B13 | Data Bit 13 (D1) | 45 | I | ĪN | Complementary Analog Input (-) |
| 25 | 0 | B14 (LSB) | Data Bit 14 (D0) (LSB) | 46 | | GND | Ground |
| 26 | | VDRV | Output Driver Voltage | 47 | I | IN | Analog Input (+) |
| | | | | 48 | | GND | Ground |




TIMING DIAGRAMS

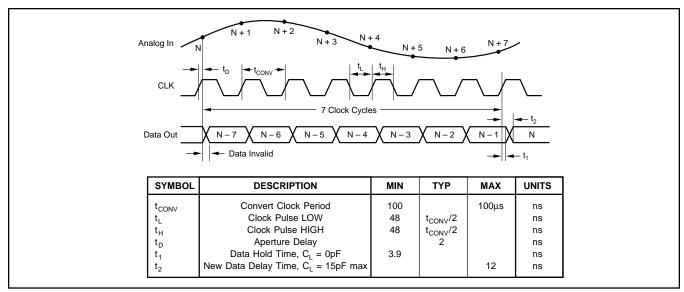


TIMING DIAGRAM 1. Pipeline Delay Timing.

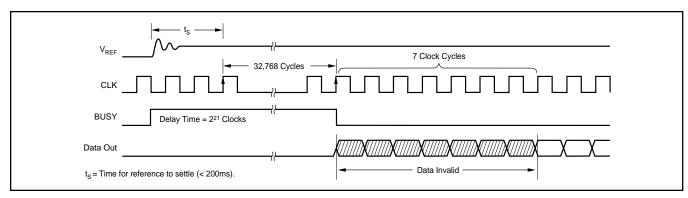

TIMING DIAGRAM 2. Power-On Calibration Mode Timing.

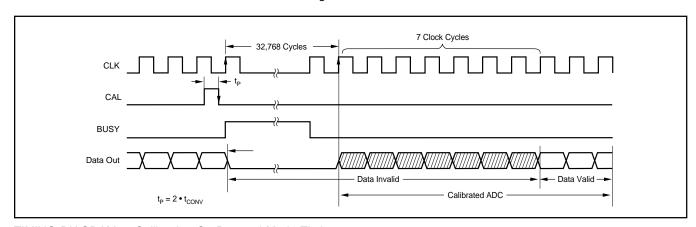

TIMING DIAGRAM 3. Calibration-On-Demand Mode Timing.

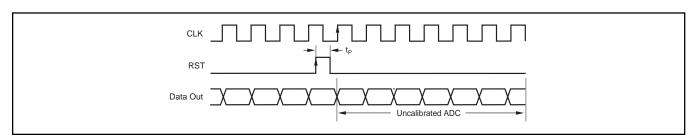


TIMING DIAGRAM 4. Reset Mode Timing.








TYPICAL CHARACTERISTICS


At T_A = full specified temperature range, V_S = +5V, specified input range = 1.5V to 3.5V, differential internal reference input and sampling rate = 10MSPS after calibration, V_{REF} = 2V, -1dB input, unless otherwise specified.


















TYPICAL CHARACTERISTICS (Cont.)


At T_A = full specified temperature range, V_S = +5V, specified input range = 1.5V to 3.5V, differential internal reference input and sampling rate = 10MSPS after calibration, V_{REF} = 2V, -1dB input, unless otherwise specified.


















TYPICAL CHARACTERISTICS (Cont.)


At T_A = full specified temperature range, V_S = +5V, specified input range = 1.5V to 3.5V, differential internal reference input and sampling rate = 10MSPS after calibration, V_{REF} = 2V, -1dB input, unless otherwise specified.















TYPICAL CHARACTERISTICS (Cont.)

At T_A = full specified temperature range, V_S = +5V, specified input range = 1.5V to 3.5V, differential internal reference input and sampling rate = 10MSPS after calibration, V_{REF} = 2V, -1dB input, unless otherwise specified.



APPLICATION INFORMATION

DRIVING THE ANALOG INPUT

The ADS850 allows its analog inputs to be driven either single-ended or differentially. The focus of the following discussion is on the single-ended configuration.

CALIBRATION PROCEDURE

The calibration procedure (CAL) is started by a positive pulse, with a minimum width of 2 clock cycles. Once calibration is initiated, the clock must operate continuously and the power supplies and references must remain stable. The calibration registers are reset on the rising edge of the CAL signal. The actual calibration procedure begins at the falling edge of the CAL signal. Calibration is completed at the end of 32,775 cycles at 10MSPS, CAL = 3.28ms (see Timing Diagram 3 on page 5). During calibration, the CAL_BUSY signal stays HIGH and the digital output pins of the ADC are forced to zero. Also, during calibration, the inputs (IN and \overline{IN}) are disabled. When the calibration procedure is complete, the CAL_BUSY goes LOW. Valid data appears at the output seven cycles later or after a total of 32,775 clock cycles. If there are any changes to the clock or the temperature changes more than ±20°C, the ADC should be re-calibrated to maintain performance.

At power-on (see Timing Diagram 2 on page 5), the ADC calibrates itself. The power-on delay, $t_{\rm S}$, is the time it takes for the reference voltage to settle. Once the clock starts, the power-on delay operates for 2^{21} clock cycles. Bypass capacitors should be selected to allow the reference to settle within 200ms. If the system is noisy or external references require a longer settling time, a CAL pulse may be required.

AC-COUPLED INPUT CONFIGURATION

See Figure 1 for the circuit example of the most common interface configuration for the ADS850. With the V_{REF} pin connected to the SEL pin, the full-scale input range is defined to be 2Vp-p. This signal is ac-coupled in single-ended form to the ADS850 using the low distortion voltage-feedback amplifier OPA642. As is generally necessary for singlesupply components, operating the ADS850 with a full-scale input signal swing requires a level-shift of the amplifier's zero-centered analog signal to comply with the ADC's input range requirements. Using a DC blocking capacitor between the output of the driving amplifier and the converter's input, a simple level-shifting scheme can be implemented. In this configuration, the top and bottom references (REFT, REFB) provide an output voltage of +3V and +2V, respectively. Here, two resistor pairs of 2 • $2k\Omega$ are used to create a common-mode voltage of approximately +2.5V to bias the inputs of the ADS850 (IN, $\overline{\text{IN}}$) to the required DC voltage.

An advantage of ac-coupling is that the driving amplifier still operates with a ground-based signal swing. This will keep the distortion performance at its optimum since the signal swing stays centered within the linear region of the op amp and sufficient headroom to the supply rails can be maintained. Consider using the inverting gain configuration to eliminate CMR induced errors of the amplifier. The addition of a small series resistor (R_S) between the output of the op amp and the input of the ADS850 will be beneficial in almost all interface configurations. This will decouple the op amp's output from the capacitive load and avoid gain peaking, which can result in increased noise. For best spurious and distortion performance, the resistor value should be kept below 100Ω . Furthermore, the series resistor together with the 100pF capacitor establish a passive low-pass filter, limiting the bandwidth for the wideband noise, thus help improving the SNR performance.

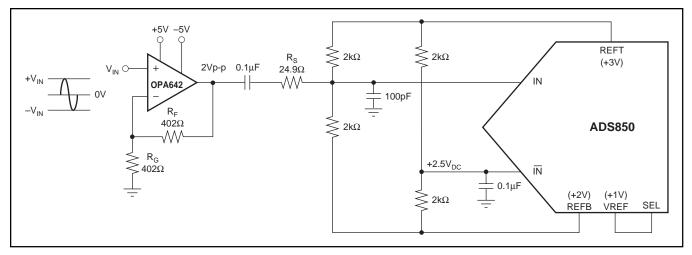


FIGURE 1. AC-Coupled Input Configuration for 2Vp-p Input Swing and Common-Mode Voltage at +2.5V Derived from Internal Top and Bottom Reference.

DC-COUPLED WITHOUT LEVEL SHIFT

In some applications the analog input signal may already be biased at a level which complies with the selected input range and reference level of the ADS850. In this case, it is only necessary to provide an adequately low source impedance to the selected input, IN or $\overline{\text{IN}}$. Always consider wideband op amps since their output impedance will stay low over a wide range of frequencies. For those applications requiring the driving amplifier to provide a signal amplification, with a gain ≥ 3 , consider using the decompensated voltage feedback op amp OPA686.

DC-COUPLED WITH LEVEL SHIFT

Several applications may require that the bandwidth of the signal path include DC, in which case the signal has to be DC-coupled to the ADC. In order to accomplish this, the interface circuit has to provide a DC-level shift. The circuit shown in Figure 2 employs an op amp, OPA681, to sum the ground

centered input signal with a required DC offset. The ADS850 typically operates with a +2.5V common-mode voltage, which is established at the center tap of the ladder and connected to the IN input of the converter. The OPA681 operates in inverting configuration. Here resistors R₁ and R₂ set the DCbias level for the OPA691. Because of the op amp's noise gain of +2V/V, assuming $R_F = R_{IN}$, the DC offset voltage applied to its noninverting input has to be divided down to +1.25V, resulting in a DC output voltage of +2.5V. DC voltage differences between the IN and IN inputs of the ADS850 effectively will produce an offset, which can be corrected for by adjusting the values of resistors R₁ and R₂. The bias current of the op amp may also result in an undesired offset. The selection criteria of the appropriate op amp should include the input bias current, output voltage swing, distortion and noise specification. Note that in this example the overall signal phase is inverted. To re-establish the original signal polarity, it is always possible to interchange the IN and $\overline{\text{IN}}$ connections.

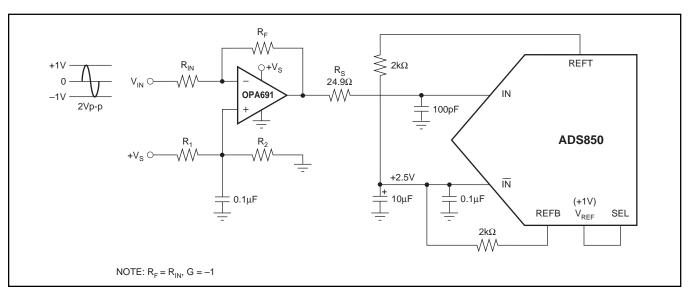


FIGURE 2. DC-Coupled, Single-Ended Input Configuration with DC-level Shift.

SINGLE-ENDED-TO-DIFFERENTIAL CONFIGURATION (TRANSFORMER COUPLED)

In order to select the best suited interface circuit for the ADS850, the performance requirements must be known. If an ac-coupled input is needed for a particular application, the next step is to determine the method of applying the signal; either single-ended or differentially. The differential input configuration may provide a noticeable advantage of achieving good SFDR performance based on the fact that in the differential mode, the signal swing can be reduced to half of the swing required for single-ended drive. Secondly, by driving the ADS850 differentially, the even-order harmonics will be reduced. Figure 3 shows the schematic for the suggested transformer-coupled interface circuit. The resistor across the secondary side (R_T) should be set to get an input impedance match (e.g., $R_T = n^2 \cdot R_G$).




FIGURE 3. Transformer-Coupled Input.

REFERENCE OPERATION

Integrated into the ADS850 is a bandgap reference circuit including logic that provides either a +1V or +2V reference output, by simply selecting the corresponding pin-strap configuration. For more design flexibility, the internal reference can be shut off and an external reference voltage used. Table I provides an overview of the possible reference options and pin configurations.

| MODE | INPUT RANGE | SEL | V _{REF} | REFB | REFT |
|----------|-------------------|-----------------|------------------|------------------|-----------------|
| Internal | 2Vp-p | V_{REF} | SEL | NC | NC |
| Internal | 4Vp-p | GND | NC | NC | NC |
| External | 2V < FSR < 4V | +V _S | 1V < FSR < 2V | NC | NC |
| External | (REFB – REFT) • 2 | +V _S | GND | 1.5V < REFB < 2V | 2V < REFT <3.5V |

TABLE I. Selected Reference Configuration Examples.

A simple model of the internal reference circuit is shown in Figure 4. The internal blocks are a 1V bandgap voltage reference, buffer, the resistive reference ladder, and the drivers for the top and bottom reference which supply the necessary current to the internal nodes. As shown, the output of the buffer appears at the V_{REF} pin. The full-scale input span of the ADS850 is determined by the voltage at V_{REF} , according to Equation 1:

Full-Scale Input Span =
$$2 \cdot V_{REF}$$
 (1)

Note that the current drive capability of this amplifier is limited to about 1mA and should not be used to drive low loads. The programmable reference circuit is controlled by the voltage applied to the select pin (SEL). Refer to Table I for an overview.

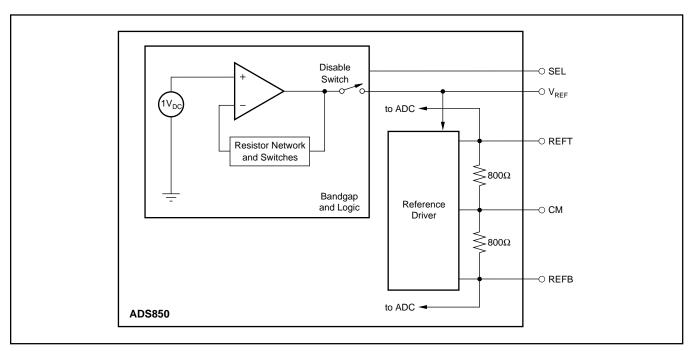


FIGURE 4. Equivalent Reference Circuit.

The top reference (REFT) and the bottom reference (REFB) are brought out mainly for external bypassing. For proper operation with all reference configurations, it is necessary to provide solid bypassing to the reference pins in order to keep the clock feedthrough to a minimum. Figure 5 shows the recommended reference decoupling configuration.




FIGURE 5. Recommended Reference Bypassing Scheme.

In addition, the Common-Mode Voltage (CMV) may be used as a reference level to provide the appropriate offset for the driving circuitry. However, care must be taken not to appreciably load this node, which is not buffered and has a high impedance. An alternate method of generating a common-mode voltage is given in Figure 6. Here, two external precision resistors (tolerance 1% or better) are located between the top and bottom reference pins. The common-mode level will appear at the midpoint. The output buffers of the top and bottom reference are designed to supply approximately 2mA of output current.




FIGURE 6. Alternative Circuit to Generate Common-Mode Voltage.

EXTERNAL REFERENCE OPERATION

Depending on the application requirements, it might be advantageous to operate the ADS850 with an external reference. This may improve the DC accuracy if the external reference circuitry is superior in its drift and accuracy. To use the ADS850 with an external reference, the user must disable the internal reference, as shown in Figure 7. By connecting the SEL pin to $\pm V_S$, the internal logic will shut

down the internal reference. At the same time, the output of the internal reference buffer is disconnected from the V_{REF} pin, which now must be driven with the external reference. Note that a similar bypassing scheme should be maintained as described for the internal reference operation.




FIGURE 7. External Reference, Input Range 1.5V to 3.5V (2Vp-p), Single-Ended, with +2.5V Common-Mode Voltage.

DIGITAL INPUTS AND OUTPUTS Over Range (OVR)

One feature of the ADS850 is its 'Over Range' digital output (OVR). This pin can be used to monitor any out-of-range condition, which occurs every time the applied analog input voltage exceeds the input range (set by V_{REF}). The OVR output is LOW when the input voltage is within the defined input range. It becomes HIGH when the input voltage is beyond the input range. This is the case when the input voltage is either below the bottom reference voltage or above the top reference voltage. OVR will remain active until the analog input returns to its normal signal range and another conversion is completed. Using the MSB and its complement in conjunction with OVR a simple clue logic can be built that detects the overrange and underrange conditions, as shown in Figure 8. It should be noted that OVR is a digital output which is updated along with the bit information corresponding to the particular sampling incidence of the analog signal. Therefore, the OVR data is subject to the same pipeline delay (latency) as the digital data.




FIGURE 8. External Logic for Decoding Under- and Over-Range Condition.



CLOCK INPUT REQUIREMENTS

Clock jitter is critical to the SNR performance of high-speed, high-resolution ADCs. It leads to aperture jitter (t_A) which adds noise to the signal being converted. The ADS850 samples the input signal on the rising edge of the CLK input. Therefore, this edge should have the lowest possible jitter. The jitter noise contribution to total SNR is given by the following equation. If this value is near your system requirements, input clock jitter must be reduced.

$$\label{eq:JitterSNR} \mbox{JitterSNR} = 20 \mbox{log} \frac{1}{2\pi f_{\mbox{\scriptsize IN}} t_{\mbox{\scriptsize A}}} \mbox{rms signal to rms noise}$$

Where: f_{IN} is Input Signal Frequency

 t_A is rms Clock Jitter

Particularly in undersampling applications, special consideration should be given to clock jitter. The clock input should be treated as an analog input in order to achieve the highest level of performance. Any overshoot or undershoot of the clock signal may cause degradation of the performance. When digitizing at high sampling rates, the clock should have a 50% duty cycle ($t_H = t_L$), along with fast rise and fall times of 2ns or less.

DIGITAL OUTPUTS

The digital outputs of the ADS850 are designed to be compatible with both high speed TTL and CMOS logic families. The driver stage for the digital outputs is supplied through a separate supply pin, VDRV, which is not connected to the analog supply pins. By adjusting the voltage on VDRV, the digital output levels will vary respectively. Therefore, it is possible to operate the ADS850 on a +5V analog supply while interfacing the digital outputs to 3V logic.

It is recommended to keep the capacitive loading on the data lines as low as possible (\leq 15pF). Larger capacitive loads demand higher charging currents as the outputs are changing. Those high current surges can feed back to the analog portion of the ADS850 and influence the performance. If necessary, external buffers or latches may be used which provide the added benefit of isolating the ADS850 from any digital noise activities on the bus coupling back high frequency noise. In addition, resistors in series with each data line may help maintain the ac performance of the ADS850. Their use depends on the capacitive loading seen by the converter. Values in the range of 100Ω to 200Ω will limit the instantaneous current the output stage has to provide for recharging the parasitic capacitances, as the output levels change from LOW to HIGH or HIGH to LOW.

GROUNDING AND DECOUPLING

Proper grounding and bypassing, short lead length, and the use of ground planes are particularly important for high frequency designs. Multi-layer PC boards are recommended for best performance since they offer distinct advantages like minimizing ground impedance, separation of signal layers by ground layers, etc. It is recommended that the analog and digital ground pins of the ADS850 be joined together at the IC and be connected only to the analog ground of the system.

The ADS850 has analog and digital supply pins, however, the converter should be treated as an analog component and all supply pins should be powered by the analog supply. This will ensure the most consistent results, since digital supply lines often carry high levels of noise that would otherwise be coupled into the converter and degrade the achievable performance.

Because of the pipeline architecture, the converter also generates high frequency current transients and noise that are fed back into the supply and reference lines. This requires that the supply and reference pins be sufficiently bypassed. Figure 9 shows the recommended decoupling scheme for the analog supplies. In most cases, $0.1\mu F$ ceramic chip capacitors are adequate to keep the impedance low over a wide frequency range. Their effectiveness largely depends on the proximity to the individual supply pin. Therefore, they should be located as close to the supply pins as possible. In addition, a larger size bipolar capacitor ($1\mu F$ to $22\mu F$) should be placed on the PC board in close proximity to the converter circuit.




FIGURE 9. Recommended Bypassing for Analog Supply Pins.

www.ti.com 11-Nov-2025

PACKAGING INFORMATION

| Orderable part number | Status | Material type | Package Pins | Package qty Carrier | RoHS | Lead finish/ | MSL rating/ | Op temp (°C) | Part marking |
|-----------------------|--------|---------------|-----------------|-----------------------|------|---------------|---------------------|--------------|--------------|
| | (1) | (2) | | | (3) | Ball material | Peak reflow | | (6) |
| | | | | | | (4) | (5) | | |
| ADS850Y/250 | Active | Production | TQFP (PFB) 48 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | ADS850Y |
| ADS850Y/250.B | Active | Production | TQFP (PFB) 48 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | ADS850Y |
| ADS850Y/2K | Active | Production | TQFP (PFB) 48 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | ADS850Y |
| ADS850Y/2K.B | Active | Production | TQFP (PFB) 48 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | ADS850Y |

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



www.ti.com 23-May-2025

TRAY



Chamfer on Tray corner indicates Pin 1 orientation of packed units.

*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | Unit array matrix | Max temperature (°C) | L (mm) | W (mm) | Κ0 (μm) | P1 (mm) | CL (mm) | CW (mm) |
|---------------|-----------------|-----------------|------|------|----------------------|----------------------------|--------|-----------|------------|------------|------------|------------|
| ADS850Y/250 | PFB | TQFP | 48 | 250 | 10 x 25 | 150 | 315 | 135.9 | 7620 | 12.2 | 11.1 | 11.25 |
| ADS850Y/250.B | PFB | TQFP | 48 | 250 | 10 x 25 | 150 | 315 | 135.9 | 7620 | 12.2 | 11.1 | 11.25 |
| ADS850Y/2K | PFB | TQFP | 48 | 2000 | 10 x 25 | 150 | 315 | 135.9 | 7620 | 12.2 | 11.1 | 11.25 |
| ADS850Y/2K.B | PFB | TQFP | 48 | 2000 | 10 x 25 | 150 | 315 | 135.9 | 7620 | 12.2 | 11.1 | 11.25 |

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025