













ADS8684, ADS8688


SBAS582C -JULY 2014-REVISED APRIL 2015

ADS868x 16-Bit, 500-kSPS, 4- and 8-Channel, Single-Supply, SAR ADCs with **Bipolar Input Ranges**

Features

- 16-Bit ADCs with Integrated Analog Front-End
- 4-, 8-Channel MUX with Auto and Manual Scan
- Channel-Independent Programmable Input Ranges:
 - Bipolar: ±10.24 V, ±5.12 V, ±2.56 V
 - Unipolar: 10.24 V, 5.12 V
- 5-V Analog Supply: 1.65-V to 5-V I/O Supply
- Constant Resistive Input Impedance: 1 $M\Omega$
- Input Overvoltage Protection: Up to ±20 V
- On-Chip, 4.096-V Reference with Low Drift
- **Excellent Performance:**
 - 500-kSPS Aggregate Throughput
 - DNL: ±0.5 LSB; INL: ±0.75 LSB
 - Low Drift for Gain Error and Offset
 - SNR: 92 dB: THD: -102 dB
 - Low Power: 65 mW
- AUX Input → Direct Connection to ADC Inputs
- SPI™-Compatible Interface with Daisy-Chain
- Industrial Temperature Range: -40°C to 125°C
- TSSOP-38 Package (9.7 mm × 4.4 mm)

Simplified Block Diagram

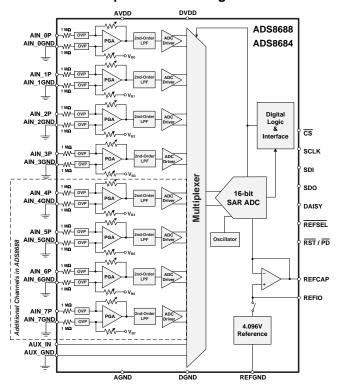

2 Applications

- **Power Automation**
- **Protection Relays**
- PLC Analog Input Modules

Description

The ADS8684 and ADS8688 are 4- and 8-channel, integrated data acquisition systems based on a 16-bit successive approximation (SAR) analog-to-digital converter (ADC), operating at a throughput of 500-kSPS. The devices feature integrated analog front-end circuitry for each input channel with overvoltage protection up to ±20 V, a 4- or 8-channel multiplexer with automatic and manual scanning modes, and an on-chip, 4.096-V reference with low temperature drift. Operating on a single 5-V analog supply, each input channel on the devices can support true bipolar input ranges of ±10.24 V, ± 5.12 V, and ± 2.56 V, as well as unipolar input ranges of 0 V to 10.24 V and 0 V to 5.12 V. The gain of the analog front-end for all input ranges is accurately trimmed to ensure a high dc precision. The input range selection is software-programmable and independent for each channel. The devices offer a 1-MΩ constant resistive input impedance irrespective of the selected input range.

The ADS8684 and ADS8688 offer a simple SPIcompatible serial interface to the digital host and also support daisy-chaining of multiple devices. The digital supply operates from 1.65 V to 5.25 V, enabling direct interface to a wide range of host controllers.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
ADS868x	TSSOP (38)	9.70 mm × 4.40 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

Gain Error versus Temperature






Table of Contents

1	Features 1		8.3 Feature Description	22
2	Applications 1		8.4 Device Functional Modes	
3	Description 1		8.5 Register Maps	45
4	Revision History2	9	Application and Implementation	
5	Device Comparison Table 4		9.1 Application Information	52
5 6			9.2 Typical Applications	
7	Pin Configuration and Functions4	10	Power-Supply Recommendations	57
1	Specifications	11	Layout	
	7.1 Absolute Maximum Ratings		11.1 Layout Guidelines	
	7.2 ESD Ratings		11.2 Layout Example	
	7.3 Recommended Operating Conditions	12	Device and Documentation Support	
	7.4 Thermal Information 6		12.1 Documentation Support	
	7.5 Electrical Characteristics		12.2 Related Links	
	7.6 Timing Requirements: Serial Interface		12.3 Trademarks	
_	7.7 Typical Characteristics		12.4 Electrostatic Discharge Caution	
8	Detailed Description		12.5 Glossary	
	8.1 Overview	13	Mechanical, Packaging, and Orderable	
	8.2 Functional Block Diagram	13	Information	59

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Cr	nanges from Revision B (August 2014) to Revision C	Page
•	Changed unipolar sub-bullet of third Features bullet	1
•	Added title to page 1 block diagram	1
•	Deleted footnote from Device Comparison table	4
•	Updated ESD Ratings table to current standards	6
•	Corrected package name in Thermal Information table	6
•	Changed Auxiliary Channel, SINAD and SFDR typical specifications in <i>Electrical Characteristics</i> table	9
•	Changed t _{DZ_CSDO} symbol in Timing Requirements table and Figure 1	11
•	Deleted clamp from second sentence of Overview section	21
•	Changed voltage range values in second paragraph of Analog Inputs section	22
•	Changed Range_CHn[2:0] to Range_CHn[3:0] in Programmable Gain Amplifier (PGA) section	25
•	Added Bit 3 column to Table 3	25
•	Changed SDO to SDI in second sentence of Event 3 in Data Acquisition Example section	34
•	Changed Continued Operation in the Selected Mode section	37
•	Changed Frame Abort Condition section	38
•	Changed STANDBY Mode section: added clarification to description of STANDBY mode	38
•	Changed second paragraph of Power-Down Mode section: added clarification to description of PWR_DN mode	40
•	Changed first two paragraphs of Auto Channel Enable with Reset section	41
•	Changed first paragraph of Manual Channel n Select section	42
•	Changed second paragraph of Reset Program Registers section: added clarity to description of RST mode	44
•	Changed Program Register Description section	45

Submit Documentation Feedback

Copyright © 2014–2015, Texas Instruments Incorporated





Ch	Changes from Original (July 2014) to Revision A			
•	Made changes to product preview data sheet	1		

Copyright © 2014–2015, Texas Instruments Incorporated




5 Device Comparison Table

PRODUCT	PRODUCT RESOLUTION (Bits)		SAMPLE RATE (kSPS)		
ADS8684	16	4, single-ended	500		
ADS8688	16	8, single-ended	500		

6 Pin Configuration and Functions

DBT Package TSSOP-38 (Top View, Not to Scale)

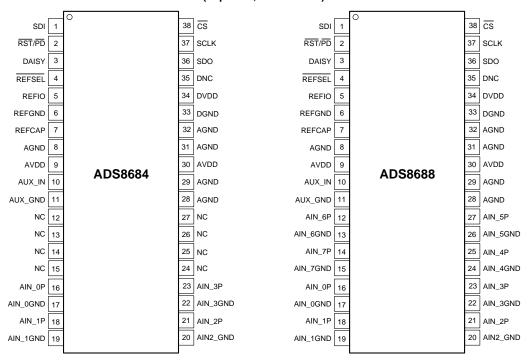

Pin Functions

	PIN				
NO	NA	ME	1/0	DESCRIPTION	
NO.	ADS8684	ADS8688			
1	S	DI	Digital input	Data input for serial communication.	
2 RST/PD Digital input Active low logic input. Dual functionality to reset or power-down the device.					
3 DAISY Digital input Chain the data input during serial communication in daisy-chain mode.					
4	4 REFSEL		Digital input	Active low logic input to enable the internal reference. When low, the internal reference is enabled; REFIO becomes an output that includes the V _{REF} voltage. When high, the internal reference is disabled; REFIO becomes an input to apply the external V _{REF} voltage.	
5	RE	FIO	Analog input, output	Internal reference output and external reference input pin. Decouple with REFGND on pin 6.	
6	REF	GND	Power supply	Reference GND pin; short to the analog GND plane. Decouple with REFIO on pin 5 and REFCAP on pin 7.	
7	REF	CAP	Analog output	ADC reference decoupling capacitor pin. Decouple with REFGND on pin 6.	
8	8 AGND		Power supply	Analog ground pin. Decouple with AVDD on pin 9.	
9	9 AVDD		Power supply	Analog supply pin. Decouple with AGND on pin 8.	
10	AUX_IN Analog input Auxiliary input channel: positive input. Decouple with AUX_GND on pin 11.				
11	AUX_	GND	Analog input	Auxiliary input channel: negative input. Decouple with AUX_IN on pin 10.	

Submit Documentation Feedback

Copyright © 2014–2015, Texas Instruments Incorporated



Pin Functions (continued)

	PIN				
NO.	NA	ME	I/O	DESCRIPTION	
NO.	ADS8684	ADS8688			
12	NC	AIN_6P	Analog input	Analog input channel 6: Positive input. Decouple with AIN_6GND on pin 13. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
13	NC	AIN_6GND	Analog input	Analog input channel 6: negative input. Decouple with AIN_6P on pin 12. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
14	NC	AIN_7P	Analog input	Analog input channel 7: positive input. Decouple with AIN_7GND on pin 15. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
15	NC	AIN_7GND	Analog input	Analog input channel 7: negative input. Decouple with AIN_7P on pin 14. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
		Analog input channel 0: positive input. Decouple with AIN_0GND on pin 17.			
Analog input Analog input channel 0: negative input. Decouple with AIN_0P on pin 16.					
Analog input Analog input channel 1: positive input. Decouple with AIN_1GND on pin 19.					
19	AIN_	IGND	Analog input	Analog input channel 1: negative input. Decouple with AIN_1P on pin 18.	
20	AIN2_	_GND	Analog input	Analog input channel 2: positive input. Decouple with AIN_2GND on pin 21.	
21	1 AIN_2P		Analog input	Analog input channel 2: negative input. Decouple with AIN_2P on pin 20.	
22	AIN_3GND		Analog input	Analog input channel 3: positive input. Decouple with AIN_3GND on pin 23.	
23	AIN_3P		Analog input	Analog input channel 3: negative input. Decouple with AIN_3P on pin 22.	
24			Analog input	Analog input channel 4: positive input. Decouple with AIN_4GND on pin 25. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
25	NC	AIN_4P	Analog input	Analog input channel 4: negative input. Decouple with AIN_4P on pin 24. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
26	NC	AIN_5GND	Analog input	Analog input channel 5: positive input. Decouple with AIN_5GND on pin 27. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
27	NC	AIN_5P	Analog input	Analog input channel 5: negative input. Decouple with AIN_5P on pin 26. No connection for the ADS8684: this pin can be left floating or connected to AGND.	
28	AG	ND	Power supply	Analog ground pin	
29	AG	ND	Power supply	Analog ground pin	
30	AV	DD	Power supply	Analog supply pin. Decouple with AGND on pin 31.	
31	AG	ND	Power supply	Analog ground pin. Decouple with AVDD on pin 30.	
32	AG	ND	Power supply	Analog ground pin	
33	DGND		Power supply	Digital ground pin. Decouple with DVDD on pin 34.	
34	DVDD		Power supply	Digital supply pin. Decouple with DGND on pin 33.	
35	5 DNC		Do not connect	Do not connect this pin to any node; must remain floating.	
36	SI	00	Digital output	Data output for serial communication	
37	SC	LK	Digital input	Clock input for serial communication	
38	C	S	Digital input	Active low logic input; chip-select signal	

Submit Documentation Feedback

Product Folder Links: ADS8684 ADS8688



7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

	MIN	MAX	UNIT
AIN_nP to AIN_nGND ⁽²⁾	-20	20	V
AIN_nP to AIN_nGND ⁽³⁾	-11	11	V
AIN_nGND to GND	-0.3	0.3	V
AUX_IN to GND	-0.3	AVDD + 0.3	V
AVDD to GND or DVDD to GND	-0.3	7	V
REFCAP to REFGND or REFIO to REFGND	-0.3	5.7	V
GND to REFGND	-0.3	0.3	V
Digital input pins to GND	-0.3	DVDD + 0.3	V
Digital output pins to GND	-0.3	DVDD + 0.3	V
Operating temperature, T _A	-40	125	°C
Storage temperature, T _{stg}	-65	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

				VALUE	UNIT
	Electrostatic	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	Analog input pins (AIN_nP; AIN_nGND)	±6000	
V _(ESD)	discharge		All other pins	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101 (2)		±500	

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
AVDD	Analog supply voltage	4.75	5	5.25	V
DVDD	Digital supply voltage	1.65	3.3	AVDD	V

7.4 Thermal Information

	W	ADS8684, ADS8688	
	JC(top) Junction-to-case (top) thermal resistance		UNIT
		38 PINS	-
$R_{\theta JA}$	Junction-to-ambient thermal resistance	68.8	
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	19.9	
$R_{\theta JB}$	Junction-to-board thermal resistance	30.4	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	1.3	C/VV
ΨЈВ	Junction-to-board characterization parameter	29.8	
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	NA	

(1) For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.

⁽²⁾ AVDD = 5 V or offers a low impedance of $< 30 \text{ k}\Omega$.

⁽³⁾ AVDD = floating with an impedance > 30 k Ω .

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



7.5 Electrical Characteristics

Minimum and maximum specifications are at $T_A = -40^{\circ}\text{C}$ to 125°C. Typical specifications are at $T_A = 25^{\circ}\text{C}$. AVDD = 5 V, DVDD = 3 V, $V_{REF} = 4.096$ V (internal), and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	TEST ⁽¹⁾ LEVEL
ANALOG INP	UTS						
		Input range = ±2.5 × V _{REF}	−2.5 × V _{REF}		$2.5 \times V_{REF}$	V	Α
	(2)	Input range = ±1.25 × V _{REF}	-1.25 × V _{REF}		1.25 × V _{REF}	V	Α
		Input range = ±0.625 × V _{REF}	-0.625 × V _{REF}		$0.625 \times V_{REF}$	V	Α
	Full-scale input span ⁽²⁾ (AIN_nP to AIN_nGND) Operating input range, positive input Operating input range, negative input Input impedance Input impedance drift	Input range = 2.5 x V _{REF}	0		$2.5 \times V_{REF}$	V	Α
		Input range = 1.25 × V _{REF}	0		1.25 × V _{REF}	V	Α
		Input range = ±2.5 × V _{REF}	−2.5 × V _{REF}		2.5 × V _{REF}	V	Α
		Input range = ±1.25 × V _{REF}	-1.25 × V _{REF}		1.25 × V _{REF}	V	Α
AIN_nP		Input range = ±0.625 × V _{REF}	-0.625 × V _{REF}		0.625 × V _{REF}	V	Α
	positive input	Input range = 2.5 x V _{REF}	0		2.5 × V _{REF}	V	Α
		Input range = 1.25 × V _{REF}	0		1.25 × V _{REF}	V	Α
AIN_nGND		All input ranges	-0.1	0	0.1	V	В
z _i	Input impedance	At T _A = 25°C All input ranges	0.85	1	1.15	ΜΩ	В
	Input impedance drift	All input ranges		7	25	ppm/°C	В
	Input leakage current	With voltage at AIN_nP pin = V_{IN} , input range = $\pm 2.5 \times V_{REF}$		V _{IN} – 2.25 R _{IN}		μΑ	Α
		With voltage at AIN_nP pin = V_{IN} , input range = $\pm 1.25 \times V_{REF}$		V _{IN} - 2.00 R _{IN}		μΑ	Α
I _{Ikg(in)}		With voltage at AIN_nP pin = V _{IN} , input range = ±0.625 x V _{REF}		V _{IN} – 1.60 R _{IN}		μΑ	А
		With voltage at AIN_nP pin = V_{IN} , input range = $2.5 \times V_{REF}$		V _{IN} – 2.50 R _{IN}		μΑ	Α
		With voltage at AIN_nP pin = V_{IN} , input range = 1.25 × V_{REF}		V _{IN} - 2.50 R _{IN}		μА	А
INPUT OVER	VOLTAGE PROTECTION		•				
V	Outside an anatostica e to	AVDD = 5 V or offers low impedance < 30 k Ω , all input ranges	-20		20	V	В
V _{OVP}	Overvoltage protection voltage	AVDD = floating with impedance > 30 k Ω , all input ranges	-11		11	V	В

⁽¹⁾ Test Levels: **(A)** Tested at final test. Over temperature limits are set by characterization and simulation. **(B)** Limits set by characterization and simulation, across temperature range. **(C)** Typical value only for information, provided by design simulation.

(2) Ideal input span, does not include gain or offset error.



Electrical Characteristics (continued)

Minimum and maximum specifications are at $T_A = -40^{\circ}\text{C}$ to 125°C. Typical specifications are at $T_A = 25^{\circ}\text{C}$. AVDD = 5 V, DVDD = 3 V, $V_{REF} = 4.096$ V (internal), and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	TEST ⁽¹⁾ LEVEL
SYSTEM P	PERFORMANCE						
	Resolution		16			Bits	Α
NMC	No missing codes		16			Bits	Α
DNL	Differential nonlinearity		-0.99	±0.5	1.5	LSB ⁽³⁾	Α
INL	Integral nonlinearity (4)		-2	±0.75	2	LSB	Α
E _G	Gain error	At $T_A = 25$ °C, all input ranges		±0.02	±0.05	%FSR ⁽⁵⁾	Α
	Gain error matching (channel-to-channel)	At T _A = 25°C, all input ranges		±0.02	±0.05	%FSR	А
	Gain error temperature drift	All input ranges		±1	±4	ppm/°C	В
		At $T_A = 25^{\circ}C$, input range = $\pm 2.5 \times V_{REF}$		±0.5	±0.75	mV	Α
		At $T_A = 25$ °C, input range = ±1.25 × V_{REF}		±0.5	±1	mV	А
Eo	Offset error	At $T_A = 25$ °C, input range = ±0.625 × V_{REF}		±0.5	±1.5	mV	А
		At $T_A = 25$ °C, input range = 0 to 2.5 × V_{REF}		±0.5	±2	mV	А
		At $T_A = 25$ °C, input range = 0 to 1.25 × V_{REF}		±0.5	±2	mV	А
		At $T_A = 25^{\circ}C$, input range = $\pm 2.5 \times V_{REF}$		±0.5	±0.75	mV	А
		At $T_A = 25^{\circ}C$, input range = $\pm 1.25 \times V_{REF}$		±0.5	±1	mV	А
	Offset error matching (channel-to-channel)	At $T_A = 25$ °C, input range = ±0.625 × V_{REF}		±0.5	±1.5	mV	А
		At $T_A = 25$ °C, input range = 0 to 2.5 × V_{REF}		±0.5	±2	mV	А
		At $T_A = 25$ °C, input range = 0 to 1.25 × V_{REF}		±0.5	±2	mV	А
	Offset error temperature drift	All input ranges		±1	±3	ppm/°C	В
SAMPLING	G DYNAMICS						
t _{CONV}	Conversion time				850	ns	Α
t _{ACQ}	Acquisition time		1150			ns	Α
f _S	Maximum throughput rate without latency				500	kSPS	А

⁽³⁾ LSB = least significant bit.

⁽⁴⁾ This parameter is the endpoint INL, not best fit INL.

⁽⁵⁾ FSR = full-scale range.



Electrical Characteristics (continued)

Minimum and maximum specifications are at $T_A = -40^{\circ}\text{C}$ to 125°C. Typical specifications are at $T_A = 25^{\circ}\text{C}$. AVDD = 5 V, DVDD = 3 V, $V_{REF} = 4.096$ V (internal), and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	TEST ⁽¹⁾ LEVEL
DYNAMIC CH	ARACTERISTICS						
		Input range = ±2.5 × V _{REF}	90	92		dB	Α
		Input range = ±1.25 x V _{REF}	89	91		dB	Α
	Signal-to-noise ratio (V _{IN} – 0.5 dBFS at 1 kHz)	Input range = ±0.625 × V _{REF}	87.5	89		dB	Α
	(VIN 0.5 dBi 6 dt i kiiz)	Input range = 2.5 × V _{REF}	88.5	90.5		dB	Α
		Input range = 1.25 × V _{REF}	87.5	89		dB	Α
THD	Total harmonic distortion ⁽⁶⁾ (V _{IN} – 0.5 dBFS at 1 kHz)	All input ranges		-102		dB	В
		Input range = $\pm 2.5 \times V_{REF}$	89	91.5		dB	Α
		Input range = ±1.25 x V _{REF}	88.5	91		dB	Α
SINAD	Signal-to-noise ratio (V _{IN} – 0.5 dBFS at 1 kHz)	Input range = ±0.625 × V _{REF}	87	89		dB	Α
	(VIN - 0.3 dbi 3 at 1 ki iz)	Input range = 2.5 × V _{REF}	87.5	90.5		dB	Α
		Input range = 1.25 × V _{REF}	87	89		dB	Α
SFDR	Spurious-free dynamic range (V _{IN} – 0.5 dBFS at 1 kHz)	All input ranges		103		dB	В
	Crosstalk isolation ⁽⁷⁾	Aggressor channel input is overdriven to 2 x maximum input voltage		110		dB	В
	Crosstalk memory ⁽⁸⁾	Aggressor channel input is overdriven to 2 x maximum input voltage		90		dB	В
BW _(-3 dB)	Small-signal bandwidth, –3 dB	At T _A = 25°C, all input ranges	15		kHz	В	
BW _(-0.1 dB)	Small-signal bandwidth, -0.1 dB	At T _A = 25°C, all input ranges	2.5		kHz	В	
AUXILIARY C	HANNEL						
	Resolution		16			Bits	Α
V _(AUX_IN)	AUX_IN voltage range	(AUX_IN – AUX_GND)	0		V_{REF}	V	Α
	0	AUX_IN	0		V_{REF}	V	Α
	Operating input range	AUX_GND		0		V	Α
0		During sampling		75		pF	С
C _i	Input capacitance	During conversion		5		pF	С
I _{lkg(in)}	Input leakage current			100		nA	Α
DNL	Differential nonlinearity		-0.99	±0.6	1.5	LSB	Α
INL	Integral nonlinearity	-4 ±1.5 4		LSB	Α		
$E_{G(AUX)}$	Gain error	$t T_A = 25^{\circ}C$ ± 0.02 ± 0.2		% FSR	Α		
E _{O(AUX)}	Offset error	At T _A = 25°C	-10 10		mV	Α	
SNR	Signal-to-noise ratio	$V_{(AUX_IN)} = -0.5 \text{ dBFS at 1 kHz}$	87	89		dB	Α
THD	Total harmonic distortion (6)	$V_{(AUX_IN)} = -0.5 \text{ dBFS at 1 kHz}$	-102		dB	В	
SINAD	Signal-to-noise + distortion	$V_{(AUX_IN)} = -0.5 \text{ dBFS at 1 kHz}$	86	88.5		dB	Α
SFDR	Spurious-free dynamic range	$V_{(AUX\ IN)} = -0.5 \text{ dBFS at 1 kHz}$		103		dB	В

⁽⁶⁾ Calculated on the first nine harmonics of the input frequency.

⁽⁷⁾ Isolation crosstalk is measured by applying a full-scale sinusoidal signal up to 10 kHz to a channel, not selected in the multiplexing sequence, and measuring its effect on the output of any selected channel.

⁽⁸⁾ Memory crosstalk is measured by applying a full-scale sinusoidal signal up to 10 kHz to a channel, which is selected in the multiplexing sequence, and measuring its effect on the output of the next selected channel, for all combinations of input channels.



Electrical Characteristics (continued)

Minimum and maximum specifications are at $T_A = -40^{\circ}\text{C}$ to 125°C. Typical specifications are at $T_A = 25^{\circ}\text{C}$. AVDD = 5 V, DVDD = 3 V, $V_{REF} = 4.096$ V (internal), and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT	TEST ⁽¹⁾ LEVEL
INTERNAL RE	FERENCE OUTPUT							
V _(REFIO_INT) (9)	Voltage on REFIO pin (configured as output)		At T _A = 25°C	4.095	4.096	4.097	V	А
	Internal reference temp drift	erature			6	10	ppm/°C	В
C _(OUT_REFIO)	Decoupling capacitor o	n REFIO		10	22		μF	В
V _(REFCAP)	Reference voltage to A (on REFCAP pin)	DC	At T _A = 25°C	4.095	4.096	4.097	V	Α
	Reference buffer outputimpedance	t			0.5	1	Ω	В
	Reference buffer tempe drift	erature			0.6	1.5	ppm/°C	В
C _(OUT_REFCAP)	Decoupling capacitor o REFCAP	n		10	22		μF	В
	Turn-on time		$C_{(OUT_REFCAP)} = 22 \mu F,$ $C_{(OUT_REFIO)} = 22 \mu F$		15		ms	В
EXTERNAL RE	FERENCE INPUT							T
V_{REFIO_EXT}	External reference volta REFIO (configured as i	0		4.046	4.096	4.146	V	С
POWER-SUPP	LY REQUIREMENTS							
AVDD	Analog power-supply v	oltage	Analog supply	4.75	5	5.25	V	В
			Digital supply range	1.65	3.3	AVDD	V	В
DVDD	Digital power-supply vo	ltage	Digital supply range for specified performance	2.7	3.3	5.25	V	В
luas suu		Dynamic,	For the ADS8688; AVDD = 5 V, f _S = maximum and internal reference		13	16	mA	А
I _{AVDD_DYN}			For the ADS8684; AVDD = 5 V, f _S = maximum and internal reference		8.5	11.5	mA	А
I _{AVDD STC}	Analog supply current	Static	For the ADS8688; AVDD = 5 V, device not converting and internal reference		10	12	mA	А
·AVDD_STC	, maiog cappi, camoni	Otalio	For the ADS8684; AVDD = 5 V, device not converting and internal reference		5.5	8.5	mA	А
I _{STDBY}		Power- down	At AVDD = 5 V, device in STDBY mode and internal reference		3	4.5	mA	А
I _{PWR_DN}		Dynamic, DVDD	At AVDD = 5 V, device in PWR_DN		3	20	μΑ	В
I _{DVDD_DYN}	Digital supply current		At DVDD = 3.3 V, output = 0000h		0.5		mA	Α
DIGITAL INPU	TS (CMOS)							
V _{IH}	Digital input logic levels	5		0.7 × DVDD		DVDD + 0.3	V	Α
V _{IL}	DVDD > 2.1 V			-0.3		0.3 × DVDD	V	Α
V _{IH}	Digital input logic levels	5		0.8 × DVDD		DVDD + 0.3	V	Α
V _{IL}	DVDD ≤ 2.1 V			-0.3		0.2 × DVDD	V	Α
Input leakage current				100		nA	Α	
	Input pin capacitance				5		pF	С
DIGITAL OUTF	PUTS (CMOS)							T
V _{OH}	Digital output logic leve	els	I _O = 500-μA source	0.8 × DVDD		DVDD	V	Α
V _{OL}			I _O = 500-μA sink	0		0.2 × DVDD	V	Α
	Floating state leakage		Only for SDO		1		μA	Α
	Internal pin capacitance	Э			5		pF	С
TEMPERATUR	RE RANGE							
T _A	Operating free-air temp	erature		-40		125	°C	В

(9) Does not include the variation in voltage resulting from solder shift effects.

0 Submit Documentation Feedback

Copyright © 2014–2015, Texas Instruments Incorporated



7.6 Timing Requirements: Serial Interface

Minimum and maximum specifications are at $T_A = -40^{\circ}\text{C}$ to 125°C. Typical specifications are at $T_A = 25^{\circ}\text{C}$. AVDD = 5 V, DVDD = 3 V, $V_{REF} = 4.096$ V (internal), SDO load = 20 pF, and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

		MIN	TYP	MAX	UNIT		
TIMING SPECIFICATIONS							
f _S	Sampling frequency (f _{CLK} = max)			500	kSPS		
t _S	ADC cycle time period (f _{CLK} = max)	2			μs		
f _{SCLK}	Serial clock frequency (f _S = max)			17	MHz		
t _{SCLK}	Serial clock time period (f _S = max)	59			ns		
t _{CONV}	Conversion time			850	ns		
t _{DZ_CSDO}	Delay time: CS falling to data enable			10	ns		
t _{D_CKCS}	Delay time: last SCLK falling to CS rising	10			ns		
t _{DZ_CSDO}	Delay time: CS rising to SDO going to 3-state	10			ns		
TIMING REQU	IREMENTS						
t _{ACQ}	Acquisition time	1150			ns		
t _{PH_CK}	Clock high time	0.4		0.6	t _{SCLK}		
t _{PL_CK}	Clock low time	0.4		0.6	t _{SCLK}		
t _{PH_CS}	CS high time	30			ns		
t _{SU_CSCK}	Setup time: CS falling to SCLK falling	30			ns		
t _{HT_CKDO}	Hold time: SCLK falling to (previous) data valid on SDO	10			ns		
t _{SU_DOCK}	Setup time: SDO data valid to SCLK falling	25			ns		
t _{SU_DICK}	Setup time: SDI data valid to SCLK falling	5			ns		
t _{HT_CKDI}	Hold time: SCLK falling to (previous) data valid on SDI	5			ns		
t _{SU_DSYCK}	Setup time: DAISY data valid to SCLK falling	5			ns		
t _{HT_CKDSY}	Hold time: SCLK falling to (previous) data valid on DAISY	5			ns		

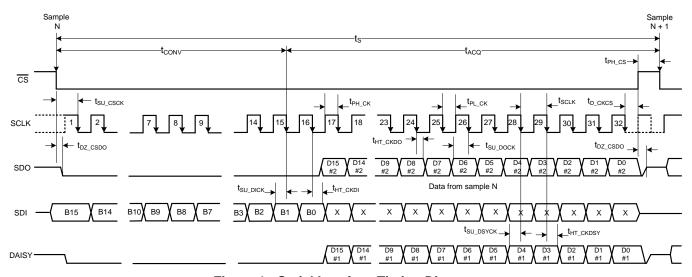



Figure 1. Serial Interface Timing Diagram

11

TEXAS INSTRUMENTS


7.7 Typical Characteristics

At $T_A = 25$ °C, AVDD = 5 V, DVDD = 3 V, internal reference $V_{REF} = 4.096$ V, and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

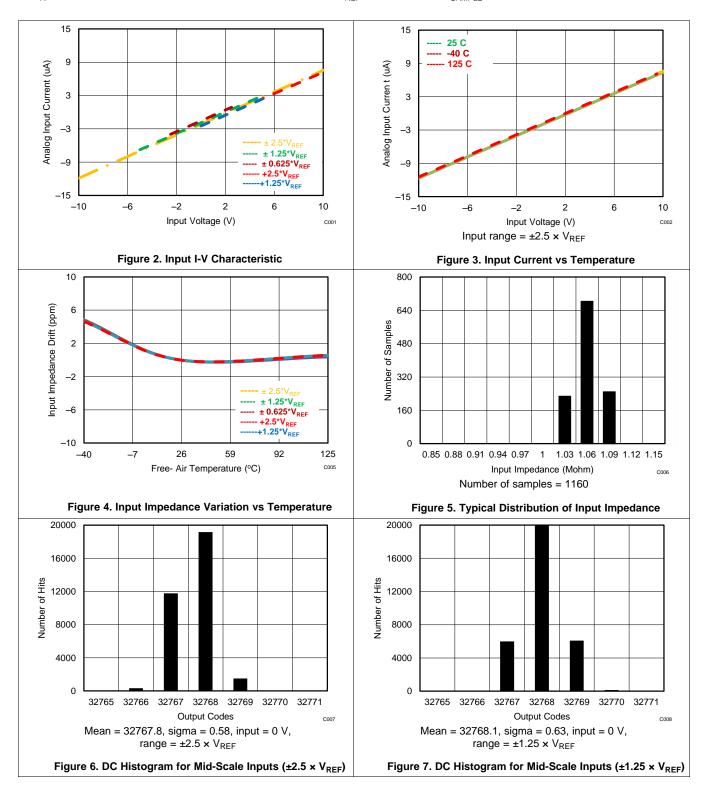



At $T_A = 25$ °C, AVDD = 5 V, DVDD = 3 V, internal reference $V_{REF} = 4.096$ V, and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.







Figure 8. DC Histogram for Mid-Scale Inputs ($\pm 0.625 \times V_{REF}$)

Figure 9. DC Histogram for Mid-Scale Inputs (2.5 \times V_{REF})







Figure 10. DC Histogram for Mid-Scale Inputs (1.25 \times V_{REF})

Figure 11. Typical DNL for All Codes







Figure 13. Typical INL for All Codes

TEXAS INSTRUMENTS

Typical Characteristics (continued)



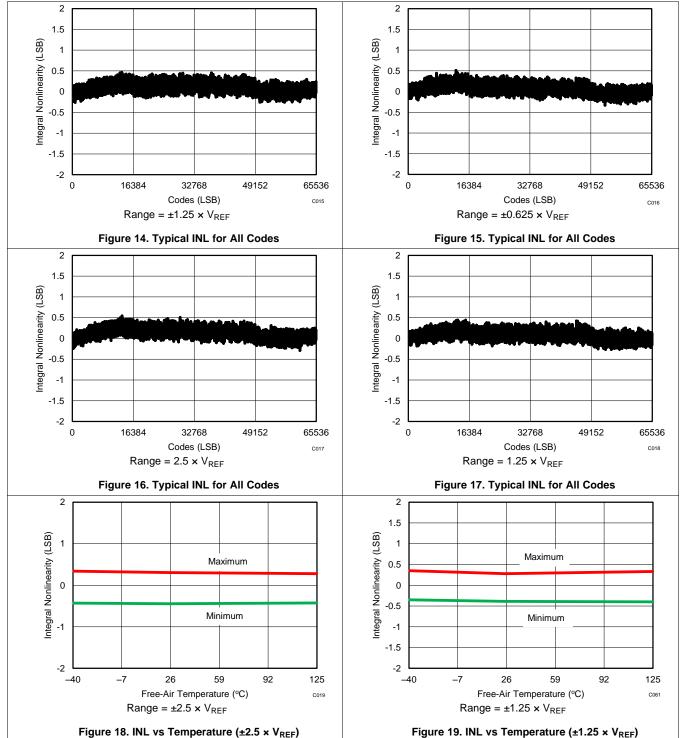


Submit Documentation Feedback

Copyright © 2014–2015, Texas Instruments Incorporated




At $T_A = 25$ °C, AVDD = 5 V, DVDD = 3 V, internal reference $V_{REF} = 4.096$ V, and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

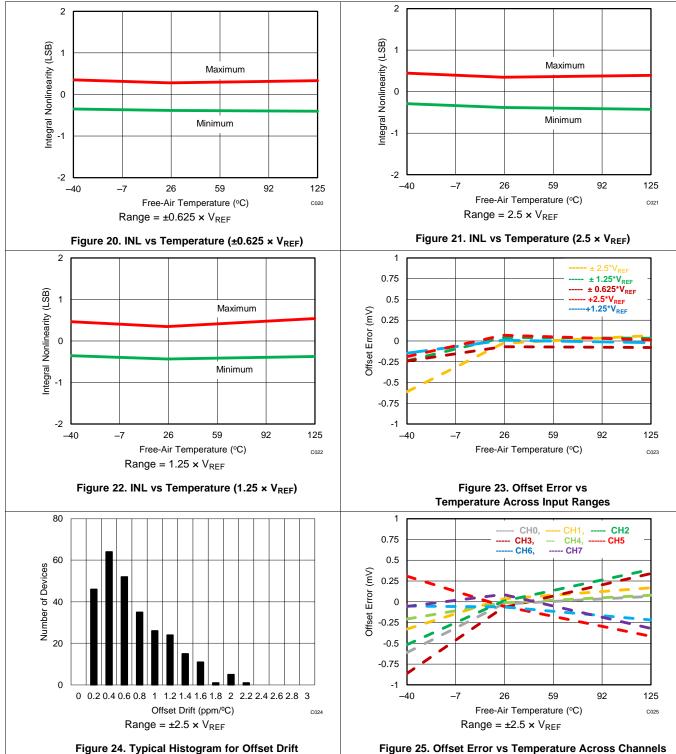











Figure 26. Gain Error vs Temperature Across Input Ranges

Figure 27. Typical Histogram for Gain Error Drift








Figure 28. Gain Error vs Temperature Across Channels

Figure 29. Gain Error vs External Resistance (R_{EXT})






Number of points = 64k, $f_{IN} = 1$ kHz, SNR = 91.4 dB, SINAD = 91.2 dB, THD = 105 dB, SFDR = 107 dB

Figure 31. Typical FFT Plot (±1.25 × V_{REF})

Figure 30. Typical FFT Plot ($\pm 2.5 \times V_{REF}$)



At T_A = 25°C, AVDD = 5 V, DVDD = 3 V, internal reference V_{REF} = 4.096 V, and f_{SAMPLE} = 500 kSPS, unless otherwise noted.

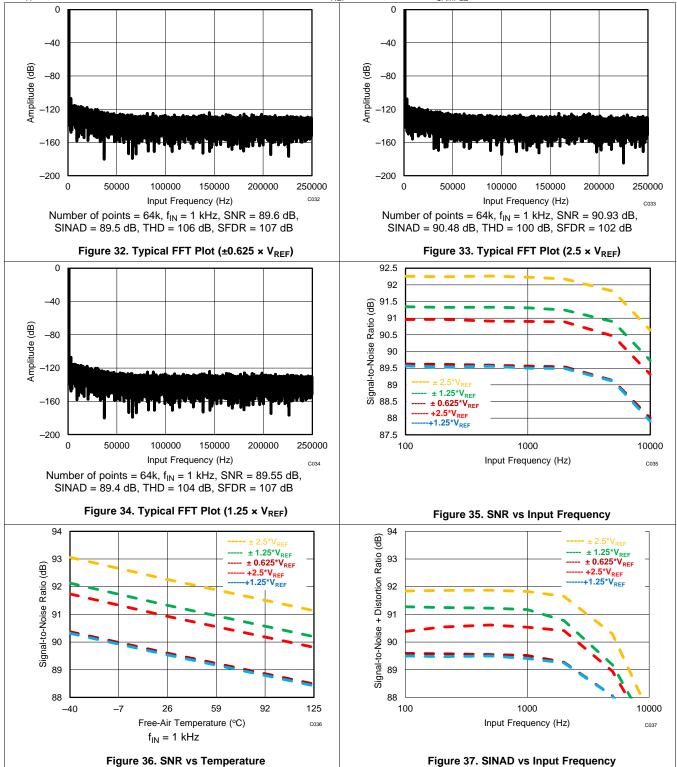

Copyright © 2014-2015, Texas Instruments Incorporated Submit Documentation Feedback



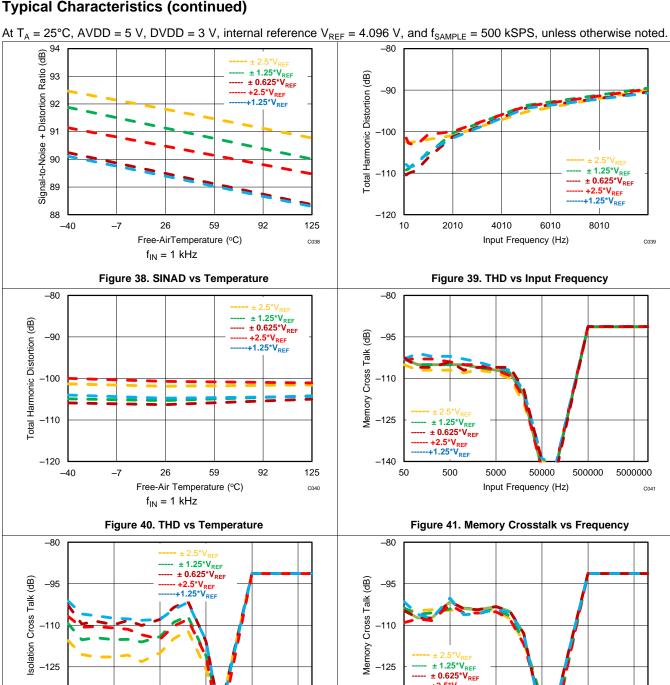


Figure 42. Isolation Crosstalk vs Frequency

Input Frequency (Hz)

50000

500000

5000000

5000




Figure 43. Memory Crosstalk vs Frequency for **Overrange Inputs**


500

-140

50





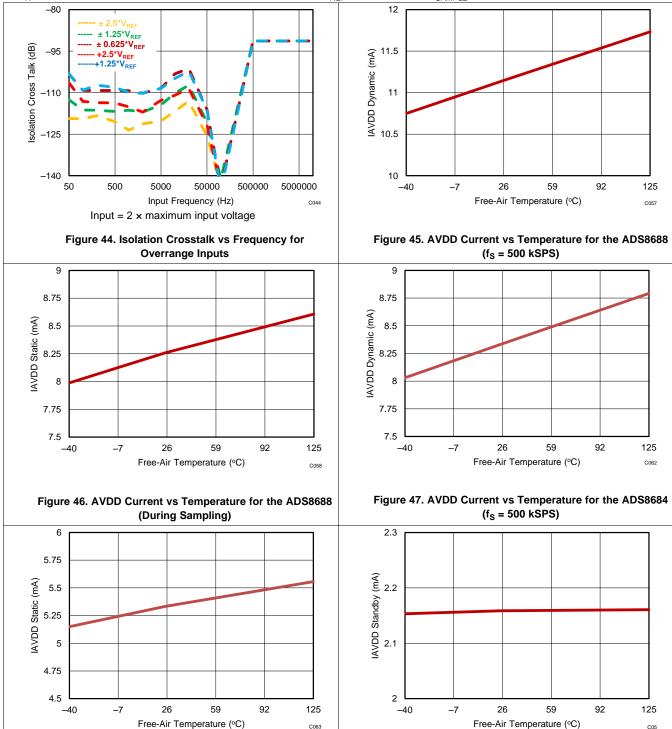

Copyright © 2014-2015, Texas Instruments Incorporated

Figure 48. AVDD Current vs Temperature for the ADS8684

(During Sampling)


Submit Documentation Feedback

Figure 49. AVDD Current vs Temperature

(STANDBY)



At $T_A = 25$ °C, AVDD = 5 V, DVDD = 3 V, internal reference $V_{REF} = 4.096$ V, and $f_{SAMPLE} = 500$ kSPS, unless otherwise noted.

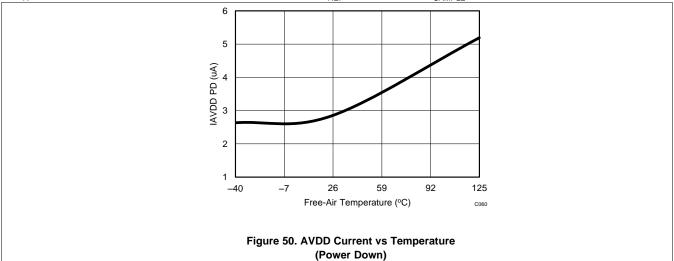




8 Detailed Description

8.1 Overview

The ADS8684 and ADS8688 are 16-bit data acquisition systems with 4- and 8-channel analog inputs, respectively. Each analog input channel consists of an overvoltage protection circuit, a programmable gain amplifier (PGA), and a second-order, antialiasing filter that conditions the input signal before being fed into a 4- or 8-channel analog multiplexer (MUX). The output of the MUX is digitized using a 16-bit analog-to-digital converter (ADC), based on the successive approximation register (SAR) architecture. This overall system can achieve a maximum throughput of 500 kSPS, combined across all channels. The devices feature a 4.096-V internal reference with a fast-settling buffer and a simple SPI-compatible serial interface with daisy-chain (DAISY) feature.

The devices operate from a single 5-V analog supply and can accommodate true bipolar input signals up to $\pm 2.5 \times V_{REF}$. The devices offer a constant 1-M Ω resistive input impedance irrespective of the sampling frequency or the selected input range. The integration of multichannel precision analog front-end circuits with high input impedance and a precision ADC operating from a single 5-V supply offers a simplified end solution without requiring external high-voltage bipolar supplies and complicated driver circuits.

8.2 Functional Block Diagram

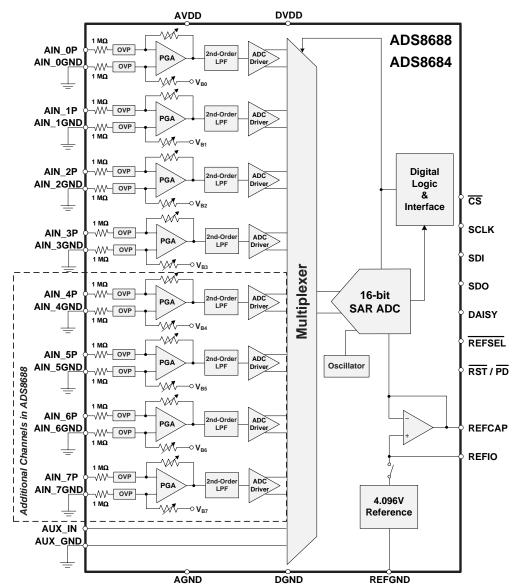




8.3 Feature Description

8.3.1 Analog Inputs

The ADS8684 and ADS8688 have either four or eight analog input channels, respectively, such that the positive inputs AIN nP (n = 0 to 3 or 7) are the single-ended analog inputs and the negative inputs AIN nGND are tied to GND. Figure 51 shows the simplified circuit schematic for each analog input channel, including the input overvoltage protection circuit, PGA, low-pass filter (LPF), high-speed ADC driver, and analog multiplexer.

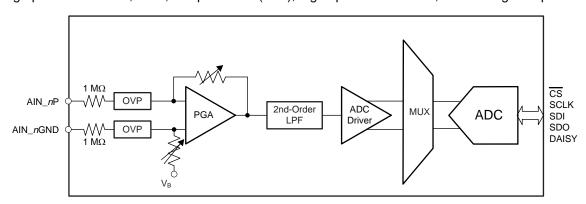

NOTE: ADS8684: n = 0 to 3. ADS8688: n = 0 to 7.

Figure 51. Front-End Circuit Schematic for Each Analog Input Channel

The devices can support multiple unipolar or bipolar, single-ended input voltage ranges based on the configuration of the program registers. As explained in the Range Select Registers section, the input voltage range for each analog channel can be configured to bipolar ±2.5 x V_{REF}, ±1.25 x V_{REF}, and ±0.625 x V_{REF} or unipolar 0 to 2.5 x V_{REF} and 0 to 1.25 x V_{REF} . With the internal or external reference voltage set to 4.096 V, the input ranges of the device can be configured to bipolar ranges of ±10.24 V, ±5.12 V, and ±2.56 V or unipolar ranges of 0 V to 10.24 V and 0 V to 5.12 V, ±10.24 V, ±5.12 V, ±2.56 V, ±1.28 V, and ±0.64 V or unipolar ranges of 0 V to 10.24 V, 0 V to 5.12 V, 0 V to 2.56 V, and 0 V to 1.28 V. Any of these input ranges can be assigned to any analog input channel of the device. For instance, the ±2.5 x V_{RFF} range can be assigned to AIN_1P, the $\pm 1.25 \times V_{REF}$ range can be assigned to AIN_2P, the 0 V to 2.5 $\times V_{REF}$ range can be assigned to AIN_3P, and so

The devices sample the voltage difference (AIN_nP - AIN_nGND) between the selected analog input channel and the AIN nGND pin. The devices allow a ±0.1-V range on the AIN nGND pin for all analog input channels. This feature is useful in modular systems where the sensor or signal conditioning block is further away from the ADC on the board and when a difference in the ground potential of the sensor or signal conditioner from the ADC ground is possible. In such cases, TI recommends running separate wires from the AIN nGND pin of the device to the sensor or signal conditioning ground.

8.3.2 Analog Input Impedance

Each analog input channel in the device presents a constant resistive impedance of 1 M Ω . The input impedance is independent of either the ADC sampling frequency, the input signal frequency, or range. The primary advantage of such high-impedance inputs is the ease of driving the ADC inputs without requiring driving amplifiers with low output impedance. Bipolar, high-voltage power supplies are not required in the system because this ADC does not require any high-voltage front-end drivers. In most applications, the signal sources or sensor outputs can be directly connected to the ADC input, which significantly simplifies the design of the signal chain.

In order to maintain the dc accuracy of the system, matching the external source impedance on the AIN_nP input pin with an equivalent resistance on the AIN_nGND pin is recommended. This matching helps to cancel any additional offset error contributed by the external resistance.



Feature Description (continued)

8.3.3 Input Overvoltage Protection Circuit

The ADS8684 and ADS8688 feature an internal overvoltage protection circuit on each of the four or eight analog input channels, respectively. Use these protection circuits as a secondary protection scheme to protect the device. TI highly recommends using external protection devices against surges, electrostatic discharge (ESD), and electrical fast transient (EFT) conditions. The conceptual block diagram of the internal overvoltage protection (OVP) circuit is shown in Figure 52.

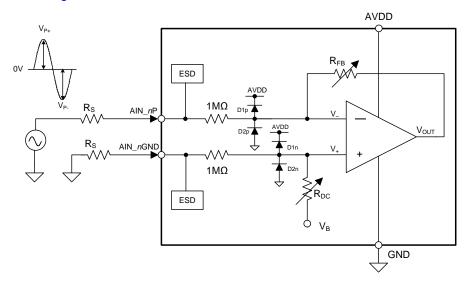


Figure 52. Input Overvoltage Protection Circuit Schematic

As shown in Figure 52, the combination of the 1-M Ω input resistors along with the PGA gain-setting resistors (R_{FB} and R_{DC}) limit the current flowing into the input pins. A combination of antiparallel diodes (D1 and D2) are added on each input pin to protect the internal circuitry and set the overvoltage protection limits.

Table 1 explains the various operating conditions for the device when the device is powered on. Table 1 indicates that when the AVDD pin of the device is connected to the proper supply voltage (AVDD = 5 V) or offers a low impedance of < 30 k Ω , the internal overvoltage protection circuit can withstand up to ± 20 V on the analog input pins.

Table 1. Input Overvoltage Protection Limits When AVDD = 5 V or Offers a Low Impedance of $< 30 \text{ k}\Omega^{(1)}$

INPUT CONDITION (V _{OVP} = ±20 V)		TEST CONDITION	ADC OUTPUT	COMMENTS
V _{IN} < V _{RANGE}	Within operating range	All input ranges	Valid	Device functions as per data sheet specifications
$ V_{RANGE} < V_{IN} < V_{OVP} $	Beyond operating range but within overvoltage range	All input ranges	Saturated	ADC output is saturated, but device is internally protected (not recommended for extended time)
$ V_{IN} > V_{OVP} $	Beyond overvoltage range	All input ranges	Saturated	This usage condition may cause irreversible damage to the device

⁽¹⁾ GND = 0, AlN_nGND = 0 V, |V_{RANGE}| is the maximum input voltage for any selected input range, and |V_{OVP}| is the break-down voltage for the internal OVP circuit. Assume R_S is approximately 0.

The results indicated in Table 1 are based on an assumption that the analog input pins are driven by very low impedance sources (R_S is approximately 0). However, if the sources driving the inputs have higher impedance, the current flowing through the protection diodes reduces further, thereby increasing the OVP voltage range. Note that higher source impedance results in gain errors and contributes to overall system noise performance.



Figure 53 shows the voltage versus current response of the internal overvoltage protection circuit when the device is powered on. According to this current-to-voltage (I-V) response, the current flowing into the device input pins is limited by the 1-M Ω input impedance. However, for voltages beyond ±20 V, the internal node voltages surpass the break-down voltage for internal transistors, thus setting the limit for overvoltage protection on the input pins.


The same overvoltage protection circuit also provides protection to the device when the device is not powered on and AVDD is floating with an impedance > 30 k Ω . This condition can arise when the input signals are applied before the ADC is fully powered on. The overvoltage protection limits for this condition are shown in Table 2.


Table 2. Input Overvoltage Protection Limits When AVDD = Floating with Impedance > 30 k $\Omega^{(1)}$

	INPUT CONDITION (V _{OVP} = ±11 V)	TEST CONDITION	ADC OUTPUT	COMMENTS
$ V_{IN} < V_{OVP} $	Within overvoltage range	All input ranges	Invalid	Device is not functional but is protected internally by the OVP circuit.
$ V_{IN} > V_{OVP} $	Beyond overvoltage range	All input ranges	Invalid	This usage condition may cause irreversible damage to the device.

⁽¹⁾ AVDD = floating, GND = 0, AIN_nGND = 0 V, |V_{RANGE}| is the maximum input voltage for any selected input range, and |V_{OVP}| is the break-down voltage for the internal OVP circuit. Assume R_S is approximately 0.

Figure 54 shows the voltage versus current response of the internal overvoltage protection circuit when the device is not powered on. According to this I-V response, the current flowing into the device input pins is limited by the $1-M\Omega$ input impedance. However, for voltages beyond ± 11 V, the internal node voltages surpass the break-down voltage for internal transistors, thus setting the limit for overvoltage protection on the input pins.

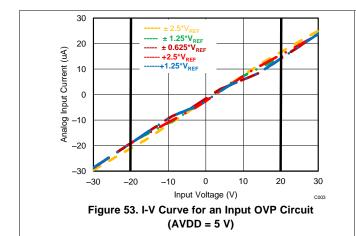



Submit Documentation Feedback

Copyright © 2014–2015, Texas Instruments Incorporated



8.3.4 Programmable Gain Amplifier (PGA)

The devices offer a programmable gain amplifier (PGA) at each individual analog input channel, which converts the original single-ended input signal into a fully-differential signal to drive the internal 16-bit ADC. The PGA also adjusts the common-mode level of the input signal before being fed into the ADC to ensure maximum usage of the ADC input dynamic range. Depending on the range of the input signal, the PGA gain can be accordingly adjusted by setting the Range_CHn[3:0] (n = 0 to 3 or 7) bits in the program register. The default or power-on state for the Range_CHn[3:0] bits is 000, which corresponds to an input signal range of $\pm 2.5 \times V_{REF}$. Table 3 lists the various configurations of the Range_CHn[3:0] bits for the different analog input voltage ranges.


The PGA uses a very highly-matched network of resistors for multiple gain configurations. Matching between these resistors and the amplifiers across all channels is accurately trimmed to keep the overall gain error low across all channels and input ranges.

ANALOG INPUT RANGE		Range_CHn[3:0]				
ANALOG INPUT RANGE	BIT 3	BIT 2	BIT 1	BIT 0		
±2.5 × V _{REF}	0	0	0	0		
±1.25 × V _{REF}	0	0	0	1		
±0.625 × V _{REF}	0	0	1	0		
0 to 2.5 × V _{REF}	0	1	0	1		
0 to 1.25 x V _{REF}	0	1	1	0		

Table 3. Input Range Selection Bits Configuration

8.3.5 Second-Order, Low-Pass Filter (LPF)

In order to mitigate the noise of the front-end amplifiers and gain resistors of the PGA, each analog input channel of the ADS8684 and ADS8688 features a second-order, antialiasing LPF at the output of the PGA. The magnitude and phase response of the analog antialiasing filter are shown in Figure 55 and Figure 56, respectively. For maximum performance, the -3-dB cutoff frequency for the antialiasing filter is typically set to 15 kHz. The performance of the filter is consistent across all input ranges supported by the ADC.

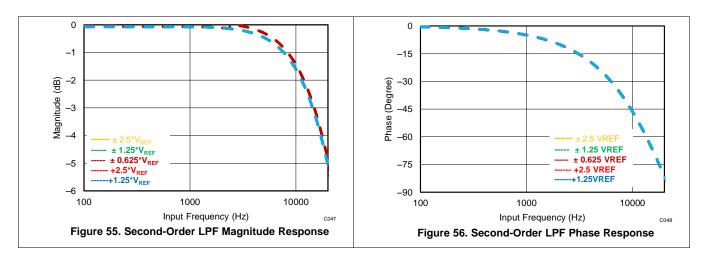

8.3.6 ADC Driver

In order to meet the performance of a 16-bit, SAR ADC at the maximum sampling rate (500 kSPS), the sample-and-hold capacitors at the input of the ADC must be successfully charged and discharged during the acquisition time window. This drive requirement at the inputs of the ADC necessitates the use of a high-bandwidth, low-noise, and stable amplifier buffer. Such an input driver is integrated in the front-end signal path of each analog input channel of the device. During transition from one channel of the multiplexer to another channel, the fast integrated driver ensures that the multiplexer output settles to 16-bit accuracy within the acquisition time of the ADC, irrespective of the input levels on the respective channels.



8.3.7 Multiplexer (MUX)

The ADS8684 and ADS8688 feature an integrated 4- and 8-channel analog multiplexer, respectively. For each analog input channel, the voltage difference between the positive analog input AIN_nP and the negative ground input AIN_nGND is conditioned by the analog front-end circuitry before being fed into the multiplexer. The output of the multiplexer is directly sampled by the ADC. The multiplexer in the device can scan these analog inputs in either manual or auto-scan mode, as explained in *Channel Sequencing Modes* section. In manual mode (MAN_Ch_n), the channel is selected for every sample via a register write; in auto-scan mode (AUTO_RST), the channel number is incremented automatically on every CS falling edge after the present channel is sampled. The analog inputs can be selected for an auto scan with register settings (refer to *Auto-Scan Sequencing Control Registers* section). The devices automatically scan only the selected analog inputs in ascending order.

The maximum overall throughput for the ADS8684 and ADS8688 is specified at 500 kSPS across all channels. The per channel throughput is dependent on the number of channels selected in the multiplexer scanning sequence. For example, the throughput per channel is equal to 250 kSPS if only two channels are selected, but is equal to 125 kSPS per channel if four channels are selected (as in the ADS8684), and so forth.

Refer to Table 6 for command register settings to switch between the auto-scan mode and manual mode for individual analog channels.

8.3.8 Reference

The ADS8684 and ADS8688 can operate with either an internal voltage reference or an external voltage reference using the internal buffer. The internal or external reference selection is determined by an external REFSEL pin. The devices have a built-in buffer amplifier to drive the actual reference input of the internal ADC core for maximizing performance.

8.3.8.1 Internal Reference

The devices have an internal 4.096-V (nominal value) reference. In order to select the internal reference, the REFSEL pin must be tied low or connected to AGND. When the internal reference is used, REFIO (pin 5) becomes an output pin with the internal reference value. TI recommends placing a 10-μF (minimum) decoupling capacitor between the REFIO pin and REFGND (pin 6), as shown in Figure 57. The capacitor must be placed as close to the REFIO pin as possible. The output impedance of the internal band-gap circuit creates a low-pass filter with this capacitor to band-limit the noise of the reference. The use of a smaller capacitor value allows higher reference noise in the system, thus degrading SNR and SINAD performance. Do not use the REFIO pin to drive external ac or dc loads because REFIO has limited current output capability. The REFIO pin can be used as a source if followed by a suitable op amp buffer (such as the OPA320).

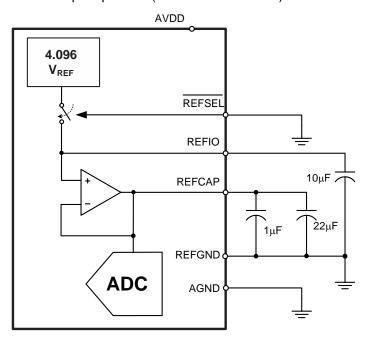


Figure 57. Device Connections for Using an Internal 4.096-V Reference

Submit Documentation Feedback

Copyright © 2014–2015, Texas Instruments Incorporated



The device internal reference is factory trimmed to a maximum initial accuracy of ±1 mV. The histogram in Figure 58 shows the distribution of the internal voltage reference output taken from more than 3300 production devices.




Figure 58. Internal Reference Accuracy at Room Temperature Histogram

The initial accuracy specification for the internal reference can be degraded if the die is exposed to any mechanical or thermal stress. Heating the device while being soldered to a PCB and any subsequent solder reflow is a primary cause for shifts in the V_{REF} value. The main cause of thermal hysteresis is a change in die stress and therefore is a function of the package, die-attach material, and molding compound, as well as the layout of the device itself.

In order to illustrate this effect, 80 devices were soldered using lead-free solder paste with the manufacturer's suggested reflow profile, as explained in the Application Report *AN-2029 Handling & Process Recommendations* (SNOA550). The internal voltage reference output is measured before and after the reflow process and the typical shift in value is displayed in Figure 59. Although all tested units exhibit a positive shift in their output voltages, negative shifts are also possible. Note that the histogram in Figure 59 displays the typical shift for exposure to a single reflow profile. Exposure to multiple reflows, which is common on PCBs with surface-mount components on both sides, causes additional shifts in the output voltage. If the PCB is to be exposed to multiple reflows, solder the ADS8684 and ADS8688 in the second pass to minimize device exposure to thermal stress.





Figure 59. Solder Heat Shift Distribution Histogram



The internal reference is also temperature compensated to provide excellent temperature drift over an extended industrial temperature range of –40°C to 125°C. Figure 60 shows the variation of the internal reference voltage across temperature for different values of the AVDD supply voltage. The typical specified value of the reference voltage drift over temperature is 6 ppm/°C (Figure 61) and the maximum specified temperature drift is equal to 10 ppm/°C.

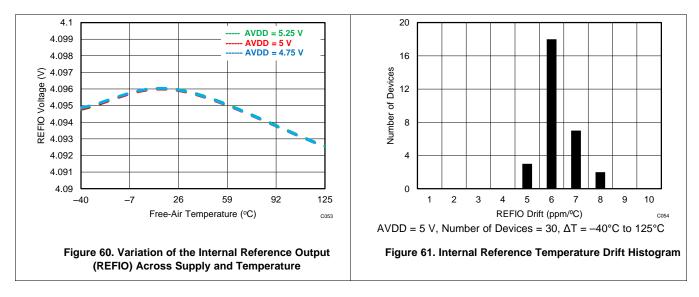

8.3.8.2 External Reference

For applications that require a better reference voltage or a common reference voltage for multiple devices, the ADS8684 and ADS8688 offer a provision to use an external reference along with an internal buffer to drive the ADC reference pin. In order to select the external reference mode, either tie the REFSEL pin high or connect this pin to the DVDD supply. In this mode, an external 4.096-V reference must be applied at REFIO (pin 5), which becomes an input pin. Any low-power, low-drift, or small-size external reference can be used in this mode because the internal buffer is optimally designed to handle the dynamic loading on the REFCAP pin, which is internally connected to the ADC reference input. The output of the external reference must be appropriately filtered to minimize the resulting effect of the reference noise on system performance. A typical connection diagram for this mode is shown in Figure 62.


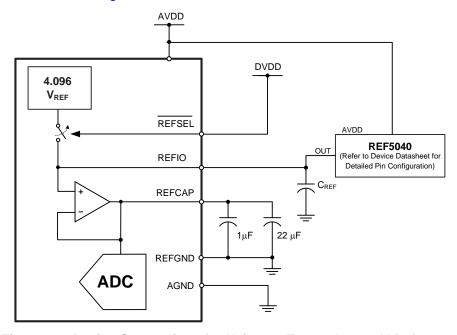



Figure 62. Device Connections for Using an External 4.096-V Reference



The output of the internal reference buffer appears at the REFCAP pin. A minimum capacitance of 10 μ F must be placed between REFCAP (pin 7) and REFGND (pin 6). Place another capacitor of 1 μ F as close to the REFCAP pin as possible for decoupling high-frequency signals. Do not use the internal buffer to drive external ac or dc loads because of the limited current output capability of this buffer.

The performance of the internal buffer output is very stable across the entire operating temperature range of –40°C to 125°C. Figure 63 shows the variation in the REFCAP output across temperature for different values of the AVDD supply voltage. The typical specified value of the reference buffer drift over temperature is 1 ppm/°C (Figure 64) and the maximum specified temperature drift is equal to 1.5 ppm/°C.








Figure 64. Reference Buffer Temperature Drift Histogram


8.3.9 Auxiliary Channel

The devices include a single-ended auxiliary input channel (AUX_IN and AUX_GND). The AUX channel provides direct interface to an internal, high-precision, 16-bit ADC through the multiplexer because this channel does not include the front-end analog signal conditioning that the other analog input channels have. The AUX channel supports a single unipolar input range of 0 V to V_{REF} because there is no front-end PGA. The input signal on the AUX_IN pin can vary from 0 V to V_{REF} , whereas the AUX_GND pin must be tied to GND.

When a conversion is initiated, the voltage between these pins is sampled directly on an internal sampling capacitor (75 pF, typical). The input current required to charge the sampling capacitor is determined by several factors, including the sampling rate, input frequency, and source impedance. For slow applications that use a low-impedance source, the inputs of the AUX channel can be directly driven. When the throughput, input frequency, or the source impedance increases, a driving amplifier must be used at the input to achieve good ac performance from the AUX channel. Some key requirements of the driving amplifier are discussed in the *Input Driver for the AUX Channel* section.

The AUX channel in the ADS8684 and ADS8688 offers a true 16-bit performance with no missing codes. Some typical performance characteristics of the AUX channel are illustrated in Figure 65 to Figure 68.



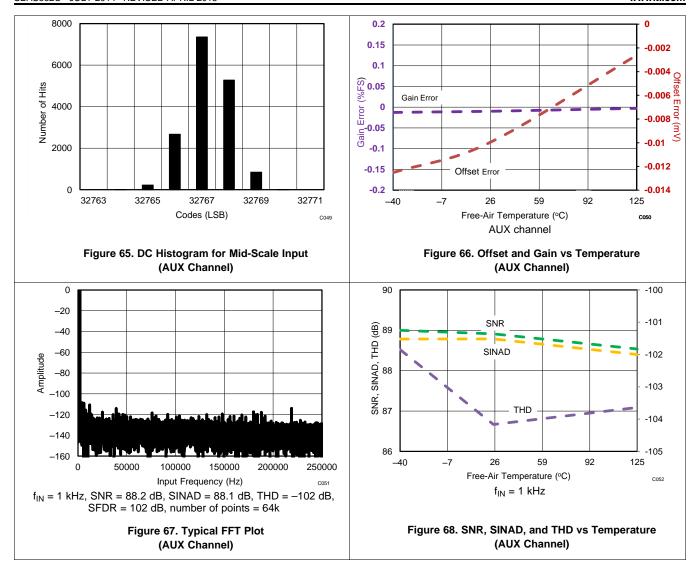

8.3.9.1 Input Driver for the AUX Channel

For applications that use the AUX input channels at high throughput and high input frequency, a driving amplifier with low output impedance is required to meet the ac performance of the internal 16-bit ADC. Some key specifications of the input driving amplifier are discussed below:

• Small-signal bandwidth. The small-signal bandwidth of the input driving amplifier must be much higher than the bandwidth of the AUX input to ensure that there is no attenuation of the input signal resulting from the bandwidth limitation of the amplifier. In a typical data acquisition system, a low cut-off frequency, antialiasing filter is used at the inputs of a high-resolution ADC. The amplifier driving the antialiasing filter must have a low closed-loop output impedance for stability, which implies a higher gain bandwidth for the amplifier. Higher small-signal bandwidth also minimizes the harmonic distortion at higher input frequencies. In general, the amplifier bandwidth requirements can be calculated on the basis of Equation 1.

$$GBW \ge 4 \times f_{-3dB}$$

where:

• f_{-3dB} is the 3-dB bandwidth of the RC filter.

(1)

Distortion. In order to achieve the distortion performance of the AUX channel, the distortion of the input driver
must be at least 10 dB lower than the specified distortion of the internal ADC, as shown in Equation 2.

$$\mathsf{THD}_{\mathsf{AMP}} \leq \mathsf{THD}_{\mathsf{ADC}} - \mathsf{10}(\mathsf{dB}) \tag{2}$$

Submit Documentation Feedback

Copyright © 2014–2015, Texas Instruments Incorporated

(3)



Noise. Careful considerations must be made to select a low-noise, front-end amplifier in order to prevent any
degradation in SNR performance of the system. As a rule of thumb, to ensure that the noise performance of
the data acquisition system is not limited by the front-end circuit, keep the total noise contribution from the
front-end circuit below 20% of the input-referred noise of the ADC. Noise from the input driver circuit is bandlimited by the low cut-off frequency of the input antialiasing filter, as explained in Equation 3.

$$N_{\text{G}} \times \sqrt{\left(\frac{V_{1/\text{f}-\text{AMP}_\text{PP}}}{6.6}\right)^2 + e_{n_\text{RMS}}^2 \times \frac{\pi}{2} \times f_{-3\text{dB}}} \quad \leq \quad \frac{1}{5} \times \frac{V_{\text{FSR}}}{2\sqrt{2}} \times 10^{-\frac{\text{SNR}(\text{dB})}{20}}$$

where:

- V_{1 / f AMP PP} is the peak-to-peak flicker noise,
- $e_{n \text{ RMS}}$ is the amplifier broadband noise density in nV/ $\sqrt{\text{Hz}}$, and
- N_G is the noise gain of the front-end circuit, which is equal to 1 in a buffer configuration.

8.3.10 ADC Transfer Function

The ADS8684 and ADS8688 are a family of multichannel devices that support single-ended, bipolar, and unipolar input ranges on all input channels. The output of the devices is in straight binary format for both bipolar and unipolar input ranges. The format for the output codes is the same across all analog channels.

The ideal transfer characteristic for each ADC channel for all input ranges is shown in Figure 69. The full-scale range (FSR) for each input signal is equal to the difference between the positive full-scale (PFS) input voltage and the negative full-scale (NFS) input voltage. The LSB size is equal to FSR / 2^{16} = FSR / 65536 because the resolution of the ADC is 16 bits. For a reference voltage of V_{REF} = 4.096 V, the LSB values corresponding to the different input ranges are listed in Table 4.

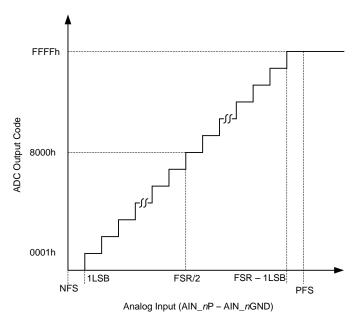


Figure 69. 16-Bit ADC Transfer Function (Straight Binary Format)

Table 4. ADC LSB Values for Different Input Ranges ($V_{REF} = 4.096 \text{ V}$)

INPUT RANGE	POSITIVE FULL SCALE	NEGATIVE FULL SCALE	FULL-SCALE RANGE	LSB (μV)
±2.5 × V _{REF}	10.24 V	–10.24 V	20.48 V	312.50
±1.25 × V _{REF}	5.12 V	−5.12 V	10.24 V	156.25
±0.625 × V _{REF}	2.56 V	-2.56 V	5.12 V	78.125
0 to 2.5 × V _{REF}	10.24 V	0 V	10.24 V	156.25
0 to 1.25 x V _{REF}	5.12 V	0 V	5.12 V	78.125

Product Folder Links: ADS8684 ADS8688



8.4 Device Functional Modes

8.4.1 Device Interface

8.4.1.1 Digital Pin Description

The digital data interface for the ADS8684 and ADS8688 is illustrated in Figure 70.

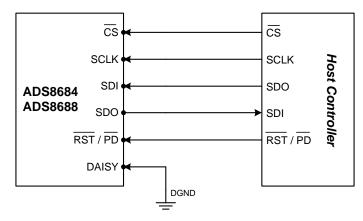


Figure 70. Pin Configuration for the Digital Interface

The signals shown in Figure 70 are summarized as follows:

 $\overline{\text{CS}}$ indicates an active-low, chip-select signal. $\overline{\text{CS}}$ is also used as a <u>control signal</u> to trigger a conversion on the falling edge. Each data frame begins with the falling edge of the $\overline{\text{CS}}$ signal. The analog input channel to be converted during a particular frame is selected in the previous frame. On the $\overline{\text{CS}}$ falling edge, the devices sample the input signal from the selected channel and a conversion is initiated using the internal clock. The device settings for the next data frame can be input during this conversion process. When the $\overline{\text{CS}}$ signal is high, the ADC is considered to be in an idle state.

8.4.1.1.2 SCLK (Input)

This pin indicates the external clock input for the data interface. All synchronous accesses to the device are timed with respect to the falling edges of the SCLK signal.

8.4.1.1.3 SDI (Input)

SDI is the serial data input line. SDI is used by the host processor to program the internal device registers for device configuration. At the beginning of each data frame, the $\overline{\text{CS}}$ signal goes low and the data on the SDI line are read by the device at every falling edge of the SCLK signal for the next 16 SCLK cycles. Any changes made to the device configuration in a particular data frame are applied to the device on the subsequent falling edge of the $\overline{\text{CS}}$ signal.

8.4.1.1.4 SDO (Output)

SDO is the serial data output line. SDO is used by the device to output conversion data. The size of the data output frame varies depending on the register setting for the SDO format; see Table 13. A low level on \overline{CS} releases the SDO pin from the Hi-Z state. SDO is kept low for the first 15 SCLK falling edges. The MSB of the output data stream is clocked out on SDO on the 16th SCLK falling edge, followed by the subsequent data bits on every falling edge thereafter. The SDO line goes low after the entire data frame is output and goes to a Hi-Z state when \overline{CS} goes high.



Device Functional Modes (continued)

8.4.1.1.5 DAISY (Input)

DAISY is a serial input pin. When multiple devices are connected in daisy-chain mode, as illustrated in Figure 73. the DAISY pin of the first device in the chain is connected to GND. The DAISY pin of every subsequent device is connected to the SDO output pin of the previous device, and the SDO output of the last device in the chain goes to the SDI of the host processor. If an application uses a stand-alone device, the DAISY pin is connected to GND.

8.4.1.1.6 RST/PD (Input)

RST/PD is a dual-function pin. Figure 71 shows the timing of this pin and Table 5 explains the usage of this pin.




Figure 71. RST/PD Pin Timing

Table 5. RST/PD Pin Functionality

CONDITION	DEVICE MODE
40 ns $< t_{PL_RST_PD} \le 100 \text{ ns}$	The device is in RST mode and does not enter PWR_DN mode.
100 ns < t _{PL_RST_PD} < 400 ns	The device is in RST mode and may or may not enter PWR_DN mode. NOTE: This setting is not recommended.
t _{PL_RST_PD} ≥ 400 ns	The device enters PWR_DN mode and the program registers are reset to default value.

The devices can be placed into power-down (PWR_DN) mode by pulling the RST/PD pin to a logic low state for at least 400 ns. The RST/PD pin is asynchronous to the clock; thus, RST/PD can be triggered at any time regardless of the status of other pins (including the analog input channels). When the device is in power-down mode, any activity on the digital input pins (apart from the RST/PD pin) is ignored.

The program registers in the device can be reset to their default values (RST) by pulling the RST/PD pin to a logic low state for no longer than 100 ns. This input is asynchronous to the clock. When RST/PD is pulled back to a logic high state, the devices are placed in normal mode. One valid write operation must be executed on the program register in order to configure the device, followed by an appropriate command (AUTO RST or MAN) to initiate conversions.

When the RST/PD pin is pulled back to a logic high level, the devices wake-up in a default state in which the program registers are reset to their default values.

Copyright © 2014-2015, Texas Instruments Incorporated

8.4.1.2 Data Acquisition Example

This section provides an example of how a host processor can use the device interface to configure the device internal registers as well as convert and acquire data for sampling a particular input channel. The timing diagram shown in Figure 72 provides further details.

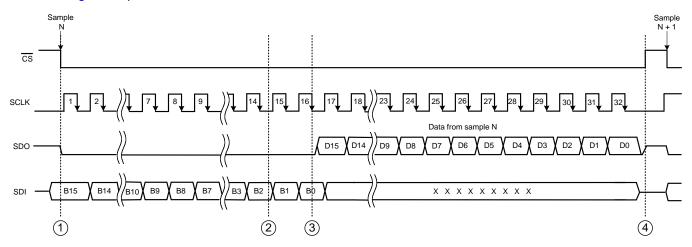


Figure 72. Device Operation Using the Serial Interface Timing Diagram

There are four events shown in Figure 72. These events are described below:

- Event 1: The host initiates a data conversion frame through a falling edge of the \overline{CS} signal. The analog input signal at the instant of the \overline{CS} falling edge is sampled by the ADC and conversion is performed using an internal oscillator clock. The analog input channel converted during this frame is selected in the previous data frame. The internal register settings of the device for the next conversion can be input during this data frame using the SDI and SCLK inputs. Initiate SCLK at this instant and latch data on the SDI line into the device on every SCLK falling edge for the next 16 SCLK cycles. At this instant, SDO goes low because the device does not output internal conversion data on the SDO line during the first 16 SCLK cycles.
- **Event 2:** During the first 16 SCLK cycles, the device completes the internal conversion process and data are now ready within the converter. However, the device does not output data bits on SDO until the 16th falling edge appears on the SCLK input. Because the ADC conversion time is fixed (the maximum value is given in the *Electrical Characteristics* table), the 16th SCLK falling edge must appear after the internal conversion is over, otherwise data output from the device is incorrect. Therefore, the SCLK frequency cannot exceed a maximum value, as provided in the *Timing Requirements: Serial Interface* table.
- **Event 3:** At the 16th falling edge of the SCLK signal, the device reads the LSB of the input word on the SDI line. The device does not read anything from the SDI line for the remaining data frame. On the same edge, the MSB of the conversion data is output on the SDO line and can be read by the host processor on the subsequent falling edge of the SCLK signal. For 16 bits of output data, the LSB can be read on the 32nd SCLK falling edge. The SDO outputs 0 on subsequent SCLK falling edges until the next conversion is initiated.
- **Event 4:** When the internal data from the device is received, the host terminates the data frame by deactivating the $\overline{\text{CS}}$ signal to high. The SDO output goes into a Hi-Z state until the next data frame is initiated, as explained in Event 1.

8.4.1.3 Host-to-Device Connection Topologies

The digital interface of the ADS8684 and ADS8688 offers a lot of flexibility in the ways that a host controller can exchange data or commands with the device. A typical connection between a host controller and a stand-alone device is illustrated in Figure 70. However, there are applications that require multiple ADCs but the host controller has limited interfacing capability. This section describes two connection topologies that can be used to address the requirements of such applications.



8.4.1.3.1 Daisy-Chain Topology

A typical connection diagram showing multiple devices in daisy-chain mode is shown in Figure 73. The CS, SCLK, and SDI inputs of all devices are connected together and controlled by a single \overline{CS} , SCLK, and SDO pin of the host controller, respectively. The DAISY₁ input pin of the first ADC in the chain is connected to DGND, the SDO₁ output pin is connected to the DAISY₂ input of ADC₂, and so forth. The SDO_N pin of the Nth ADC in the chain is connected to the SDI pin of the host controller. The devices do not require any special hardware or software configuration to enter daisy-chain mode.

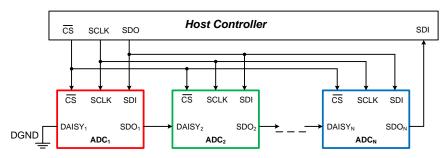


Figure 73. Daisy-Chain Connection Schematic

A typical timing diagram for three devices connected in daisy-chain mode is shown in Figure 74.

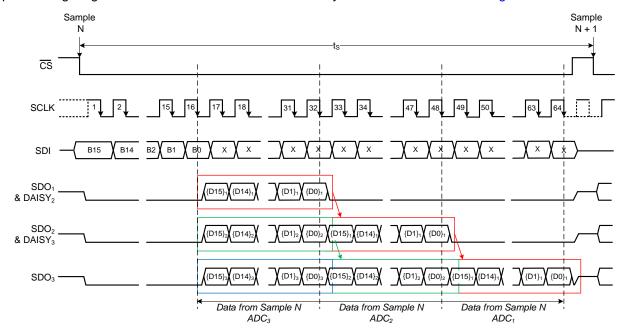


Figure 74. Three Devices Connected in Daisy-Chain Mode Timing Diagram

At the falling edge of the CS signal, all devices sample the input signal at their respective selected channels and enter into conversion phase. For the first 16 SCLK cycles, the internal register settings for the next conversion can be entered using the SDI line, which is common to all devices in the chain. During this time period, the SDO outputs for all devices remain low. At the end of conversion, every ADC in the chain loads its own conversion result into an internal 16-bit shift register. At the 16th SCLK falling edge, every ADC in the chain outputs the MSB bit on its own SDO output pin. On every subsequent SCLK falling edge, the internal shift register of each ADC latches the data available on its DAISY pin and shifts out the next bit of data on its SDO pin. Therefore, the digital host receives the data of ADC_N, followed by the data of ADC_{N-1}, and so forth (in MSB-first fashion). In total, a minimum of 16 x N SCLK falling edges are required to capture the outputs of all N devices in the chain. This example uses three devices in a daisy-chain connection, so 3 x 16 = 48 SCLK cycles are required to capture the outputs of all devices in the chain along with the 16 SCLK cycles to input the register settings for the next conversion, resulting in a total of 64 SCLK cycles for the entire data frame. Note that the overall throughput of the system is proportionally reduced with the number of devices connected in a daisy-chain configuration.

Copyright © 2014–2015, Texas Instruments Incorporated



The following points must be noted about the daisy-chain configuration illustrated in Figure 73:

- The SDI pins for all devices are connected together so each device operates with the same internal configuration. This limitation can be overcome by spending additional host controller resources to control the SDI input of devices with unique configurations.
- If the number of devices connected in daisy-chain is more than four, loading increases on the shared output lines from the host controller (CS, SDO, and SCLK). This increased loading may lead to digital timing errors. This limitation can be overcome by using digital buffers on the shared outputs from the host controller before feeding the shared digital lines into additional devices.

8.4.1.3.2 Star Topology

A typical connection diagram showing multiple devices in the star topology is shown in Figure 75. The SDI and SCLK inputs of all devices are connected together and are controlled by a single SDO and SCLK pin of the host controller, respectively. Similarly, the SDO outputs of all devices are tied together and connected to the SDI input pin of the host controller. The CS input pin of each device is individually controlled by separate CS control lines from the host controller.

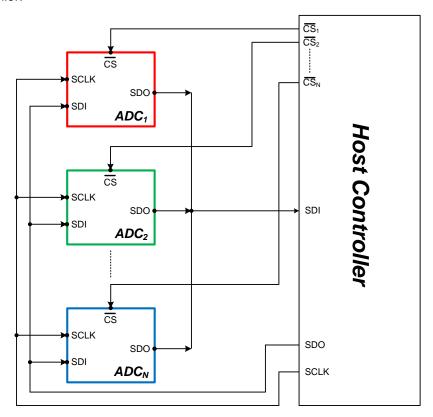


Figure 75. Star Topology Connection Schematic

The timing diagram for a typical data frame in the star topology is the same as in a stand-alone device operation, as illustrated in Figure 72. The data frame for a particular device starts with the falling edge of the \overline{CS} signal and ends when the \overline{CS} signal goes high. Because the host controller provides separate \overline{CS} control signals for each device in this topology, the user can select the devices in any order and initiate a conversion by bringing down the \overline{CS} signal for that particular device. As explained in Figure 72, when \overline{CS} goes high at the end of each data frame, the SDO output of the device is placed into a Hi-Z state. Therefore, the shared SDO line in the star topology is controlled only by the device with an active data frame (\overline{CS} is low). In order to avoid any conflict related to multiple devices driving the SDO line at the same time, ensure that the host controller pulls down the \overline{CS} signal for only one device at any particular time.

TI recommends connecting a maximum of four devices in the star topology. Beyond that, loading may increase on the shared output lines from the host controller (SDO and SCLK). This loading may lead to digital timing errors. This limitation can be overcome by using digital buffers on the shared outputs from the host controller before being fed into additional devices.



8.4.2 Device Modes

The ADS8684 and ADS8688 support multiple modes of operation that are software programmable. After powering up, the device is placed into idle mode and does not perform any function until a command is received from the user. Table 6 lists all commands to enter the different modes of the device. After power-up, the program registers wake up with the default values and require appropriate configuration settings before performing any conversion. The diagram in Figure 76 explains how to switch the device from one mode of operation to another.

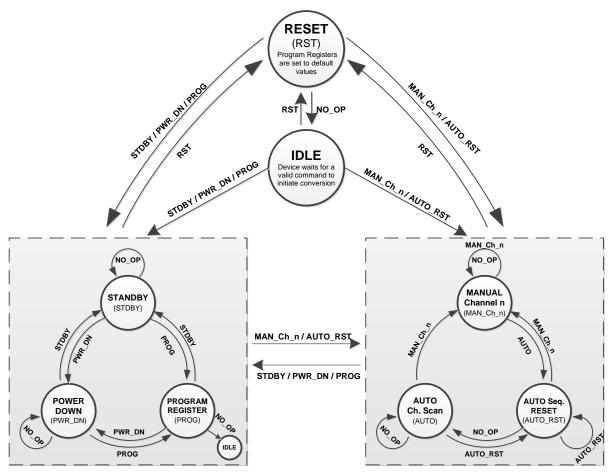


Figure 76. State Transition Diagram

8.4.2.1 Continued Operation in the Selected Mode (NO_OP)

Holding the SDI line low continuously (equivalent to writing a 0 to all 16 bits) during device operation continues device operation in the last selected mode (STDBY, PWR_DN, AUTO_RST, or MAN_Ch_n). In this mode, the device follows the same settings that are already configured in the program registers.

If a NO_OP condition occurs when the device is performing any read or write operation in the program register (PROG mode), then the device retains the current settings of the program registers. The device goes back to IDLE mode and waits for the user to enter a proper command to execute the program register read or write configuration.



8.4.2.2 Frame Abort Condition (FRAME_ABORT)

As explained in the *Data Acquisition Example* section, the device digital interface is designed such that each data frame starts with a falling edge of the CS signal. During the first 16 SCLK cycles, the device reads the 16-bit command word on the SDI line. The device waits to execute the command until the <u>last</u> bit of the command is received, which is latched on the 16th SCLK falling edge. During this operation, the CS signal must stay low. If the CS signal goes high for any reason before the data transmission is complete, the device goes into an INVALID state and waits for a proper command to be written. This condition is called the FRAME_ABORT condition. When the device is operating in this INVALID mode, any read operation on the device returns invalid data on the SDO line.

8.4.2.3 STANDBY Mode (STDBY)

The devices support a low-power standby mode (STDBY) in which only part of the circuit is powered down. The internal reference and buffer is not powered down, and therefore, the devices can be quickly powered up in 20 µs on exiting the STDBY mode. When the device comes out of STDBY mode, the program registers are not reset to the default values.

To enter STDBY mode, execute a valid write operation to the command register with a STDBY command of 8200h, as shown in Figure 77. The command is executed and the device enters STDBY mode on the next $\overline{\text{CS}}$ rising edge following this write operation. The device remains in STDBY mode if no valid conversion command (AUTO_RST or MAN_Ch_n) is executed and SDI remains low (refer to the *Continued Operation in the Selected Mode* section) during the subsequent data frames. When the device operates in STDBY mode, the program register settings can be updated (as explained in the *Program Register Read/Write Operation* section) using 16 SCLK cycles. However, if 32 complete SCLK cycles are provided, then the device returns invalid data on the SDO line because there is no ongoing conversion in STDBY mode. The program register read operation can take place normally during this mode.

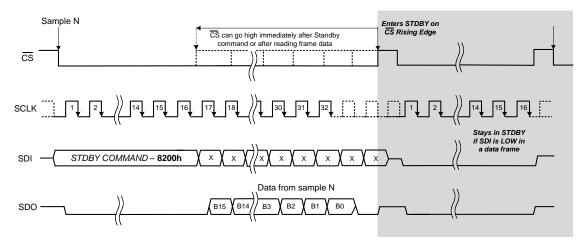


Figure 77. Enter and Remain in STDBY Mode Timing Diagram



In order to exit STDBY mode a valid 16-bit write command must be executed to enter auto (AUTO_RST) or manual (MAN_CH_n) scan mode, as shown in Figure 78. The device starts exiting STDBY mode on the next CS rising edge. At the next CS falling edge, the device samples the analog input at the channel selected by the MAN_CH_n command or the first channel of the AUTO_RST mode sequence. To ensure that the input signal is sampled correctly, keep the minimum width of the CS signal at 20 µs after exiting STDBY mode so the device internal circuitry can be fully powered up and biased properly before taking the sample. The data output for the selected channel can be read during the same data frame, as explained in Figure 72.

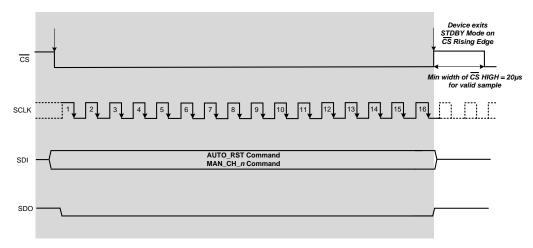


Figure 78. Exit STDBY Mode Timing Diagram



8.4.2.4 Power-Down Mode (PWR DN)

The devices support a hardware and software power-down mode (PWR_DN) in which all internal circuitry is powered down, including the internal reference and buffer. A minimum time of 15 ms is required for the device to power up and convert the selected analog input channel after exiting PWR_DN mode, if the device is operating in the internal reference mode (REFSEL = 0). The hardware power mode for the device is explained in the RST/PD (Input) section. The primary difference between the hardware and software power-down modes is that the program registers are reset to default values when the devices wake up from hardware power-down, but the previous settings of the program registers are retained when the devices wake up from software power-down.

To enter PWR_DN mode using software, execute a valid write operation on the command register with a software PWR_DN command of 8300h, as shown in Figure 79. The command is executed and the device enters PWR_DN mode on the next \overline{CS} rising edge following this write operation. The device remains in PWR_DN mode if no valid conversion command (AUTO_RST or MAN_Ch_n) is executed and SDI remains low (refer to the Continued Operation in the Selected Mode section) during the subsequent data frames. When the device operates in PWR_DN mode, the program register settings can be updated (as explained in the Program Register Read/Write Operation section) using 16 SCLK cycles. However, if 32 complete SCLK cycles are provided, then the device returns invalid data on the SDO line because there is no ongoing conversion in PWR_DN mode. The program register read operation can take place normally during this mode.

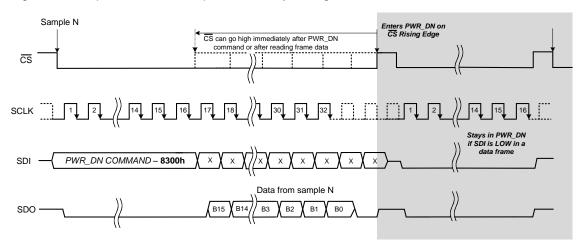


Figure 79. Enter and Remain in PWR DN Mode Timing Diagram

In order to exit from PWR_DN mode a valid 16-bit write command must be executed, as shown in Figure 80. The $\frac{\text{device co}}{\text{CS}}$ round on the next $\frac{\text{CS}}{\text{CS}}$ rising edge. For operation in internal reference mode (REFSEL = 0), 15 ms are required for the device to power-up the reference and other internal circuits and settle to the required accuracy before valid conversion data are output for the selected input channel.

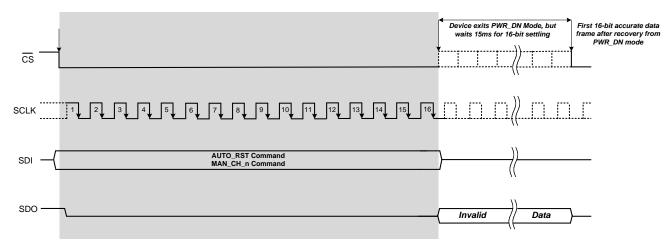


Figure 80. Exit PWR_DN Mode Timing Diagram



8.4.2.5 Auto Channel Enable with Reset (AUTO_RST)

The devices can be programmed to scan the input signal on all analog channels automatically by writing a valid auto channel sequence with a reset (AUTO_RST, A000h) command in the command register, as explained in Figure 81. As shown in Figure 81, the $\overline{\text{CS}}$ signal can be pulled high immediately after the AUTO_RST command or after reading the output data of the frame. However, in order to accurately acquire and convert the input signal on the first selected channel in the next data frame, the command frame must be a complete frame of 32 SCLK cycles.

The sequence of channels for the automatic scan can be configured by the AUTO SCAN sequencing control register (01h to 02h) in the program register; refer to the *Program Register Map* section. In this mode, the devices continuously cycle through the selected channels in ascending order, beginning with the lowest channel and converting all channels selected in the program register. On completion of the sequence, the devices return to the lowest count channel in the program register and repeat the sequence. The input voltage range for each channel in the auto-scan sequence can be configured by setting the Range Select Registers of the program registers.

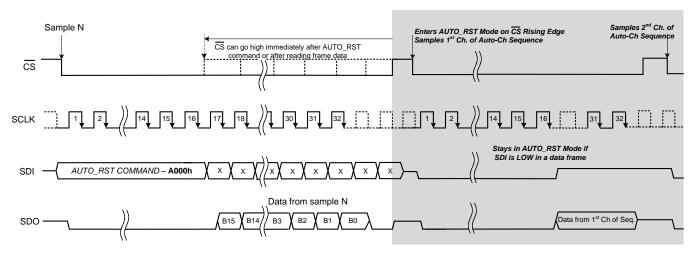


Figure 81. Enter AUTO_RST Mode Timing Diagram

The devices remain in AUTO_RST mode if no other valid command is executed and SDI is kept low (refer to the *Continued Operation in the Selected Mode (NO_OP)* section) during subsequent data frames. If the AUTO_RST command is executed again at any time during this mode of operation, then the sequence of the scanned channels is reset. The devices return to the lowest count channel of the auto-scan sequence in the program register and repeat the sequence. The timing diagram in Figure 82 shows this behavior using an example in which channels 0 to 3 are selected in the auto sequence. For switching between AUTO_RST mode and MAN Ch n mode, refer to the *Channel Sequencing Modes* section.

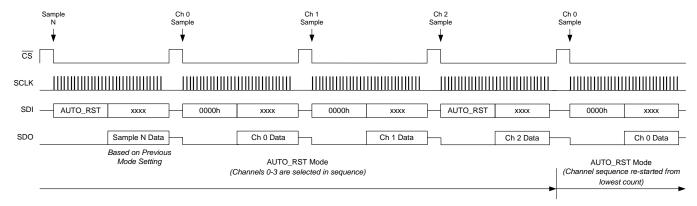


Figure 82. Device Operation Example in AUTO RST Mode



8.4.2.6 Manual Channel n Select (MAN_Ch_n)

The devices can be programmed to convert a particular analog input channel by operating in manual channel n scan mode (MAN_Ch_n). This programming is done by writing a valid manual channel n select command (MAN_Ch_n) in the command register, as shown in Figure 83. As shown in Figure 83, the $\overline{\text{CS}}$ signal can be pulled high immediately after the MAN_Ch_n command or after reading the output data of the frame. However, in order to accurately acquire and convert the input signal on the next channel, the command frame must be a complete frame of 32 SCLK cycles. Refer to Table 6 for a list of commands to select individual channels during MAN Ch_n mode.

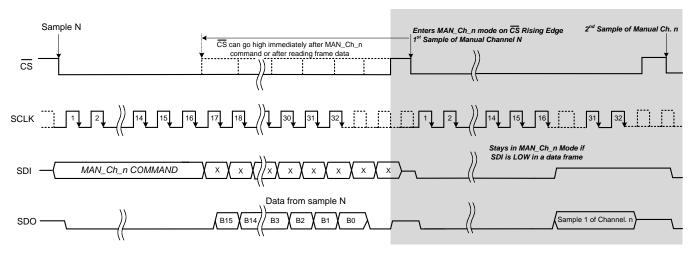


Figure 83. Enter MAN Ch n Scan Mode Timing Diagram

The manual channel *n* select <u>command</u> (MAN_Ch_n) is executed and the devices sample the analog input on the selected channel on the <u>CS</u> falling edge of the next data frame following this write operation. The input voltage range for each channel in the MAN_Ch_n mode can be configured by setting the <u>Range Select Registers</u> in the program registers. The device continues to sample the analog input on the same channel if no other valid command is executed and SDI is kept low (refer to the <u>Continued Operation in the Selected Mode (NO_OP)</u> section) during subsequent data frames. The timing diagram in <u>Figure 84</u> illustrates this behavior using an example in which channel 1 is selected in the manual sequencing mode. For switching between MAN_Ch_n mode and AUTO_RST mode, refer to the <u>Channel Sequencing Modes</u> section.

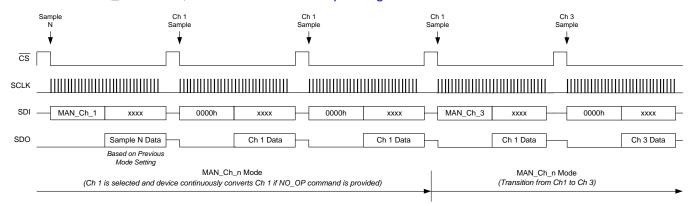


Figure 84. Device Operation in MAN_Ch_n Mode



8.4.2.7 Channel Sequencing Modes

The devices offer two channel sequencing modes: AUTO_RST and MAN_Ch_n.

In AUTO_RST mode, the channel number automatically increments in every subsequent frame. As explained in the *Auto-Scan Sequencing Control Registers* section, the analog inputs can be selected for an automatic scan with a register setting. The device automatically scans only the selected analog inputs in ascending order. The unselected analog input channels can also be powered down for optimizing power consumption in this mode of operation. The auto-mode sequence can be reset at any time during an automatic scan (using the AUTO_RST command). When the reset command is received, the ongoing auto-mode sequence is reset and restarts from the lowest selected channel in the sequence.

In MAN_Ch_n mode, the same input channel is selected during every data conversion frame. The input command words to select individual analog channels in MAN_Ch_n mode are listed in Table 6. If a particular input channel is selected during a data frame, then the analog inputs on the same channel are sampled during the next data frame. Figure 85 shows the SDI command sequence for transitions from AUTO_RST to MAN Ch n mode.

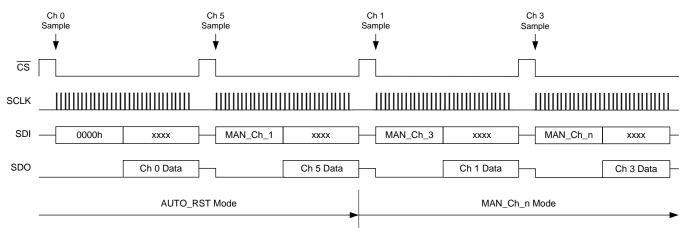


Figure 85. Transitioning from AUTO_RST to MAN_Ch_n Mode (Channels 0 and 5 are Selected for Auto Sequence)

Figure 86 shows the SDI command sequence for transitions from MAN_Ch_n to AUTO_RST mode. Note that each SDI command is executed on the next CS falling edge. A RST command can be issued at any instant during any channel sequencing mode, after which the device is placed into a default power-up state in the next data frame.

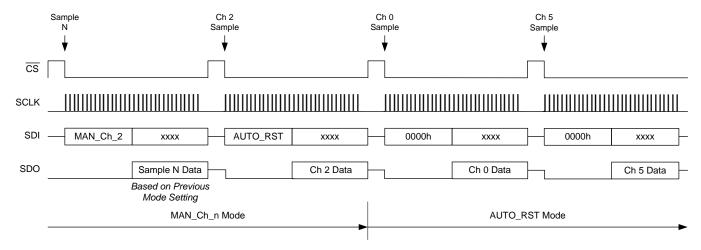


Figure 86. Transitioning from MAN_Ch_n to AUTO_RST Mode (Channels 0 and 5 are Selected for Auto Sequence)



8.4.2.8 Reset Program Registers (RST)

The devices support a hardware and software reset (RST) mode in which all program registers are reset to their default values. The devices can be put into RST mode using a hardware pin, as explained in the RST/PD (Input) section.

The device program registers can be reset to their default values during any data frame by executing a valid write operation on the command register with a RST command of 8500h, as shown in Figure 87. The device remains in RST mode if no valid conversion command (AUTO_RST or MAN_Ch_n) is executed and SDI remains low (refer to the *Continued Operation in the Selected Mode (NO_OP)* section) during the subsequent data frames. When the device operates in RST mode, the program register settings can be updated (as explained in the *Program Register Read/Write Operation* section) using 16 SCLK cycles. However, if 32 complete SCLK cycles are provided, then the device returns invalid data on the SDO line because there is no ongoing conversion in RST mode. The values of the program register can be read normally during this mode. A valid AUTO_RST or MAN_CH_n channel selection command must be executed for initiating a conversion on a particular analog channel using the default program register settings.

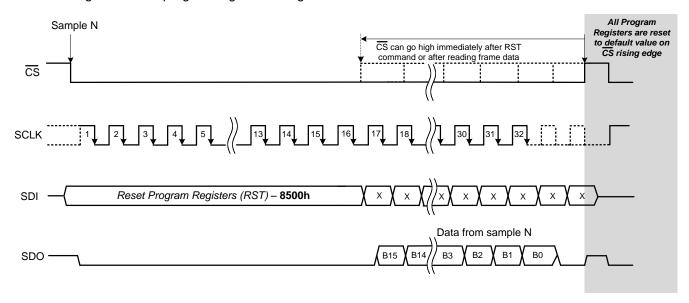


Figure 87. Reset Program Registers (RST) Timing Diagram



8.5 Register Maps

The internal registers of the ADS8684 and ADS8688 are categorized into two categories: command registers and program registers.

The command registers are used to select the channel sequencing mode (AUTO_RST or MAN_Ch_n), configure the device in standby (STDBY) or power-down (PWR_DN) mode, and reset (RST) the program registers to their default values.

The program registers are used to select the sequence of channels for AUTO_RST mode, select the SDO output format, and control input range settings for individual channels.

8.5.1 Command Register Description

The command register is a 16-bit, write-only register that is used to set the operating modes of the ADS8684 and ADS8688. The settings in this register are used to select the channel sequencing mode (AUTO_RST or MAN_Ch_n), configure the device in standby (STDBY) or power-down (PWR_DN) mode, and reset (RST) the program registers to their default values. All command settings for this register are listed in Table 6. During power-up or reset, the default content of the command register is all 0's and the device waits for a command to be written before being placed into any mode of operation. Refer to Figure 1 for a typical timing diagram for writing a 16-bit command into the device. The device executes the command at the end of this particular data frame when the $\overline{\text{CS}}$ signal goes high.

MSB BYTE LSB BYTE COMMAND REGISTER **OPERATION IN NEXT FRAME** (Hex) B11 B15 **B14** B13 B12 **B10** B9 B8 B[7:0] Continued Operation 0 0 0 0 0 0 0 0 0000 0000 0000h Continue operation in previous mode (NO OP) Standby (STDBY) 1 0 0 0 0 0 1 0 0000 0000 8200h Device is placed into standby mode Power Down 0 0 0 0 0 1 1 1 0000 0000 8300h Device is powered down (PWR_DN) Reset program registers (RST) 1 0 0 0 0 1 0 1 0000 0000 8500h Program register is reset to default Auto Ch. Sequence with Reset 1 0 1 0 0 0 0 0 0000 0000 A000h Auto mode enabled following a reset (AUTO_RST) Manual Ch 0 Selection ٥ 0 0 n 0 1 1 0 0000 0000 C000h Channel 0 input is selected (MAN Ch 0) Manual Ch 1 Selection 1 1 0 0 0 1 0 0 0000 0000 C400h Channel 1 input is selected (MAN_Ch_1) Manual Ch 2 Selection 1 0 0 1 0 0 1 0 0000 0000 C800h Channel 2 input is selected (MAN_Ch_2) Manual Ch 3 Selection 1 1 0 0 1 1 0 0 0000 0000 CC00h Channel 3 input is selected (MAN Ch 3) Manual Ch 4 Selection (MAN_Ch_4)⁽¹⁾ 0 0 1 1 0 1 0 0 0000 0000 D000h Channel 4 input is selected Manual Ch 5 Selection (MAN_Ch_5) 1 1 0 1 0 0 0 0000 0000 D400h Channel 5 input is selected Manual Ch 6 Selection 1 1 0 1 1 0 0 0 0000 0000 D800h Channel 6 input is selected (MAN_Ch_6) Manual Ch 7 Selection 1 1 0 1 1 1 0 0 0000 0000 DC00h Channel 7 input is selected (MAN_Ch_7) Manual AUX Selection 0 0 0000 0000 E000h AUX channel input is selected (MAN_AUX)

Table 6. Command Register Map

8.5.2 Program Register Description

The program register is a 16-bit register used to set the operating modes of the ADS8684 and ADS8688. The settings in this register are used to select the channel sequence for AUTO_RST mode, configure the device ID in daisy-chain mode, select the SDO output format, and control input range settings for individual channels. All program settings for this register are listed in Table 9. During power-up or reset, the different program registers in the device wake up with their default values and the device waits for a command to be written before being placed into any mode of operation.

Product Folder Links: ADS8684 ADS8688

⁽¹⁾ Shading indicates bits or registers not included in the 4-channel version of the device.



8.5.2.1 Program Register Read/Write Operation

The program register is a 16-bit read or write register. There must be a minimum of 24 SCLKs after the \overline{CS} falling edge for any read or write operation to the program registers. When \overline{CS} goes low, the SDO line goes low as well. The device receives the command (as shown in Table 7 and Table 8) through SDI where the first seven bits (bits 15-9) represent the register address and the eighth bit (bit 8) is the write or read instruction.

For a write cycle, the next eight bits (bits 7-0) on SDI are the desired data for the addressed register. Over the next eight SCLK cycles, the device outputs this 8-bit data that is written into the register. This data readback allows verification to determine if the correct data are entered into the device. A typical timing diagram for a program register write cycle is shown in Figure 88.

Table 7. Write Cycle Command Word

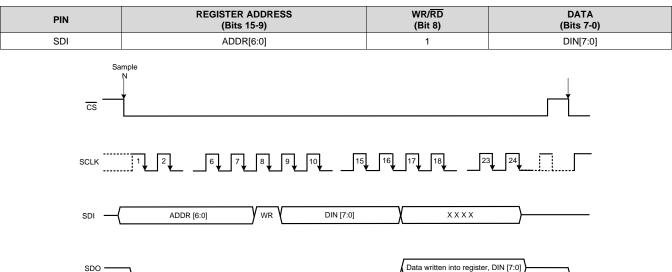


Figure 88. Program Register Write Cycle Timing Diagram

For a read cycle, the next eight bits (bits 7-0) on SDI are *don't care* bits and SDO stays low. From the 16th SCLK falling edge and onwards, SDO outputs the 8-bit data from the addressed register during the next eight clocks, in MSB-first fashion. A typical timing diagram for a program register read cycle is shown in Figure 89.

Table 8. Read Cycle Command Word

PIN	REGISTER ADDRESS (Bits 15-9)	WR/RD (Bit 8)	DATA (Bits 7-0)
SDI	ADDR[6:0]	0	XXXXX
SDO	0000 000	0	DOUT[7:0]
<u>cs</u>			
SCLK	1 2 6 7 8 9 10 15	16 17 18 23	3 24
SDI —	ADDR [6:0] RD	xxxxx	
sdo —		DOUT [7:0	0]

Figure 89. Program Register Read Cycle Timing Diagram



8.5.2.2 Program Register Map

This section provides a bit-by-bit description of each program register.

Table 9. Program Register Map

				3	3					
REGISTER	REGISTER ADDRESS BITS[15:9]	DEFAULT VALUE ⁽¹⁾	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
AUTO SCAN SEQUENCING CONTROL										
AUTO_SEQ_EN	01h	FFh	CH7_EN ⁽²⁾	CH6_EN	CH5_EN	CH4_EN	CH3_EN	CH2_EN	CH1_EN	CH0_EN
Channel Power Down	02h	00h	CH7_PD	CH6_PD	CH5_PD	CH4_PD	CH3_PD	CH2_PD	CH1_PD	CH0_PD
DEVICE FEATURES SELECTION	CONTROL		•			•		•		
Feature Select	03h	00h	DEV	[1:0]	0	0	0		SDO [2:0]	
RANGE SELECT REGISTERS		•			•		•			
Channel 0 Input Range	05h	00h	0	0	0	0	Range Select Channel 0 [3:0]			
Channel 1 Input Range	06h	00h	0	0	0	0		Range Select	Channel 1 [3:0]	
Channel 2 Input Range	07h	00h	0	0	0	0		Range Select	Channel 2 [3:0]	
Channel 3 Input Range	08h	00h	0	0	0	0		Range Select	Channel 3 [3:0]	
Channel 4 Input Range	09h	00h	0	0	0	0		Range Select	Channel 4 [3:0]	
Channel 5 Input Range	0Ah	00h	0	0	0	0		Range Select	Channel 5 [3:0]	
Channel 6 Input Range	0Bh	00h	0	0	0	0	Range Select Channel 6 [3:0]			
Channel 7 Input Range	0Ch	00h	0	0	0	0		Range Select	Channel 7 [3:0]	
COMMAND READ BACK (Read-O	nly)									
Command Read Back	3Fh	00h				COMMAND	WORD [7:0]			

⁽¹⁾ All registers are reset to the default values at power-on or at device reset using the register settings method.

Product Folder Links: ADS8684 ADS8688

⁽²⁾ Shading indicates bits or registers that are not included in the 4-channel version of the device. A write operation on any of these bits or registers has no effect on device behavior. A read operation on any of these bits or registers outputs all 1's on the SDO line.



8.5.2.3 Program Register Descriptions

8.5.2.3.1 Auto-Scan Sequencing Control Registers

In AUTO_RST mode, the device automatically scans the preselected channels in ascending order with a new channel selected for every conversion. Each individual channel can be selectively included in the auto channel sequencing. For channels not selected for auto sequencing, the analog front-end circuitry can be individually powered down.

8.5.2.3.1.1 Auto-Scan Sequence Enable Register (address = 01h)

This register selects individual channels for sequencing in AUTO_RST mode. The default value for this register is FFh, which implies that in default condition all channels are included in the auto-scan sequence. If no channels are included in the auto sequence (that is, the value for this register is 00h), then channel 0 is selected for conversion by default.

Figure 90. AUTO_SEQ_EN Register

7	6	5	4	3	2	1	0
CH7_EN ⁽¹⁾	CH6_EN	CH5_EN	CH4_EN	CH3_EN	CH2_EN	CH1_EN	CH0_EN
R/W-1h	R/W-1h	R/W-1h	R/W-1h	R/W-1h	R/W-1h	R/W-1h	R/W-1h

LEGEND: R/W = Read/Write; -n = value after reset

(1) Shading indicates bits or registers that are not included in the 4-channel version of the device. A write operation on any of these bits or registers has no effect on device behavior. A read operation on any of these bits or registers outputs all 1's on the SDO line.

Table 10. AUTO_SEQ_EN Field Descriptions

Bit	Field	Туре	Reset	Description
7	CH7_EN	R/W	1h	Channel 7 enable. 0 = Channel 7 is not selected for sequencing in AUTO_RST mode 1 = Channel 7 is selected for sequencing in AUTO_RST mode
6	CH6_EN	R/W	1h	Channel 6 enable. 0 = Channel 6 is not selected for sequencing in AUTO_RST mode 1 = Channel 6 is selected for sequencing in AUTO_RST mode
5	CH5_EN	R/W	1h	Channel 5 enable. 0 = Channel 5 is not selected for sequencing in AUTO_RST mode 1 = Channel 5 is selected for sequencing in AUTO_RST mode
4	CH4_EN	R/W	1h	Channel 4 enable. 0 = Channel 4 is not selected for sequencing in AUTO_RST mode 1 = Channel 4 is selected for sequencing in AUTO_RST mode
3	CH3_EN	R/W	1h	Channel 3 enable. 0 = Channel 3 is not selected for sequencing in AUTO_RST mode 1 = Channel 3 is selected for sequencing in AUTO_RST mode
2	CH2_EN	R/W	1h	Channel 2 enable. 0 = Channel 2 is not selected for sequencing in AUTO_RST mode 1 = Channel 2 is selected for sequencing in AUTO_RST mode
1	CH1_EN	R/W	1h	Channel 1 enable. 0 = Channel 1 is not selected for sequencing in AUTO_RST mode 1 = Channel 1 is selected for sequencing in AUTO_RST mode
0	CH0_EN	R/W	1h	Channel 0 enable. 0 = Channel 0 is not selected for sequencing in AUTO_RST mode 1 = Channel 0 is selected for sequencing in AUTO_RST mode

Product Folder Links: ADS8684 ADS8688



8.5.2.3.1.2 Channel Power Down Register (address = 02h)

This register powers down individual channels that are not included for sequencing in AUTO_RST mode. The default value for this register is 00h, which implies that in default condition all channels are powered up. If all channels are powered down (that is, the value for this register is FFh), then the analog front-end circuits for all channels are powered down and the output of the ADC contains invalid data. If the device is in MAN-Ch_n mode and the selected channel is powered down, then the device yields invalid output that can also trigger a false alarm condition.

Figure 91. Channel Power Down Register

7	6	5	4	3	2	1	0
CH7_PD ⁽¹⁾	CH6_PD	CH5_PD	CH4_PD	CH3_PD	CH2_PD	CH1_PD	CH0_PD
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; -n = value after reset

(1) Shading indicates bits or registers that are not included in the 4-channel version of the device. A write operation on any of these bits or registers has no effect on device behavior. A read operation on any of these bits or registers outputs all 1's on the SDO line.

Table 11. Channel Power Down Register Field Descriptions

Bit	Field	Туре	Reset	Description
7	CH7_PD	R/W	Oh	Channel 7 power-down. 0 = The analog front-end on channel 7 is powered up and channel 7 can be included in the AUTO_RST sequence 1 = The analog front-end on channel 7 is powered down and channel 7 cannot be included in the AUTO_RST sequence
6	CH6_PD	R/W	0h	Channel 6 power-down. 0 = The analog front-end on channel 6 is powered up and channel 6 can be included in the AUTO_RST sequence 1 = The analog front-end on channel 6 is powered down and channel 6 cannot be included in the AUTO_RST sequence
5	CH5_PD	R/W	0h	Channel 5 power-down. 0 = The analog front-end on channel 5 is powered up and channel 5 can be included in the AUTO_RST sequence 1 = The analog front-end on channel 5 is powered down and channel 5 cannot be included in the AUTO_RST sequence
4	CH4_PD	R/W	0h	Channel 4 power-down. 0 = The analog front-end on channel 4 is powered up and channel 4 can be included in the AUTO_RST sequence 1 = The analog front-end on channel 4 is powered down and channel 4 cannot be included in the AUTO_RST sequence
3	CH3_PD	R/W	0h	Channel 3 power-down. 0 = The analog front-end on channel 3 is powered up and channel 3 can be included in the AUTO_RST sequence 1 = The analog front end on channel 3 is powered down and channel 3 cannot be included in the AUTO_RST sequence
2	CH2_PD	R/W	0h	Channel 2 power-down. 0 = The analog front end on channel 2 is powered up and channel 2 can be included in the AUTO_RST sequence 1 = The analog front end on channel 2 is powered down and channel 2 cannot be included in the AUTO_RST sequence
1	CH1_PD	R/W	0h	Channel 1 power-down. 0 = The analog front end on channel 1 is powered up and channel 1 can be included in the AUTO_RST sequence 1 = The analog front end on channel 1 is powered down and channel 1 cannot be included in the AUTO_RST sequence
0	CH0_PD	R/W	0h	Channel 0 power-down. 0 = The analog front end on channel 0 is powered up and channel 0 can be included in the AUTO_RST sequence 1 = The analog front end on channel 0 is powered down and channel 0 cannot be included in the AUTO_RST sequence



8.5.2.3.2 Device Features Selection Control Register (address = 03h)

The bits in this register can be used to configure the device ID for daisy-chain operation and to configure the output bit format on SDO.

Figure 92. Feature Select Register

7	6	5	4	3	2	1	0
DEV[1	:0]	0	0	0		SDO[2:0]	
R/W-0	Oh	R-0h	R-0h	R-0h		R/W-0h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 12. Feature Select Register Field Descriptions

Bit	Field	Туре	Reset	Description
7-6	DEV[1:0]	R/W	0h	Device ID bits. 00 = ID for device 0 in daisy-chain mode 01 = ID for device 1 in daisy-chain mode 10 = ID for device 2 in daisy-chain mode 11 = ID for device 3 in daisy-chain mode
5	0	R	0h	Must always be set to 0
4	0	R	0h	Must always be set to 0
3	0	R	0h	Must always be set to 0
2-0	SDO[2:0]	R/W	0h	SDO data format bits (refer to Table 13).

Table 13. Description of Program Register Bits for SDO Data Format

SDO FORMAT	BEGINNING OF THE					
SDO[2:0]	OUTPUT BIT STREAM	BITS 24-9	BITS 8-5	BITS 4-3	BITS 2-0	
000	16th SCLK falling edge, no latency	Conversion result for selected channel (MSB-first)	SDC	D pulled low		
001	16th SCLK falling edge, no latency	Conversion result for selected channel (MSB-first)	Channel address ⁽¹⁾	SDO p	ulled low	
010	16th SCLK falling edge, no latency	Conversion result for selected channel (MSB-first)	Channel address ⁽¹⁾	Device address ⁽¹⁾	SDO pulled low	
011	16th SCLK falling edge, no latency	Conversion result for selected channel (MSB-first)	Channel address ⁽¹⁾	Device address ⁽¹⁾	Input range ⁽¹⁾	

(1) Table 14 lists the bit descriptions for these channel addresses, device addresses, and input range.

Table 14. Bit Description for the SDO Data

BIT	BIT DESCRIPTION
24-9	16 bits of conversion result for the channel represented in MSB-first format.
8-5	Four bits of channel address. 0000 = Channel 0 0001 = Channel 1 0010 = Channel 2 0011 = Channel 3 0100 = Channel 4 (valid only for the ADS8688) 0101 = Channel 5 (valid only for the ADS8688) 0110 = Channel 6 (valid only for the ADS8688) 0111 = Channel 7 (valid only for the ADS8688)
4-3	Two bits of device address (mainly useful in daisy-chain mode).
2-0	Three LSB bits of input voltage range (refer to the Range Select Registers section).

Product Folder Links: ADS8684 ADS8688



8.5.2.3.3 Range Select Registers (addresses 05h-0Ch)

Address 05h corresponds to channel 0, address 06h corresponds to channel 1, address 07h corresponds to channel 2, address 08h corresponds to channel 3, address 09h corresponds to channel 4, address 0Ah corresponds to channel 5, address 0Bh corresponds to channel 6, and address 0Ch corresponds to channel 7.

These registers allow the selection of input ranges for all individual channels (n = 0 to 3 for the ADS8684 and n = 0 to 7 for the ADS8688). The default value for these registers is 00h.

Figure 93. Channel *n* Input Range Registers

7	6	5	4	3	2	1	0
0	0	0	0		Range_0	CH <i>n</i> [3:0]	
R-0h	R-0h	R-0h	R-0h		R/W	/-0h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset


Table 15. Channel n Input Range Registers Field Descriptions

Bit	Field	Туре	Reset	Description
7-4	0	R	0h	Must always be set to 0
3-0	Range_CH <i>n</i> [3:0]	R/W	0h	Input range selection bits for channel n (n = 0 to 3 for the ADS8684 and n = 0 to 7 for the ADS8688). $0000 = \text{Input range is set to } \pm 2.5 \times \text{V}_{REF} \\ 0001 = \text{Input range is set to } \pm 1.25 \times \text{V}_{REF} \\ 0010 = \text{Input range is set to } \pm 0.625 \times \text{V}_{REF} \\ 0101 = \text{Input range is set to } 0 \text{ to } 2.5 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0110 = \text{Input range is set to } 0 \text{ to } 1.25 \times \text{V}_{REF} \\ 0 \text{ to } 0.25 \times \text{V}_{REF} \\ 0 \text{ to }$

8.5.2.3.4 Command Read-Back Register (address = 3Fh)

This register allows the device mode of operation to be read. On execution of this command, the device outputs the command word executed in the previous data frame. The output of the command register appears on SDO from the 16th falling edge onwards in an MSB-first format. All information regarding the command register is contained in the first eight bits and the last eight bits are 0 (refer to Table 6), thus the command read-back operation can be stopped after the 24th SCLK cycle.

Figure 94. Command Read-Back Register



LEGEND: R = Read only; -n = value after reset

Table 16. Command Read-Back Register Field Descriptions

Bit Field Type Reset				Description			
7-0	COMMAND_WORD[15:8]	R	0h	Command executed in previous data frame.			

Copyright © 2014–2015, Texas Instruments Incorporated



9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The ADS8684 and ADS8688 devices are fully-integrated data acquisition systems based on a 16-bit SAR ADC. The devices include an integrated analog front-end for each input channel and an integrated precision reference with a buffer. As such, this device family does not require any additional external circuits for driving the reference or analog input pins of the ADC.

9.2 Typical Applications

9.2.1 Phase-Compensated, 8-Channel, Multiplexed Data Acquisition System for Power Automation

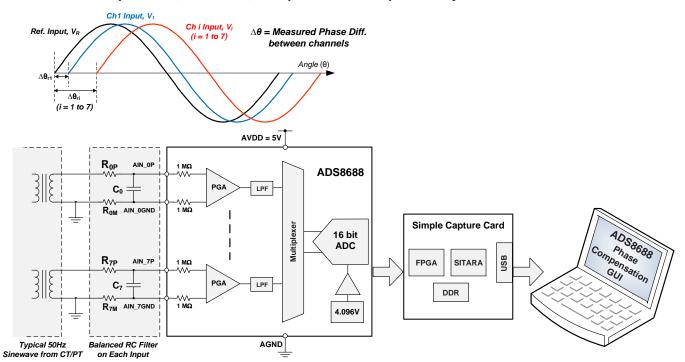


Figure 95. 8-Channel, Multiplexed Data Acquisition System for Power Automation

9.2.1.1 Design Requirements

In modern power grids, accurately measuring the electrical parameters of the various areas of the power grid is extremely critical. This measurement helps determine the operating status and running quality of the grid. Such accurate measurements also help diagnose potential problems with the power network so that these problems can be resolved quickly without having any significant service impact. The key electrical parameters include amplitude, frequency, and phase, which are important for calculating the power factor, power quality, and other parameters of the power system.



Typical Applications (continued)

The phase angle of the electrical signal on the power network buses is a special interest to power system engineers. The primary objective for this design is to accurately measure the phase and phase difference between the analog input signals in a multichannel data acquisition system. When multiple input channels are sampled in a sequential manner as in a multiplexed ADC, an additional phase delay is introduced between the channels. Thus the phase measurements are not accurate. However, this additional phase delay is constant and can be compensated in application software.

The key design requirements are given below:

- Single-ended sinusoidal input signal with a ±10-V amplitude and typical frequency (f_{IN} = 50 Hz).
- Design an 8-channel multiplexed data acquisition system using a 16-bit SAR ADC.
- Design a software algorithm to compensate for the additional phase difference between the channels.

9.2.1.2 Detailed Design Procedure

The application circuit and system diagram for this design is shown in Figure 95. This design includes a complete hardware and software implementation of a multichannel data acquisition system for power automation applications.

The system hardware uses the ADS8688, which is a 16-bit, 500-kSPS, 8-channel, multiplexed input, SAR ADC with integrated precision reference and analog front-end circuitry for each channel. The ADC supports bipolar input ranges up to ±10.24 V with a single 5-V supply and provides minimum latency in data output resulting from the SAR architecture. The integration offered by this device makes the ADS8684 and ADS8688 an ideal selection for such applications, because the integrated signal conditioning helps minimize system components and avoids the need for generating high-voltage supply rails. The overall system-level dc precision (gain and offset errors) and low temperature drift offered by this device helps system designers achieve the desired system accuracy without calibration. In most applications, using passive RC filters or multi-stage filters in front of the ADC is preferred to reduce the noise of the input signal.

The software algorithm implemented in this design uses the discrete fourier transform (DFT) method to calculate and track the input signal frequency, get the exact phase angle of the individual signal, calculate the phase difference, and implement phase compensation. The entire algorithm has four steps:

- Calculate the theoretical phase difference introduced by the ADC resulting from multiplexing input channels.
- Estimate the frequency of the input signal using frequency tracking and DFT techniques.
- Calculate the phase angle of all signals in the system based on the estimated frequency.
- Compensate the phase difference for all channels using the theoretical value of an additional MUX phase delay calculated in the first step.

9.2.1.3 Application Curve

The performance summary for this design is summarized in Table 17 and Figure 96. In this example, multiple sinusoidal input signals of amplitude ±10 V are applied to the inputs of the ADC. The initial phase angle is the same for all signals, but the input frequency is varied from 45 Hz to 55 Hz. The phase error in the last column of Table 17 reflects the measurement accuracy of this design.

Table 17. Theoretical and Measured Phase Difference

INPUT TEST CONDITION	THEORETICAL PHASE ERROR ⁽¹⁾	MEASURED PHASE ERROR ⁽²⁾	PHASE ERROR AFTER COMPENSATION (3)
Phase difference (consecutive channels)	0.036°	0.036145°	0.000145°
Phase difference (farthest channels, channel 0 to channel 7)	0.252°	0.249964°	0.002036°

- (1) Theoretical phase difference introduced by multiplexing is calculated based on the formula: $\Delta \phi = (f_{IN} / f_{ADC}) \times N \times 360^{\circ}$, where N = integral gap between two channels in the multiplexer sequence; f_{IN} = input signal frequency; and f_{ADC} = 500 kSPS, maximum throughput of the ADC.
- (2) Measured phase value (before compensation) includes phase difference between any two channels resulting from multiplexing ADC inputs.
- (3) The algorithm subtracts theoretical phase difference from the measured phase to compensate for the phase difference resulting from the MUX inputs.



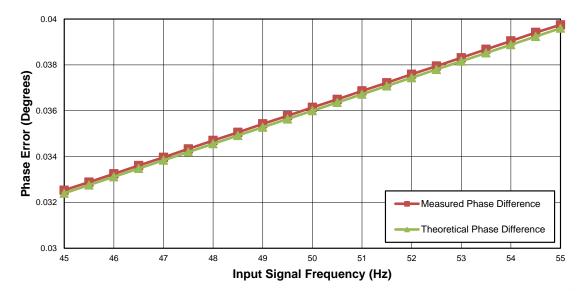


Figure 96. Measured and Theoretical Phase Difference Between Consecutive Channels



For a step-by-step design procedure, circuit schematics, bill of materials, PCB files, simulation results, and test results, refer to *Phase Compensated 8-Channel, Multiplexed Data Acquisition System for Power Automation Reference Design* (TIDU427).

9.2.2 16-Bit, 8-Channel, Integrated Analog Input Module for Programmable Logic Controllers (PLCs)

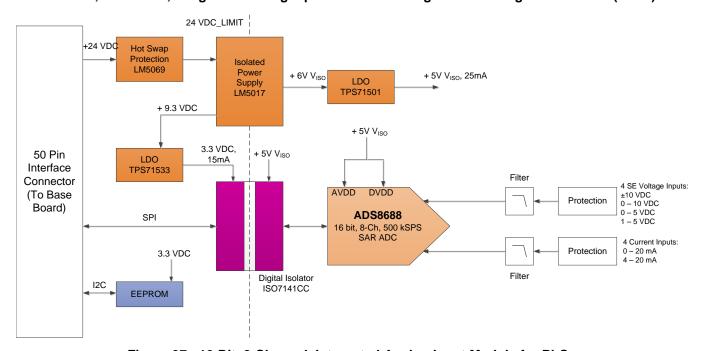


Figure 97. 16-Bit, 8-Channel, Integrated Analog Input Module for PLCs



9.2.2.1 Design Requirements

This reference design provides a complete solution for a single-supply industrial control analog input module. The design is suitable for process control end equipment such as programmable logic controllers (PLCs), distributed control systems (DCS) and data acquisition systems (DAS) modules that must digitize standard industrial current inputs, and bipolar or unipolar input voltage ranges up to ±10 V. In an industrial environment, the analog voltage and current ranges typically include ±2.5 V, ±5 V, ±10 V, 0 V to 5 V, 0 V to 10 V, 4 mA to 20 mA, and 0 mA to 20 mA. This reference design can measure all standard industrial voltage and current inputs. Eight channels are provided on the module, and each channel can be configured as a current or voltage input with software configuration.

The key design requirements are given below:

- Up to eight channels of user-programmable inputs:
 - Voltage inputs (with a typical Z_{IN} of 1 M Ω): \pm 10 V, \pm 5 V, \pm 2.5 V, 0 V to 10 V and 0 V to 5 V.
 - Current inputs (with a Z_{IN} of 300 Ω): 0 mA to 20 mA, 4 mA to 20 mA, and ±20 mA.
- A 16-bit SAR ADC with SPI.
- Accuracy of $\leq 0.2\%$ at 25°C over entire input range of voltage and current inputs.
- Onboard isolated Fly-Buck[™] power supply with inrush current protection.
- Slim-form factor $96 \times 50.8 \times 10$ mm (L × W × H).
- LabView-based GUI for signal-chain analysis and functional testing.
- Designed to comply with IEC61000-4 standards for ESD, EFT, and surge.

9.2.2.2 Detailed Design Procedure

The application circuit and system diagram for this design is shown in Figure 97.

The module has eight analog input channels, and each channel can be configured as a current or voltage input with software configuration. The design uses the ADS8688 (16-bit, 8-channel, single-supply SAR ADC) with an on-chip PGA and reference. The on-chip PGA provides a high-input impedance (typically 1 $M\Omega$) and filters noise interference. The on-chip, 4.096-V, ultra-low drift voltage reference is used as the reference for the ADC core.

The digital isolation is achieved using an ISO7141CC and ISO1541D. The host microcontroller communicates with a TCA6408A (an 8-bit, I²C, I/O expander over an I²C bus). The ISO1541D is a bidirectional, I²C isolator that isolates the I²C lines for the TCA6408A. The TCA6408A controls the low R_{ON} opto-switch (TLP3123), which is used to switch between voltage-to-current input modes. The input channel configuration is done in microcontroller firmware.

A low-cost, constant, on-time, synchronous buck regulator in fly-buck configuration with an external transformer (LM5017) generates the isolated power supply. The LM5017 has a wide input supply range, making this device ideal for accepting a 24-V industrial supply. This transformer can accept up to 100 V, thereby making reliable transient protection of the input supply more easily achievable. The fly-buck power supply isolates and steps the input voltage down to 6 V. The supply then provides that voltage to the TPS70950 (the low dropout regulator) to generate 5 V to power the ADS8688 and other circuitry. The LM5017 also features a number of other safety and reliability functions, such as undervoltage lockout (UVLO), thermal shutdown, and peak current limit protection.

Input analog signals are protected against high-voltage, fast-transient events often expected in an industrial environment. The protection circuitry makes use of the transient voltage suppressor (TVS) and ESD diodes. The RC low-pass mode filters are used on each analog input before the input reaches the ADS8688, which eliminates any high-frequency noise pickups and minimizes aliasing.

Copyright © 2014-2015, Texas Instruments Incorporated



9.2.2.3 Application Curve

The performance summary for this design is summarized in Table 18.

Table 18. Measurement Results Summary for PLC Analog Input Module Design

		•	•		
SERIAL NUMBER	PARAMETER	INPUT RANGE	ADS8688 SPECIFICATION	MEASURED RESULT	
		±10 V	90 dB (min)	90.85 dB	
1	SNR (dB)	0 V 10 V	88.5 dB (min)	89.52 dB	
		0 V to 5 V 87.5 dB (min) ±10 V 14.66	88.48 dB		
		±10 V	14.66	14.80	
2	ENOB (Bits)	0 V 10 V	14.41	14.58	
		0 V to 5 V	14.24	14.41	
		±10 V	2	1.77	
3	Maximum INL (LSB)	0 V 10 V	2	1.64	
		0 V to 5 V	2	1.35	
		±10 V	-2	-1.47	
4	Minimum INL (LSB)	0 V 10 V	-2	-1.36	
		0 V to 5 V	-2	-1.37	

The accuracy performance for this design for the ±10.24-V input range is shown in Figure 98.

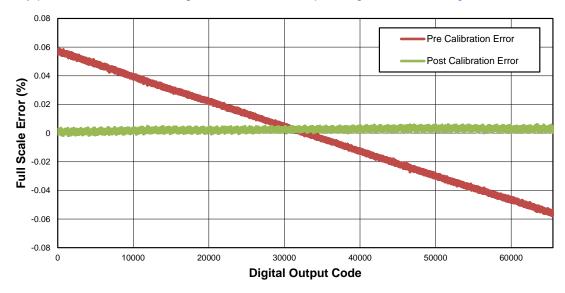


Figure 98. System Accuracy Performance in ±2.5 x V_{REF} Input Range




For a step-by-step design procedure, circuit schematics, bill of materials, PCB files, simulation results, and test results, refer to 16-Bit, 8-Channel, Integrated Analog Input Module for Programmable Logic Controllers (PLCs) (TIDU365).




10 Power-Supply Recommendations

The device uses two separate power supplies: AVDD and DVDD. The internal circuits of the device operate on AVDD, while DVDD is used for the digital interface. AVDD and DVDD can be independently set to any value within the permissible range.

The AVDD supply pins must be decoupled with AGND by using a minimum 10-µF and 1-µF capacitor on each supply. Place the 1-µF capacitor as close to the supply pins as possible. Place a minimum 10-µF decoupling capacitor very close to the DVDD supply to provide the high-frequency digital switching current. The effect of using the decoupling capacitor is illustrated in the difference between the power-supply rejection ratio (PSRR) performance of the device. Figure 99 shows the PSRR of the device without using a decoupling capacitor. The PSRR improves when the decoupling capacitors are used, as shown in Figure 100.

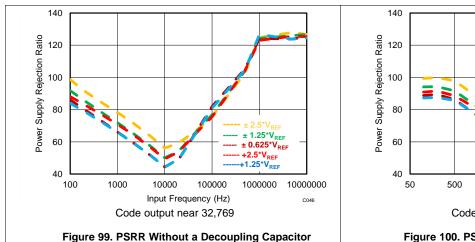



11 Layout

11.1 Layout Guidelines

Figure 101 illustrates a PCB layout example for the ADS8684 and ADS8688.

- Partition the PCB into analog and digital sections. Care must be taken to ensure that the analog signals are kept away from the digital lines. This layout helps keep the analog input and reference input signals away from the digital noise. In this layout example, the analog input and reference signals are routed on the lower side of the board while the digital connections are routed on the top side of the board.
- · Using a single dedicated ground plane is strongly encouraged.
- Power sources to the ADS8684 and ADS8688 must be clean and well-bypassed. TI recommends using a 1-μF, X7R-grade, 0603-size ceramic capacitor with at least a 10-V rating in close proximity to the analog (AVDD) supply pins. For decoupling the digital (DVDD) supply pin, a 10-μF, X7R-grade, 0805-size ceramic capacitor with at least a 10-V rating is recommended. Placing vias between the AVDD, DVDD pins and the bypass capacitors must be avoided. All ground pins must be connected to the ground plane using short, low impedance paths.
- There are two decoupling capacitors used for REFCAP pin. The first is a small, 1-µF, X7R-grade, 0603-size ceramic capacitor placed close to the device pins for decoupling the high-frequency signals and the second is a 22-µF, X7R-grade, 1210-size ceramic capacitor to provide the charge required by the reference circuit of the device. Both these capacitors must be directly connected to the device pins without any vias between the pins and capacitors.
- The REFIO pin also must be decoupled with a 10-µF ceramic capacitor, if the internal reference of the device is used. The capacitor must be placed close to the device pins.
- For the auxiliary channel, the fly-wheel RC filter components must be placed close to the device. Among
 ceramic surface-mount capacitors, COG (NPO) ceramic capacitors provide the best capacitance precision.
 The type of dielectric used in COG (NPO) ceramic capacitors provides the most stable electrical properties
 over voltage, frequency, and temperature changes.

Copyright © 2014–2015, Texas Instruments Incorporated



11.2 Layout Example

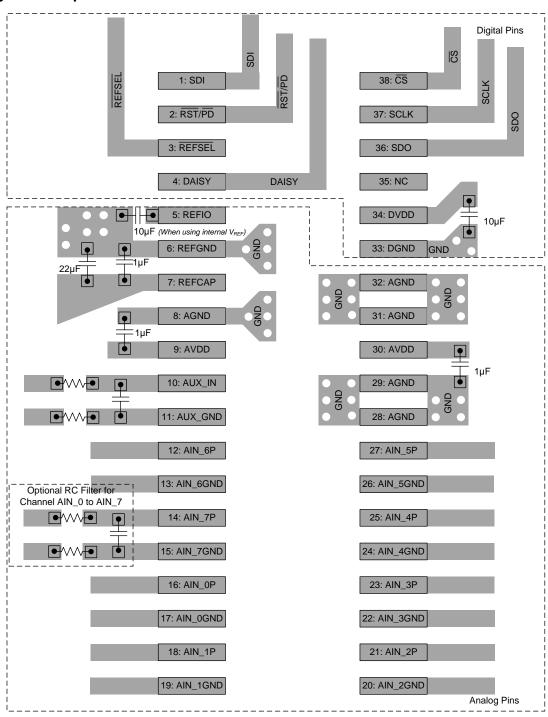


Figure 101. Board Layout for the ADS8684 and ADS8688



12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation see the following:

- TIPD167 Verified Design Reference Guide: Phase Compensated 8-Channel, Multiplexed Data Acquisition System for Power Automation, TIDU427
- TIDA-00164 Verified Design Reference Guide: 16-Bit, 8-Channel, Integrated Analog Input Module for Programmable Logic Controllers (PLCs), TIDU365
- OPA320 Data Sheet, SBOS513
- REF5040 Data Sheet, SBOS410F
- AN-2029 Handling & Process Recommendations, SNOA550B
- LM5017 Data Sheet, SNVS783

12.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 19. Related Links

PARTS	PRODUCT FOLDER SAMPLE & BUY		TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY	
ADS8684	Click here	Click here	Click here	Click here	Click here	
ADS8688	Click here	Click here	Click here	Click here	Click here	

12.3 Trademarks

SPI is a trademark of Motorola.

All other trademarks are the property of their respective owners.

12.4 Electrostatic Discharge Caution

Copyright © 2014-2015, Texas Instruments Incorporated



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.5 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: ADS8684 ADS8688

www.ti.com 10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking
	(1)	(2)			(3)	(4)	(5)		(6)
ADS8684IDBT	Active	Production	TSSOP (DBT) 38	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8684
ADS8684IDBT.B	Active	Production	TSSOP (DBT) 38	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8684
ADS8684IDBTR	Active	Production	TSSOP (DBT) 38	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8684
ADS8684IDBTR.B	Active	Production	TSSOP (DBT) 38	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8684
ADS8688IDBT	Active	Production	TSSOP (DBT) 38	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8688
ADS8688IDBT.B	Active	Production	TSSOP (DBT) 38	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8688
ADS8688IDBTG4	Active	Production	TSSOP (DBT) 38	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8688
ADS8688IDBTG4.B	Active	Production	TSSOP (DBT) 38	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8688
ADS8688IDBTR	Active	Production	TSSOP (DBT) 38	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8688
ADS8688IDBTR.B	Active	Production	TSSOP (DBT) 38	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ADS8688

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 24-Jul-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ADS8684IDBTR	TSSOP	DBT	38	2000	330.0	16.4	6.75	10.1	1.8	12.0	16.0	Q1
ADS8688IDBTR	TSSOP	DBT	38	2000	330.0	16.4	6.75	10.1	1.8	12.0	16.0	Q1

www.ti.com 24-Jul-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ADS8684IDBTR	TSSOP	DBT	38	2000	353.0	353.0	32.0
ADS8688IDBTR	TSSOP	DBT	38	2000	353.0	353.0	32.0

PACKAGE MATERIALS INFORMATION

www.ti.com 24-Jul-2025


TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
ADS8684IDBT	DBT	TSSOP	38	50	530	10.2	3600	3.5
ADS8684IDBT.B	DBT	TSSOP	38	50	530	10.2	3600	3.5
ADS8688IDBT	DBT	TSSOP	38	50	530	10.2	3600	3.5
ADS8688IDBT.B	DBT	TSSOP	38	50	530	10.2	3600	3.5
ADS8688IDBTG4	DBT	TSSOP	38	50	530	10.2	3600	3.5
ADS8688IDBTG4.B	DBT	TSSOP	38	50	530	10.2	3600	3.5

SMALL OUTLINE PACKAGE

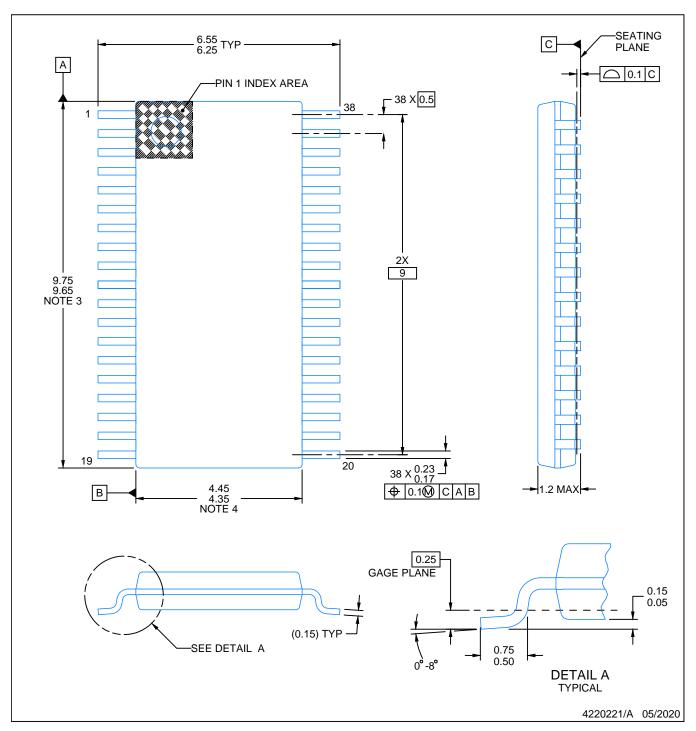


NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE

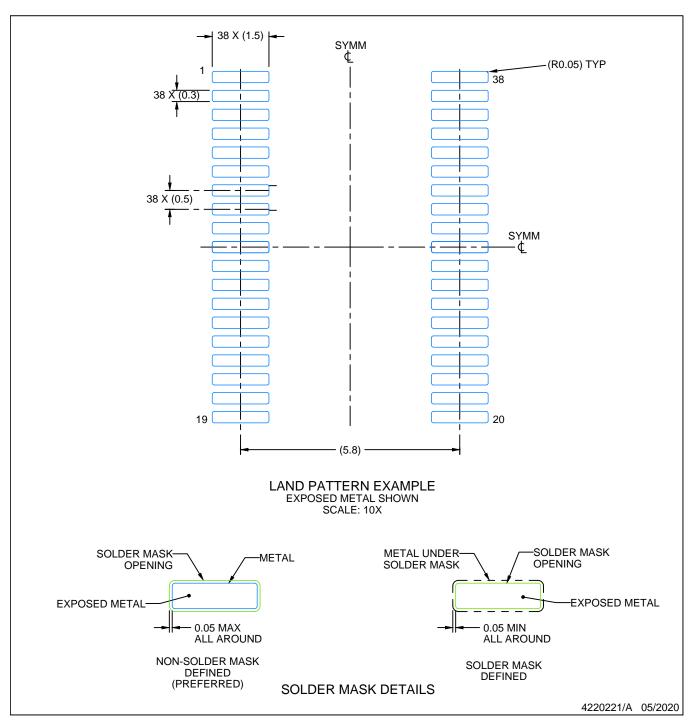


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE

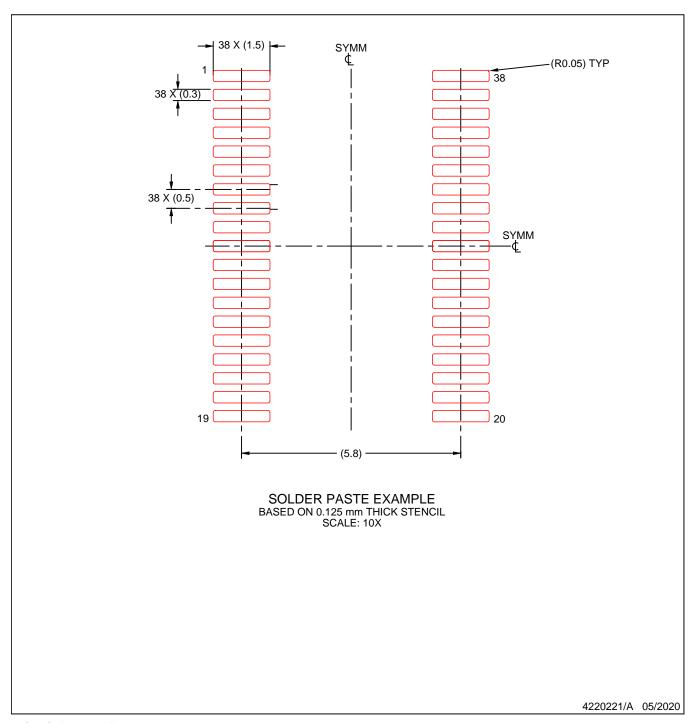

NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025