











bq25071

SLUSBK6-JULY 2014

# bg25071 1-A, Single-Input, Single-Cell LiFePO<sub>4</sub> Linear Battery Charger with 50 mA LDO

#### **Features**

- Single Cell LiFePO<sub>4</sub> Charging Algorithm
- 30V Input Rating, With 10.5 V Overvoltage Protection (OVP)
- 50mA Integrated Low Dropout Linear Regulator
- Programmable Charge Current Through ISET and **EN Terminals**
- 7% Charge Current Regulation Accuracy
- Thermal Regulation and Protection
- Soft-Start Feature to Reduce Inrush Current
- **Battery NTC Monitoring**
- **Charging Status Indication**

# **Applications**

- **Smart Phones**
- Mobile Phones
- Portable Media Players
- Low Power Handheld Devices

# 3 Description

The bg25071 is a highly integrated, linear, LiFePO<sub>4</sub> battery charger targeted at space-limited portable applications. It accepts power from either a USB port or AC adapter and charges a single-cell LiFePO<sub>4</sub> battery with up to 1 A of charge current. The 30 V input rating with 10.5 V input overvoltage protection supports low-cost unregulated adapters.

The bq25071 has a single power output that simultaneously charges the battery and powers the system. The input current is programmable from 100 mA up to 1 A using the ISET input or configurable for USB500. There is also a 4.9 V ±10% 50 mA LDO integrated into the IC for supplying low power external circuitry.


The LiFePO₄ charging algorithm removes the current taper typically seen as part of the constant voltage mode control used in Li-Ion battery charge cycles which reduces charge time significantly. Instead, the battery is fast charged to the overcharge voltage and then allowed to relax to a lower float charge voltage threshold. The charger integrates the power stage with the charge current and voltage sense to achieve a high level of accuracy in the current and voltage regulation loops. An internal control loop monitors the IC junction temperature through the charge cycle and reduces the charge current if an internal temperature threshold is exceeded.

#### Device Information<sup>(1)</sup>

		= =		
PART NUMBER	PACKAGE	BODY SIZE (NOM)		
bq25071	WSON (10)	2.00mm x 3.00mm		

(1) For all available packages, see the orderable addendum at the end of the datasheet.

# Application Schematic

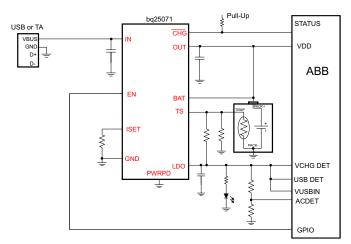

SLUSBK6 – JULY 2014 www.ti.com



# **Table of Contents**

1	Features 1		9.1 Overview	8
2	Applications 1		9.2 Functional Block Diagram	9
3	Description 1		9.3 Feature Description	10
4	Application Schematic 1		9.4 Device Functional Modes	12
5	Revision History2	10	Application and Implementation	14
6	Device Comparison Table		10.1 Application Information	14
7	Pin Configuration and Functions		10.2 Typical Application	14
, 8	_	11	Power Supply Recommendations	17
0	Specifications	12	Layout	17
	8.1 Absolute Maximum Ratings		12.1 Layout Guidelines	17
	8.2 Handling Ratings		12.2 Layout Example	17
	8.3 Recommended Operating Conditions	13	Device and Documentation Support	19
	8.5 Electrical Characteristics		13.1 Trademarks	
	8.6 Timing Requirements		13.2 Electrostatic Discharge Caution	19
	8.7 Typical Characteristics		13.3 Glossary	
^	**	14	Mechanical, Packaging, and Orderable	
9	Detailed Description 8		Information	19

# **5 Revision History**

DATE	REVISION	NOTES
July 2014	*	Initial release.


Submit Documentation Feedback



# 6 Device Comparison Table

PART NUMBER	V <sub>BAT(OVCH)</sub>	V <sub>BAT(FLOAT)</sub>	V <sub>(OVP)</sub>	V <sub>(LDO)</sub>
bq25071DQCR	3.7 V	3.5 V	10.5 V	4.9 V
bq25071DQCT	3.7 V	3.5 V	10.5 V	4.9 V

# 7 Pin Configuration and Functions



## **Pin Functions**

PIN			DECODURTION
NAME	NO.	1/0	DESCRIPTION
IN	1	I	Input power supply. IN is connected to the external DC supply (AC adapter or USB port). Bypass IN to GND with at least a 0.1 µF ceramic capacitor.
ISET	2	0	Input current programming bias pin. Connect a resistor from ISET to GND to program the input current limit when the user programmable mode is selected by grounding the EN pin. The resistor range is between 1 k $\Omega$ and 10 k $\Omega$ to set the current between 100 mA and 1 A.
GND	3, 9	_	Ground pin. Connect to the thermal pad and the ground plane of the circuit.
LDO	4	0	LDO output. LDO is regulated to 4.9V and drives up to 50 mA. Bypass LDO to GND with a 0.1 $\mu$ F ceramic capacitor. LDO is enabled when $V_{(UVLO)} < V_{IN} < V_{(OVP)}$ .
TS	5	1	Battery pack NTC monitoring input. Connect a resistor divider from LDO to GND with TS connected to the center tap to set the charge temperature window. The battery pack NTC is connected in parallel with the bottom resistor of the divider. See the <i>Detailed Design Procedure</i> section for details on the selecting the proper component values.
BAT	6	I	BAT is the sense input for the battery voltage. Connect BAT and OUT to the battery.
EN	7	I	Enable input. Drive EN high to disable the IC. Connect EN to GND to place the bq25071 in the user programmable mode using the ISET input where the input current is programmed. Leave EN floating to place the bq25071 in USB500 mode. See the <i>Input Current Limit Control (EN)</i> section for details on using the EN interface.
CHG	8	0	Charge status indicator open-drain output. $\overline{\text{CHG}}$ is pulled low while the device is charging the battery. $\overline{\text{CHG}}$ goes high impedance when the battery is fully charged.
OUT	10	0	System output connection. Bypass the OUT to GND with a 1 µF ceramic capacitor. Connect OUT and BAT together.
Thermal Pad	Pad	_	There is an internal electrical connection between the exposed thermal pad and the GND pin of the device. The thermal pad must be connected to the same potential as the GND pin on the printed circuit board. Do not use the thermal pad as the primary ground input for the device. GND pin must be connected to ground at all times.

SLUSBK6-JULY 2014 www.ti.com

# **STRUMENTS**

## 8 Specifications

# 8.1 Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Innut Voltage	IN (with respect to GND)	-0.3	30	٧
Input Voltage	EN, TS (with respect to GND)	-0.3	7	V
Output Voltage	BAT, OUT, LDO, CHG, ISET (with respect to GND)	-0.3	7	V
Input Current (Continuous)	IN		1.2	Α
Output Current (Continuous)	BAT		1.2	Α
Output Current (Continuous)	LDO		100	mA
Output Sink Current	CHG		5	mA
Junction temperature, T <sub>J</sub>		-40	150	ô

Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. All voltage values are with respect to the network ground pin unless otherwise noted.

# 8.2 Handling Ratings

			MIN	MAX	UNIT
T <sub>STG</sub>	Storage temperature		<del>-</del> 65	150	°C
V	0.0	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	0	3000	V
VESD	Electrostatic discharge	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins (2)	a body model (HBM), per ANSI/ESDA/JEDEC 0 3000 ad device model (CDM), per JEDEC 0 1000	V	

JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

#### 8.3 Recommended Operating Conditions

	gg			
		MIN	MAX	UNITS
V	IN voltage	3.75 <sup>(1)</sup>	28	V
V <sub>IN</sub>	IN operating voltage	3.75 <sup>(1)</sup>	10.2	V
I <sub>IN</sub>	Input current, IN		1	Α
I <sub>OUT</sub>	Output Current in charge mode, OUT		1	Α
$T_J$	Junction Temperature	0	125	°C

<sup>(1)</sup> Charge current may be limited at low input voltages due to the dropout of the device.

### 8.4 Thermal Information

	THERMAL METRIC <sup>(1)</sup>	bq25071 DQC (10 PINS)	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	61.6	
R <sub>0</sub> JC(top)	Junction-to-case (top) thermal resistance	65.5	
$R_{\theta JB}$	Junction-to-board thermal resistance	22.8	°C/W
ΨЈТ	Junction-to-top characterization parameter	1.5	*C/VV
ΨЈВ	Junction-to-board characterization parameter	22.7	
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	5.5	

(1) For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.



www.ti.com

# 8.5 Electrical Characteristics

Over junction temperature range 0°C ≤ T<sub>J</sub> ≤ 125°C and recommended supply voltage (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
INPUT						
V <sub>(UVLO)</sub>	Under-voltage lock-out	$V_{IN}$ : 0 V $\rightarrow$ 4 V	3.15	3.30	3.55	V
V <sub>HYS(UVLO)</sub>	Hysteresis on V <sub>(UVLO)</sub>	$V_{IN}$ : 4 V $\rightarrow$ 0 V		250		mV
V <sub>IN(SLP)</sub>	Valid input source threshold $V_{\text{IN(SLP)}}$ above $V_{\text{BAT}}$	Input power good if $V_{IN} > V_{BAT} + V_{IN(SLP)}$ $V_{(BAT)} = 3.6 \text{ V}, V_{IN}: 3.5 \text{ V} \rightarrow 4 \text{ V}$	30	75	150	mV
V <sub>HYS(INSLP)</sub>	Hysteresis on V <sub>IN(SLP)</sub>	$V_{(BAT)} = 3.6 \text{ V}, V_{IN}: 4 \text{ V} \rightarrow 3.5 \text{ V}$	18	32	54	mV
t <sub>DGL(NO-IN)</sub>	Delay time, input power loss to charger turn-off	Time measured from V <sub>IN</sub> : 5 V $\rightarrow$ 2.5 V 1 $\mu$ s fall-time		32		ms
V <sub>OVP</sub>	Input over-voltage protection threshold	$V_{IN}$ : 5 V $\rightarrow$ 11 V	10.2	10.5	10.8	V
V <sub>HYS(OVP)</sub>	Hysteresis on OVP	$V_{IN}$ : 11 V $\rightarrow$ 5 V		100		mV
QUIESCENT	CURRENT					
I <sub>BAT(PDWN)</sub>	Battery current into BAT, No input connected	$V_{IN} = 0 V^{(1)}, V_{(\overline{CHG})} = Low, T_J = 85^{\circ}C$			6	μΑ
. ,		EN = HI, V <sub>IN</sub> = 5.5V			0.25	
I <sub>IN(STDBY)</sub>	Standby current into IN pin	$EN = HI, V_{IN} \le V_{(OVP)}$			0.5	mA
, ,		EN = HI, V <sub>IN</sub> > V <sub>(OVP)</sub>			2	
BATTERY CH	ARGER FAST-CHARGE					
.,	<b>.</b>	$T_A = 0$ °C to 125°C, $I_{OUT} = 50$ mA	3.455	3.5	5 3.539 V	.,
$V_{BAT(REG)}$	Battery charge regulation voltage	T <sub>A</sub> = 25°C	3.455	3.5		V
V <sub>BAT(OVCH)</sub>	Battery overcharge voltage threshold		3.62	3.7	3.78	V
I <sub>IN(RANGE)</sub>	User programmable input current limit range	$R_{(ISET)} = 1 k\Omega$ to 1 0k $\Omega$ , EN = $V_{SS}$	100		1000	mA
		EN = FLOAT	435	467	500	
I <sub>IN(LIM)</sub>	Input current limit, or fast-charge current	EN = V <sub>SS</sub>	Kı	SET/RISE	Т	mA
K <sub>ISET</sub>	Fast charge current factor	$R_{(ISET)} = 1 k\Omega$ to $10 k\Omega$ , $EN = V_{SS}$	900	1000	1100	ΑΩ
V <sub>DO(IN-OUT)</sub>	V <sub>IN</sub> – V <sub>OUT</sub>	V <sub>IN</sub> = 3.55 V, I <sub>OUT</sub> = 0.75 A		500	900	mV
	CIRCUIT PROTECTION					
R <sub>ISET(MAX)</sub>	Highest resistor value considered a short fault	$R_{\text{(ISET)}}$ : 900 $\Omega$ $\rightarrow$ 300 $\Omega$ , $I_{\text{OUT}}$ latches off, Cycle power to reset, Fault range > 1.10 A	430		700	Ω
I <sub>OUT(CL)</sub>	Maximum OUT current limit regulation (Clamp)		1.07		2	Α
PRE-CHARG	E AND CHARGE DONE					
$V_{(LOWV)}$	Pre-charge to fast-charge transition threshold		0.5	0.7	0.9	V
I <sub>(PRECHARGE)</sub>	Precharge current to BAT during precharge mode	V <sub>(BAT)</sub> = 0 V to 0.7 V	41.5	45	48.5	mA
RECHARGE	OR REFRESH					
V <sub>(RCH)</sub>	Recharge detection threshold	V <sub>(BAT)</sub> falling	3.1	3.3	3.5	V
LDO					L	
V <sub>(LDO)</sub>	LDO Output Voltage	V <sub>IN</sub> = 5 V to 10.5 V, I <sub>(LDO)</sub> = 0 mA to 50 mA	4.7	4.9	5.1	V
I <sub>(LDO)</sub>	Maximum LDO Output Current		60			mA
V <sub>(DO)</sub>	Dropout Voltage	$V_{IN} = 4.5V, I_{(LDO)} = 50 \text{ mA}$		200	350	mV

<sup>(1)</sup> Force V<sub>(CHG)</sub>

SLUSBK6 – JULY 2014 www.ti.com



# **Electrical Characteristics (continued)**

Over junction temperature range  $0^{\circ}C \le T_{J} \le 125^{\circ}C$  and recommended supply voltage (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
LOGIC LEVI	ELS ON EN				•	
V <sub>IL</sub>	Logic low input voltage				0.4	V
V <sub>IH</sub>	Logic high input voltage		1.4			V
V <sub>(FLT)</sub>	Logic FLOAT input voltage		600	850	1100	mV
I <sub>(FLTIkg)</sub>	Maximum leakage sink or source current to keep in FLOAT				1	μΑ
I <sub>EN(DRIVE)</sub>	Minimal drive current from an external device for Low or High		8			μΑ
BATTERY-P	ACK NTC MONITOR (TS)					
V <sub>(COLD)</sub>	TS Cold Threshold	V <sub>(TS)</sub> Rising	24.5	25	25.5	$%V_{LDO}$
V <sub>(CUTOFF)</sub>	TS Cold Cutoff Threshold	V <sub>(TS)</sub> Falling		1		%V <sub>LDO</sub>
V <sub>(HOT)</sub>	TS Hot Threshold	V <sub>(TS)</sub> Falling	12	12.5	13	%V <sub>LDO</sub>
V <sub>HOT(HYS)</sub>	TS Hot Cutoff Threshold	V <sub>(TS)</sub> Rising		1		%V <sub>LDO</sub>
CHG OUTPU	JT					
V <sub>OL</sub>	Output LOW voltage	I <sub>(SINK)</sub> = 1 mA			0.45	V
I <sub>IH</sub>	Leakage current	<del>CHG</del> = 5 V			1	μA
THERMAL F	REGULATION					
$T_{J(REG)}$	Temperature Regulation Limit	T <sub>J</sub> rising		125		°C
T <sub>J(OFF)</sub>	Thermal shutdown temperature	T <sub>J</sub> rising		155		°C
T <sub>J(OFF-HYS)</sub>	Thermal shutdown hysteresis	T <sub>J</sub> falling		20		°C

# 8.6 Timing Requirements


			MIN	TYP	MAX	UNIT
INPUT					*	
t <sub>BLK(OVP)</sub>	Input overvoltage blanking time			100		μs
t <sub>REC(OVP)</sub>	Input overvoltage recovery time	Time measured from V <sub>IN</sub> : 11 V $\rightarrow$ 5 V 1 $\mu$ s fall-time to LDO = HI, V <sub>(BAT)</sub> = 3.5 V		100		μs
ISET SHORT	CIRCUIT PROTECTION					
t <sub>DGL(SHORT)</sub>	Deglitch time transition from I <sub>(SET)</sub> short to I <sub>OUT</sub> disable	Clear fault by cycling V <sub>(BUS)</sub> or EN		1.5		ms
PRE-CHARG	SE AND CHARGE DONE					
t <sub>DGL1(LOWV)</sub>	Deglitch time on pre-charge to fast-charge transition			25		ms
t <sub>DGL2(LOWV)</sub>	Deglitch time on fast-charge to pre- charge transition			25		ms
RECHARGE	OR REFRESH					
t <sub>DGL(RCH)</sub>	Deglitch time, recharge threshold detected	V <sub>(BAT)</sub> falling to New Charge Cycle		25		ms
BATTERY-P	ACK NTC MONITOR (TS)				*	
t <sub>dgl(TS)</sub>	Deglitch for TS Fault	Fault detected on TS to stop charge		25		ms



www.ti.com

# 8.7 Typical Characteristics

 $V_{IN} = 5 \text{ V}, V_{BAT} = 3.2 \text{ V}, I_{\overline{(CHG)}} = 280 \text{ mA}, Typical Application Circuit}$ 

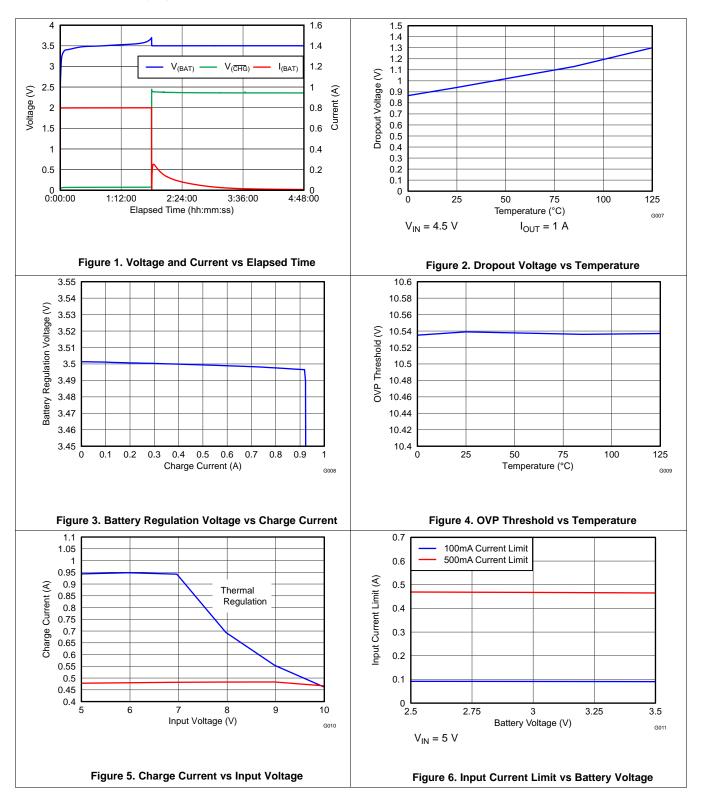

SLUSBK6 – JULY 2014 www.ti.com

# TEXAS INSTRUMENTS

### 9 Detailed Description

#### 9.1 Overview


The bq25071 is a highly integrated, linear, LiFePO<sub>4</sub> battery charger targeted at space-limited portable applications. It accepts power from either a USB port or AC adapter and charges a single-cell LiFePO<sub>4</sub> battery with up to 1 A of charge current. The 30 V input rating with 10.5 V input overvoltage protection supports low-cost unregulated adapters.

The bq25071 has a single power output that simultaneously charges the battery and powers the system. The input current is programmable from 100 mA up to 1 A using the ISET input or configurable for USB500. There is also a 4.9 V ±10% 50 mA LDO is integrated into the IC for supplying low power external circuitry.

The LiFePO<sub>4</sub> charging algorithm removes the constant voltage mode control typically used in Li-Ion battery charge cycles which reduces charge time significantly. Instead, the battery is fast charged to the overcharge voltage and then allowed to relax to a lower float charge voltage threshold. The charger power stage and charge current sense functions are fully integrated. The charger function has high accuracy current and voltage regulation loops, and charge status display. During the charge cycle, an internal control loop monitors the IC junction temperature and reduces the charge current if an internal temperature threshold is exceeded.

www.ti.com

# 9.2 Functional Block Diagram

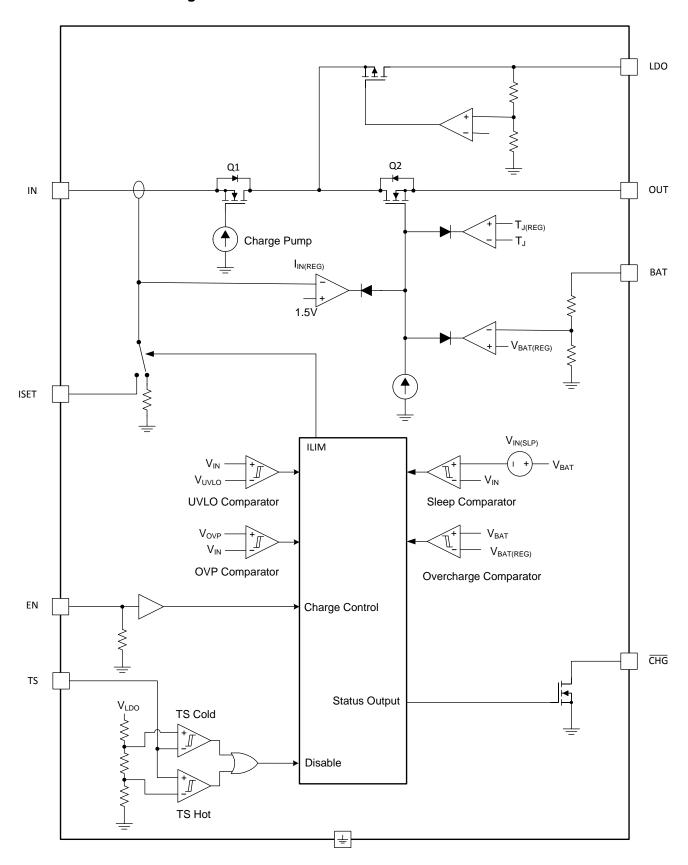

# TEXAS INSTRUMENTS

#### 9.3 Feature Description

#### 9.3.1 Input Overvoltage Protection

The bq25071 contains an input overvoltage protection circuit that disables the LDO output and charging when the input voltage rises above  $V_{(OVP)}$ . This prevents damage from faulty adapters. The OVP circuitry contains an 100  $\mu$ s blanking period that prevents ringing on the input from line transients from tripping the OVP circuitry falsely. If an adapter with an output greater than  $V_{(OVP)}$  is plugged in, the IC completes soft-start power up and then shuts down if the voltage remains above  $V_{(OVP)}$  after 100  $\mu$ s. The LDO remains off and charging remains disabled until the input voltage falls below  $V_{(OVP)}$ .

#### 9.3.2 Undervoltage Lockout (UVLO)

The bq25071 remains in power down mode when the input voltage is below the undervoltage lockout threshold  $(V_{(UVLO)})$ . During this mode, the control input (EN) is ignored. The LDO, the charge FET connected between IN and OUT are off and the status output  $(\overline{CHG})$  is high impedance. Once the input voltage rises above  $V_{(UVLO)}$ , the internal circuitry is turned on and the normal operating procedures are followed.

### 9.3.3 External NTC Monitoring (TS)

The bq25071 features a flexible, voltage based external battery pack temperature monitoring input. The TS input connects to the NTC thermistor in the battery pack to monitor battery temperature and prevent dangerous over-temperature conditions. During charging, the voltage at TS is continuously monitored. If the voltage at the TS pin is outside of the operating range ( $V_{(HOT)}$  to  $V_{(COLD)}$  for longer than the built in 25 ms deglitch time, charging is suspended. When the voltage measured at TS returns to within the operation window, charging resumes. When a battery pack temperature fault occurs charging is suspended, but the CHG output remains low and continues to indicate charging.

The temperature thresholds are programmed using a resistor divider from LDO to GND with the NTC thermistor connected to the center tap from TS to GND. See Figure 7 for the circuit example. The value of R1 and R2 are calculated using the following equations:

$$R1 = \frac{-R2 \times RHOT \times (0.125 - 1)}{0.125 \times (R2 + RHOT)}$$
(1)


$$R2 = \frac{-RHOT \times RCOLD \times (0.125 - 0.250)}{RHOT \times 0.250 \times (0.125 - 1) + RCOLD \times 0.125 \times (1 - 0.250)}$$
(2)

RHOT is the expected thermistor resistance at the programmed hot threshold; RCOLD is the expected thermistor resistance at the programmed cold threshold.

10



#### **Feature Description (continued)**



For applications that do not require the TS monitoring function, set R1 = 490 k $\Omega$  and R2 = 100 k $\Omega$  to set the TS voltage at a valid level and maintain charging.

Figure 7. NTC Monitoring Function

### 9.3.4 50 mA LDO (LDO)

The LDO output of the bq25071 is a low dropout linear regulator (LDO) that supplies up to 50 mA while regulating to  $V_{(LDO)}$ . The LDO is active whenever the input voltage is above  $V_{(UVLO)}$  and below  $V_{(OVP)}$ . It is not affected by the EN input. The LDO output is used to power and protect circuitry such as USB transceivers from transients on the input supply.

#### 9.3.5 Charge Status Indicator (CHG)

The bq25071 contains an open drain  $\overline{\text{CHG}}$  output that indicates charging state and faults. When charging a battery in precharge or fastcharge mode, the  $\overline{\text{CHG}}$  output is pulled to GND. Once the BAT output reaches the overcharge voltage threshold,  $\overline{\text{CHG}}$  goes high impedance to signal the battery is fully charged. When the battery voltage drops below the recharge voltage threshold the  $\overline{\text{CHG}}$  output is pulled low to signal the host of a new charge cycle. Connect  $\overline{\text{CHG}}$  to the required logic level voltage through a 1 k $\Omega$  to 100 k $\Omega$  resistor to use the signal with a microprocessor.  $I_{(\overline{\text{CHG}})}$  must be below 5 mA.

The IC monitors the CHG pin when no input is connected to verify if the system circuitry is active. If the voltage at CHG is logic being drive low when no input is connected, the TS circuit is turned off for a low quiescent current state. Once the voltage at CHG increases above logic high, the TS circuit is turned on.

#### 9.3.6 Input Current Limit Control (EN)

The bq25071 contains a 3-state that controls the input current limit. Drive EN low to program the input current limit to the user defined value programmed using ISET. Drive EN high to place the bq25071 in USB suspend mode. In USB suspend mode, the input current into bq25071 is reduced. Leaving EN unconnected or connected to a high impedance source programs the USB500 input current limit.

Table 1. EN Input Definition

EN	MODE				
Low	ISET				
Hi-Z	USB500				
Hi	USB Suspend				





#### 9.4 Device Functional Modes

## 9.4.1 Charging Operation

The bq25071 uses a charge algorithm that is unique to LiFePO<sub>4</sub> chemistry cells. The current taper typically seen as part of the constant voltage mode control usually present in Li-Ion battery charge cycles is replaced with a floating regulation voltage with minimal charging current. This dramatically decreases the charge time. When the bq25071 is enabled by EN, the battery voltage is monitored to verify which stage of charging must be used. When  $V_{(BAT)} < V_{(LOWV)}$ , the bq25071 charges in precharge mode; when  $V_{(BAT)} > V_{(LOWV)}$ , the normal charge cycle is used.

## 9.4.1.1 Charger Operation with Minimum System Voltage Mode Enabled

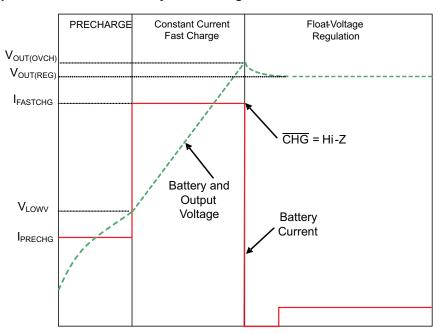


Figure 8. Typical Charging Cycle with Minimum System Voltage Enabled

#### 9.4.1.2 Precharge Mode $(V_{(BAT)} \le V_{(LOWV)})$

The bq25071 enters precharge mode when  $V_{BAT} \le V_{(LOWV)}$ . Upon entering precharge mode, the battery is charged with a 47.5 mA current and  $\overline{CHG}$  goes low.

## 9.4.1.3 Fast Charge Mode

Once  $V_{(BAT)} > V_{(LOWV)}$ , the bq25071 enters constant current (CC) mode where charge current is regulated using the internal MOSFETs between IN and OUT. The total current is shared between the output load and the battery. Once the battery voltage charges up to  $V_{BAT(OVCH)}$ , the  $\overline{CHG}$  output goes high indicating the charge cycle is complete and the bq25071 switches the battery regulation voltage to  $V_{BAT(REG)}$ . The battery voltage is allowed to relax down to  $V_{BAT(REG)}$ . The charger remains enabled and regulates the output to  $V_{BAT(REG)}$ . If at any time the battery falls below  $V_{(RCH)}$ , the charge cycle restarts.

2 Submit Documentation Feedback

SLUSBK6-JULY 2014



### **Device Functional Modes (continued)**

#### 9.4.2 Programmable Input Current Limit (ISET)

When the charger is enabled, and the user programmable current limit is selected by the EN input, internal circuits generate a current proportional to the input current at the ISET input. The current out of ISET is 1/1000 (±10%) of the charge current. This current, when applied to the external charge current programming resistor, R1 (Figure 9), generates an analog voltage that is regulated to program the fast charge current. Connect a resistor from ISET to GND to program the input current limit using the following equation:

$$I_{(IN\_LIM)} = \frac{K_{(ISET)}}{R_{(ISET)}} = \frac{1000A \times \Omega}{R_{(ISET)}}$$
(3)

I(IN LIM) is programmable from 100 mA to 1 A. The voltage at ISET can be monitored by an external host to calculate the charging current to the battery. The input current is related to the ISET voltage using the following equation:

$$I_{IN} = V_{(ISET)} \times \frac{1000}{R_{(ISET)}}$$
(4)

Monitoring the ISET voltage allows for the host to calculate the actual charging current and therefore perform more accurate termination. The input current to the system must be monitored and subtracted from the current into the bq25071 which is show by  $V_{(ISET)}$ .

#### 9.4.3 Thermal Regulation and Thermal Shutdown

The bg25071 contains a thermal regulation loop that monitors the die temperature continuously. If the temperature exceeds T<sub>J(REG)</sub>, the device automatically reduces the charging current to prevent the die temperature from increasing further. In some cases, the die temperature continues to rise despite the operation of the thermal loop, particularly under high  $V_{IN}$  conditions. If the die temperature increases to  $T_{J(OFF)}$ , the IC is turned off. Once the device die temperature cools by T<sub>J(OFF-HYS)</sub>, the device turns on and returns to thermal regulation. Continuous overtemperature conditions result in the pulsing of the load current. If the junction temperature of the device exceeds T<sub>J(OFF)</sub>, the charge FET is turned off. The FET is turned back on when the junction temperature falls below  $T_{J(OFF)} - T_{J(OFF-HYS)}$ .

Note that these features monitor the die temperature of the bq25071. This is not synonymous with ambient temperature. Self heating exists due to the power dissipated in the IC because of the linear nature of the battery charging algorithm.

# TEXAS INSTRUMENTS

# 10 Application and Implementation

## 10.1 Application Information

The typical application circuit uses a single output which charges the battery and powers the system. Additionally a 50-mA LDO can supply a low power external circuit.

The bq25071EVM-658 evaluation module (EVM) is a complete charger module for evaluating the bq25071. Refer to SLUUB49.

## 10.2 Typical Application

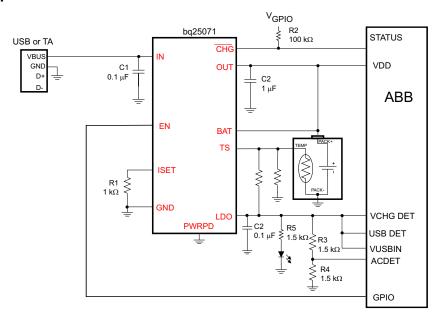


Figure 9. bq25071 Typical Application Circuit

#### 10.2.1 Design Requirements

**Table 2. Design Parameters** 

PARAMETER	EXAMPLE VALUE
Input supply range	5 V ±5%
Output voltage range	3.5 V
Output current rating	1000 mA

Submit Documentation Feedback



www.ti.com

# 10.2.2 Detailed Design Procedure

#### 10.2.2.1 Selection of Input and Output Capacitors

In most applications, all that is needed is a high-frequency decoupling capacitor on the input power pin. For normal charging applications, a 0.1 µF ceramic capacitor, placed in close proximity to the IN pin and GND pad works best. In some applications, depending on the power supply characteristics and cable length, it may be necessary to increase the input filter capacitor to avoid exceeding the OVP voltage threshold during adapter hot plug events where the ringing exceeds the deglitch time.

The charger in the bq25071 requires a capacitor from OUT to GND for loop stability. Connect a 1 µF ceramic capacitor from OUT to GND close to the pins for best results. More output capacitance may be required to minimize the output drop during large load transients.

The LDO also requires an output capacitor for loop stability. Connect a 0.1 µF ceramic capacitor from LDO to GND close to the pins. For improved transient response, this capacitor may be increased.

#### 10.2.2.2 Thermal Considerations

The bg25071 is packaged in a thermally enhanced QFN package. The package includes a thermal pad to provide an effective thermal contact between the IC and the printed circuit board (PCB). Full PCB design guidelines for this package are provided in the application note entitled: QFN/SON PCB Attachment Application Note (SLUA271).

The most common measure of package thermal performance is thermal impedance (θ<sub>JA</sub>) measured (or modeled) from the chip junction to the air surrounding the package surface (ambient). The mathematical expression for  $\theta_{JA}$ is:

Where:

$$\theta_{JA} = \frac{T_J - T_A}{P_D} \tag{5}$$

 $T_J$  = chip junction temperature

 $T_A$  = ambient temperature

 $P_D$  = device power dissipation

Factors that can greatly influence the measurement and calculation of  $\theta_{\text{JA}}$  include:

- Whether or not the device is board mounted
- Trace size, composition, thickness, and geometry
- Orientation of the device (horizontal or vertical)
- Volume of the ambient air surrounding the device under test and airflow
- Whether other surfaces are in close proximity to the device being tested

The device power dissipation, PD, is a function of the charge rate and the voltage drop across the internal PowerFET. It can be calculated from the following equation when a battery pack is being charged:


$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$$

Copyright © 2014, Texas Instruments Incorporated

Due to the charge profile of LiFePO<sub>4</sub> batteries the maximum power dissipation is typically seen at the beginning of the charge cycle when the battery voltage is at its lowest. See the charging profile, Figure 8. If the board thermal design is not adequate the programmed fast charge rate current may not be achieved under maximum input voltage and minimum battery voltage, as the thermal loop can be active, effectively reducing the charge current to avoid excessive IC junction temperature.

# TEXAS INSTRUMENTS

## 10.2.3 Application Curves

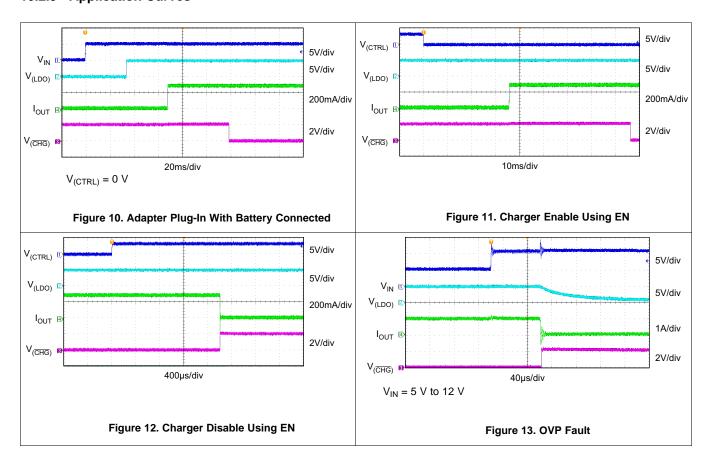



www.ti.com SLUSBK6 – JULY 2014

# 11 Power Supply Recommendations

In a typical application, the system is powered by a USB port or USB wall adapter.

The wide input voltage range supports low cost and unregulated adapters.

The minimum input voltage - where the charging process starts with a reduced charging current - could be 3.75 V. The maximum supported input voltage is up to 10 V; the overvoltage protection kicks in at 10.5 V and the maximum input voltage rating is 30 V Input Rating.


## 12 Layout

## 12.1 Layout Guidelines

It is important to pay special attention to the PCB layout. The following provides some guidelines:

- To obtain optimal performance, the decoupling capacitor from IN to GND (thermal pad) and the output filter capacitors from OUT to GND (thermal pad) should be placed as close as possible to the bq25071, with short trace runs to both IN, OUT and GND (thermal pad).
- All low-current GND connections should be kept separate from the high-current charge or discharge paths
  from the battery. Use a single-point ground technique incorporating both the small signal ground path and the
  power ground path.
- The high current charge paths into IN pin and from the OUT pin must be sized appropriately for the maximum charge current in order to avoid voltage drops in these traces.
- The bq25071 is packaged in a thermally enhanced SON package. The package includes a thermal pad to
  provide an effective thermal contact between the IC and the printed circuit board (PCB); this thermal pad is
  also the main ground connection for the device. Connect the thermal pad to the PCB ground connection. Full
  PCB design guidelines for this package are provided in the application note entitled: QFN/SON PCB
  Attachment Application Note (SLUA271).

## 12.2 Layout Example

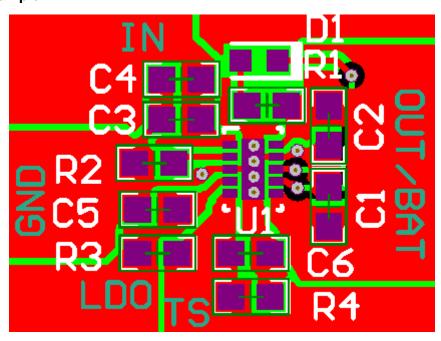

The bottom plane is a ground plane that is connected to the top through vias.

Copyright © 2014, Texas Instruments Incorporated

Submit Documentation Feedback

SLUSBK6 – JULY 2014 www.ti.com

# TEXAS INSTRUMENTS

# **Layout Example (continued)**

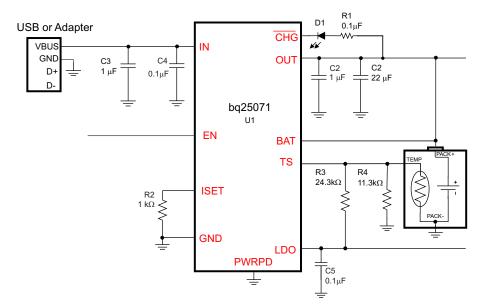


Figure 14. Schematic

www.ti.com SLUSBK6 – JULY 2014

# 13 Device and Documentation Support

#### 13.1 Trademarks

All trademarks are the property of their respective owners.

#### 13.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

# 13.3 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

# 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

10-Nov-2025

www.ti.com

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
BQ25071DQCR	Active	Production	WSON (DQC)   10	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	25071
BQ25071DQCR.A	Active	Production	WSON (DQC)   10	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	25071
BQ25071DQCR.B	Active	Production	WSON (DQC)   10	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	25071
BQ25071DQCT	Active	Production	WSON (DQC)   10	250   SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	25071
BQ25071DQCT.A	Active	Production	WSON (DQC)   10	250   SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	25071
BQ25071DQCT.B	Active	Production	WSON (DQC)   10	250   SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	25071

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

#### OTHER QUALIFIED VERSIONS OF BQ25071:

Automotive: BQ25071-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 19-Dec-2023

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
BQ25071DQCR	WSON	DQC	10	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
BQ25071DQCT	WSON	DQC	10	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 19-Dec-2023



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
BQ25071DQCR	WSON	DQC	10	3000	182.0	182.0	20.0
BQ25071DQCT	WSON	DQC	10	250	210.0	185.0	35.0

PLASTIC SMALL OUTLINE - NO LEAD



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4209674/B



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025