







CC2652R7 SWRS253B - MAY 2021 - REVISED MARCH 2023

# CC2652R7 SimpleLink™ Multiprotocol 2.4 GHz Wireless MCU

#### 1 Features

#### Wireless microcontroller

- Powerful 48-MHz Arm® Cortex®-M4F processor
- 704KB flash program memory
- 256KB of ROM for protocols and library functions
- 8KB of cache SRAM
- 144KB of ultra-low leakage SRAM with parity for high-reliability operation
- Dynamic multiprotocol manager (DMM) driver
- Programmable radio includes support for 2-(G)FSK, 4-(G)FSK, MSK, Bluetooth® 5.2 Low Energy, IEEE 802.15.4 PHY and MAC
- Supports over-the-air upgrade (OTA)

#### Ultra-low power sensor controller

- Autonomous MCU with 4KB of SRAM
- Sample, store, and process sensor data
- Fast wake-up for low-power operation
- Software defined peripherals; capacitive touch, flow meter, LCD

### Low power consumption

- MCU consumption:
  - 3.10 mA active mode, CoreMark
  - 65 µA/MHz running CoreMark
  - 0.9 μA standby mode, RTC, 144KB RAM
  - 0.1 µA shutdown mode, wake-up on pin
- Ultra low-power sensor controller consumption:
  - 29.2 µA in 2 MHz mode
  - 799 µA in 24 MHz mode
- Radio Consumption:
  - 6.4 mA RX
  - 7.3 mA TX at 0 dBm
  - 9.7 mA TX at +5 dBm

### Wireless protocol support

- Thread, Zigbee®, Matter
- Bluetooth® 5.2 Low Energy
- SimpleLink™ TI 15.4-stack
- **6LoWPAN**
- Proprietary systems

## High performance radio

- -104 dBm for *Bluetooth*® Low Energy 125-kbps
- Output power up to +5 dBm with temperature compensation

#### Regulatory compliance

- Suitable for systems targeting compliance with these standards:
  - ETSI EN 300 328, EN 300 440 Cat. 2 and 3
  - FCC CFR47 Part 15
  - ARIB STD-T66

### MCU peripherals

- Digital peripherals can be routed to any GPIO
- Four 32-bit or eight 16-bit general-purpose timers
- 12-bit ADC, 200 kSamples/s, 8 channels
- 8-bit DAC
- Two comparators
- Programmable current source
- Two UART, two SSI, I<sup>2</sup>C, I<sup>2</sup>S
- Real-time clock (RTC)
- Integrated temperature and battery monitor

### Security enablers

- AES 128- and 256-bit cryptographic accelerator
- ECC and RSA public key hardware accelerator
- SHA2 Accelerator (full suite up to SHA-512)
- True random number generator (TRNG)

## **Development tools and software**

- LP-CC2652R7 Development Kit
- SimpleLink™ CC13xx and CC26xx Software Development Kit (SDK)
- SmartRF™ Studio for simple radio configuration
- Sensor Controller Studio for building low-power sensing applications
- SysConfig system configuration tool

### Operating range

- On-chip buck DC/DC converter
- 1.8-V to 3.8-V single supply voltage
- 1.7-V to 1.95-V external regulator mode
- -40 to +105°C

#### **Package**

- 7-mm × 7-mm RGZ VQFN48 (31 GPIOs)
- RoHS-compliant package



## 2 Applications

- 2400 to 2500 MHz ISM and SRD systems <sup>1</sup> with down to 4 kHz of receive bandwidth
- Building automation
  - Building security systems motion detector, electronic smart lock, door and window sensor, garage door system, gateway
  - HVAC thermostat, wireless environmental sensor, HVAC system controller, gateway
  - Fire safety system smoke and heat detector, fire alarm control panel (FACP)
  - Video surveillance IP network camera
  - Elevators and escalators elevator main control panel for elevators and escalators

- Industrial transport asset tracking
- Factory automation and control
- Medical
- Electronic point of sale (EPOS) Electronic Shelf Label (ESL)
- · Communication equipment
  - Wired networking wireless LAN or Wi-Fi access points, edge router, small business router
- Personal electronics
  - Home theater & entertainment smart speakers, smart display, set-top box
  - Wearables (non-medical) smart trackers, smart clothing

## 3 Description

The SimpleLink™ CC2652R7 device is a multiprotocol 2.4-GHz wireless microcontroller (MCU) supporting Thread, Zigbee®, Matter, *Bluetooth*® 5.2 Low Energy, IEEE 802.15.4g, IPv6-enabled smart objects (6LoWPAN), TI 15.4-Stack (2.4 GHz), and concurrent multiprotocol through a Dynamic Multiprotocol Manager (DMM) driver. The CC2652R7 is based on an Arm® Cortex® M4F main processor and optimized for low-power wireless communication and advanced sensing in grid infrastructure, building automation, retail automation, personal electronics and medical applications.

The CC2652R7 has a software defined radio powered by an Arm® Cortex® M0, which allows support for multiple physical layers and RF standards. The device supports operation in the 2360 to 2500-MHz frequency band. PHY and frequency switching can be done runtime through a dynamic multiprotocol manager (DMM) driver. The CC2652R7 supports +5 dBm TX at 9.7 mA in the 2.4-GHz band. CC2652R7 has a receive sensitivity of -104 dBm for 125-kbps Bluetooth® Low Energy Coded PHY.

The CC2652R7 has a low sleep current of 0.9  $\mu$ A with RTC and 144KB RAM retention. In addition to the main Cortex® M4F processor, the device also has an autonomous ultra-low power Sensor Controller CPU with fast wake-up capability. As an example, the sensor controller is capable of 1-Hz ADC sampling at 1- $\mu$ A system current.

The CC2652R7 has Low SER (Soft Error Rate) FIT (Failure-in-time) for long operational lifetime. Always-on SRAM parity minimizes risk for corruption due to potential radiation events. Consistent with many customers' 10 to 15 years or longer life cycle requirements, TI has a product life cycle policy with a commitment to product longevity and continuity of supply.

The CC2652R7 device is part of the SimpleLink™ MCU platform, which consists of Wi-Fi®, *Bluetooth*® Low Energy, Thread, Zigbee, Wi-SUN®, Amazon Sidewalk, mioty®, Sub-1 GHz MCUs, and host MCUs. CC2652R7 is part of a scalable portfolio with flash sizes from 32KB to 704KB with pin-to-pin compatible package options. The common SimpleLink™CC13xx and CC26xx Software Development Kit (SDK) and SysConfig system configuration tool supports migration between devices in the portfolio. A comprehensive number of software stacks, application examples and SimpleLink™ Academy training sessions are included in the SDK. For more information, visit wireless connectivity.

#### **Device Information**

PART NUMBER <sup>(1)</sup>	PACKAGE	BODY SIZE (NOM)
CC2652R74T0RGZR	VQFN (48)	7.00 mm × 7.00 mm

<sup>(1)</sup> For the most current part, package, and ordering information for all available devices, see the Package Option Addendum in Section 11, or see the TI website.

Product Folder Links: CC2652R7

See RF Core for additional details on supported protocol standards, modulation formats, and data rates.



## 3.1 Functional Block Diagram

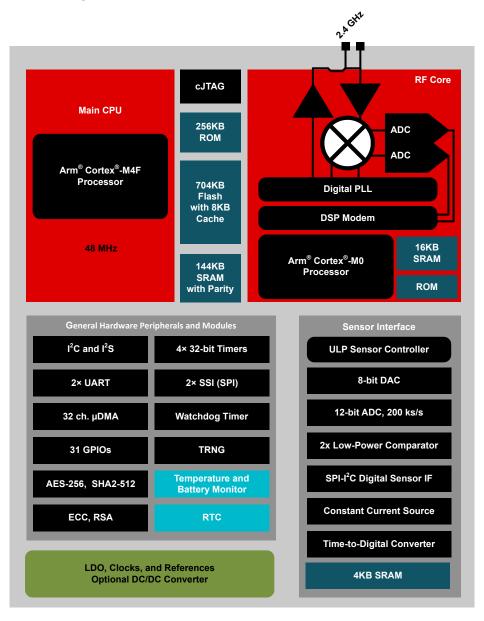


Figure 3-1. CC2652R7 Block Diagram



## **Table of Contents**

1 Features1	8 Detailed Description	35
2 Applications2	8.1 Overview	
3 Description2	8.2 System CPU	
3.1 Functional Block Diagram3	8.3 Radio (RF Core)	
4 Revision History4	8.4 Memory	
5 Device Comparison5	8.5 Sensor Controller	37
6 Terminal Configuration and Functions6	8.6 Cryptography	38
6.1 Pin Diagram – RGZ Package (Top View)6	8.7 Timers	
6.2 Signal Descriptions – RGZ Package7	8.8 Serial Peripherals and I/O	40
6.3 Connections for Unused Pins and Modules8	8.9 Battery and Temperature Monitor	40
7 Specifications9	8.10 µDMA	
7.1 Absolute Maximum Ratings9	8.11 Debug	
7.2 ESD Ratings9	8.12 Power Management	41
7.3 Recommended Operating Conditions9	8.13 Clock Systems	42
7.4 Power Supply and Modules9	8.14 Network Processor	
7.5 Power Consumption - Power Modes11	9 Application, Implementation, and Layout	43
7.6 Power Consumption - Radio Modes12	9.1 Reference Designs	
7.7 Nonvolatile (Flash) Memory Characteristics12	9.2 Junction Temperature Calculation	43
7.8 Thermal Resistance Characteristics12	10 Device and Documentation Support	45
7.9 RF Frequency Bands13	10.1 Device Nomenclature	
7.10 Bluetooth Low Energy - Receive (RX)14	10.2 Tools and Software	45
7.11 Bluetooth Low Energy - Transmit (TX)17	10.3 Documentation Support	48
7.12 Zigbee and Thread - IEEE 802.15.4-2006 2.4	10.4 Support Resources	48
GHz (OQPSK DSSS1:8, 250 kbps) - RX	10.5 Trademarks	48
7.13 Zigbee and Thread - IEEE 802.15.4-2006 2.4	10.6 Electrostatic Discharge Caution	49
GHz (OQPSK DSSS1:8, 250 kbps) - TX19	10.7 Glossary	49
7.14 Timing and Switching Characteristics19	11 Mechanical, Packaging, and Orderable	
7.15 Peripheral Characteristics23	Information	<mark>5</mark> 0
7.16 Typical Characteristics29		

# **4 Revision History**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

C	Changes from November 30, 2021 to March 10, 2023 (from Revision A (November 2021) to					
R	evision B (March 2023))	Page				
•	Added External Regulator Mode to Operating Range in Section 1	1				
•	Added External Regulator Mode to Section 6.2	<mark>7</mark>				
•	Added External Regulator Mode to Section 6.3	8				
•	Added External Regulator Mode added to Section 7.1, Section 7.3, and Section 7.4	9				



# **5 Device Comparison**

**Table 5-1. Device Family Overview** 

	lable 3-1. De	FLASH	RAM		
DEVICE	RADIO SUPPORT	(KB)	(KB)	GPIO	PACKAGE SIZE
CC1310	Sub-1 GHz Wireless M-Bus	32-128	16-20	10-30	RGZ (7-mm × 7-mm VQFN48) RHB (5 mm × 5 mm VQFN32) RSM (4 mm × 4 mm VQFN32)
CC1312R	Sub-1 GHz Wi-SUN <sup>®</sup> Amazon Sidewalk Wireless M-Bus	352-704	80-144	30	RGZ (7-mm × 7-mm VQFN48)
CC1352P	Multiprotocol Sub-1 GHz Wi-SUN® Amazon Sidewalk Wireless M-Bus Bluetooth 5.2 Low Energy Zigbee Thread 2.4 GHz proprietary FSK-based formats +20-dBm high-power amplifier	352-704	80-144	26	RGZ (7-mm × 7-mm VQFN48)
CC1352R	Multiprotocol Sub-1 GHz Wi-SUN® Wireless M-Bus Bluetooth 5.2 Low Energy Zigbee Thread 2.4 GHz proprietary FSK-based formats	352	80	28	RGZ (7-mm × 7-mm VQFN48)
CC2642R	Bluetooth 5.2 Low Energy 2.4 GHz proprietary FSK-based formats	352	80	31	RGZ (7-mm × 7-mm VQFN48)
CC2642R-Q1	Bluetooth 5.2 Low Energy	352	80	31	RTC (7-mm × 7-mm VQFN48)
CC2652R	Multiprotocol Bluetooth 5.2 Low Energy Zigbee Thread 2.4 GHz proprietary FSK-based formats	352-704	80-144	31	RGZ (7-mm × 7-mm VQFN48)
CC2652RB	Multiprotocol Bluetooth 5.2 Low Energy Zigbee Thread	352	80	31	RGZ (7-mm × 7-mm VQFN48)
CC2652P	Multiprotocol Bluetooth 5.2 Low Energy Zigbee Thread 2.4 GHz proprietary FSK-based formats +19.5-dBm high-power amplifier	352-704	80-144	26	RGZ (7-mm × 7-mm VQFN48)



## **6 Terminal Configuration and Functions**

# 6.1 Pin Diagram - RGZ Package (Top View)

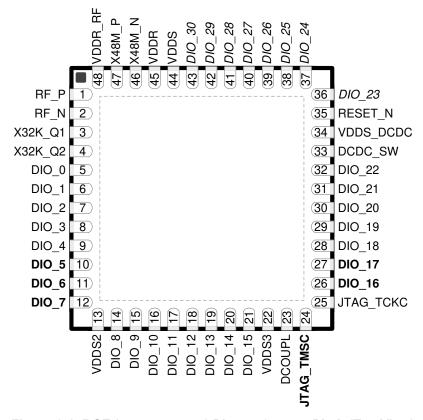


Figure 6-1. RGZ (7-mm × 7-mm) Pinout, 0.5-mm Pitch (Top View)

The following I/O pins marked in Figure 6-1 in **bold** have high-drive capabilities:

- Pin 10, DIO\_5
- Pin 11, DIO 6
- Pin 12, DIO 7
- Pin 24, JTAG\_TMSC
- Pin 26, DIO\_16
- Pin 27, DIO\_17

The following I/O pins marked in Figure 6-1 in *italics* have analog capabilities:

- Pin 36, DIO 23
- Pin 37, DIO\_24
- Pin 38, DIO\_25
- Pin 39, DIO\_26
- Pin 40, DIO\_27
- Pin 41, DIO\_28Pin 42, DIO\_29
- Pin 43, DIO\_30

# 6.2 Signal Descriptions - RGZ Package

Table 6-1. Signal Descriptions – RGZ Package

PIN	PIN Table 6-1. Signal Descriptions – RGZ Package						
NAME	NO.	I/O	TYPE	DESCRIPTION			
DCDC_SW	33	_	Power	Output from internal DC/DC converter. Tie to ground for external regulator model (1.7-V to 1.95-V operation). (1)			
DCOUPL	23	_	Power	For decoupling of internal 1.27-V regulated digital supply (2)			
DIO_0	5	I/O	Digital	GPIO			
DIO_1	6	I/O	Digital	GPIO			
DIO_2	7	I/O	Digital	GPIO			
DIO_3	8	I/O	Digital	GPIO			
DIO_4	9	I/O	Digital	GPIO			
DIO_5	10	I/O	Digital	GPIO, high-drive capability			
DIO_6	11	I/O	Digital	GPIO, high-drive capability			
DIO_7	12	I/O	Digital	GPIO, high-drive capability			
DIO_8	14	I/O	Digital	GPIO			
DIO_9	15	I/O	Digital	GPIO			
DIO_10	16	I/O	Digital	GPIO			
DIO_11	17	I/O	Digital	GPIO			
DIO_12	18	I/O	Digital	GPIO			
DIO_13	19	I/O	Digital	GPIO			
DIO_14	20	I/O	Digital	GPIO			
DIO_15	21	I/O	Digital	GPIO			
DIO_16	26	I/O	Digital	GPIO, JTAG_TDO, high-drive capability			
DIO_17	27	I/O	Digital	GPIO, JTAG_TDI, high-drive capability			
DIO_18	28	I/O	Digital	GPIO			
DIO_19	29	I/O	Digital	GPIO			
DIO_20	30	I/O	Digital	GPIO			
DIO_21	31	I/O	Digital	GPIO			
DIO_22	32	I/O	Digital	GPIO			
DIO_23	36	I/O	Digital or Analog	GPIO, analog capability			
DIO_24	37	I/O	Digital or Analog	GPIO, analog capability			
DIO_25	38	I/O	Digital or Analog	GPIO, analog capability			
DIO_26	39	I/O	Digital or Analog	GPIO, analog capability			
DIO_27	40	I/O	Digital or Analog	GPIO, analog capability			
DIO_28	41	I/O	Digital or Analog	GPIO, analog capability			
DIO_29	42	I/O	Digital or Analog	GPIO, analog capability			
DIO_30	43	I/O	Digital or Analog	GPIO, analog capability			
EGP	_	_	GND	Ground – exposed ground pad <sup>(3)</sup>			
JTAG_TMSC	24	I/O	Digital	JTAG TMSC, high-drive capability			
JTAG_TCKC	25	ı	Digital	JTAG TCKC			
RESET_N	35	I	Digital	Reset, active low. No internal pullup resistor			
RF_P	1	_	RF	Positive RF input signal to LNA during RX Positive RF output signal from PA during TX			
RF_N	2	_	RF	Negative RF input signal to LNA during RX Negative RF output signal from PA during TX			



Table 6-1. Signal Descriptions - RGZ Package (continued)

PIN		I/O	TYPE	
NAME	NO.	1/0	TYPE	DESCRIPTION
VDDR	45	_	Power	Internal supply, must be powered from the internal DC/DC converter or the internal LDO. For external regulator mode (1.7-V to 1.95-V operation, connect to external regulator and internal DC-DC cannot be used. (2) (4) (6)
VDDR_RF	48	_	Power	Internal supply, must be powered from the internal DC/DC converter or the internal LDO. For external regulator mode (1.7-V to 1.95-V operation, connect to external regulator and internal DC-DC cannot be used. (2) (5) (6)
VDDS	44	_	Power	1.8-V to 3.8-V main chip supply. For external regulator mode (1.7-V to 1.95-V operation, connect to external regulator and internal DC-DC cannot be used. (1)
VDDS2	13	_	Power	1.8-V to 3.8-V DIO supply. For external regulator mode (1.7-V to 1.95-V operation, connect to external regulator and internal DC-DC cannot be used. (1)
VDDS3	22	_	Power	1.8-V to 3.8-V DIO supply. For external regulator mode (1.7-V to 1.95-V operation, connect to external regulator and internal DC-DC cannot be used. (1)
VDDS_DCDC	34	_	Power	1.8-V to 3.8-V DC/DC converter supply. Tie to ground for external regulator mode (1.7-V to 1.95-V operation).
X48M_N	46	_	Analog	48-MHz crystal oscillator pin 1
X48M_P	47		Analog	48-MHz crystal oscillator pin 2
X32K_Q1	3	_	Analog	32-kHz crystal oscillator pin 1
X32K_Q2	4	_	Analog	32-kHz crystal oscillator pin 2

- (1) For more details, see technical reference manual listed in Section 10.3.
- (2) Do not supply external circuitry from this pin.
- (3) EGP is the only ground connection for the device. Good electrical connection to device ground on printed circuit board (PCB) is imperative for proper device operation.
- (4) If internal DC/DC converter is not used, this pin is supplied internally from the main LDO.
- (5) If internal DC/DC converter is not used, this pin must be connected to VDDR for supply from the main LDO.
- (6) Output from internal DC/DC and LDO is trimmed to 1.68 V.

#### 6.3 Connections for Unused Pins and Modules

Table 6-2. Connections for Unused Pins - RGZ Package

FUNCTION	SIGNAL NAME	PIN NUMBER	ACCEPTABLE PRACTICE <sup>(1)</sup>	PREFERRED PRACTICE <sup>(1)</sup>
GPIO	DIO_n	5–12 14–21 26–32 36–43	NC or GND	NC
32.768-kHz crystal	X32K_Q1	3	NC or GND	NC
32.700-KHZ GIYSTAI	X32K_Q2 4		NC	
DC/DC converter <sup>(2)</sup>	DCDC_SW	33	NC (GND) <sup>(3)</sup>	NC (GND) <sup>(3)</sup>
DC/DC converter	VDDS_DCDC	34	VDDS (GND) <sup>(3)</sup>	VDDS (GND) <sup>(3)</sup>

- (1) NC = No connect
- (2) When the DC/DC converter is not used, the inductor between DCDC\_SW and VDDR can be removed. VDDR and VDDR\_RF must still be connected and the 22 uF DCDC capacitor must be kept on the VDDR net.
- (3) When operating in external regulator mode.

# 7 Specifications

## 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1) (2)

			MIN	MAX	UNIT
VDDS(3)	Supply voltage		-0.3	4.1	V
VDDR <sup>(4)</sup>	Supply voltage (External	regulator mode)	-0.3	2.25	V
	Voltage on any digital pir	(5) (6)	-0.3	VDDS + 0.3, max 4.1	V
	Voltage on crystal oscilla	tor pins, X32K_Q1, X32K_Q2, X48M_N and X48M_P	-0.3	VDDR + 0.3, max 2.25	V
		Voltage scaling enabled	-0.3	VDDS	
V <sub>in</sub>	Voltage on ADC input	Voltage scaling disabled, internal reference	-0.3	1.49	V
		Voltage scaling disabled, VDDS as reference	-0.3	VDDS / 2.9	
	Input level, RF pins (RF_	P and RF_N)		5	dBm
T <sub>stg</sub>	Storage temperature		-40	150	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime
- (2) All voltage values are with respect to ground, unless otherwise noted.
- (3) VDDS DCDC, VDDS2 and VDDS3 must be at the same potential as VDDS.
- (4) VDDR, VDDS, VDDS2 and VDDS3 must be at the same potential.
- (5) Including analog capable DIOs.
- (6) Injection current is not supported on any GPIO pin

## 7.2 ESD Ratings

				VALUE	UNIT
V	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	All pins	±2000	V
V <sub>ESD</sub>	Electrostatic discriarge	Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	All pins	±500	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Operating ambient temperature <sup>(1)</sup> (3)		-40	105	°C
Operating junction temperature <sup>(1) (3)</sup>		-40	115	°C
Operating supply voltage (VDDS and VDDR), external regulator mode	For operation in 1.8-V systems (VDDS and VDDR pins connected on PCB, internal DC-DC cannot be used)	1.7	1.95	V
Operating supply voltage (VDDS)		1.8	3.8	V
Rising supply voltage slew rate		0	100	mV/μs
Falling supply voltage slew rate <sup>(2)</sup>		0	20	mV/μs

- (1) Operation at or near maximum operating temperature for extended durations will result in a reduction in lifetime.
- (2) For small coin-cell batteries, with high worst-case end-of-life equivalent source resistance, a 22-μF VDDS input capacitor must be used to ensure compliance with this slew rate.
- (3) For thermal resistance characteristics refer to Section 7.8.

### 7.4 Power Supply and Modules

over operating free-air temperature range (unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNIT
VDDS Power-on-Reset (POR) threshold		1	.1 - 1.55		V
VDDS Brown-out Detector (BOD) (1)	Rising threshold		1.77		V



## 7.4 Power Supply and Modules (continued)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNIT
VDDS Brown-out Detector (BOD) External regulator mode	Rising threshold		1.64		V
VDDS Brown-out Detector (BOD), before initial boot (2)	Rising threshold		1.70		V
VDDS Brown-out Detector (BOD) (1)	Falling threshold		1.75		V
VDDS Brown-out Detector (BOD) External regulator mode	Falling threshold		1.63		V

 <sup>(1)</sup> For boost mode (VDDR =1.95 V), TI drivers software initialization will trim VDDS BOD limits to maximum (approximately 2.0 V)
 (2) Brown-out Detector is trimmed at initial boot, value is kept until device is reset by a POR reset or the RESET\_N pin



## 7.5 Power Consumption - Power Modes

When measured on the CC26x2-R7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V with DC/DC enabled unless otherwise noted.

	PARAMETER	TEST CONDITIONS	TYP	UNIT
Core Curre	ent Consumption		1	
	Reset and Shutdown	Reset. RESET_N pin asserted or VDDS below power-on-reset threshold	100	nA
	Reset and Shutdown	Shutdown. No clocks running, no retention	100	IIA
		RTC running, CPU, 144KB RAM and (partial) register retention. RCOSC_LF	0.9	μA
	Standby without cache retention	RTC running, CPU, 64KB RAM and (partial) register retention. RCOSC_LF	0.8	μA
I <sub>core</sub>		RTC running, CPU, 144KB RAM and (partial) register retention XOSC_LF	1.0	μΑ
	Standby	RTC running, CPU, 144KB RAM and (partial) register retention. RCOSC_LF	2.3	μA
	with cache retention	RTC running, CPU, 144KB RAM and (partial) register retention. XOSC_LF	2.4	μA
	Idle	Supply Systems and RAM powered RCOSC_HF	669	μA
core	Active	MCU running CoreMark at 48 MHz RCOSC_HF	3.1	mA
Peripheral	Current Consumption			
	Peripheral power domain	Delta current with domain enabled	49	
	Serial power domain	Delta current with domain enabled	3.6	
	RF Core	Delta current with power domain enabled, clock enabled, RF core idle	109	
	μDMA	Delta current with clock enabled, module is idle	69	
	Timers	Delta current with clock enabled, module is idle <sup>(3)</sup>	115	
peri	I2C	Delta current with clock enabled, module is idle	11.6	μΑ
	128	Delta current with clock enabled, module is idle	27.6	
	SSI	Delta current with clock enabled, module is idle	61	
	UART	Delta current with clock enabled, module is idle <sup>(1)</sup>	131	
	CRYPTO (AES)	Delta current with clock enabled, module is idle <sup>(2)</sup>	19.5	
	PKA	Delta current with clock enabled, module is idle	70	
	TRNG	Delta current with clock enabled, module is idle	25	
Sensor Co	ntroller Engine Consumption	·	I.	
	Active mode	24 MHz, infinite loop	799	
I <sub>SCE</sub>	Low-power mode	2 MHz, infinite loop	29.2	μA

- (1)
- Only one UART running Only one SSI running Only one GPTimer running



### 7.6 Power Consumption - Radio Modes

When measured on the CC26x2-R7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V with DC/DC enabled unless otherwise noted.

PARAMETER	TEST CONDITIONS	TYP	UNIT
Radio receive current	2440 MHz	6.4	mA
Radio transmit current	0 dBm output power setting 2440 MHz	7.3	mA
2.4 GHz PA (Bluetooth Low Energy)	+5 dBm output power setting 2440 MHz	9.7	mA

## 7.7 Nonvolatile (Flash) Memory Characteristics

Over operating free-air temperature range and V<sub>DDS</sub> = 3.0 V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Flash sector size			8		KB
Supported flash erase cycles before failure, single-bank <sup>(1) (5)</sup>		30			k Cycles
Supported flash erase cycles before failure, single sector <sup>(2)</sup>		60			k Cycles
Maximum number of write operations per row before sector erase <sup>(3)</sup>				83	Write Operations
Flash retention	105 °C	11.4			Years
Flash sector erase current	Average delta current		9.5		mA
Flash sector erase time <sup>(4)</sup>	Zero cycles		10		ms
Flash sector erase time(*)	30k cycles			4000	ms
Flash write current	Average delta current, 4 bytes at a time		5.2		mA
Flash write time <sup>(4)</sup>	4 bytes at a time		21.6		μs

- (1) A full bank erase is counted as a single erase cycle on each sector. If both flash banks are always cycled simultaneously they can be cycled 30K times each. Alternatively, the banks can be cycled a total of 30K times, e.g. the main bank X times and the second bank Y times (X+Y=30K)
- (2) Up to 4 customer-designated sectors can be individually erased an additional 30k times beyond the baseline bank limitation of 30k cycles
- (3) Each wordline is 2048 bits (or 256 bytes) wide. This limitation corresponds to sequential memory writes of 4 (3.1) bytes minimum per write over a whole wordline. If additional writes to the same wordline are required, a sector erase is required once the maximum number of write operations per row is reached.
- (4) This number is dependent on Flash aging and increases over time and erase cycles
- (5) Aborting flash during erase or program modes is not a safe operation.

#### 7.8 Thermal Resistance Characteristics

		PACKAGE	
	THERMAL METRIC(1)	RGZ (VQFN)	UNIT
		48 PINS	1
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	23.7	°C/W <sup>(2)</sup>
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	13.0	°C/W <sup>(2)</sup>
$R_{\theta JB}$	Junction-to-board thermal resistance	7.7	°C/W <sup>(2)</sup>
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	0.1	°C/W <sup>(2)</sup>
ΨЈВ	Junction-to-board characterization parameter	7.6	°C/W <sup>(2)</sup>
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	1.9	°C/W <sup>(2)</sup>

- (1) For more information about traditional and new thermal metrics, see Semiconductor and IC Package Thermal Metrics.
- (2) °C/W = degrees Celsius per watt.



## 7.9 RF Frequency Bands

Over operating free-air temperature range (unless otherwise noted).

PARAMETER	MIN	TYP	MAX	UNIT
Frequency bands	2360		2500	MHz



## 7.10 Bluetooth Low Energy - Receive (RX)

When measured on the CC26x2R-7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V,  $f_{RF}$ = 2440 MHz with DC/DC enabled unless otherwise noted. All measurements are performed at the antenna input with a combined RX and TX path. All measurements are performed conducted.

Receiver sensitivity	PARAMETER	TEST CONDITIONS	MIN TYP N	IAX UNIT
Receiver saturation	125 kbps (LE Coded)			
Difference between the incoming carrier frequency and be internally generated carrier frequency   \$ (-300 / 300)   kHzz	Receiver sensitivity	Differential mode. BER = 10 <sup>-3</sup>	-104	dBm
Data rate error tolerance the internally generated carrier frequency (1971) 2019 (1972) 2019 (1972) 2019 (1972) 2016 (1972) 2	Receiver saturation	Differential mode. BER = 10 <sup>-3</sup>	>5	dBm
Data rate error toterance generated data rate (37-9½ ps packets)  Data rate error toterance professional and a professional an	Frequency error tolerance	, , , ,	> (-300 / 300)	kHz
Data rate error tolerance   generated data rate (255-byte packets)   > (-1.25 / 100)   ppm	Data rate error tolerance		> (-320 / 240)	ppm
Co-channel rejection   Co-channel   ERR = 10-3   Co-channel   ERR = 10-1   ERR = 10-3   Co-channel   ERR = 10-1   ERR = 10-1   ERR = 10-1   ERR   ERR = 10-3   Co-channel   ERR = 10-1   ERR = 10-1   ERR   ERR = 10-1   ERR   ERR = 10-3	Data rate error tolerance		> (–125 / 100)	ppm
Selectivity, ±1 MHz.¹¹	Co-channel rejection <sup>(1)</sup>		-1.5	dB
MHz, BER = 10-3   Mark   BER = 10-3   Mark   BER = 10-3   Mark	Selectivity, ±1 MHz <sup>(1)</sup>			dB
MHz, BER = 10 <sup>-3</sup>   MHz   Manted signal at −79 dBm, modulated interferer at ±4   44 / 46(²)   dB	Selectivity, ±2 MHz <sup>(1)</sup>		44 / 37 <sup>(2)</sup>	dB
MHz, BER = 10 <sup>-3</sup>   Wanted signal at −79 dBm, modulated interferer at ≥ ±6   48 / 44  <sup>20</sup>   dB	Selectivity, ±3 MHz <sup>(1)</sup>			dB
MHz, BER ≈ 10 <sup>-3</sup> Manted signal at −79 dBm, modulated interferer at ≥ ±7  MHz, BER ≈ 10 <sup>-3</sup> Manted signal at −79 dBm, modulated interferer at image frequency. Image frequency bear 10 <sup>-3</sup> Note that Image frequency ±1 MHz is the Co- channel −1 MHz. Wanted signal at −79 dBm, modulated interferer at ±1 MHz from image frequency, BER ≈ 10 <sup>-3</sup> RSSI Range  MSSI Range  MSSI Racuracy (+/-)  Differential mode. BER ≈ 10 <sup>-3</sup> MSSI PER	Selectivity, ±4 MHz <sup>(1)</sup>			dB
MHz, BER = 10 <sup>-3</sup>   MHz, BER = 10 <sup>-3</sup>   MHz, BER = 10 <sup>-3</sup>   MB	Selectivity, ±6 MHz <sup>(1)</sup>		48 / 44 <sup>(2)</sup>	dB
Selectivity, Image frequency:   Frequency   ERR = 10-3   Selectivity, Image frequency ±1   Note that Image frequency + 1 MHz is the Co- channel   HHz. Wanted signal at −79 dBm, modulated interferer at ±1 MHz from image frequency, BER = 10-3   89   dB   88SI Range   ±4   dB   88SI Accuracy (+/-)   ±4   dB   48   dB   48   dB   48   dB   dB   dB   dB   dB   dB   d	Selectivity, ±7 MHz		51 / 45 <sup>(2)</sup>	dB
-1 MHz. Wanted signal at -79 dBm, modulated interferer at ±1 MHz from image frequency, BER = 10 <sup>-3</sup> RSSI Range  RSSI Accuracy (+/-)  Book kbps (LE Coded)  Receiver sensitivity  Differential mode. BER = 10 <sup>-3</sup> Prequency error tolerance  Difference between the incoming carrier frequency and the internally generated data rate (37-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (37-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (35-byte packets)  Co-channel rejection(1)  Wanted signal at -72 dBm, modulated interferer in channel, BER = 10 <sup>-3</sup> Selectivity, ±1 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±1  MHz, BER = 10 <sup>-3</sup> Selectivity, ±2 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±3  MHz, BER = 10 <sup>-3</sup> Selectivity, ±3 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±4  MHz, BER = 10 <sup>-3</sup> Selectivity, ±4 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Selectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Belectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Belectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Belectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Belectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Belectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Belectivity, ±7 MHz	Selectivity, Image frequency <sup>(1)</sup>	Wanted signal at –79 dBm, modulated interferer at image frequency, BER = $10^{-3}$	37	dB
RSSI Accuracy (+/-)  ### dB  ### 500 kbps (LE Coded)    Receiver sensitivity	Selectivity, Image frequency ±1 MHz <sup>(1)</sup>	-1 MHz. Wanted signal at -79 dBm, modulated interferer	4.5 / 44 <sup>(2)</sup>	dB
Receiver sensitivity Differential mode. BER = 10 <sup>-3</sup> —100 dBm Receiver sensitivity Differential mode. BER = 10 <sup>-3</sup> —100 dBm Receiver saturation Differential mode. BER = 10 <sup>-3</sup> —5 dBm Frequency error tolerance Difference between the incoming carrier frequency and the internally generated carrier frequency  Data rate error tolerance Difference between incoming data rate and the internally generated data rate (37-byte packets) —9 (-450 / 450) —9 pm  Data rate error tolerance Difference between incoming data rate and the internally generated data rate (255-byte packets) —9 (-450 / 450) —9 pm  Co-channel rejection(1) Wanted signal at -72 dBm, modulated interferer in channel, BER = 10 <sup>-3</sup> —3.5 dB  Selectivity, ±1 MHz(1) Wanted signal at -72 dBm, modulated interferer at ±1 —8 / 42 dB  Selectivity, ±2 MHz(1) Wanted signal at -72 dBm, modulated interferer at ±2 —43 / 35(2) dB  Selectivity, ±3 MHz(1) Wanted signal at -72 dBm, modulated interferer at ±3 —46 / 46(2) dB  Selectivity, ±4 MHz(1) Wanted signal at -72 dBm, modulated interferer at ±4 —45 / 47(2) dB  Selectivity, ±4 MHz(1) Wanted signal at -72 dBm, modulated interferer at ±4 —45 / 47(2) dB  Selectivity, ±6 MHz(1) Wanted signal at -72 dBm, modulated interferer at ±6 —46 / 45(2) dB  Selectivity, ±6 MHz(1) Wanted signal at -72 dBm, modulated interferer at ±2 —46 / 45(2) dB	RSSI Range		89	dB
Receiver sensitivity  Differential mode. BER = 10 <sup>-3</sup> Receiver saturation  Differential mode. BER = 10 <sup>-3</sup> Differential mode. BER = 10 <sup>-3</sup> Difference between the incoming carrier frequency and the internally generated carrier frequency  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (37-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (27-byte packets)  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Ppm  Co-channel rejection(1)  Wanted signal at −72 dBm, modulated interferer in channel, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ±1 MHz, BER = 10 <sup>-3</sup> Selectivity, ±2 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±2 MHz, BER = 10 <sup>-3</sup> Selectivity, ±3 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±3 MHz, BER = 10 <sup>-3</sup> Selectivity, ±4 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±4 MHz, BER = 10 <sup>-3</sup> Selectivity, ±4 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±4 MHz, BER = 10 <sup>-3</sup> Selectivity, ±4 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±4 MHz, BER = 10 <sup>-3</sup> Selectivity, ±6 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±4 MHz, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ±6 MHz, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ≥ ±6 MHz, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ≥ ±7  Wanted signal at −72 dBm, modulated interferer at ≥ ±7	RSSI Accuracy (+/-)		±4	dB
Receiver saturation  Differential mode. BER = 10 <sup>-3</sup> >5 dBm  Frequency error tolerance  Difference between the incoming carrier frequency and the internally generated carrier frequency  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (37-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Ppm  Co-channel rejection(1)  Wanted signal at -72 dBm, modulated interferer in channel, BER = 10 <sup>-3</sup> Selectivity, ±1 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±1  MHz, BER = 10 <sup>-3</sup> Selectivity, ±2 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±2  MHz, BER = 10 <sup>-3</sup> Selectivity, ±3 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±3  MHz, BER = 10 <sup>-3</sup> Selectivity, ±4 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±4  MHz, BER = 10 <sup>-3</sup> Selectivity, ±4 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±4  MHz, BER = 10 <sup>-3</sup> Selectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ±6  MHz, BER = 10 <sup>-3</sup> Selectivity, ±6 MHz(1)  Wanted signal at -72 dBm, modulated interferer at ≥ ±6  MHz, BER = 10 <sup>-3</sup> Wanted signal at -72 dBm, modulated interferer at ≥ ±6  MHz, BER = 10 <sup>-3</sup> Wanted signal at -72 dBm, modulated interferer at ≥ ±7  Wanted signal at -72 dBm, modulated interferer at ≥ ±7  Wanted signal at -72 dBm, modulated interferer at ≥ ±7  Wanted signal at -72 dBm, modulated interferer at ≥ ±7	500 kbps (LE Coded)			
Difference between the incoming carrier frequency and the internally generated carrier frequency  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (37-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (37-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Co-channel rejection(1)  Wanted signal at −72 dBm, modulated interferer in channel, BER = 10−3  Selectivity, ±1 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±1  MHz, BER = 10−3  Selectivity, ±2 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±2  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±3  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±4  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±4  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±4  Wanted signal at −72 dBm, modulated interferer at ±4  Wanted signal at −72 dBm, modulated interferer at ±4  Wanted signal at −72 dBm, modulated interferer at ±4  Wanted signal at −72 dBm, modulated interferer at ±6  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±6  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ≥ ±6  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ≥ ±7  Wanted signal at −72 dBm, modulated interferer at ≥ ±7  Wanted signal at −72 dBm, modulated interferer at ≥ ±7	Receiver sensitivity	Differential mode. BER = 10 <sup>-3</sup>	-100	dBm
the internally generated carrier frequency  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (37-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Data rate error tolerance  Difference between incoming data rate and the internally generated data rate (255-byte packets)  Co-channel rejection(1)  Wanted signal at −72 dBm, modulated interferer in channel, BER = 10−3  Selectivity, ±1 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±1  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±2  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±3  MHz, BER = 10−3  Selectivity, ±3 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±4  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±4  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±4  MHz, BER = 10−3  Selectivity, ±4 MHz(1)  Wanted signal at −72 dBm, modulated interferer at ±4  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±4  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ±6  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ≥±6  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ≥±6  MHz, BER = 10−3  Wanted signal at −72 dBm, modulated interferer at ≥±7  Wanted signal at −72 dBm, modulated interferer at ≥±7  Wanted signal at −72 dBm, modulated interferer at ≥±7	Receiver saturation	Differential mode. BER = 10 <sup>-3</sup>	> 5	dBm
Data rate error tolerance generated data rate (37-byte packets)  Data rate error tolerance Difference between incoming data rate and the internally generated data rate (255-byte packets)  Co-channel rejection <sup>(1)</sup> Wanted signal at −72 dBm, modulated interferer in channel, BER = 10 <sup>-3</sup> Selectivity, ±1 MHz <sup>(1)</sup> Wanted signal at −72 dBm, modulated interferer at ±1 MHz, BER = 10 <sup>-3</sup> Selectivity, ±2 MHz <sup>(1)</sup> Wanted signal at −72 dBm, modulated interferer at ±2 MHz, BER = 10 <sup>-3</sup> Selectivity, ±2 MHz <sup>(1)</sup> Wanted signal at −72 dBm, modulated interferer at ±3 MHz, BER = 10 <sup>-3</sup> Selectivity, ±3 MHz <sup>(1)</sup> Wanted signal at −72 dBm, modulated interferer at ±3 MHz, BER = 10 <sup>-3</sup> Selectivity, ±4 MHz <sup>(1)</sup> Wanted signal at −72 dBm, modulated interferer at ±4 MHz, BER = 10 <sup>-3</sup> Selectivity, ±6 MHz <sup>(1)</sup> Wanted signal at −72 dBm, modulated interferer at ±6 MHz, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ≥ ±6 MHz, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ≥ ±6 MHz, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ≥ ±6 MHz, BER = 10 <sup>-3</sup> Wanted signal at −72 dBm, modulated interferer at ≥ ±7  Wanted signal at −72 dBm, modulated interferer at ≥ ±7  Wanted signal at −72 dBm, modulated interferer at ≥ ±7  Wanted signal at −72 dBm, modulated interferer at ≥ ±7	Frequency error tolerance	, , , ,	> (-300 / 300)	kHz
Data rate error tolerance generated data rate (255-byte packets)  Co-channel rejection <sup>(1)</sup> Wanted signal at $-72$ dBm, modulated interferer in channel, BER = $10^{-3}$ Selectivity, $\pm 1$ MHz <sup>(1)</sup> Wanted signal at $-72$ dBm, modulated interferer at $\pm 1$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 2$ MHz, BER = $10^{-3}$ Selectivity, $\pm 2$ MHz <sup>(1)</sup> Wanted signal at $-72$ dBm, modulated interferer at $\pm 2$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 3$ MHz, BER = $10^{-3}$ Selectivity, $\pm 4$ MHz <sup>(1)</sup> Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$	Data rate error tolerance		> (-450 / 450)	ppm
channel rejection $O(1)$ channel rejection $O$	Data rate error tolerance		> (–150 / 175)	ppm
Selectivity, $\pm 1$ MHz <sup>(1)</sup> MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 2$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 3$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 3$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$	Co-channel rejection <sup>(1)</sup>	Wanted signal at $-72$ dBm, modulated interferer in channel, BER = $10^{-3}$	-3.5	dB
Selectivity, $\pm 2$ MHz <sup>(1)</sup> MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 3$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Selectivity, $\pm 6$ MHz <sup>(1)</sup> Wanted signal at $-72$ dBm, modulated interferer at $\pm 2$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 2$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 2$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 2$	Selectivity, ±1 MHz <sup>(1)</sup>		8 / 4 <sup>(2)</sup>	dB
Selectivity, $\pm 3$ MHz <sup>(1)</sup> MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$ Selectivity, $\pm 6$ MHz <sup>(1)</sup> Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 6$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 6$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 7$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 7$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 7$	Selectivity, ±2 MHz <sup>(1)</sup>		43 / 35 <sup>(2)</sup>	dB
Selectivity, $\pm 4$ MHz.  MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 6$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 7$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 7$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 7$ dB  At $-72$ dBm, modulated interferer at $-72$ dBm,	Selectivity, ±3 MHz <sup>(1)</sup>			dB
Selectivity, $\pm 0$ MHz, BER = $10^{-3}$ Wanted signal at $-72$ dBm, modulated interferer at $\geq \pm 7$ 46 / 45(2)  dB	Selectivity, ±4 MHz <sup>(1)</sup>			dB
	Selectivity, ±6 MHz <sup>(1)</sup>		46 / 45 <sup>(2)</sup>	dB
	Selectivity, ±7 MHz		49 / 45 <sup>(2)</sup>	dB



# 7.10 Bluetooth Low Energy - Receive (RX) (continued)

When measured on the CC26x2R-7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V,  $f_{RF}$ = 2440 MHz with DC/DC enabled unless otherwise noted. All measurements are performed at the antenna input with a combined RX and TX path. All measurements are performed conducted.

PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
Selectivity, Image frequency <sup>(1)</sup>	Wanted signal at –72 dBm, modulated interferer at image frequency, BER = 10 <sup>-3</sup>	35		dB
Selectivity, Image frequency ±1 MHz <sup>(1)</sup>	Note that Image frequency + 1 MHz is the Co- channel -1 MHz. Wanted signal at -72 dBm, modulated interferer at ±1 MHz from image frequency, BER = 10 <sup>-3</sup>	4 / 46 <sup>(2)</sup>		dB
RSSI Range		90		dB
RSSI Accuracy (+/-)		±4		dB
1 Mbps (LE 1M)				
Receiver sensitivity	Differential mode. BER = 10 <sup>-3</sup>	<b>–97</b>		dBm
Receiver saturation	Differential mode. BER = 10 <sup>-3</sup>	> 5		dBm
Frequency error tolerance	Difference between the incoming carrier frequency and the internally generated carrier frequency	> (-350 / 350)		kHz
Data rate error tolerance	Difference between incoming data rate and the internally generated data rate (37-byte packets)	> (-650 / 750)		ppm
Co-channel rejection <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer in channel, BER = 10 <sup>-3</sup>	-6		dB
Selectivity, ±1 MHz <sup>(1)</sup>	Wanted signal at $-67$ dBm, modulated interferer at $\pm 1$ MHz, BER = $10^{-3}$	7 / 4 <sup>(2)</sup>		dB
Selectivity, ±2 MHz <sup>(1)</sup>	Wanted signal at $-67$ dBm, modulated interferer at $\pm 2$ MHz,BER = $10^{-3}$	39 / 33 <sup>(2)</sup>		dB
Selectivity, ±3 MHz <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer at $\pm 3$ MHz, BER = $10^{-3}$	36 / 40 <sup>(2)</sup>		dB
Selectivity, ±4 MHz <sup>(1)</sup>	Wanted signal at $-67$ dBm, modulated interferer at $\pm 4$ MHz, BER = $10^{-3}$	36 / 45 <sup>(2)</sup>		dB
Selectivity, ±5 MHz or more <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer at $\geq \pm 5$ MHz, BER = $10^{-3}$	40		dB
Selectivity, image frequency <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer at image frequency, BER = $10^{-3}$	33		dB
Selectivity, image frequency ±1 MHz <sup>(1)</sup>	Note that Image frequency + 1 MHz is the Co- channel -1 MHz. Wanted signal at -67 dBm, modulated interferer at ±1 MHz from image frequency, BER = 10 <sup>-3</sup>	4 / 41 <sup>(2)</sup>		dB
Out-of-band blocking <sup>(3)</sup>	30 MHz to 2000 MHz	-10		dBm
Out-of-band blocking	2003 MHz to 2399 MHz	-18		dBm
Out-of-band blocking	2484 MHz to 2997 MHz	-12		dBm
Out-of-band blocking	3000 MHz to 12.75 GHz	-2		dBm
Intermodulation	Wanted signal at 2402 MHz, –64 dBm. Two interferers at 2405 and 2408 MHz respectively, at the given power level	-42		dBm
Spurious emissions, 30 to 1000 MHz	Measurement in a 50-Ω single-ended load.	< -59		dBm
Spurious emissions, 1 to 12.75 GHz	Measurement in a 50-Ω single-ended load.	< -47		dBm
RSSI dynamic range		70		dB
RSSI accuracy		±4		dB
2 Mbps (LE 2M)				
Receiver sensitivity	Differential mode. Measured at SMA connector, BER = 10 <sup>-3</sup>	-91		dBm
Receiver saturation	Differential mode. Measured at SMA connector, BER = 10 <sup>-3</sup>	> 5		dBm
Frequency error tolerance	Difference between the incoming carrier frequency and the internally generated carrier frequency	> (-500 / 500)		kHz
Data rate error tolerance	Difference between incoming data rate and the internally generated data rate (37-byte packets)	> (-700 / 750)		ppm



## 7.10 Bluetooth Low Energy - Receive (RX) (continued)

When measured on the CC26x2R-7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V,  $f_{RF}$ = 2440 MHz with DC/DC enabled unless otherwise noted. All measurements are performed at the antenna input with a combined RX and TX path. All measurements are performed conducted.

PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
Co-channel rejection <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer in channel,BER = 10 <sup>-3</sup>	-7		dB
Selectivity, ±2 MHz <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer at ±2 MHz, Image frequency is at –2 MHz, BER = 10 <sup>-3</sup>	8 / 4 <sup>(2)</sup>		dB
Selectivity, ±4 MHz <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer at ±4 MHz, BER = 10 <sup>-3</sup>	36 / 34(2)		dB
Selectivity, ±6 MHz <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer at ±6 MHz, BER = $10^{-3}$	37 / 36 <sup>(2)</sup>		dB
Selectivity, image frequency <sup>(1)</sup>	Wanted signal at –67 dBm, modulated interferer at image frequency, BER = 10 <sup>-3</sup>	4		dB
Selectivity, image frequency ±2 MHz <sup>(1)</sup>	Note that Image frequency + 2 MHz is the Co-channel. Wanted signal at –67 dBm, modulated interferer at ±2 MHz from image frequency, BER = 10 <sup>-3</sup>	-7 / 36 <sup>(2)</sup>		dB
Out-of-band blocking <sup>(3)</sup>	30 MHz to 2000 MHz	-16		dBm
Out-of-band blocking	2003 MHz to 2399 MHz	-21		dBm
Out-of-band blocking	2484 MHz to 2997 MHz	-15		dBm
Out-of-band blocking	3000 MHz to 12.75 GHz	-12		dBm
Intermodulation	Wanted signal at 2402 MHz, –64 dBm. Two interferers at 2408 and 2414 MHz respectively, at the given power level	-38		dBm
RSSI Range		60		dB
RSSI Accuracy (+/-)		±4		dB

- (1) Numbers given as I/C dB
- (2) X / Y, where X is +N MHz and Y is -N MHz
- (3) Excluding one exception at F<sub>wanted</sub> / 2, per Bluetooth Specification

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated



## 7.11 Bluetooth Low Energy - Transmit (TX)

When measured on the CC26x2-R7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V,  $f_{RF}$ = 2440 MHz with DC/DC enabled unless otherwise noted. All measurements are performed at the antenna input with a combined RX and TX path. All measurements are performed conducted.

PARAMETER		TEST CONDITIONS	MIN TYP	MAX	UNIT
General Parameters					
Max output power	Differential mode, delivered to a sing	le-ended 50 Ω load through a balun	5		dBm
Output power programmable range	Differential mode, delivered to a sing	le-ended 50 Ω load through a balun	26		dB
Spurious emissions a	and harmonics				
3purious emissions a	f < 1 GHz, outside restricted bands		< -36		dBm
Caurious amissions	f < 1 GHz, restricted bands ETSI		< -54		dBm
Max output power  Output power  programmable range	f < 1 GHz, restricted bands FCC	1	< -55		dBm
	f > 1 GHz, including harmonics	+5 dBm setting	< -42		dBm
Harmaniaa	Second harmonic		MIN TYP MAX	dBm	
Harmonics	Third harmonic		< -42		dBm



## 7.12 Zigbee and Thread - IEEE 802.15.4-2006 2.4 GHz (OQPSK DSSS1:8, 250 kbps) - RX

When measured on the CC26x2-R7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V,  $f_{RF}$ = 2440 MHz with DC/DC enabled unless otherwise noted. All measurements are performed at the antenna input with a combined RX and TX path. All measurements are performed conducted.

PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
General Parameters				
Receiver sensitivity	PER = 1%	-99		dBm
Receiver saturation	PER = 1%	> 5		dBm
Adjacent channel rejection	Wanted signal at –82 dBm, modulated interferer at ±5 MHz, PER = 1%	36		dB
Alternate channel rejection	Wanted signal at –82 dBm, modulated interferer at ±10 MHz, PER = 1%	57		dB
Channel rejection, ±15 MHz or more	Wanted signal at –82 dBm, undesired signal is IEEE 802.15.4 modulated channel, stepped through all channels 2405 to 2480 MHz, PER = 1%	59		dB
Blocking and desensitization, 5 MHz from upper band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	57		dB
Blocking and desensitization, 10 MHz from upper band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	62		dB
Blocking and desensitization, 20 MHz from upper band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	62		dB
Blocking and desensitization, 50 MHz from upper band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	65		dB
Blocking and desensitization, –5 MHz from lower band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	59		dB
Blocking and desensitization, –10 MHz from lower band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	59		dB
Blocking and desensitization, –20 MHz from lower band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	63		dB
Blocking and desensitization, –50 MHz from lower band edge	Wanted signal at –97 dBm (3 dB above the sensitivity level), CW jammer, PER = 1%	65		dB
Spurious emissions, 30 MHz to 1000 MHz	Measurement in a 50-Ω single-ended load	-66		dBm
Spurious emissions, 1 GHz to 12.75 GHz	Measurement in a 50-Ω single-ended load	-53		dBm
Frequency error tolerance	Difference between the incoming carrier frequency and the internally generated carrier frequency	> 350		ppm
Symbol rate error tolerance	Difference between incoming symbol rate and the internally generated symbol rate	> 1000		ppm
RSSI dynamic range		95		dB
RSSI accuracy		±4		dB

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated

## 7.13 Zigbee and Thread - IEEE 802.15.4-2006 2.4 GHz (OQPSK DSSS1:8, 250 kbps) - TX

When measured on the CC26x2-R7EM-7ID reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V,  $f_{RF}$ = 2440 MHz with DC/DC enabled unless otherwise noted. All measurements are performed at the antenna input with a combined RX and TX path. All measurements are performed conducted.

PARAMETER		TEST CONDITIONS	MIN TYP	MAX UNIT
General Parameters				
Max output power	Differential mode, delivered to a si	ngle-ended 50-Ω load through a balun	5	dBm
Output power programmable range	Differential mode, delivered to a si	ngle-ended 50-Ω load through a balun	26	dB
Spurious emissions and	harmonics			
Max output power       Differential mode, delivered to a single-ended 50-Ω load through a balun         Output power programmable range       Differential mode, delivered to a single-ended 50-Ω load through a balun         Spurious emissions and harmonics         Spurious emissions (1)       f < 1 GHz, outside restricted bands ETSI f < 1 GHz, restricted bands FCC f > 1 GHz, including harmonics       +5 dBm setting         Harmonics         Gecond harmonic         Third harmonic       Third harmonic         IEEE 802.15.4-2006 2.4 GHz (OQPSK DSSS1:8, 250 kbps)	*		< -36	dBm
	< -47	dBm		
	f < 1 GHz, restricted bands FCC	+5 dBm setting	< -55	dBm
	f > 1 GHz, including harmonics		< -42	dBm
Harmaniaa	Second harmonic	ferential mode, delivered to a single-ended 50-Ω load through a balun  monics  1 GHz, outside restricted ands 1 GHz, restricted bands ETSI 1 GHz, restricted bands FCC 1 GHz, including harmonics cond harmonic ird harmonic  (OQPSK DSSS1:8, 250 kbps)	< -42	dBm
Harmonics	Third harmonic		< -42	dBm
IEEE 802.15.4-2006 2.4	GHz (OQPSK DSSS1:8, 250 kbps)		·	
Error vector magnitude	+5 dBm setting		2	%

<sup>(1)</sup> To ensure margins for passing FCC band edge requirements at 2483.5 MHz, a lower than maximum output-power setting or less than 100% duty cycle may be used when operating at 2480 MHz.

## 7.14 Timing and Switching Characteristics

## 7.14.1 Reset Timing

PARAMETER	MIN	TYP MAX	UNIT
RESET_N low duration	1		μs

### 7.14.2 Wakeup Timing

Measured over operating free-air temperature with  $V_{DDS}$  = 3.0 V (unless otherwise noted). The times listed here do not include software overhead.

PARAMETER	TEST CONDITIONS	MIN	TYP M.	λX	UNIT
MCU, Reset to Active <sup>(1)</sup>		85	50 - 4000		μs
MCU, Shutdown to Active <sup>(1)</sup>		85	50 - 4000		μs
MCU, Standby to Active			165		μs
MCU, Active to Standby			39		μs
MCU, Idle to Active			15		μs

<sup>(1)</sup> The wakeup time is dependent on remaining charge on VDDR capacitor when starting the device, and thus how long the device has been in Reset or Shutdown before starting up again. The wake up time increases with a higher capacitor value.



## 7.14.3 Clock Specifications

## 7.14.3.1 48 MHz Crystal Oscillator (XOSC\_HF)

Measured on a Texas Instruments reference design with T<sub>c</sub> = 25 °C, V<sub>DDS</sub> = 3.0 V, unless otherwise noted.<sup>(1)</sup>

	PARAMETER	MIN	TYP	MAX	UNIT
	Crystal frequency		48		MHz
ESR	Equivalent series resistance 6 pF < C <sub>L</sub> ≤ 9 pF		20	60	Ω
ESR	Equivalent series resistance $5 \text{ pF} < C_L \le 6 \text{ pF}$			80	Ω
L <sub>M</sub>	Motional inductance, relates to the load capacitance that is used for the crystal ( $C_L$ in Farads) $^{(5)}$		< 3 × 10 <sup>-25</sup> / C <sub>L</sub> <sup>2</sup>		Н
CL	Crystal load capacitance <sup>(4)</sup>	5	7 <sup>(3)</sup>	9	pF
	Start-up time <sup>(2)</sup>		200		μs

- (1) Probing or otherwise stopping the crystal while the DC/DC converter is enabled may cause permanent damage to the device.
- (2) Start-up time using the TI-provided power driver. Start-up time may increase if driver is not used.
- (3) On-chip default connected capacitance including reference design parasitic capacitance. Connected internal capacitance is changed through software in the Customer Configuration section (CCFG).
- (4) Adjustable load capacitance is integrated into the device.
- (5) The crystal manufacturer's specification must satisfy this requirement for proper operation.

## 7.14.3.2 48 MHz RC Oscillator (RCOSC\_HF)

Measured on a Texas Instruments reference design with T<sub>c</sub> = 25 °C, V<sub>DDS</sub> = 3.0 V, unless otherwise noted.

	MIN	TYP	MAX	UNIT
Frequency		48		MHz
Uncalibrated frequency accuracy		±1		%
Calibrated frequency accuracy <sup>(1)</sup>		±0.25		%
Start-up time		5		μs

(1) Accuracy relative to the calibration source (XOSC\_HF)

#### 7.14.3.3 2 MHz RC Oscillator (RCOSC\_MF)

Measured on a Texas Instruments reference design with T<sub>c</sub> = 25 °C, V<sub>DDS</sub> = 3.0 V, unless otherwise noted.

	MIN	TYP	MAX	UNIT
Calibrated frequency		2		MHz
Start-up time		5		μs

#### 7.14.3.4 32.768 kHz Crystal Oscillator (XOSC\_LF)

Measured on a Texas Instruments reference design with T<sub>c</sub> = 25 °C, V<sub>DDS</sub> = 3.0 V, unless otherwise noted.

		MIN	TYP	MAX	UNIT
	Crystal frequency		32.768		kHz
ESR	Equivalent series resistance		30	100	kΩ
C <sub>L</sub>	Crystal load capacitance	6	7 <sup>(1)</sup>	12	pF

Default load capacitance using TI reference designs including parasitic capacitance. Crystals with different load capacitance may be used.

### 7.14.3.5 32 kHz RC Oscillator (RCOSC\_LF)

Submit Document Feedback

Measured on a Texas Instruments reference design with T<sub>c</sub> = 25 °C, V<sub>DDS</sub> = 3.0 V, unless otherwise noted.

medealed on a reside medianies de estado de es	0.0 1, 0000 010		
	MIN	TYP MAX	UNIT
Frequency		32.8	kHz
Calibrated RTC Calibrated periodically against XOSC_HF <sup>(2)</sup> variation <sup>(1)</sup>		±600 <sup>(3)</sup>	ppm

Product Folder Links: CC2652R7

## 7.14.3.5 32 kHz RC Oscillator (RCOSC\_LF) (continued)

Measured on a Texas Instruments reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V, unless otherwise noted.

	MIN	TYP	MAX	UNIT
Temperature coefficient		50		ppm/°C

- (1) When using RCOSC\_LF as source for the low frequency system clock (SCLK\_LF), the accuracy of the SCLK\_LF-derived Real Time Clock (RTC) can be improved by measuring RCOSC\_LF relative to XOSC\_HF and compensating for the RTC tick speed. This functionality is available through the TI-provided Power driver.
- (2) TI driver software calibrates the RTC every time XOSC\_HF is enabled.
- (3) Some device's variation can exceed 1000 ppm. Further calibration will not improve variation.

## 7.14.4 Synchronous Serial Interface (SSI) Characteristics

### 7.14.4.1 Synchronous Serial Interface (SSI) Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER NO.		PARAMETER	MIN	TYP	MAX	UNIT
S1	t <sub>clk_per</sub>	SSICIk cycle time	12	-	65024	System Clocks (2)
S2 <sup>(1)</sup>	t <sub>clk_high</sub>	SSICIk high time		0.5		t <sub>clk_per</sub>
S3 <sup>(1)</sup>	t <sub>clk_low</sub>	SSICIk low time		0.5		t <sub>clk_per</sub>

- (1) Refer to SSI timing diagrams Figure 7-1, Figure 7-2 and Figure 7-3.
- (2) When using the TI-provided Power driver, the SSI system clock is always 48 MHz.

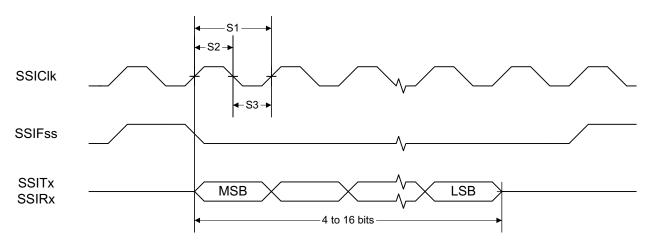


Figure 7-1. SSI Timing for TI Frame Format (FRF = 01), Single Transfer Timing Measurement



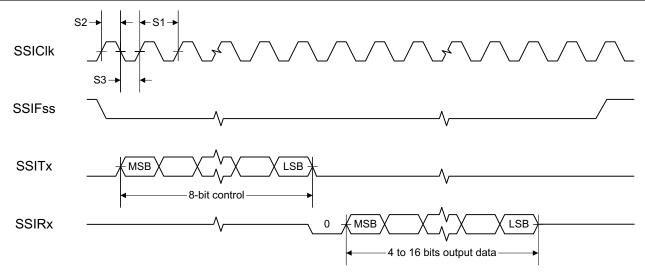


Figure 7-2. SSI Timing for MICROWIRE Frame Format (FRF = 10), Single Transfer

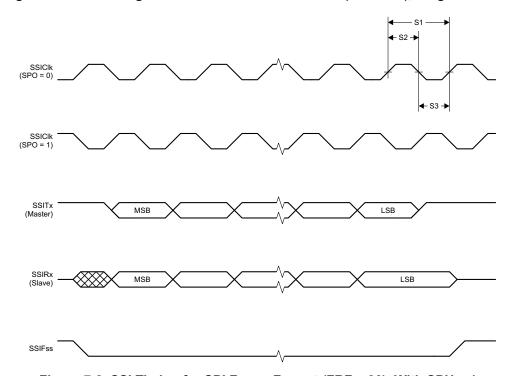


Figure 7-3. SSI Timing for SPI Frame Format (FRF = 00), With SPH = 1

### 7.14.5 UART

## 7.14.5.1 UART Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	MIN	TYP	MAX	UNIT
UART rate			2.89	MBaud

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated

## 7.15 Peripheral Characteristics

## 7.15.1 ADC

## 7.15.1.1 Analog-to-Digital Converter (ADC) Characteristics

 $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V and voltage scaling enabled, unless otherwise noted.<sup>(1)</sup> Performance numbers require use of offset and gain adjustments in software by TI-provided ADC drivers.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Input voltage range		0		VDDS	V
	Resolution			12		Bits
	Sample Rate				200	ksps
	Offset	Internal 4.3 V equivalent reference <sup>(2)</sup>		±2		LSB
	Gain error	Internal 4.3 V equivalent reference <sup>(2)</sup>		±7		LSB
DNL <sup>(4)</sup>	Differential nonlinearity			>-1		LSB
INL	Integral nonlinearity			±4		LSB
		Internal 4.3 V equivalent reference <sup>(2)</sup> , 200 kSamples/s, 9.6 kHz input tone		9.8		
		Internal 4.3 V equivalent reference <sup>(2)</sup> , 200 kSamples/s, 9.6 kHz input tone, DC/DC enabled		9.8		
		VDDS as reference, 200 kSamples/s, 9.6 kHz input tone		10.1		
ENOB	Effective number of bits	Internal reference, voltage scaling disabled, 32 samples average, 200 kSamples/s, 300 Hz input tone		11.1		Bits
		Internal reference, voltage scaling disabled, 14-bit mode, 200 kSamples/s, 600 Hz input tone <sup>(5)</sup>		11.3		
		Internal reference, voltage scaling disabled, 15-bit mode, 200 kSamples/s, 150 Hz input tone <sup>(5)</sup>		11.6		
	Total harmonic distortion	Internal 4.3 V equivalent reference <sup>(2)</sup> , 200 kSamples/s, 9.6 kHz input tone		-65		
THD		VDDS as reference, 200 kSamples/s, 9.6 kHz input tone		-70		dB
		Internal reference, voltage scaling disabled, 32 samples average, 200 kSamples/s, 300 Hz input tone		-72		
	Signal-to-noise	Internal 4.3 V equivalent reference <sup>(2)</sup> , 200 kSamples/s, 9.6 kHz input tone		60		
SINAD, SNDR	and	VDDS as reference, 200 kSamples/s, 9.6 kHz input tone		63		dB
511511	distortion ratio	Internal reference, voltage scaling disabled, 32 samples average, 200 kSamples/s, 300 Hz input tone		68		
		Internal 4.3 V equivalent reference <sup>(2)</sup> , 200 kSamples/s, 9.6 kHz input tone		70		
SFDR	Spurious-free dynamic range	VDDS as reference, 200 kSamples/s, 9.6 kHz input tone		73		dB
		Internal reference, voltage scaling disabled, 32 samples average, 200 kSamples/s, 300 Hz input tone		75		
	Conversion time	Serial conversion, time-to-output, 24 MHz clock		50		Clock Cycles
	Current consumption	Internal 4.3 V equivalent reference <sup>(2)</sup>		0.40		mA
	Current consumption	VDDS as reference		0.57		mA
	Reference voltage	Equivalent fixed internal reference (input voltage scaling enabled). For best accuracy, the ADC conversion should be initiated through the TI-RTOS API in order to include the gain/ offset compensation factors stored in FCFG1	4	1.3 <sup>(2) (3)</sup>		V
	Reference voltage	Fixed internal reference (input voltage scaling disabled). For best accuracy, the ADC conversion should be initiated through the TI-RTOS API in order to include the gain/offset compensation factors stored in FCFG1. This value is derived from the scaled value (4.3 V) as follows: $V_{\text{ref}} = 4.3 \text{ V} \times 1408 \text{ / }4095$		1.48		V
	Reference voltage	VDDS as reference, input voltage scaling enabled		VDDS		V
	Reference voltage	VDDS as reference, input voltage scaling disabled	,	VDDS / 2.82 <sup>(3)</sup>		٧



## 7.15.1.1 Analog-to-Digital Converter (ADC) Characteristics (continued)

 $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V and voltage scaling enabled, unless otherwise noted.<sup>(1)</sup>

Performance numbers require use of offset and gain adjustments in software by TI-provided ADC drivers.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	200 kSamples/s, voltage scaling enabled. Capacitive input, Input impedance depends on sampling frequency and sampling time		>1		ΜΩ

- (1) Using IEEE Std 1241-2010 for terminology and test methods
- (2) Input signal scaled down internally before conversion, as if voltage range was 0 to 4.3 V
- (3) Applied voltage must be within Absolute Maximum Ratings at all times
- (4) No missing codes
- (5) ADC\_output =  $\Sigma(4^n \text{ samples}) >> n, n = \text{desired extra bits}$

#### 7.15.2 DAC

## 7.15.2.1 Digital-to-Analog Converter (DAC) Characteristics

 $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V, unless otherwise noted.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Genera	I Parameters					
	Resolution			8		Bits
		Any load, any V <sub>REF</sub> , pre-charge OFF, DAC charge-pump ON	1.8		3.8	
$V_{DDS}$	Supply voltage	External Load <sup>(4)</sup> , any V <sub>REF</sub> , pre-charge OFF, DAC charge-pump OFF	2.0		3.8	٧
		Any load, V <sub>REF</sub> = DCOUPL, pre-charge ON	2.6		3.8	
	Clock fraguency	Buffer ON (recommended for external load)	16		250	kHz
F <sub>DAC</sub>	Clock frequency	Buffer OFF (internal load)	16		1000	KΠZ
	Voltage output settling time	V <sub>REF</sub> = VDDS, buffer OFF, internal load		13		1/5
	Voltage output settling time	V <sub>REF</sub> = VDDS, buffer ON, external capacitive load = 20 pF <sup>(3)</sup>		13.8		1 / F <sub>DAC</sub>
	External capacitive load			20	200	pF
	External resistive load		10			МΩ
	Short circuit current				400	μΑ
	Max output impedance Vref = VDDS, buffer ON, CLK 250 kHz	VDDS = 3.8 V, DAC charge-pump OFF		50.8		
		VDDS = 3.0 V, DAC charge-pump ON		51.7		
		VDDS = 3.0 V, DAC charge-pump OFF		53.2		
Z <sub>MAX</sub>		VDDS = 2.0 V, DAC charge-pump ON		48.7		kΩ
		VDDS = 2.0 V, DAC charge-pump OFF		70.2		
		VDDS = 1.8 V, DAC charge-pump ON		46.3		
		VDDS = 1.8 V, DAC charge-pump OFF		88.9		
Internal	Load - Continuous Time Com	parator / Low Power Clocked Comparator			•	
DAII	Differential nonlinearity	V <sub>REF</sub> = VDDS, load = Continuous Time Comparator or Low Power Clocked Comparator F <sub>DAC</sub> = 250 kHz		±1		L CD(1)
DNL	Differential nonlinearity	V <sub>REF</sub> = VDDS, load = Continuous Time Comparator or Low Power Clocked Comparator F <sub>DAC</sub> = 16 kHz		±1.2		LSB <sup>(1)</sup>
		V <sub>REF</sub> = VDDS = 3.8 V		±0.64		
		V <sub>REF</sub> = VDDS= 3.0 V		±0.81		
	Offset error <sup>(2)</sup>	V <sub>REF</sub> = VDDS = 1.8 V		±1.27		LSB <sup>(1)</sup>
	Load = Continuous Time Comparator	V <sub>REF</sub> = DCOUPL, pre-charge ON		±3.43		ror.,
		V <sub>REF</sub> = DCOUPL, pre-charge OFF		±2.88		
		V <sub>REF</sub> = ADCREF		±2.37		

Product Folder Links: CC2652R7

## 7.15.2.1 Digital-to-Analog Converter (DAC) Characteristics (continued)

T<sub>c</sub> = 25 °C, V<sub>DDS</sub> = 3.0 V, unless otherwise noted.

	PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
		V <sub>REF</sub> = VDDS= 3.8 V	±0.78		
		V <sub>REF</sub> = VDDS = 3.0 V	±0.77		
	Offset error <sup>(2)</sup> Load = Low Power Clocked	V <sub>REF</sub> = VDDS= 1.8 V	±3.46		LSB <sup>(1)</sup>
	Comparator	V <sub>REF</sub> = DCOUPL, pre-charge ON	±3.44		LODO
		V <sub>REF</sub> = DCOUPL, pre-charge OFF	±4.70		
		V <sub>REF</sub> = ADCREF	±4.11		
		V <sub>REF</sub> = VDDS = 3.8 V	±1.53		
		V <sub>REF</sub> = VDDS = 3.0 V	±1.71		
	Max code output voltage variation <sup>(2)</sup>	V <sub>REF</sub> = VDDS= 1.8 V	±2.10		L OD(1)
	Load = Continuous Time	V <sub>REF</sub> = DCOUPL, pre-charge ON	±6.00		LSB <sup>(1)</sup>
	Comparator	V <sub>REF</sub> = DCOUPL, pre-charge OFF	±3.85		
		V <sub>REF</sub> = ADCREF	±5.84		
		V <sub>REF</sub> = VDDS= 3.8 V	±2.92		
		V <sub>REF</sub> =VDDS= 3.0 V	±3.06		
	Max code output voltage variation <sup>(2)</sup>	V <sub>REF</sub> = VDDS= 1.8 V	±3.91		(4)
	Load = Low Power Clocked	V <sub>REF</sub> = DCOUPL, pre-charge ON	±7.84		LSB <sup>(1)</sup>
	Comparator	V <sub>RFF</sub> = DCOUPL, pre-charge OFF	±4.06		
		V <sub>RFF</sub> = ADCREF	±6.94		
		V <sub>REF</sub> = VDDS = 3.8 V, code 1	0.03		
		V <sub>REF</sub> = VDDS = 3.8 V, code 255	3.62		
		V <sub>REF</sub> = VDDS= 3.0 V, code 1	0.02		
		V <sub>REF</sub> = VDDS= 3.0 V, code 255	2.86		
		V <sub>REF</sub> = VDDS= 1.8 V, code 1	0.01		
	Output voltage range <sup>(2)</sup>	V <sub>REF</sub> = VDDS = 1.8 V, code 255	1.71		
	Load = Continuous Time	V <sub>REF</sub> = DCOUPL, pre-charge OFF, code 1	0.01		V
	Comparator	V <sub>REF</sub> = DCOUPL, pre-charge OFF, code 255	1.21		
		V <sub>REF</sub> = DCOUPL, pre-charge ON, code 1	1.27		
		V <sub>REF</sub> = DCOUPL, pre-charge ON, code 255	2.46		
		V <sub>REF</sub> = DOCREF, code 1	0.01		
		V <sub>REF</sub> = ADCREF, code 255	1.41		
		V <sub>REF</sub> = VDDS = 3.8 V, code 1	0.03		
		V <sub>REF</sub> = VDDS = 3.8 V, code 1	3.61		
		V <sub>REF</sub> = VDDS= 3.0 V, code 1	0.02		
		V <sub>REF</sub> = VDDS= 3.0 V, code 1 V <sub>REF</sub> = VDDS= 3.0 V, code 255	2.85		
		V <sub>REF</sub> = VDDS = 1.8 V, code 1	0.01		
	Output voltage range <sup>(2)</sup>	V <sub>REF</sub> = VDDS = 1.8 V, code 1 V <sub>REF</sub> = VDDS = 1.8 V, code 255	1.71		
	Load = Low Power Clocked				V
	Comparator	V <sub>REF</sub> = DCOUPL, pre-charge OFF, code 1  V <sub>REF</sub> = DCOUPL, pre-charge OFF, code 255	0.01		
		V <sub>REF</sub> = DCOUPL, pre-charge ON, code 1	1.27		
		V <sub>REF</sub> = DCOUPL, pre-charge ON, code 255	2.46		
		V <sub>REF</sub> = ADCREF, code 1	0.01		
	111	V <sub>REF</sub> = ADCREF, code 255	1.41		
erna	I Load	V VDD0 5 050111			
		V <sub>REF</sub> = VDDS, F <sub>DAC</sub> = 250 kHz	±1		LSB <sup>(1)</sup>
	Integral nonlinearity	V <sub>REF</sub> = DCOUPL, F <sub>DAC</sub> = 250 kHz	±2		
	1	V <sub>REF</sub> = ADCREF, F <sub>DAC</sub> = 250 kHz	±1		



## 7.15.2.1 Digital-to-Analog Converter (DAC) Characteristics (continued)

T<sub>o</sub> = 25 °C. V<sub>DDS</sub> = 3.0 V. unless otherwise noted

PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
	V <sub>REF</sub> = VDDS= 3.8 V	±0.40		
	V <sub>REF</sub> = VDDS= 3.0 V	±0.50		
Offset error	V <sub>REF</sub> = VDDS = 1.8 V	±0.75		LSB <sup>(1)</sup>
Oliset error	V <sub>REF</sub> = DCOUPL, pre-charge ON	±1.55		LSB(1)
	V <sub>REF</sub> = DCOUPL, pre-charge OFF	±1.30		
	V <sub>REF</sub> = ADCREF	±1.10		
	V <sub>REF</sub> = VDDS= 3.8 V	±1.00		
	V <sub>REF</sub> = VDDS= 3.0 V	±1.00		
Max code output voltage	V <sub>REF</sub> = VDDS= 1.8 V	±1.00		LSB <sup>(1)</sup>
variation	V <sub>REF</sub> = DCOUPL, pre-charge ON	±3.45		LSB(i)
	V <sub>REF</sub> = DCOUPL, pre-charge OFF	±2.10		
	V <sub>REF</sub> = ADCREF	±1.90		
	V <sub>REF</sub> = VDDS = 3.8 V, code 1	0.03		
	V <sub>REF</sub> = VDDS = 3.8 V, code 255	3.61		
	V <sub>REF</sub> = VDDS = 3.0 V, code 1	0.02		
	V <sub>REF</sub> = VDDS= 3.0 V, code 255	2.85		
	V <sub>REF</sub> = VDDS= 1.8 V, code 1	0.02		
Output voltage range Load = Low Power Clocked	V <sub>REF</sub> = VDDS = 1.8 V, code 255	1.71		V
Comparator	V <sub>REF</sub> = DCOUPL, pre-charge OFF, code 1	0.02		V
	V <sub>REF</sub> = DCOUPL, pre-charge OFF, code 255	1.20		
	V <sub>REF</sub> = DCOUPL, pre-charge ON, code 1	1.27		
	V <sub>REF</sub> = DCOUPL, pre-charge ON, code 255	2.46		
	V <sub>REF</sub> = ADCREF, code 1	0.02		
	V <sub>REF</sub> = ADCREF, code 255	1.42		

- 1 LSB ( $V_{REF}$  3.8 V/3.0 V/1.8 V/DCOUPL/ADCREF) = 14.10 mV/11.13 mV/6.68 mV/4.67 mV/5.48 mV
- (2)
- Includes comparator offset
  A load > 20 pF will increases the settling time (3) A load > 20 pF will increases(4) Keysight 34401A Multimeter

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated

## 7.15.3 Temperature and Battery Monitor

### 7.15.3.1 Temperature Sensor

Measured on a Texas Instruments reference design with  $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V, unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Resolution			2		°C
Accuracy	-40 °C to 0 °C		±4.0		°C
Accuracy	0 °C to 105 °C		±2.5		°C
Supply voltage coefficient <sup>(1)</sup>			3.6		°C/V

(1) The temperature sensor is automatically compensated for VDDS variation when using the TI-provided temperature driver.

## 7.15.3.2 Battery Monitor

Measured on a Texas Instruments reference design with T<sub>G</sub> = 25 °C, unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Resolution			25		mV
Range		1.8		3.8	V
Integral nonlinearity (max)			23		mV
Accuracy	VDDS = 3.0 V		22.5		mV
Offset error			-32		mV
Gain error			-1		%

### 7.15.4 Comparators

## 7.15.4.1 Low-Power Clocked Comparator

 $T_c = 25$  °C,  $V_{DDS} = 3.0$  V, unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage range		0		V <sub>DDS</sub>	V
Clock frequency			SCLK_LF		
Internal reference voltage <sup>(1)</sup>	Using internal DAC with VDDS as reference voltage, DAC code = 0 - 255	ge, 0.024 - 2.865			V
Offset	Measured at V <sub>DDS</sub> / 2, includes error from internal DAC		±5		mV
Decision time	Step from -50 mV to 50 mV		1		Clock Cycle

<sup>(1)</sup> The comparator can use an internal 8 bits DAC as its reference. The DAC output voltage range depends on the reference voltage selected. See #none#

#### 7.15.4.2 Continuous Time Comparator

 $T_c = 25$ °C,  $V_{DDS} = 3.0$  V, unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage range <sup>(1)</sup>		0		$V_{DDS}$	V
Offset	Measured at V <sub>DDS</sub> / 2		±5		mV
Decision time	Step from –10 mV to 10 mV		0.70		μs
Current consumption	Internal reference		8.0		μΑ

<sup>(1)</sup> The input voltages can be generated externally and connected throughout I/Os or an internal reference voltage can be generated using the DAC

Copyright © 2023 Texas Instruments Incorporated



## 7.15.5 Current Source

# 7.15.5.1 Programmable Current Source

 $T_c$  = 25 °C,  $V_{DDS}$  = 3.0 V, unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
Current source programmable output range (logarithmic range)		0.25 - 20		μA
Resolution		0.25		μA

## 7.15.6 GPIO

## 7.15.6.1 GPIO DC Characteristics


PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
T <sub>A</sub> = 25 °C, V <sub>DDS</sub> = 1.8 V				
GPIO VOH at 8 mA load	IOCURR = 2, high-drive GPIOs only	1.56	;	V
GPIO VOL at 8 mA load	IOCURR = 2, high-drive GPIOs only	0.24		V
GPIO VOH at 4 mA load	IOCURR = 1	1.59	)	V
GPIO VOL at 4 mA load	IOCURR = 1	0.21		V
GPIO pullup current	Input mode, pullup enabled, Vpad = 0 V	73	}	μA
GPIO pulldown current	Input mode, pulldown enabled, Vpad = VDDS	19	)	μA
GPIO low-to-high input transition, with hysteresis	IH = 1, transition voltage for input read as $0 \rightarrow 1$	1.08	}	V
GPIO high-to-low input transition, with hysteresis	IH = 1, transition voltage for input read as $1 \rightarrow 0$	0.73	3	V
GPIO input hysteresis	IH = 1, difference between $0 \rightarrow 1$ and $1 \rightarrow 0$ points	0.35	;	٧
T <sub>A</sub> = 25 °C, V <sub>DDS</sub> = 3.0 V				
GPIO VOH at 8 mA load	IOCURR = 2, high-drive GPIOs only	2.59	)	V
GPIO VOL at 8 mA load	IOCURR = 2, high-drive GPIOs only	0.42	2	V
GPIO VOH at 4 mA load	IOCURR = 1	2.63	3	V
GPIO VOL at 4 mA load	IOCURR = 1	0.40	)	V
T <sub>A</sub> = 25 °C, V <sub>DDS</sub> = 3.8 V				•
GPIO pullup current	Input mode, pullup enabled, Vpad = 0 V	282	2	μA
GPIO pulldown current	Input mode, pulldown enabled, Vpad = VDDS	110	)	μA
GPIO low-to-high input transition, with hysteresis	IH = 1, transition voltage for input read as $0 \rightarrow 1$	1.97	•	V
GPIO high-to-low input transition, with hysteresis	IH = 1, transition voltage for input read as $1 \rightarrow 0$	1.55	j	V
GPIO input hysteresis	IH = 1, difference between $0 \rightarrow 1$ and $1 \rightarrow 0$ points	0.42	2	٧
T <sub>A</sub> = 25 °C				
VIH	Lowest GPIO input voltage reliably interpreted as a High	0.8*V <sub>DDS</sub>		V
VIL	Highest GPIO input voltage reliably interpreted as a Low		0.2*V <sub>DDS</sub>	V

Product Folder Links: CC2652R7

### 7.16 Typical Characteristics

All measurements in this section are done with  $T_c = 25$  °C and  $V_{DDS} = 3.0$  V, unless otherwise noted. See Section 7.3 for device limits. Values exceeding these limits are for reference only.

#### 7.16.1 MCU Current

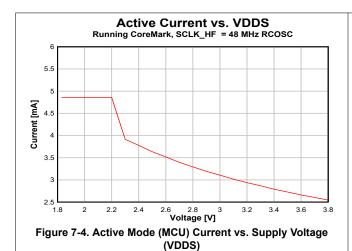






Figure 7-5. Standby Mode (MCU) Current vs. Temperature

## 7.16.2 RX Current










Figure 7-7. RX Current vs. Supply Voltage (VDDS) (Bluetooth Low Energy 1 Mbps, 2.44 GHz)



### 7.16.3 TX Current









Figure 7-9. TX Current vs. Supply Voltage (VDDS) (Bluetooth Low Energy 1 Mbps, 2.44 GHz)

Table 7-1. Typical TX Current and Output Power

	CC2652R at 2.4 GHz, VDDS = 3.0 V <sup>(1)</sup> (Measured on CC2652-R7EM-7ID)								
txPower	TX Power Setting (SmartRF Studio)	Typical Output Power [dBm]	Typical Current Consumption [mA]						
0x701F	5	4.8	10						
0x3A17	4	3.8	9						
0x3A64	3	2.7	8						
0x325F	2	1.7	8						
0x2C5C	1	1.0	8						
0x2659	0	0.1	7						
0x1697	-3	-2.8	7						
0x1693	-5	-4.8	6						
0x1292	-6	-5.4	6						
0x0CD3	-9	-8.9	5						
0x0AD1	-10	-10.2	5						
0x0ACF	-12	-11.8	5						
0x06CD	-15	-13.7	5						
0x06CA	-18	-16.9	5						
0x04C8	-20	-19.6	5						


(1) Internal regulated voltage powers the PA, therefore the output power is not affected by variation in VDDS voltage.

#### 7.16.4 RX Performance

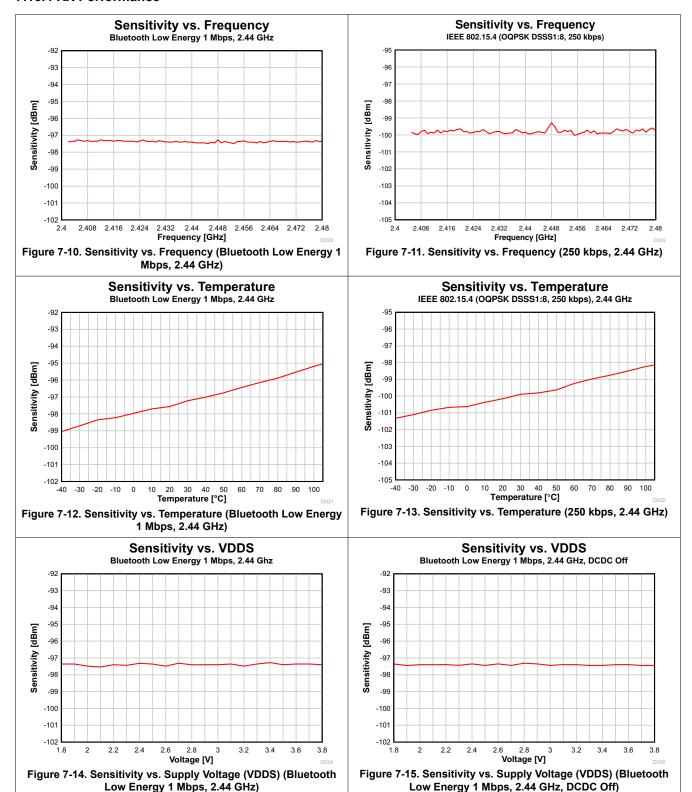



## 7.16.4 RX Performance (continued)

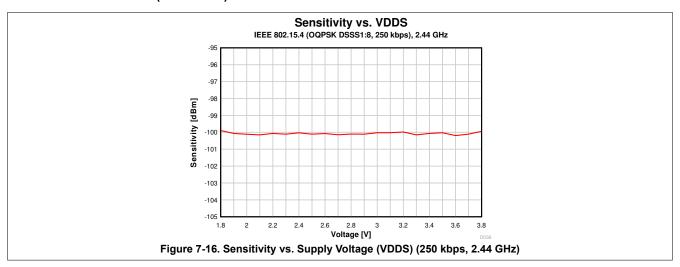

#### 7.16.5 TX Performance




Figure 7-17. Output Power vs. Temperature (Bluetooth Low Energy 1 Mbps, 2.44 GHz)




Figure 7-18. Output Power vs. Temperature (Bluetooth Low Energy 1 Mbps, 2.44 GHz, +5 dBm)




Figure 7-19. Output Power vs. Supply Voltage (VDDS) (Bluetooth Low Energy 1 Mbps, 2.44 GHz)






Figure 7-20. Output Power vs. Supply Voltage (VDDS) (Bluetooth Low Energy 1 Mbps, 2.44 GHz, +5 dBm)









Figure 7-22. Output Power vs. Frequency (Bluetooth Low Energy 1 Mbps, 2.44 GHz, +5 dBm)



#### 7.16.6 ADC Performance

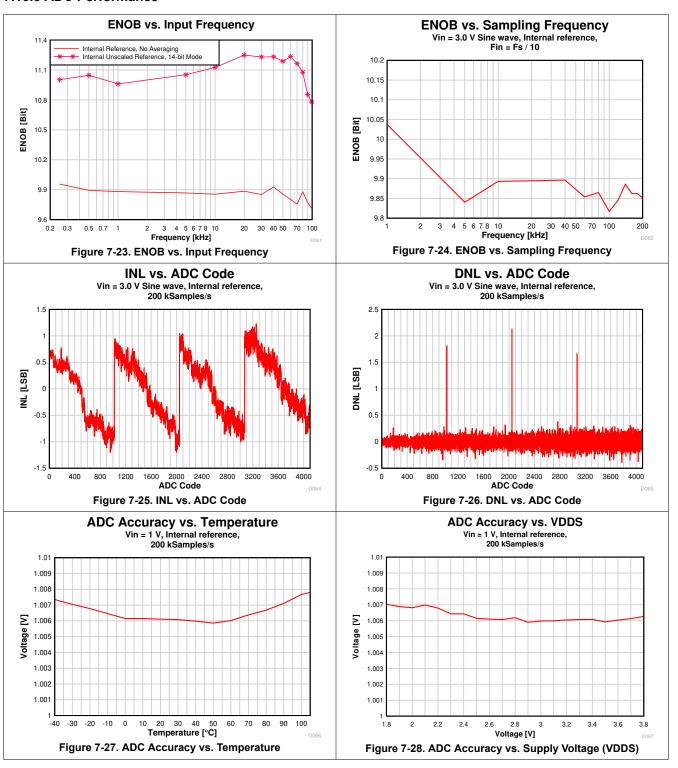

## 8 Detailed Description

#### 8.1 Overview

Section 3.1 shows the core modules of the CC2652R7 device.

## 8.2 System CPU

The CC2652R7 SimpleLink<sup>™</sup> Wireless MCU contains an Arm<sup>®</sup> Cortex<sup>®</sup>-M4F system CPU, which runs the application and the higher layers of radio protocol stacks.

The system CPU is the foundation of a high-performance, low-cost platform that meets the system requirements of minimal memory implementation, and low-power consumption, while delivering outstanding computational performance and exceptional system response to interrupts.

Its features include the following:

- ARMv7-M architecture optimized for small-footprint embedded applications
- Arm Thumb®-2 mixed 16- and 32-bit instruction set delivers the high performance expected of a 32-bit Arm
  core in a compact memory size
- Fast code execution permits increased sleep mode time
- Deterministic, high-performance interrupt handling for time-critical applications
- Single-cycle multiply instruction and hardware divide
- · Hardware division and fast digital-signal-processing oriented multiply accumulate
- Saturating arithmetic for signal processing
- IEEE 754-compliant single-precision Floating Point Unit (FPU)
- · Memory Protection Unit (MPU) for safety-critical applications
- Full debug with data matching for watchpoint generation
  - Data Watchpoint and Trace Unit (DWT)
  - JTAG Debug Access Port (DAP)
  - Flash Patch and Breakpoint Unit (FPB)
- Trace support reduces the number of pins required for debugging and tracing
  - Instrumentation Trace Macrocell Unit (ITM)
  - Trace Port Interface Unit (TPIU) with asynchronous serial wire output (SWO)
- Optimized for single-cycle flash memory access
- Tightly connected to 8-KB 4-way random replacement cache for minimal active power consumption and wait states
- Ultra-low-power consumption with integrated sleep modes
- 48 MHz operation
- 1.25 DMIPS per MHz

### 8.3 Radio (RF Core)

The RF Core is a highly flexible and future proof radio module which contains an Arm Cortex-M0 processor that interfaces the analog RF and base-band circuitry, handles data to and from the system CPU side, and assembles the information bits in a given packet structure. The RF core offers a high level, command-based API to the main CPU that configurations and data are passed through. The Arm Cortex-M0 processor is not programmable by customers and is interfaced through the TI-provided RF driver that is included with the SimpleLink Software Development Kit (SDK).

The RF core can autonomously handle the time-critical aspects of the radio protocols, thus offloading the main CPU, which reduces power and leaves more resources for the user application. Several signals are also available to control external circuitry such as RF switches or range extenders autonomously.

Multiprotocol solutions are enabled through time-sliced access of the radio, handled transparently for the application through the TI-provided RF driver and dual-mode manager.

The various physical layer radio formats are partly built as a software defined radio where the radio behavior is either defined by radio ROM contents or by non-ROM radio formats delivered in form of firmware patches with the SimpleLink SDKs. This allows the radio platform to be updated for support of future versions of standards even with over-the-air (OTA) updates while still using the same silicon.

#### 8.3.1 Bluetooth 5.2 Low Energy

The RF Core offers full support for Bluetooth 5.2 Low Energy, including the high-speed 2-Mbps physical layer and the 500-kbps and 125-kbps long range PHYs (Coded PHY) through the TI provided Bluetooth 5.2 stack or through a high-level Bluetooth API. The Bluetooth 5.2 PHY and part of the controller are in radio and system ROM, providing significant savings in memory usage and more space available for applications.

The new high-speed mode allows data transfers up to 2 Mbps, twice the speed of Bluetooth 4.2 and five times the speed of Bluetooth 4.0, without increasing power consumption. In addition to faster speeds, this mode offers significant improvements for energy efficiency and wireless coexistence with reduced radio communication time.

Bluetooth 5.2 also enables unparalleled flexibility for adjustment of speed and range based on application needs, which capitalizes on the high-speed or long-range modes respectively. Data transfers are now possible at 2 Mbps, enabling development of applications using voice, audio, imaging, and data logging that were not previously an option using Bluetooth Low Energy. With high-speed mode, existing applications deliver faster responses, richer engagement, and longer battery life. Bluetooth 5.2 enables fast, reliable firmware updates.

### 8.3.2 802.15.4 (Thread, Zigbee, 6LoWPAN)

Through a dedicated IEEE radio API, the RF Core supports the 2.4-GHz IEEE 802.15.4-2011 physical layer (2 Mchips per second Offset-QPSK with DSSS 1:8), used in Thread, Zigbee, and 6LoWPAN protocols. The 802.15.4 PHY and MAC are in radio and system ROM. TI also provides royalty-free protocol stacks for Thread and Zigbee as part of the SimpleLink SDK, enabling a robust end-to-end solution.

### 8.4 Memory

The up to 704KB nonvolatile (flash) memory provides storage for code and data. The flash memory is in-system programmable and erasable. The last flash memory sector must contain a Customer Configuration section (CCFG) that is used by boot ROM and TI provided drivers to configure the device. This configuration is done through the ccfg.c source file that is included in all TI provided examples.

The ultra-low leakage system static RAM (SRAM) is split into four 32KB and one 16KB blocks and can be used for both storage of data and execution of code. Retention of SRAM contents in Standby power mode is enabled by default and included in Standby mode power consumption numbers. Parity checking for detection of bit errors in memory is built-in, which reduces chip-level soft errors and thereby increases reliability. System SRAM is always initialized to zeroes upon code execution from boot.

To improve code execution speed and lower power when executing code from nonvolatile memory, a 4-way nonassociative 8-KB cache is enabled by default to cache and prefetch instructions read by the system CPU. The cache can be used as a general-purpose RAM by enabling this feature in the Customer Configuration Area (CCFG).

There is a 4KB ultra-low leakage SRAM available for use with the Sensor Controller Engine which is typically used for storing Sensor Controller programs, data and configuration parameters. This RAM is also accessible by the system CPU. The Sensor Controller RAM is not cleared to zeroes between system resets.

The ROM includes a TI-RTOS kernel and low-level drivers, as well as significant parts of selected radio stacks, which frees up flash memory for the application. The ROM also contains a serial (SPI and UART) bootloader that can be used for initial programming of the device.

#### 8.5 Sensor Controller

The Sensor Controller contains circuitry that can be selectively enabled in both Standby and Active power modes. The peripherals in this domain can be controlled by the Sensor Controller Engine, which is a proprietary power-optimized CPU. This CPU can read and monitor sensors or perform other tasks autonomously; thereby significantly reducing power consumption and offloading the system CPU.

The Sensor Controller Engine is user programmable with a simple programming language that has syntax similar to C. This programmability allows for sensor polling and other tasks to be specified as sequential algorithms rather than static configuration of complex peripheral modules, timers, DMA, register programmable state machines, or event routing.

The main advantages are:

- Flexibility data can be read and processed in unlimited manners while still ensuring ultra-low power
- · 2 MHz low-power mode enables lowest possible handling of digital sensors
- · Dynamic reuse of hardware resources
- 40-bit accumulator supporting multiplication, addition and shift
- · Observability and debugging options

Sensor Controller Studio is used to write, test, and debug code for the Sensor Controller. The tool produces C driver source code, which the System CPU application uses to control and exchange data with the Sensor Controller. Typical use cases may be (but are not limited to) the following:

- Read analog sensors using integrated ADC or comparators
- Interface digital sensors using GPIOs, SPI, UART, or I<sup>2</sup>C (UART and I<sup>2</sup>C are bit-banged)
- · Capacitive sensing
- Waveform generation
- Very low-power pulse counting (flow metering)
- Key scan

The peripherals in the Sensor Controller include the following:

- The low-power clocked comparator can be used to wake the system CPU from any state in which the comparator is active. A configurable internal reference DAC can be used in conjunction with the comparator. The output of the comparator can also be used to trigger an interrupt or the ADC.
- Capacitive sensing functionality is implemented through the use of a constant current source, a time-to-digital
  converter, and a comparator. The continuous time comparator in this block can also be used as a higheraccuracy alternative to the low-power clocked comparator. The Sensor Controller takes care of baseline
  tracking, hysteresis, filtering, and other related functions when these modules are used for capacitive
  sensing.
- The ADC is a 12-bit, 200-ksamples/s ADC with eight inputs and a built-in voltage reference. The ADC can be triggered by many different sources including timers, I/O pins, software, and comparators.
- The analog modules can connect to up to eight different GPIOs
- Dedicated SPI master with up to 6 MHz clock speed

The peripherals in the Sensor Controller can also be controlled from the main application processor.

Copyright © 2023 Texas Instruments Incorporated

Submit Document Feedback



## 8.6 Cryptography

The CC2652R7 device comes with a wide set of modern cryptography-related hardware accelerators, drastically reducing code footprint and execution time for cryptographic operations. It also has the benefit of being lower power and improves availability and responsiveness of the system because the cryptography operations runs in a background hardware thread.

Together with a large selection of open-source cryptography libraries provided with the Software Development Kit (SDK), this allows for secure and future proof IoT applications to be easily built on top of the platform. The hardware accelerator modules are:

- True Random Number Generator (TRNG) module provides a true, nondeterministic noise source for the
  purpose of generating keys, initialization vectors (IVs), and other random number requirements. The TRNG is
  built on 24 ring oscillators that create unpredictable output to feed a complex nonlinear-combinatorial circuit.
- Secure Hash Algorithm 2 (SHA-2) with support for SHA224, SHA256, SHA384, and SHA512
- Advanced Encryption Standard (AES) with 128 and 256 bit key lengths
- **Public Key Accelerator** Hardware accelerator supporting mathematical operations needed for elliptic curves up to 512 bits and RSA key pair generation up to 1024 bits.

Through use of these modules and the TI provided cryptography drivers, the following capabilities are available for an application or stack:

#### Key Agreement Schemes

- Elliptic curve Diffie
   Hellman with static or ephemeral keys (ECDH and ECDHE)
- Elliptic curve Password Authenticated Key Exchange by Juggling (ECJ-PAKE)

## Signature Generation

Elliptic curve Diffie-Hellman Digital Signature Algorithm (ECDSA)

#### Curve Support

- Short Weierstrass form (full hardware support), such as:
  - NIST-P224, NIST-P256, NIST-P384, NIST-P521
  - Brainpool-256R1, Brainpool-384R1, Brainpool-512R1
  - secp256r1
- Montgomery form (hardware support for multiplication), such as:
  - Curve25519

#### SHA2 based MACs

- HMAC with SHA224, SHA256, SHA384, or SHA512
- Block cipher mode of operation
  - AESCCM
  - AESGCM
  - AESECB
  - AESCBC
  - AESCBC-MAC

#### True random number generation

Other capabilities, such as RSA encryption and signatures as well as Edwards type of elliptic curves such as Curve1174 or Ed25519, can also be implemented using the provided hardware accelerators but are not part of the TI SimpleLink SDK for the CC2652R7 device.

Submit Document Feedback

#### 8.7 Timers

A large selection of timers are available as part of the CC2652R7 device. These timers are:

## Real-Time Clock (RTC)

A 70-bit 3-channel timer running on the 32 kHz low frequency system clock (SCLK\_LF). This timer is available in all power modes except Shutdown. The timer can be calibrated to compensate for frequency drift when using the RCOSC\_LF as the low frequency system clock. If an external LF clock with frequency different from 32.768 kHz is used, the RTC tick speed can be adjusted to compensate for this. When using TI-RTOS, the RTC is used as the base timer in the operating system and should thus only be accessed through the kernel APIs such as the Clock module. The real time clock can also be read by the Sensor Controller Engine to timestamp sensor data and also has dedicated capture channels. By default, the RTC halts when a debugger halts the device.

## General Purpose Timers (GPTIMER)

The four flexible GPTIMERs can be used as either 4× 32 bit timers or 8× 16 bit timers, all running on up to 48 MHz. Each of the 16- or 32-bit timers support a wide range of features such as one-shot or periodic counting, pulse width modulation (PWM), time counting between edges and edge counting. The inputs and outputs of the timer are connected to the device event fabric, which allows the timers to interact with signals such as GPIO inputs, other timers, DMA and ADC. The GPTIMERs are available in Active and Idle power modes.

#### Sensor Controller Timers

The Sensor Controller contains 3 timers:

AUX Timer 0 and 1 are 16-bit timers with a  $2^N$  prescaler. Timers can either increment on a clock or on each edge of a selected tick source. Both one-shot and periodical timer modes are available.

AUX Timer 2 is a 16-bit timer that can operate at 24 MHz, 2 MHz or 32 kHz independent of the Sensor Controller functionality. There are 4 capture or compare channels, which can be operated in one-shot or periodical modes. The timer can be used to generate events for the Sensor Controller Engine or the ADC, as well as for PWM output or waveform generation.

#### Radio Timer

A multichannel 32-bit timer running at 4 MHz is available as part of the device radio. The radio timer is typically used as the timing base in wireless network communication using the 32-bit timing word as the network time. The radio timer is synchronized with the RTC by using a dedicated radio API when the device radio is turned on or off. This ensures that for a network stack, the radio timer seems to always be running when the radio is enabled. The radio timer is in most cases used indirectly through the trigger time fields in the radio APIs and should only be used when the accurate 48 MHz high frequency crystal is the source of SCLK\_HF.

## Watchdog timer

The watchdog timer is used to regain control if the system operates incorrectly due to software errors. It is typically used to generate an interrupt to and reset of the device for the case where periodic monitoring of the system components and tasks fails to verify proper functionality. The watchdog timer runs on a 1.5 MHz clock rate and cannot be stopped once enabled. The watchdog timer pauses to run in Standby power mode and when a debugger halts the device.



## 8.8 Serial Peripherals and I/O

The SSIs are synchronous serial interfaces that are compatible with SPI, MICROWIRE, and TI's synchronous serial interfaces. The SSIs support both SPI master and slave up to 4 MHz. The SSI modules support configurable phase and polarity.

The UARTs implement universal asynchronous receiver and transmitter functions. They support flexible baudrate generation up to a maximum of 3 Mbps.

The I<sup>2</sup>S interface is used to handle digital audio and can also be used to interface pulse-density modulation microphones (PDM).

The I<sup>2</sup>C interface is used to communicate with devices compatible with the I<sup>2</sup>C standard. The I<sup>2</sup>C interface can handle 100 kHz and 400 kHz operation, and can serve as both master and slave.

The I/O controller (IOC) controls the digital I/O pins and contains multiplexer circuitry to allow a set of peripherals to be assigned to I/O pins in a flexible manner. All digital I/Os are interrupt and wake-up capable, have a programmable pullup and pulldown function, and can generate an interrupt on a negative or positive edge (configurable). When configured as an output, pins can function as either push-pull or open-drain. Five GPIOs have high-drive capabilities, which are marked in **bold** in Section 6. All digital peripherals can be connected to any digital pin on the device.

For more information, see the CC13x2x7, CC26x2x7 SimpleLink™ Wireless MCU Technical Reference Manual.

## 8.9 Battery and Temperature Monitor

A combined temperature and battery voltage monitor is available in the CC2652R7 device. The battery and temperature monitor allows an application to continuously monitor on-chip temperature and supply voltage and respond to changes in environmental conditions as needed. The module contains window comparators to interrupt the system CPU when temperature or supply voltage go outside defined windows. These events can also be used to wake up the device from Standby mode through the Always-On (AON) event fabric.

## 8.10 µDMA

The device includes a direct memory access ( $\mu$ DMA) controller. The  $\mu$ DMA controller provides a way to offload data-transfer tasks from the system CPU, thus allowing for more efficient use of the processor and the available bus bandwidth. The  $\mu$ DMA controller can perform a transfer between memory and peripherals. The  $\mu$ DMA controller has dedicated channels for each supported on-chip module and can be programmed to automatically perform transfers between peripherals and memory when the peripheral is ready to transfer more data.

Some features of the µDMA controller include the following (this is not an exhaustive list):

- Highly flexible and configurable channel operation of up to 32 channels
- Transfer modes: memory-to-memory, memory-to-peripheral, peripheral-to-memory, and peripheral-to-peripheral
- Data sizes of 8, 16, and 32 bits
- · Ping-pong mode for continuous streaming of data

#### 8.11 Debug

The on-chip debug support is done through a dedicated cJTAG (IEEE 1149.7) or JTAG (IEEE 1149.1) interface. The device boots by default into cJTAG mode and must be reconfigured to use 4-pin JTAG.

Submit Document Feedback

## 8.12 Power Management

To minimize power consumption, the CC2652R7 supports a number of power modes and power management features (see Table 8-1).

Table 8-1. Power Modes

MODE	SOFTV	RESET PIN				
MODE	ACTIVE	IDLE	STANDBY	SHUTDOWN	HELD	
CPU	Active	Off	Off	Off	Off	
Flash	On	Available	Off	Off	Off	
SRAM	On	On	Retention	Off	Off	
Supply System	On	On	Duty Cycled	Off	Off	
Register and CPU retention	Full	Full	Partial	No	No	
SRAM retention	Full	Full	Full	No	No	
48 MHz high-speed clock (SCLK_HF)	XOSC_HF or RCOSC_HF	XOSC_HF or RCOSC_HF	Off	Off	Off	
2 MHz medium-speed clock (SCLK_MF)	RCOSC_MF	RCOSC_MF	Available	Off	Off	
32 kHz low-speed clock (SCLK_LF)	XOSC_LF or RCOSC_LF	XOSC_LF or RCOSC_LF	XOSC_LF or RCOSC_LF	Off	Off	
Peripherals	Available	Available	Off	Off	Off	
Sensor Controller	Available	Available	Available	Off	Off	
Wake-up on RTC	Available	Available	Available	Off	Off	
Wake-up on pin edge	Available	Available	Available	Available	Off	
Wake-up on reset pin On		On	On	On	On	
Brownout detector (BOD)	On	On	Duty Cycled	Off	Off	
Power-on reset (POR)	On	On	On	Off	Off	
Watchdog timer (WDT)	Available	Available	Paused	Off	Off	

In **Active** mode, the application system CPU is actively executing code. Active mode provides normal operation of the processor and all of the peripherals that are currently enabled. The system clock can be any available clock source (see Table 8-1).

In **Idle** mode, all active peripherals can be clocked, but the Application CPU core and memory are not clocked and no code is executed. Any interrupt event brings the processor back into active mode.

In **Standby** mode, only the always-on (AON) domain is active. An external wake-up event, RTC event, or Sensor Controller event is required to bring the device back to active mode. MCU peripherals with retention do not need to be reconfigured when waking up again, and the CPU continues execution from where it went into standby mode. All GPIOs are latched in standby mode.

In **Shutdown** mode, the device is entirely turned off (including the AON domain and Sensor Controller), and the I/Os are latched with the value they had before entering shutdown mode. A change of state on any I/O pin defined as a *wake from shutdown pin* wakes up the device and functions as a reset trigger. The CPU can differentiate between reset in this way and reset-by-reset pin or power-on reset by reading the reset status register. The only state retained in this mode is the latched I/O state and the flash memory contents.



The Sensor Controller is an autonomous processor that can control the peripherals in the Sensor Controller independently of the system CPU. This means that the system CPU does not have to wake up, for example to perform an ADC sampling or poll a digital sensor over SPI, thus saving both current and wake-up time that would otherwise be wasted. The Sensor Controller Studio tool enables the user to program the Sensor Controller, control its peripherals, and wake up the system CPU as needed. All Sensor Controller peripherals can also be controlled by the system CPU.

#### Note

The power, RF and clock management for the CC2652R7 device require specific configuration and handling by software for optimized performance. This configuration and handling is implemented in the TI-provided drivers that are part of the SimpleLink™ CC13xx and CC26xx software development kit (SDK). Therefore, TI highly recommends using this software framework for all application development on the device. The complete SDK with TI-RTOS (optional), device drivers, and examples are offered free of charge in source code.

## 8.13 Clock Systems

The CC2652R7 device has several internal system clocks.

The 48 MHz SCLK\_HF is used as the main system (MCU and peripherals) clock. This can be driven by the internal 48 MHz RC Oscillator (RCOSC\_HF) or an external 48 MHz crystal (XOSC\_HF). Radio operation requires an external 48 MHz crystal.

SCLK\_MF is an internal 2 MHz clock that is used by the Sensor Controller in low-power mode and also for internal power management circuitry. The SCLK\_MF clock is always driven by the internal 2 MHz RC Oscillator (RCOSC\_MF).

SCLK\_LF is the 32.768 kHz internal low-frequency system clock. It can be used by the Sensor Controller for ultra-low-power operation and is also used for the RTC and to synchronize the radio timer before or after Standby power mode. SCLK\_LF can be driven by the internal 32.8 kHz RC Oscillator (RCOSC\_LF), a 32.768 kHz watch-type crystal, or a clock input on any digital IO.

When using a crystal or the internal RC oscillator, the device can output the 32 kHz SCLK\_LF signal to other devices, thereby reducing the overall system cost.

#### **8.14 Network Processor**

Depending on the product configuration, the CC2652R7 device can function as a wireless network processor (WNP - a device running the wireless protocol stack with the application running on a separate host MCU), or as a system-on-chip (SoC) with the application and protocol stack running on the device's system CPU inside the device.

In the first case, the external host MCU communicates with the device using SPI or UART. In the second case, the application must be written according to the application framework supplied with the wireless protocol stack.

Submit Document Feedback

## 9 Application, Implementation, and Layout

#### Note

Information in the following Applications section is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

For general design guidelines and hardware configuration guidelines, refer to CC13xx/CC26xx Hardware Configuration and PCB Design Considerations Application Report.

## 9.1 Reference Designs

The following reference designs should be followed closely when implementing designs using the CC2652R7 device.

Special attention must be paid to RF component placement, decoupling capacitors and DCDC regulator components, as well as ground connections for all of these.

CC26x2-R7EM-7ID **Design Files** 

The differential CC26x2-R7EM-7ID reference design provides schematic, layout and production files for the characterization board used for deriving the performance number found in this document.

LP-CC2652R7 Design Files

The CC26X2R LaunchPad Design Files contain detailed schematics and lavouts to build application specific boards using the CC2652R7 device. This design applies to both the CC2642R and CC2652R devices.

Sub-1 GHz for LaunchPad™ Development Kit and SensorTag

The antenna kit allows real-life testing to identify the optimal antenna for your and 2.4 GHz Antenna Kit application. The antenna kit includes 16 antennas for frequencies from 169 MHz to 2.4 GHz, including:

- PCB antennas
- · Helical antennas
- Chip antennas
- Dual-band antennas for 868 MHz and 915 MHz combined with 2.4 GHz

The antenna kit includes a JSC cable to connect to the Wireless MCU LaunchPad Development Kits and SensorTags.

## 9.2 Junction Temperature Calculation

This section shows the different techniques for calculating the junction temperature under various operating conditions. For more details, see Semiconductor and IC Package Thermal Metrics.

There are three recommended ways to derive the junction temperature from other measured temperatures:

1. From package temperature:

$$T_I = \psi_{\text{IT}} \times P + T_{\text{case}} \tag{1}$$

2. From board temperature:

$$T_I = \psi_{\rm IB} \times P + T_{\rm board} \tag{2}$$

3. From ambient temperature:

$$T_I = R_{\theta IA} \times P + T_A \tag{3}$$

P is the power dissipated from the device and can be calculated by multiplying current consumption with supply voltage. Thermal resistance coefficients are found in Section 7.8.

## Example:



Using Equation 3, the temperature difference between ambient temperature and junction temperature is calculated. In this example, we assume a simple use case where the radio is transmitting continuously at 0dBm output power. Let us assume the ambient temperature is 105  $^{\circ}$ C and the supply voltage is 3.0 V. To calculate P, we need to look up the current consumption for Tx at 105  $^{\circ}$ C in Figure 7-8. From the plot, we see that the current consumption is 8.1 mA. This means that P is 3.0 V × 8.1 mA = 194.4 mW.

The junction temperature is then calculated as:

$$T_I = 23.4^{\circ}C/_W \times 194.4mW + T_A = 4.5^{\circ}C + T_A$$
 (4)

As can be seen from the example, the junction temperature is 4.5 °C higher than the ambient temperature when running continuous Tx at 105 °C and, thus, well within the recommended operating conditions of 115 °C.

For various application use cases current consumption for other modules may have to be added to calculate the appropriate power dissipation. For example, the MCU may be running simultaneously as the radio, peripheral modules may be enabled, etc. Typically, the easiest way to find the peak current consumption, and thus the peak power dissipation in the device, is to measure as described in *Measuring CC13xx and CC26xx Current Consumption*.

## 10 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed as follows.

#### 10.1 Device Nomenclature

To designate the stages in the product development cycle, TI assigns prefixes to all part numbers and/or date-code. Each device has one of three prefixes/identifications: X, P, or null (no prefix) (for example, XCC2652R7 is in preview; therefore, an X prefix/identification is assigned).

Device development evolutionary flow:

- **X** Experimental device that is not necessarily representative of the final device's electrical specifications and may not use production assembly flow.
- **P** Prototype device that is not necessarily the final silicon die and may not necessarily meet final electrical specifications.

null Production version of the silicon die that is fully qualified.

Production devices have been characterized fully, and the quality and reliability of the device have been demonstrated fully. Tl's standard warranty applies.

Predictions show that prototype devices (X or P) have a greater failure rate than the standard production devices. Texas Instruments recommends that these devices not be used in any production system because their expected end-use failure rate still is undefined. Only qualified production devices are to be used.

TI device nomenclature also includes a suffix with the device family name. This suffix indicates the package type (for example, *RGZ*).

For orderable part numbers of *CC2652R7* devices in the RGZ (7-mm x 7-mm) package type, see the *Package Option Addendum* of this document, the Device Information in Section 3, the TI website (www.ti.com), or contact your TI sales representative.

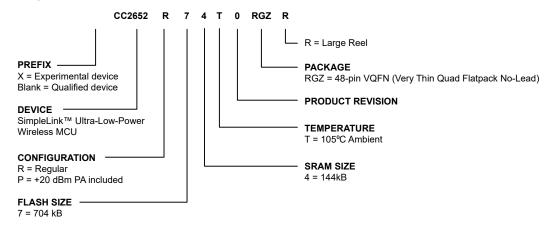


Figure 10-1. Device Nomenclature

#### 10.2 Tools and Software

The CC2652R7 device is supported by a variety of software and hardware development tools.

#### **Development Kit**

CC2652R7 LaunchPad™ Development Kit

The CC2652R7 LaunchPad™ Development Kit enables development of high-performance wireless applications that benefit from low-power operation. The kit features the CC2652R7 SimpleLink Wireless MCU, which allows you to quickly evaluate and prototype 2.4-GHz wireless applications such as Bluetooth 5 Low Energy, Zigbee and Thread, plus



combinations of these. The kit works with the LaunchPad ecosystem, easily enabling additional functionality like sensors, display and more. The built-in EnergyTrace™ software is an energy-based code analysis tool that measures and displays the application's energy profile and helps to optimize it for ultra-low-power consumption. See Table 5-1 for guidance in selecting the correct device for single-protocol products.

#### **Software**

SimpleLink™ CC13XX-CC26XX SDK

The SimpleLink CC13xx and CC26xx Software Development Kit (SDK) provides a complete package for the development of wireless applications on the CC13XX / CC26XX family of devices. The SDK includes a comprehensive software package for the CC2652R7 device, including the following protocol stacks:

- Bluetooth Low Energy 4 and 5.2
- Thread (based on OpenThread)
- Zigbee 3.0
- Wi-SUN®
- TI 15.4-Stack an IEEE 802.15.4-based star networking solution for Sub-1 GHz and 2.4 GHz
- Proprietary RF a large set of building blocks for building proprietary RF software
- Multiprotocol support concurrent operation between stacks using the Dynamic Multiprotocol Manager (DMM)

The SimpleLink CC13XX-CC26XX SDK is part of TI's SimpleLink MCU platform, offering a single development environment that delivers flexible hardware, software and tool options for customers developing wired and wireless applications. For more information about the SimpleLink MCU Platform, visit <a href="http://www.ti.com/simplelink">http://www.ti.com/simplelink</a>.

Submit Document Feedback

## **Development Tools**

Code Composer Studio™ Integrated Development Environment (IDE)

Code Composer Studio is an integrated development environment (IDE) that supports TI's Microcontroller and Embedded Processors portfolio. Code Composer Studio comprises a suite of tools used to develop and debug embedded applications. It includes an optimizing C/C++ compiler, source code editor, project build environment, debugger, profiler, and many other features. The intuitive IDE provides a single user interface taking you through each step of the application development flow. Familiar tools and interfaces allow users to get started faster than ever before. Code Composer Studio combines the advantages of the Eclipse® software framework with advanced embedded debug capabilities from TI resulting in a compelling feature-rich development environment for embedded developers.

CCS has support for all SimpleLink Wireless MCUs and includes support for EnergyTrace™ software (application energy usage profiling). A real-time object viewer plugin is available for TI-RTOS, part of the SimpleLink SDK.

Code Composer Studio is provided free of charge when used in conjunction with the XDS debuggers included on a LaunchPad Development Kit.

Code Composer Studio™ Cloud IDE

Code Composer Studio (CCS) Cloud is a web-based IDE that allows you to create, edit and build CCS and Energia<sup>™</sup> projects. After you have successfully built your project, you can download and run on your connected LaunchPad. Basic debugging, including features like setting breakpoints and viewing variable values is now supported with CCS Cloud.

IAR Embedded Workbench® for Arm®

IAR Embedded Workbench<sup>®</sup> is a set of development tools for building and debugging embedded system applications using assembler, C and C++. It provides a completely integrated development environment that includes a project manager, editor, and build tools. IAR has support for all SimpleLink Wireless MCUs. It offers broad debugger support, including XDS110, IAR I-jet<sup>™</sup> and Segger J-Link<sup>™</sup>. A real-time object viewer plugin is available for TI-RTOS, part of the SimpleLink SDK. IAR is also supported out-of-the-box on most software examples provided as part of the SimpleLink SDK.

A 30-day evaluation or a 32 KB size-limited version is available through iar.com.

SmartRF™ Studio

SmartRF™ Studio is a Windows® application that can be used to evaluate and configure SimpleLink Wireless MCUs from Texas Instruments. The application will help designers of RF systems to easily evaluate the radio at an early stage in the design process. It is especially useful for generation of configuration register values and for practical testing and debugging of the RF system. SmartRF Studio can be used either as a standalone application or together with applicable evaluation boards or debug probes for the RF device. Features of the SmartRF Studio include:

- · Link tests transmit and receive packets between nodes
- Antenna and radiation tests set the radio in continuous wave TX and RX states
- Export radio configuration code for use with the TI SimpleLink SDK RF driver
- · Custom GPIO configuration for signaling and control of external switches

Sensor Controller Studio

Sensor Controller Studio is used to write, test and debug code for the Sensor Controller peripheral. The tool generates a Sensor Controller Interface driver, which is a set of C source files that are compiled into the System CPU application. These source files also contain the Sensor Controller binary image and allow the System CPU application to control and exchange data with the Sensor Controller. Features of the Sensor Controller Studio include:

- Ready-to-use examples for several common use cases
- Full toolchain with built-in compiler and assembler for programming in a C-like programming language



Provides rapid development by using the integrated sensor controller task testing and debugging functionality, including visualization of sensor data and verification of algorithms

#### **CCS UniFlash**

CCS UniFlash is a standalone tool used to program on-chip flash memory on TI MCUs. UniFlash has a GUI, command line, and scripting interface. CCS UniFlash is available free of charge.

## 10.2.1 SimpleLink™ Microcontroller Platform

The SimpleLink microcontroller platform sets a new standard for developers with the broadest portfolio of wired and wireless Arm® MCUs (System-on-Chip) in a single software development environment. Delivering flexible hardware, software and tool options for your IoT applications. Invest once in the SimpleLink software development kit and use throughout your entire portfolio. Learn more on ti.com/simplelink.

## **10.3 Documentation Support**

To receive notification of documentation updates on data sheets, errata, application notes and similar, navigate to the device product folder on ti.com/product/CC2652R7. In the upper right corner, click on Alert me to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

The current documentation that describes the MCU, related peripherals, and other technical collateral is listed as follows.

#### **TI Resource Explorer**

TI Resource Explorer Software examples, libraries, executables, and documentation are available for your device and development board.

#### **Errata**

CC2652R7 Silicon Errata

The silicon errata describes the known exceptions to the functional specifications for each silicon revision of the device and description on how to recognize a device revision.

#### **Application Reports**

All application reports for the CC2652R7 device are found on the device product folder at: ti.com/product/ CC2652R7/#tech-docs.

## **Technical Reference Manual (TRM)**

CC13x2x7, CC26x2x7 SimpleLink™ Wireless MCU TRM

The TRM provides a detailed description of all modules and peripherals available in the device family.

## 10.4 Support Resources

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the guick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 10.5 Trademarks

SimpleLink<sup>™</sup>, LaunchPad<sup>™</sup>, EnergyTrace<sup>™</sup>, Code Composer Studio<sup>™</sup>, and TI E2E<sup>™</sup> are trademarks of Texas Instruments.

I-jet<sup>™</sup> is a trademark of IAR Systems AB.

J-Link<sup>™</sup> is a trademark of SEGGER Microcontroller Systeme GmbH.

www.ti.com

Zigbee® is a registered trademark of Zigbee Alliance Inc.

Bluetooth® is a registered trademark of Bluetooth SIG Inc.

Wi-SUN® is a registered trademark of Wi-SUN Alliance Inc.

Arm Thumb® is a registered trademark of Arm Limited (or its subsidiaries).

Eclipse® is a registered trademark of Eclipse Foundation.

IAR Embedded Workbench® is a registered trademark of IAR Systems AB.

Windows® is a registered trademark of Microsoft Corporation.

All trademarks are the property of their respective owners.

## 10.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 10.7 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.



# 11 Mechanical, Packaging, and Orderable Information

www.ti.com 21-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
CC2652R74T0RGZR	Active	Production	VQFN (RGZ)   48	2500   LARGE T&R	Yes	Call TI   Nipdau	Level-3-260C-168 HR	-40 to 105	CC2652 R74
CC2652R74T0RGZR.A	Active	Production	VQFN (RGZ)   48	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 105	CC2652 R74
CC2652R74T0RGZR.B	Active	Production	VQFN (RGZ)   48	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 105	CC2652 R74

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

## PACKAGE MATERIALS INFORMATION

www.ti.com 15-Jun-2023

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

## QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

	Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ĺ	CC2652R74T0RGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.1	12.0	16.0	Q2

# PACKAGE MATERIALS INFORMATION

www.ti.com 15-Jun-2023



## \*All dimensions are nominal

Ì	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
ı	CC2652R74T0RGZR	VQFN	RGZ	48	2500	367.0	367.0	35.0	

7 x 7, 0.5 mm pitch

PLASTIC QUADFLAT PACK- NO LEAD



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4224671/A



PLASTIC QUADFLAT PACK- NO LEAD



#### NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.



PLASTIC QUADFLAT PACK- NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUADFLAT PACK- NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025