





BQ25730 SLUSE65A - FEBRUARY 2021 - REVISED JANUARY 2024

BQ25730 I²C 1- to 5-Cell Buck-Boost Narrow VDC Battery Charge Controller with Power Path Control and USB-C PD 3.0 OTG Output

1 Features

- Power path control through battery MOSFET implementing independent system voltage instanton with no battery or depleted battery
- 400kHz/800kHz programmable switching frequency for high efficiency/high power density
- Buck-boost narrow voltage DC (NVDC) charger for USB-C Power Delivery (PD) interface platform
 - 3.5V to 26V input range to charge 1- to 5-cell
 - Charge current up to 16.2A/8.1A with 128mA/ 64mA resolution based on $5m\Omega/10m\Omega$ sensing resistor
 - Input current limit up to 10A/6.35A with 100mA/ 50mA resolution based on $5m\Omega/10m\Omega$ sensing
 - Support USB 2.0, USB 3.0, USB 3.1 and USB Power Delivery (PD)
 - Input Current Optimizer (ICO) to extract max input power without overloading the adapter
 - Seamless transition between buck, buck-boost, and boost operations
 - Input current and voltage regulation (IINDPM) and VINDPM) against source overload
- TI patented switching frequency dithering pattern for EMI noise reduction
- TI patented Pass Through Mode (PTM) for system power efficiency improvement and battery fast charging achieving 99% efficiency.
- Input and battery current monitor through dedicated pins
- Integrated 8-bit ADC to monitor voltage, current and power
- Battery MOSFET ideal diode operation in supplement mode to support system when adapter is fully loaded
- Power up USB port from battery (USB OTG)
 - 3V to 24V OTG with 8mV resolution
 - Output current limit up to 12.7A/6.35A with 100mA/50mA resolution based on $5\text{m}\Omega/10\text{m}\Omega$ sensing resistor
- I²C host control interface for flexible system configuration
- High accuracy for the regulation and monitor
 - ±0.5% Charge voltage regulation
 - ±3% Charge current regulation
 - ±2.5% Input current regulation
 - ±2% Input/charge current monitor
- Safety

- Thermal shutdown
- Input, system, battery overvoltage protection
- Input, MOSFET, inductor overcurrent protection
- Safety-Related Certifications
 - IEC 62368-1 CB Certification
- Package: 32-Pin 4.0mm × 4.0mm WQFN

2 Applications

- Oxygen concentrator, ventilators vacuum robot
- Tablet (multimedia), wireless speaker


3 Description

The BQ25730 is a synchronous NVDC buck-boost battery charge controller to charge a 1- to 5-cell battery from a wide range of input sources including USB adapter, high voltage USB-C Power Delivery (PD) sources, and traditional adapters. It offers a low component count, high efficiency solution for space constrained, 1- to 5-cell battery charging applications. The Narrow VDC buck-boost architecture avoid direct power path from input source to system voltage which implements wide input voltage range and narrow system voltage range at same time. Narrow system voltage range is valuable for faster battery supplement and lower MOSFET rating for next stage converter.

Device Information

PART NUMBER	PACKAGE ⁽¹⁾	BODY SIZE (NOM)
BQ25730	RSN (WQFN 32)	4.00mm × 4.00mm

For all available packages, see Section 14.



Application Diagram



Table of Contents

1 Features	8.6 Register Map.
2 Applications	9 Application and I
3 Description1	9.1 Application Inf
4 Description (continued)3	9.2 Typical Applic
5 Device Comparison Table4	10 Power Supply R
6 Pin Configuration and Functions5	11 Layout
7 Specifications8	11.1 Layout Guide
7.1 Absolute Maximum Ratings8	11.2 Layout Exam
7.2 ESD Ratings8	12 Device and Doc
7.3 Recommended Operating Conditions8	12.1 Device Supp
7.4 Thermal Information9	12.2 Documentati
7.5 Electrical Characteristics(BQ25730)9	12.3 Receiving No
7.6 Timing Requirements19	12.4 Support Res
7.7 Typical Characteristics21	12.5 Trademarks.
8 Detailed Description25	12.6 Electrostatic
8.1 Overview	12.7 Glossary
8.2 Functional Block Diagram26	13 Revision History
8.3 Feature Description27	14 Mechanical, Pag
8.4 Device Functional Modes38	Information
8.5 Programming39	

8.6 Register Map	44
9 Application and Implementation	
9.1 Application Information	
9.2 Typical Application	
10 Power Supply Recommendations	
11 Layout	98
11.1 Layout Guidelines	98
11.2 Layout Example	99
12 Device and Documentation Support	101
12.1 Device Support	101
12.2 Documentation Support	
12.3 Receiving Notification of Documentation Up	
12.4 Support Resources	101
12.5 Trademarks	101
12.6 Electrostatic Discharge Caution	101
12.7 Glossary	101
13 Revision History	
14 Mechanical, Packaging, and Orderable	
Information	103

4 Description (continued)

The NVDC configuration allows the system to be regulated based on battery voltage, but not drop below system minimum voltage. The system keeps operating even when the battery is completely discharged or removed. When load power exceeds input source rating, the battery goes into supplement mode and prevents the system from crashing.

During power up, the charger sets the converter to a buck, boost, or buck-boost configuration based on the input source and battery conditions. The charger seamlessly transitions between the buck, boost, and buck-boost operation modes without host control.

In the absence of an input source, the BQ25730 supports the USB On-the-Go (OTG) function from a 1- to 5-cell battery to generate an adjustable 3V to 24V output on VBUS with 8mV resolution. The OTG output voltage transition slew rate can be configured to comply with the USB-PD 3.0 PPS specification.

The latest version of the USB-C PD specification includes Fast Role Swap (FRS) to ensure power role swapping occurs in a timely fashion so that the device(s) connected to the dock can avoid experiencing momentary power loss or glitching. This device integrates FRS in compliance with the PD specification.

TI patented switching frequency dithering pattern can significantly reduce EMI noise over the whole conductive EMI frequency range (150kHz to 30MHz). Multiple dithering scale options are available to provide flexibility for different applications to simplify EMI noise filter design.

The charger can be operated in the TI patented Pass Through Mode (PTM) to improve efficiency over the full load range. In PTM, input power is directly passed through the charger to the system. Switching losses of the MOSFETs and inductor core loss can be saved for high efficiency operation.

The BQ25730 is available in a 32-pin 4mm × 4mm WQFN package.



5 Device Comparison Table

	BQ25710	BQ25713	BQ25792	BQ25730	BQ25731
Interface	SMBus	I ² C	I ² C	I ² C	I ² C
Device Address	09h	6Bh	6Bh	6Bh	6Bh
Integrated MOSFET/Controller	Controller	Controller	Integrated MOSFET	Controller	Controller
Maximum Charge Current	8.128 A	8.128 A	5 A	16.256 A	16.256 A
Switching Frequency (Hz)	800 k/1.2 M	800 k/1.2 M	750 k/1.5 M	400 k/800 k	400 k/800 k
Cell Count	1s to 4s	1s to 4s	1s to 4s	1s to 5s	1s to 5s
Input Current Sense Resistor	10 mΩ/20 mΩ	10 mΩ/20 mΩ	Integrated	5 mΩ/10 mΩ	5 mΩ/10 mΩ
Independent Comparator Latch	Non Latch	Non Latch	NA	Latch/Non latch (default)	Latch/Non latch (default)
VSYS_UVP	2.4 V	2.4 V	2.2 V	2.4 V ~ 8.0 V (0.8-V step size) Default: 2.4 V	1.6 V
OTG Voltage Range	3.0 V to 20.8 V	3.0 V to 20.8 V	2.8 V to 22 V	3.0 V to 24 V	3.0 V to 24 V
Frequency Dithering	No	No	No	Yes	Yes
BATFET Power Path	Yes	Yes	Yes	Yes	No
Pre-charge LDO Mode	Yes	Yes	Yes	Yes	No



6 Pin Configuration and Functions

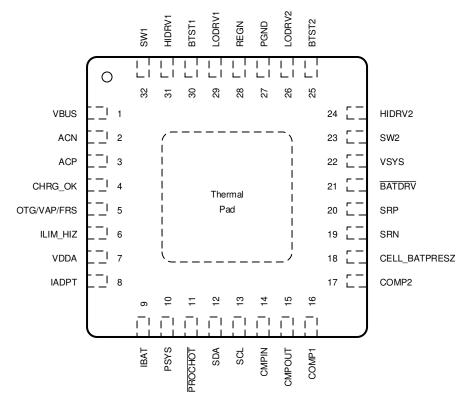


Figure 6-1. RSN Package 32-Pin WQFN Top View

Table 6-1. Pin Functions

PIN	PIN		DESCRIPTION
NAME	NUMBER	I/O	DESCRIPTION
ACN	2	PWR	Input current sense amplifier negative input. The leakage on ACP and ACN are matched. A RC low-pass filter is required to be placed between the sense resistor and the ACN pin to suppress the high frequency noise in the input current signal. Refer to Section 9.2.2.2 for ACP/ACN filter design.
ACP	3	PWR	Input current sense amplifier positive input. The leakage on ACP and ACN are matched. A RC low-pass filter is required to be placed between the sense resistor and the ACP pin to suppress the high frequency noise in the input current signal. Refer to Section 9.2.2.2 for ACP/ACN filter design.
BATDRV	21	0	P-channel battery FET (BATFET) gate driver output. It is shorted to VSYS to turn off the BATFET. It goes 10 V below VSYS to fully turn on BATFET. BATFET is in linear mode to regulate VSYS at minimum system voltage when battery is depleted. BATFET is fully on during fast charge and works as an ideal-diode in supplement mode.
BTST1	30	PWR	Buck mode high-side power MOSFET driver power supply. Connect a 0.047-μF capacitor between SW1 and BTST1. The bootstrap diode between REGN and BTST1 is integrated.
BTST2	25	PWR	Boost mode high-side power MOSFET driver power supply. Connect a 0.047-µF capacitor between SW2 and BTST2. The bootstrap diode between REGN and BTST2 is integrated.
CELL_BATPRESZ	18	I	Battery cell selection pin for 1- to 5- cell battery setting. CELL_BATPRESZ pin is biased from VDDA through a resistor divider. CELL_BATPRESZ pin also sets SYSOVP thresholds to 5 V for 1-cell, 12 V for 2-cell and 19.5 V for 3-cell/4-cell. CELL_BATPRESZ pin is pulled below V _{CELL_BATPRESZ_FALL} to indicate battery removal. After battery is removed the charge voltage register REG0x05/04h() goes back to default. No external cap is allowed at CELL_BATPRESZ pin. The device exits LEARN mode and disables charge when CELL_BATPRESZ pin is pulled low (upon battery removal).



Table 6-1. Pin Functions (continued)

PIN			Properties	
NAME	NUMBER	I/O	DESCRIPTION	
CHRG_OK	4	0	Open drain active high indicator to inform the system good power source is connected to the charger input. Connect to the pullup rail via 10-kΩ resistor. When VBUS rises above 3.5 V and falls below 25.8 V, CHRG_OK is HIGH after 50-ms deglitch time. When VBUS falls below 3.2 V or rises above 26.8 V, CHRG_OK is LOW. When one of SYSOVP, SYSUVP, ACOC, TSHUT, BATOVP, BATOC or force converter off faults occurs, CHRG_OK is asserted LOW.	
CMPIN	14	I	Input of independent comparator. The independent comparator compares the voltage sensed on CMPIN pin with internal reference, and its output is on CMPOUT pin. Internal reference, output polarity and deglitch time is selectable by the I ² C host. With polarity HIGH (CMP_POL = 1b), place a resistor between CMPIN and CMPOUT to program hysteresis. With polarity LOW (CMP_POL = 0b), the internal hysteresis is 100 mV. If the independent comparator is not in use, tie CMPIN to ground.	
CMPOUT	15	0	Open-drain output of independent comparator. Place a pullup resistor from CMPOUT to pullup supply rail. Internal reference, output polarity and deglitch time are selectable by the I ² C host. If the independent comparator is not in use, float CMPOUT pin.	
COMP2	17	I	Buck boost converter compensation pin 2. Refer to Section 8.3.12 for COMP2 pin RC network.	
COMP1	16	I	Buck boost converter compensation pin 1. Refer to Section 8.3.12 for COMP1 pin RC network.	
OTG/VAP/FRS	5	I	Active HIGH to enable OTG or FRS modes. 1) When OTG_VAP_MODE=1b and EN_OTG=1b, pulling high this pin can enable OTG mode. 2) When OTG_VAP_MODE=1b and EN_FRS=1b, pulling high this pin can enable FRS mode in forward operation.	
HIDRV1	31	0	Buck mode high-side power MOSFET (Q1) driver. Connect to high-side n-channel MOSFET gate.	
HIDRV2	24	0	Boost mode high-side power MOSFET(Q4) driver. Connect to high-side n-channel MOSFET gate.	
IADPT	8	0	The adapter current monitoring output pin. $V_{IADPT} = 20$ or $40 \times (V_{ACP} - V_{ACN})$ with ratio selectable through IADPT_GAIN bit. This pin is also used to program the inductance used in the application. Refer to Section 8.3.11 for selecting resistor from the IADPT pin to ground . For a 4.7-µH inductance, the resistor is 191-k Ω or 187-k Ω standard value. Place a 100-pF or less ceramic decoupling capacitor from IADPT pin to ground. IADPT output voltage is clamped below 3.3 V.	
IBAT	9	0	The battery current monitoring output pin. $V_{IBAT} = 8$ or $16 \times (V_{SRP} - V_{SRN})$ for charge current, or $V_{IBAT} = 8$ or $16 \times (V_{SRN} - V_{SRP})$ for discharge current, with ratio selectable through IBAT_GAIN bit. Place a 100-pF or less ceramic decoupling capacitor from IBAT pin to ground. This pin can be floating if not in use. Its output voltage is clamped below 3.3 V.	
ILIM_HIZ	6	I	Input current limit setting pin. Program ILIM_HIZ voltage by connecting a resistor divider from VDDA rail to ground. The pin voltage is calculated as: $V_{(ILIM_HIZ)} = 1 \text{ V} + 40 \times \text{IDPM} \times \text{Rac}$, in which IDPM is the target input current limit. When EN_EXTILIM = 1b the input current limit used by the charger is the lower setting of ILIM_HIZ pin and IIN_HOST register. When EN_EXTILIM = 0b input current limit is only determined by IIN_HOST register. When the pin voltage is below 0.4 V, the device enters high impedance (HIZ) mode with low quiescent current. When the pin voltage is above 0.8 V, the device is out of HIZ mode. The ILIM_HIZ pin voltage is continuous read and used for updating current limit setting (If EN_EXTILIM=1b), this allows dynamic change input current limit setting by adjusting this pin voltage.	
LODRV1	29	0	Buck mode low side power MOSFET (Q2) driver. Connect to low side n-channel MOSFET gate.	
LODRV2	26	0	Boost mode low side power MOSFET (Q3) driver. Connect to low side n-channel MOSFET gate.	
PGND	27	GND	Device power ground.	
PROCHOT	11	0	Active low open drain output indicator. It monitors adapter input current, battery discharge current, and system voltage. After any event in the PROCHOT profile is triggered, a pulse is asserted. The minimum pulse width is adjustable through PROCHOT_WIDTH bits.	



Table 6-1. Pin Functions (continued)

PIN				
NAME	NUMBER	I/O	DESCRIPTION	
PSYS	10	0	Current mode system power monitor. The output current is proportional to the total power from the adapter and the battery. The gain is selectable through I ² C. Place a resistor from PSYS to ground to generate output voltage. This pin can be floating if not in use. Its output voltage is clamped at 3.3 V. Place a capacitor in parallel with the resistor for filtering.	
REGN	28	PWR	6-V linear regulator output supplied from VBUS or VSYS. The LDO is active when VBUS above V _{VBUS_CONVEN} . Connect a 2.2- or 3.3-µF ceramic capacitor from REGN to power ground. REGN pin output is for power stage gate drive.	
SCL	13	I	I^2 C clock input. Connect to clock line from the host controller or smart battery. Connect a 10 -k Ω pullup resistor according to specifications.	
SDA	12	I/O	I^2 C open-drain data I/O. Connect to data line from the host controller or smart battery. Connect a 10-kΩ pullup resistor according to I^2 C specifications.	
SRN	19	PWR	Charge current sense amplifier negative input. SRN pin is for battery voltage sensing as well. Connect a 0.1- μ F filter cap cross battery charging sensing resistor and use 10- Ω contact resistor between SRN pin and battery charging sensing resistor. The leakage current on SRP and SRN are matched.	
SRP	20	PWR	Charge current sense amplifier positive input. Connect a $0.1-\mu F$ filter cap cross battery charging sensing resistor and use $10-\Omega$ contact resistor between SRP pin and battery charging sensing resistor. The leakage current on SRP and SRN are matched.	
SW1	32	PWR	Buck mode switching node. Connect to the source of the buck half bridge high side n-channel MOSFET.	
SW2	23	PWR	Boost mode switching node. Connect to the source of the boost half bridge high side n-channel MOSFET.	
VBUS	1	PWR	Charger input voltage. An input low pass filter of 1 Ω and 0.47 μF (minimum) is recommended.	
VDDA	7	PWR	Internal reference bias pin. Connect a $10-\Omega$ resistor from REGN to VDDA and a $1-\mu F$ ceramic capacitor from VDDA to power ground.	
VSYS	22	PWR	Charger system voltage sensing. The system voltage regulation maximum limit is programmed in ChargeVoltage register plus 150 mV and regulation minimum limit is programmed in VSYS_MIN register.	
Thermal pad	_	_	Exposed pad beneath the IC. Always solder thermal pad to the board, and have vias on the thermal pad plane connecting to power ground planes. It serves as a thermal pad to dissipate the heat.	

Copyright © 2024 Texas Instruments Incorporated



7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
	SRN, SRP, ACN, ACP, VBUS, VSYS	-0.3	32	
	SW1, SW2	-2	32	
	BTST1, BTST2, HIDRV1, HIDRV2, BATDRV	-0.3	38	
	LODRV1, LODRV2 (25nS)	-4	7	
	HIDRV1, HIDRV2 (25nS)	-4	38	
Voltage	SW1, SW2 (25nS)	-4	32	V
	SDA, SCL, REGN, PSYS, CHRG_OK, CELL_BATPRESZ, ILIM_HIZ, LODRV1, LODRV2, VDDA, COMP2, CMPIN, CMPOUT,OTG/VAP/FRS,	-0.3	7	
	PROCHOT	-0.3	5.5	
	IADPT, IBAT, COMP1	-0.3	3.6	
Differential	BTST1-SW1, BTST2-SW2, HIDRV1-SW1, HIDRV2-SW2	-0.3	7	V
Voltage	SRP-SRN, ACP-ACN	-0.5	0.5	V
Temperature	Junction temperature range, T _J	-40	150	°C
Temperature	Storage temperature, T _{stg}	– 55	150	C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Rating may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Condition. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/ JEDEC JS-001, all pins ⁽¹⁾	±2000	V
V _(ESD)	Lieurostano discrialge	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	±500	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
	ACN, ACP, VBUS	0	26	
	SRN, SRP, VSYS	0	23.15	
	SW1, SW2	-2	26	
Voltage	BTST1, BTST2, HIDRV1, HIDRV2, BATDRV	0	32	V
Voltage	SDA, SCL, REGN, PSYS, CHRG_OK, CELL_BATPRESZ, ILIM_HIZ, LODRV1, LODRV2, VDDA, COMP2, CMPIN, CMPOUT,OTG/VAP/FRS	0	6.5	
	PROCHOT	0	5.3	
	IADPT, IBAT, COMP1	0	3.3	
	BTST1-SW1, BTST2-SW2, HIDRV1-SW1, HIDRV2-SW2	0	6.5	
Differential Voltage	SRP-SRN, ACP-ACN	-0.5	0.5	V
Tanaga	BATDRV-VSYS	0	10.8	

7.3 Recommended Operating Conditions (continued)

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
	Junction temperature range, T _J	-20	125	°C
Temperature	Storage temperature, T _{stg}	-20	85	

7.4 Thermal Information

		BQ25730	
	THERMAL METRIC(1)	RSN (WQFN)	UNIT
		32 PINS	
R _{0JA}	Junction-to-ambient thermal resistance (JEDEC ⁽¹⁾)	37.2	°C/W
R ₀ JC(top)	Junction-to-case (top) thermal resistance	26.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	7.8	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.3	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	7.8	°C/W
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	2.3	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

7.5 Electrical Characteristics(BQ25730)

 $V_{VBUS\ UVLOZ} < V_{VBUSOV\ FALL}$, $T_J = -40^{\circ}C$ to +125°C, and $T_J = 25^{\circ}C$ for typical values (unless otherwise noted)

PAR	RAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{INPUT_OP}	Input voltage operating range		3.5		26	V
MAX SYSTEM VOL	TAGE REGULATION					
V _{SYSMAX_RNG}	System Voltage Regulation, measured on V _{SYS} (charge disabled)		1.024		23.15	V
V _{SYSMAX_ACC}	System voltage regulation accuracy (charge disabled and OOA disabled)	REG0x05/04() = 0x5208H (21.000 V)	-2%	V _{SRN} + 150 mV	2%	V
	OOA disabled)	REG0x05/04() = 0x41A0H (16.800 V)		V _{SRN} + 150 mV		V
			-2%		2%	
	System voltage	REG0x05/04() = 0x3138H (12.600 V)		V _{SRN} + 150 mV		V
.,	regulation accuracy	, , ,	-2%		2%	
V _{SYSMAX_ACC}	(charge disabled and EN_OOA=0b)	REG0x05/04() = 0x20D0H (8.400 V)		V _{SRN} + 150 mV		V
			-3%		3%	
		REG0x05/04() = 0x1068H (4.200 V)		V _{SRN} + 150 mV		V
		, , ,	-3%		3%	
MINIMUM SYSTEM	VOLTAGE REGULATION	Ī	-			
V _{SYS_MIN_RNG}	System Voltage Regulation, measured on V _{SYS}		1.00		23.00	V



Vyrus 11/10z < Vyrus < Vyrusov, Fall . Ti = -40°C to +125°C, and Ti = 25°C for typical values (unless otherwise noted)

PAR	AMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Minimum System			15.40		V
V _{SYS_MIN_REG_ACC}	Voltage Regulation Accuracy (VBAT below REG0x0D/0C() setting,OOA disabled)	REG0x0D/0C() = 0x9A00H	-2%		-2%	
		REG0x0D/0C() = 0x7B00H		12.30		V
		(NEG0X0B/0G() = 0X/B0011	-2%		-2%	
	Minimum System	REG0x0D/0C() = 0x5C00H		9.20		V
V _{SYS_MIN_REG_ACC}	Voltage Regulation Accuracy (VBAT	TTE GOXOD/00() 0x000011	-2%		-2%	
VSYS_MIN_REG_ACC	below REG0x0D/0C()	REG0x0D/0C() = 0x4200H		6.60		V
	setting, EN_OOA=0b))	-3%		-3%	
		REG0x0D/0C() = 0x2400H		3.60		V
			-3%		-3%	
CHARGE VOLTAGE	REGULATION					
V_{BAT_RNG}	Battery voltage regulation		1.024		23.00	V
	Battery voltage regulation accuracy	DECO-05/04/) 0.5000H		21		V
V _{BAT_REG_ACC}	(0°C to 85°C)	REG0x05/04() = 0x5208H	-0.5%		0.5%	
				16.8		V
		REG0x05/04() = 0x41A0H	-0.5%		0.5%	
				12.6		V
	Battery voltage	REG0x05/04() = 0x3138H	-0.5%		0.5%	
$V_{BAT_REG_ACC}$	regulation accuracy (0°C to 85°C)	REG0x05/04() = 0x20D0H		8.4		V
	,		-0.6%		0.6%	
		DEC0v05/04/) = 0v406911		4.2		V
		REG0x05/04() = 0x1068H	-1.1%		1.45%	
CHARGE CURRENT	REGULATION IN FAST	CHARGE	1			
V _{IREG_CHG_RNG}	Charge current regulation differential voltage range	V _{IREG_CHG} = V _{SRP} - V _{SRN}	0		81.28	mV
	3 3			8192		mA
		REG0x03/02() = 0x1000H	-3.0%		3.0%	
	Charge current regulation accuracy			4096		mA
	5-m Ω R _{SR} sensing	REG0x03/02() = 0x0800H	-5.0%		6.0%	
I _{CHRG_REG_ACC}	resistor, VBAT above VSYS_MIN(Reg0x0D			2048		mA
	/0C)setting(0°C to	REG0x03/02() = 0x0400H	-12%		13.5%	
	85°C)	7		1024		mA
		REG0x03/02() = 0x0200H	-18%		21.5%	
CHARGE CURRENT	Γ REGULATION IN LDO	MODE				-
	Pre-charge current	CELL(≥2 S),VSRN < VSYS_MIN		384		mA
I _{CLAMP}	clamp under low	CELL 1 S, VSRN < 3 V		384		mA
	battery voltage	CELL 1 S, 3 V < VSRN < VSYS MIN		2		Α

 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}\text{C}$ to +125°C, and $T_J = 25^{\circ}\text{C}$ for typical values (unless otherwise noted)

PARA	METER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Pre-charge current	REG0x03/02() = 0x00C0H		384		mA
	regulation accuracy	≥2S	-25.0%		25.0%	
I _{PRECHRG_REG_ACC}	with 5-mΩ R _{SR}	18	-50.0%		50.0%	
	resistor, VBAT below REG0x0D/0C()	REG0x03/02() = 0x0080H		256		mA
	setting (0°C to 85°C)	≥2S	-30.0%	<u> </u>	30.0%	
	SRP, SRN leakage					
I _{LEAK_SRP_SRN}	current mismatch (0°C to 85°C)		-13.5		10.0	μA
INPUT CURRENT RE	GULATION					
Vireg_dpm_rng	Input current regulation differential voltage range with 10-mΩ R _{AC} sensing resistor	V _{IREG_DPM} = V _{ACP} - V _{ACN}	0.5		64	mV
	Input current	REG0x0F/0E() = 0x4E00H	7600	7800	8000	mA
	regulation accuracy	REG0x0F/0E() = 0x3A00H	5600	5800	6000	mA
IIIN_DPM_REG_ACC	(-40°C to 105°C) with 5-mΩ R _{AC} sensing	REG0x0F/0E() = 0x1C00H	2600	2800	3000	mA
	resistor	REG0x0F/0E() = 0x0800H	600	800	1000	mA
I _{LEAK_ACP_ACN}	ACP, ACN leakage current mismatch	V	-16		10	μA
V _{IREG_DPM_RNG_ILIM}	Voltage range for input current regulation (ILIM_HIZ Pin)		1.15		4	V
	Input Current Regulation Accuracy on ILIM_HIZ pin V _{ILIM HIZ} = 1 V + 40	V _{ILIM HIZ} = 2.6 V	7600	8000	8400	mA
		V _{ILIM HIZ} = 2.2 V	5600	6000	6400	mA
IIIN DPM REG ACC ILIM		V _{ILIM HIZ} = 1.6 V	2600	3000	3400	mA
	\times I _{DPM} \times R _{AC} , with 5-m Ω R _{AC} sensing resistor	V _{ILIM_HIZ} = 1.2 V	600	1000	1400	mA
I _{LEAK_ILIM}	ILIM_HIZ pin leakage current		-1		1	μA
INPUT VOLTAGE REC	GULATION					
V _{DPM_RNG}	Input voltage regulation range	Voltage on VBUS	3.2		19.52	٧
		REG0x0B/0A()=0x3C80H		18688		mV
			-3.5%		2%	
.,	Input voltage	REG0x0B/0A()=0x1E00H		10880		mV
V _{DPM_REG_ACC}	regulation accuracy		-4.5%		3%	
		REG0x0B/0A()=0x0500H		4480		mV
			-8%		5.5%	
OTG CURRENT REG	ULATION		I			
V _{IOTG_REG_RNG}	OTG output current regulation differential voltage range	V _{IOTG_REG} = V _{ACP} - V _{ACN}	0		81.28	mV
	OTG output current	REG0x09/08() = 0x3C00H	5600	6000	6400	mA
l	regulation accuracy with 100-mA LSB	REG0x09/08() = 0x1E00H	2600	3000	3400	mA
I _{OTG_} ACC	and 5-mΩ R _{AC} series resistor	REG0x09/08() = 0x0A00H	600	1000	1400	mA
OTG VOLTAGE REGI		<u>I</u>				



 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}C$ to +125°C, and $T_J = 25^{\circ}C$ for typical values (unless otherwise noted)

PARA	AMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{OTG_REG_RNG}	OTG voltage regulation range(OOA disabled)	Voltage on VBUS	3		24.00	٧
		REG0x07/06()=0x2CECH		23.00		V
	OTC wells as		-2%		2%	
	OTG voltage regulation	REG0x07/06()=0x1770H		12.00		V
V _{OTG_REG_ACC}	accuracy(OOA		-2%		2%	
	disabled)	REG0x07/06()=0x09C4H		5.00		V
			-4%		3.5%	
REGN REGULATOR						
V _{REGN_REG}	REGN regulator voltage (0 mA – 60 mA)	V _{VBUS} = 10 V	5.7	6	6.3	V
V _{DROPOUT}	REGN voltage in drop out mode	V _{VBUS} = 5 V, I _{LOAD} = 20 mA	3.8	4.3	4.6	V
I _{REGN_LIM}	REGN current limit when converter is enabled	V _{VBUS} = 10 V, force V _{REGN} =4 V	50	65		mA
QUIESCENT CURRE	ENT					
		VBAT = 18 V, REG0x01[7] = 1,REG0x31[6] = 0b, in low-power mode, Disable PSYS		22	45	μA
lt.	System powered by battery. BATFET on. I _{SRN} + I _{SRP} + I _{SW2} +	VBAT = 18 V, REG0x01[7] = 1, REG0x31[6] = 1b, REG0x31[5:4] = 11b,REGN off, Disable PSYS, Enable low power PROCHOT		35	60	μA
BAT_BATFET_ON	$I_{BTST2} + I_{SW1} + I_{BTST1} + I_{ACP} + I_{ACN} + I_{VBUS}$	VBAT = 18 V, REG0x01[7]= 0,REG0x31[5:4]= 11b, REGN on, Disable PSYS, In performance mode		880	1170	μΑ
	+ I _{VSYS}	VBAT = 18 V, REG0x01[7] = 0, REG0x31[5:4] = 00b, REGN on, Enable PSYS, In performance mode		980	1270	μA
I _{AC_SW_LIGHT_buck}	Input current during PFM in buck mode, no load, lyBUS + lACP + lACN + lySyS + lSRP + lSRN + lSW1 + lBTST + lSW2 + lBTST2	VIN = 20 V, VBAT = 12.6 V, 3s, REG0x01[2] = 0; MOSFET Qg = 4 nC		2.2		mA
I _{AC_SW_LIGHT_boost}	Input current during PFM in boost mode, no load, I _{VBUS} + I _{ACP} + I _{ACN} + I _{VSYS} + I _{SRP} + I _{SRN} + I _{SW1} + I _{BTST2} + I _{SW2} + I _{BTST2}	VIN = 5 V, VBAT = 8.4 V, 2s, REG0x01[2] = 0; MOSFET Qg = 4 nC		2.7		mA
IAC_SW_LIGHT_buckboost	Input current during PFM in buck boost mode, no load, I _{VBUS} + I _{ACP} + I _{ACN} + I _{VSYS} + I _{SRP} + I _{SRN} + I _{SW1} + I _{BTST1} + I _{SW2} + I _{BTST2}	VIN = 12 V, VBAT = 12 V, REG0x01[2] = 0; MOSFET Qg = 4 nC		2.4		mA
	Quiescent current during PFM in OTG	VBAT = 8.4 V, VBUS = 5 V, 800 kHz switching frequency, MOSFET Qg = 4nC		3		mA
I _{OTG_STANDBY}	mode, EN_OOA=0b, _{VBUS} + _{ACP} + _{ACN} + _{VSYS} + _{SRP} + _{SRN} +	VBAT = 8.4 V, VBUS = 12 V, 800 kHz switching frequency, MOSFET Qg = 4nC		4.2		mA
	I _{SW1} + I _{BTST2} + I _{SW2} + I _{BTST2}	VBAT = 8.4 V, VBUS = 20 V, 800 kHz switching frequency, MOSFET Qg = 4nC		6.2		mA

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated



 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}\text{C}$ to +125°C, and $T_J = 25^{\circ}\text{C}$ for typical values (unless otherwise noted)

PA	RAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{ACP_ACN_OP}	Input common mode range	Voltage on ACP/ACN	3.8		26	V
V _{IADPT_CLAMP}	I _{ADPT} output clamp voltage		3.1	3.2	3.3	V
I _{IADPT}	I _{ADPT} output current				1	mA
A	Input current sensing	$V_{(IADPT)} / V_{(ACP-ACN)}$, REG0x00[4] = 0		20		V/V
A _{IADPT}	gain	$V_{\text{(IADPT)}} / V_{\text{(ACP-ACN)}}$, REG0x00[4] = 1		40		V/V
		V _(ACP-ACN) = 40.96 mV	-2%		2%	
.,	Input current monitor	V _(ACP-ACN) = 20.48 mV	-3%		3%	
V _{IADPT_ACC}	accuracy	V _(ACP-ACN) =10.24 mV	-6%		6%	
		V _(ACP-ACN) = 5.12 mV	-10%		10%	
C _{IADPT_MAX}	Maximum capacitance at IADPT Pin				100	pF
V _{SRP_SRN_OP}	Battery common mode range	Voltage on SRP/SRN	2.5		23.15	V
V _{IBAT_CLAMP}	IBAT output clamp voltage		3.05	3.2	3.3	٧
I _{IBAT}	IBAT output current				1	mA
	Charge and	$V_{(IBAT)} / V_{(SRN-SRP)}$, REG0x00[3] = 0,		8		V/V
A _{IBAT}	discharge current sensing gain on IBAT pin	V _(IBAT) / V _(SRN-SRP) , REG0x00[3] = 1,		16		V/V
	Charge and	V _(SRN-SRP) = 40.96 mV	-2%		2%	
	Charge and discharge current	V _(SRN-SRP) = 20.48 mV	-4%		4%	
IBAT_CHG_ACC	monitor accuracy on IBAT pin	V _(SRN-SRP) =10.24 mV	-7%		7%	
		V _(SRN-SRP) = 5.12 mV	-15%		15%	
C _{IBAT_MAX}	Maximum capacitance at IBAT Pin				100	pF
SYSTEM POWER	SENSE AMPLIFIER					
V _{PSYS}	PSYS output voltage range		0		3.3	V
I _{PSYS}	PSYS output current		0		160	μΑ
A _{PSYS}	PSYS system gain	I _(PSYS) / (P _(IN) +P _(BAT)), REG0x31[5:4] = 00b;REG0x31[1] = 1b		1		μΑ/W
A _{PSYS}	PSYS system gain	I _(PSYS) / P _(IN) , REG0x31[5:4]= 01b;REG0x31[1] = 1b		1		μΑ/W
	PSYS gain accuracy	Adapter only with system power = 19.5 V / 45 W, TA = 0 to 85°C	-4%		4%	
V _{PSYS_ACC}	(REG0x30[13:12] = 00b)	Battery only with system power = 11 V / 44 W, TA = 0 to 85°C	-3%		3%	
•	PSYS gain accuracy (REG0x30[13:12] = 01b)	Adapter only with system power = 19.5 V / 45 W, TA = 0 to 85°C	-4 %		4%	
V _{PSYS_CLAMP}	PSYS clamp voltage		3		3.3	V
VSYS UNDER VO	LTAGE LOCKOUT COMPA	ARATOR				
V _{SYS_UVLOZ}	VSYS undervoltage rising threshold(≥1S)	VSYS rising	2.3	2.5	2.65	V
V _{SYS_UVLO}	VSYS undervoltage falling threshold(≥1S)	VSYS falling REG3D[7:5]=000b	2.2	2.4	2.55	V
		1				

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}\text{C}$ to +125°C, and $T_J = 25^{\circ}\text{C}$ for typical values (unless otherwise noted)

	METER	ງ = -40°C to +125°C, and T _J = 25°C for typical va TEST CONDITIONS	MIN	TYP	MAX	
V _{SYS_UVLO_HYST}	VSYS undervoltage hysteresis(≥1S)			100		mV
VBUS UNDER VOLT	AGE LOCKOUT COMP	ARATOR				
V _{VBUS_UVLOZ}	VBUS undervoltage rising threshold	VBUS rising	2.35	2.55	2.80	V
V _{VBUS_UVLO}	VBUS undervoltage falling threshold	VBUS falling	2.2	2.4	2.6	V
V _{VBUS_UVLO_HYST}	VBUS undervoltage hysteresis			150		mV
V _{VBUS_CONVEN}	VBUS converter enable rising threshold	VBUS rising	3.2	3.5	3.9	V
V _{VBUS_CONVENZ}	VBUS converter enable falling threshold	VBUS falling	2.9	3.2	3.5	V
V _{VBUS_CONVEN_HYST}	VBUS converter enable hysteresis			300		mV
BATTERY UNDER V	OLTAGE LOCKOUT CO	MPARATOR	1			
V _{VBAT_UVLOZ}	VBAT undervoltage rising threshold	VSRN rising	2.35	2.55	2.80	V
V _{VBAT_UVLO}	VBAT undervoltage falling threshold	VSRN falling	2.2	2.4	2.6	V
V _{VBAT_UVLO_HYST}	VBAT undervoltage hysteresis			150		mV
V _{VBAT_OTGEN}	VBAT OTG enable rising threshold	VSRN rising	3.25	3.55	3.85	V
V _{VBAT_OTGENZ}	VBAT OTG enable falling threshold	VSRN falling	2.15	2.4	2.65	V
V _{VBAT_OTGEN_HYST}	VBAT OTG enable hysteresis			1150		mV
VBUS UNDER VOLT	AGE COMPARATOR (C	TG MODE)				
V _{VBUS_OTG_UV}	VBUS undervoltage falling threshold	As percentage of REG0x07/06()		85%		
t _{VBUS_OTG_UV}	VBUS time undervoltage deglitch			7		ms
VBUS OVER VOLTA	GE COMPARATOR (OT	G MODE)				
V _{VBUS_OTG_OV}	VBUS overvoltage rising threshold	As percentage of REG0x07/06()		110%		
t _{VBUS_OTG_OV}	VBUS Time Overvoltage Deglitch			10		ms
PRE-CHARGE to FA	ST CHARGE TRANSIT	ON(For ≥2S)				
V _{BAT_} VSYS_MIN_RISE	LDO mode to fast charge mode threshold, VSRN rising	as percentage of 0x0D/0C()	98%	100%	102%	
V _{BAT_VSYS_MIN_} FALL	LDO mode to fast charge mode threshold, VSRN falling	as percentage of 0x0D/0C()		97.5%		
V _{BAT_VSYS_MIN_HYST}	Fast charge mode to LDO mode threshold hysteresis	as percentage of 0x0D/0C()		2.5%		



 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}\text{C}$ to +125°C, and $T_J = 25^{\circ}\text{C}$ for typical values (unless otherwise noted)

	BUS VVBUSOV_FALL , I. RAMETER	$_{\rm J}$ = -40°C to +125°C, and $_{\rm J}$ = 25°C for typical v	MIN	TYP	MAX	
		Pre-charge to Fast Charge Threshold for 1S)				· · · · ·
DATTERT LOW VO	1	rie-charge to rast onlarge Threshold for 13)				
V _{BATLV_FALL}	BATLOWV falling threshold			2.8		V
V _{BATLV_RISE}	BATLOWV rising threshold			3		V
V _{BATLV_RHYST}	BATLOWV hysteresis			200		mV
INPUT OVER-VOLT	AGE COMPARATOR (A	COV)				
V _{VBUSOV_RISE}	VBUS overvoltage rising threshold	VBUS rising	26.0	26.8	27.7	V
V _{VBUSOV_FALL}	VBUS overvoltage falling threshold	VBUS falling	25.0	25.8	26.7	V
V _{VBUSOV_HYST}	VBUS overvoltage hysteresis			1.0		V
t _{VBUSOV_RISE_DEG}	VBUS deglitch overvoltage rising	VBUS converter rising to stop converter		100		us
t _{VBUSOV_FALL_DEG}	VBUS deglitch overvoltage falling	VBUS converter falling to start converter		1		ms
INPUT OVER CURF	RENT COMPARATOR (A	COC)				
V _{ACOC}	ACP to ACN rising threshold, w.r.t. ILIM2_VTH	Voltage across input sense resistor rising, Reg0x32[2]= 1	180%	200%	220%	
V _{ACOC_FLOOR}	Measure between ACP and ACN	Set IIN_DPM to minimum	44	50	56	mV
V _{ACOC_CEILING}	Measure between ACP and ACN	Set IIN_DPM to maximum	172	180	188	mV
t _{ACOC_DEG_RISE}	Rising deglitch time	Deglitch time to trigger ACOC		250		us
t _{ACOC_RELAX}	Relax time	Relax time before converter starts again		250		ms
SYSTEM OVER-VO	LTAGE COMPARATOR	SYSOVP)	·			
		1 s	5.8	6	6.1	V
	System overvoltage	2 s	11.7	12	12.2	V
V _{SYSOVP_RISE}	rising threshold to	3 s	19	19.5	20	V
_	turnoff converter	4 s	19	19.5	20	V
		5 s	24	25	26	V
		1 s		5.5		V
		2 s		11.7		V
V _{SYSOVP_FALL}	System overvoltage	3 s		19.3		V
010041 _17.22	falling threshold	4 s		19.3		V
		5 s		24.5		V
I _{SYSOVP}	Discharge current when SYSOVP stop switching was triggered	on VSYS pin		20		mA
BAT OVER-VOLTA	GE COMPARATOR (BAT	OVP)	1			
	Overvoltage rising	1 s	102.3%	104%	106%	
V _{BATOVP_RISE}	threshold as percentage of VBAT_REG in REG0x05/04h()	≥2 s	102.3%	104%	105%	

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



 $V_{VBUS_UVLOZ} < V_{VBUSOV_FALL}$, $T_J = -40^{\circ}C$ to +125°C, and $T_J = 25^{\circ}C$ for typical values (unless otherwise noted)

PARA	METER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Overvoltage falling	1 s	100%	102%	104%	
V	threshold as percentage of					
V _{BATOVP} _FALL	VBAT_REG in REG0x05/04h()	≥2 s	100%	102%	103%	
	Overvoltage	1 s		2%		
V _{BATOVP} _HYST	hysteresis as percentage of VBAT_REG in REG0x05/04h()	≥2 s		2%		
I _{BATOVP}	Discharge current during BATOVP	Discharge current through VSYS pin		20		mA
CONVERTER OVER	CURRENT COMPARAT	OR (Q2)				
	Converter Over-	Reg0x32[5]=1b		150		mV
$V_{OCP_lim_Q2}$	Current Limit across Q2 MOSFET drain to source voltage	Reg0x32[5]=0b		210		mV
.,	System Short or SRN	Reg0x32[5]=1b		45		mV
V _{OCP_lim_SYSSHRT_Q2}	< 2.4 V	Reg0x32[5]=0b		60		mV
CONVERTER OVER	L CURRENT COMPARAT	OR (ACX)	1			
	Converter Over-	Reg0x32[4]=1b; RSNS_RAC=0b		150		mV
$V_{OCP_lim_ACX}$	Current Limit across ACP-ACN input current sensing	Reg0x32[4]=1b; RSNS RAC=1b		100		mV
		Reg0x32[4]=0b;RSNS_RAC=0b		280		mV
	resistor	Reg0x32[4]=0b; RSNS RAC=1b		200		mV
		Reg0x32[4]=1b;RSNS RAC=0b		90		mV
	System Short or SRN	Reg0x32[4]=1b;RSNS_RAC=1b		60		mV
V _{OCP_lim_SYSSHRT_ACX}	< 2.4 V	Reg0x32[4]=0b;RSNS RAC=0b		150		mV
		Reg0x32[4]=0b;RSNS_RAC=1b		120		mV
THERMAL SHUTDON	WN COMPARATOR					
T _{SHUT_RISE}	Thermal shutdown rising temperature	Temperature increasing		155		°C
T _{SHUTF_FALL}	Thermal shutdown falling temperature	Temperature reducing		135		°C
T _{SHUT_HYS}	Thermal shutdown hysteresis			20		°C
t _{SHUT_RDEG}	Thermal deglitch shutdown rising			100		us
t _{SHUT_FHYS}	Thermal deglitch shutdown falling			12		ms
ICRIT PROCHOT CO	MPARATOR					
I _{ICRIT_PRO}	Input current rising threshold for throttling as 10% above ILIM2_VTH	Only when ILIM2 setting is higher than 2A	105%	110%	117%	
INOM PROCHOT CO	MPARATOR					
I _{INOM_PRO}	INOM rising threshold as 10% above IIN_DPM		105%	110%	116%	
BATTERY DISCHAR	GE CURRENT LIMIT PR	ROCHOT COMPARATOR(IDCHG)	1			
	IDCHG threshold1 for	Reg0x39[7:2]=010000b, with 5mΩ R _{SR} current sensing resistor		16.384		Α



 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}\text{C}$ to +125°C, and $T_J = 25^{\circ}\text{C}$ for typical values (unless otherwise noted)

DCHG threshold1 leglitch time DCHG threshold2 for hrottling for IDSCHG of 6 A DCHG threshold2 leglitch time	Reg0x39h[1:0]=01b Reg0x39[7:2]=010000b 3C[5:3]=001b,with $5m\Omega$ R _{SR} current sensing resistor		1.25		sec
hrottling for IDSCHG of 6 A DCHG threshold2			04 570		
DCHG threshold2		96%	24.576	103%	Α
	Reg0x3C[7:6]=01b		1.6		ms
ARATOR					
ndependent	Reg0x30h[7]= 1, CMPIN falling	1.17	1.2	1.23	V
comparator threshold	Reg0x30h[7]= 0, CMPIN falling	2.27	2.3	2.33	V
ndependent comparator systeresis	CMPIN falling		100		mV
'ER					
D RAMP					
PWM switching	Reg0x01[1] = 0	680	800	920	kHz
requency	Reg0x01[1] = 1	340	400	460	kHz
(BATDRV)					
Gate drive voltage on BATFET		8.5	10	11.5	V
Orain-source voltage on BATFET during deal diode operation			30		mV
Measured by courcing 10 μA current to BATDRV		3	4	6	kΩ
Measured by sinking 0 μA current from BATDRV			1.2	2.1	kΩ
ER (HIDRV Q1)					
The resistance of the pate driver loop for urning on Q1	V _{BTST1} - V _{SW1} = 5 V		6		Ω
The resistance of the pate driver loop for urning off Q1	V _{BTST1} - V _{SW1} = 5 V		1.3	2.2	Ω
Bootstrap refresh comparator falling hreshold voltage	V _{BTST1} - V _{SW1} when low-side refresh pulse is requested	3.2	3.7	4.6	V
ER (HIDRV Q4)					
The resistance of the pate driver loop for urning on Q4	V _{BTST2} - V _{SW2} = 5 V		6		Ω
The resistance of the pate driver loop for urning off Q4	V _{BTST2} - V _{SW2} = 5 V		1.5	2.4	Ω
Bootstrap refresh comparator falling hreshold voltage	V _{BTST2} - V _{SW2} when low-side refresh pulse is requested	3.3	3.7	4.6	٧
	DRAMP WMM switching requency (BATDRV) Gate drive voltage on ATFET Drain-source voltage in BATFET during deal diode operation Measured by ourcing 10 µA urrent to BATDRV Measured by sinking 0 µA current from ATDRV ER (HIDRV Q1) The resistance of the ate driver loop for urning on Q1 The resistance of the ate driver loop for urning off Q1 The resistance of the ate driver loop for urning off Q1 The resistance of the ate driver loop for urning on Q4 The resistance of the ate driver loop for urning on Q4 The resistance of the ate driver loop for urning on Q4 The resistance of the ate driver loop for urning on Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4 The resistance of the ate driver loop for urning off Q4	PWM switching requency Reg0x01[1] = 0 Reg0x01[1] = 1 (BATDRV) Sate drive voltage on ATFET Drain-source voltage is a BATFET during deal diode operation Measured by ourcing 10 µA urrent to BATDRV Measured by sinking 0 µA current from ATDRV Mere resistance of the ate driver loop for urning off Q1 Mootstrap refresh omparator falling in reshold voltage Reg0x01[1] = 0 Reg0x01[1] = 1 Reg0x01[1] = 1 Neg0x01[1] = 1 Neg1x1 - V SW1 = 5 V Metron To V SW2 = 5 V Metron To V SW3 =	D RAMP PWM switching equency Reg0x01[1] = 0 680	D RAMP PWM switching equency Reg0x01[1] = 0 680 800 Reg0x01[1] = 1 340 400 Regox01[1] = 1 340 400 Reg0x01[1] = 1 340 400 Regox01[1] = 1 340 400 Reg0x01[1] = 1 340 400 Regox01[1] = 1 340 400	D RAMP PWM switching Reg0x01[1] = 0 680 800 920



 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}C$ to +125°C, and $T_J = 25^{\circ}C$ for typical values (unless otherwise noted)

	, 20, 30, 21, 10, 10		21	••••
gate driver loop for turning on Q2	V _{BTST1} - V _{SW1} = 5.5 V	6		Ω
The resistance of the gate driver loop for turning off Q2	V _{BTST1} - V _{SW1} = 5.5 V	1.7	2.6	Ω
VER (LODRV Q3)				
The resistance of the gate driver loop for turning on Q3	V _{BTST2} - V _{SW2} = 5.5 V	6.8		Ω
The resistance of the gate driver loop for turning off Q3	V _{BTST2} - V _{SW2} = 5.5 V	2.2	4.6	Ω
ART During Charge En	able			
Charge current soft- start step size		64		mA
Charge current soft- start duration time for each step		8		us
DIODE (D1)				
Forward bias voltage	IF = 20 mA at 25°C	0.8		V
Reverse breakdown voltage	IR = 2 μA at 25°C		20	V
DIODE (D2)				
Forward bias voltage	IF = 20 mA at 25°C	0.8		V
Reverse breakdown voltage	IR = 2 μA at 25°C		20	V
SCL)				
Input low threshold	I ² C		0.4	V
Input high threshold	I ² C	1.3		V
N DRAIN (SDA, CHRG	OK, CMPOUT)			
Output saturation voltage	5 mA drain current		0.4	V
Leakage current	Voltage = 7 V	–1	1	μΑ
/AP/FRS pin)				
Input low threshold			0.4	V
Input high threshold		1.3		V
N DRAIN SDA		<u> </u>		
Output Saturation Voltage	5 mA drain current		0.4	V
Leakage Current	Voltage = 7 V	-1	1	μΑ
N DRAIN CHRG_OK				
Output Saturation Voltage	5 mA drain current		0.4	V
Leakage Current	Voltage = 7 V	-1	1	μA
N DRAIN CMPOUT				
Output Saturation Voltage	5 mA drain current		0.4	V
	The resistance of the gate driver loop for turning on Q2 The resistance of the gate driver loop for turning off Q2 /ER (LODRV Q3) The resistance of the gate driver loop for turning on Q3 The resistance of the gate driver loop for turning on Q3 The resistance of the gate driver loop for turning off Q3 ART During Charge En Charge current soft-start step size Charge current soft-start duration time for each step DIODE (D1) Forward bias voltage Reverse breakdown voltage Leakage current /AP/FRS pin) Input low threshold Input low threshold Input low threshold Input low threshold N DRAIN SDA Output Saturation Voltage Leakage Current N DRAIN CHRG_OK Output Saturation Voltage Leakage Current N DRAIN CMPOUT Output Saturation	TEST CONDITIONS The resistance of the gate driver loop for turning on Q2 The resistance of the gate driver loop for turning on Q2 The resistance of the gate driver loop for turning off Q2 //ER (LODRV Q3) The resistance of the gate driver loop for turning off Q2 //ER (LODRV Q3) The resistance of the gate driver loop for turning on Q3 The resistance of the gate driver loop for turning off Q3 RT During Charge Enable Charge current soft-start steep size Charge current soft-start duration time for each step IODE (D1) Forward bias voltage IF = 20 mA at 25°C INDUB (D2) Forward bias voltage IF = 20 mA at 25°C Reverse breakdown voltage IR = 2 µA at 25°C INDUB (D2) Forward bias voltage IR = 2 µA at 25°C Input low threshold Input low threshold Input high threshold Input saturation voltage = 7 V /AP/FRS pin) Input low threshold Input low threshold Input ligh threshold Input ligh threshold Input low t	Test Test	The resistance of the gate driver loop for turning on Q2

 $V_{VBUS\ UVLOZ} < V_{VBUS\ OV\ FALL}$, $T_J = -40^{\circ}\text{C}$ to +125°C, and $T_J = 25^{\circ}\text{C}$ for typical values (unless otherwise noted)

PARA	METER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{OUT_LEAK_CMPOUT}	Leakage Current	Voltage = 7 V	-1		1	μΑ
LOGIC OUTPUT OPE	N DRAIN (PROCHOT)					
V _{OUT_LO_PROCHOT}	Output saturation voltage	50 Ω pullup to 1.05 V / 5-mA			300	mV
V _{OUT_LEAK_PROCHOT}	Leakage current	Voltage = 5.5 V	-1		1	μΑ
ANALOG INPUT (ILII	M_HIZ)					
V _{HIZ_LO}	Voltage to get out of HIZ mode	ILIM_HIZ pin rising	0.8			V
V _{HIZ_HIGH}	Voltage to enable HIZ mode	ILIM_HIZ pin falling			0.4	٧
ANALOG INPUT (CE	LL_BATPRESZ)					
V _{CELL_5S}	5s	CELL_BATPRESZ pin voltage as percentage of REGN = 6 V	90%	100%		
V _{CELL_4S}	4s setting	CELL_BATPRESZ pin voltage as percentage of REGN = 6 V	68.4%	75%	81.5%	
V _{CELL_3S}	3s setting	CELL_BATPRESZ pin voltage as percentage of REGN = 6 V	51.7%	55%	65%	
V _{CELL_2S}	2s setting	CELL_BATPRESZ pin voltage as percentage of REGN = 6 V	35%	40%	48.5%	
V _{CELL_1S}	1s setting	CELL_BATPRESZ pin voltage as percentage of REGN = 6 V	18.4%	25%	31.6%	
V _{CELL_BATPRESZ_RISE}	Battery is present	CELL_BATPRESZ rising	18%			
V _{CELL_BATPRESZ_FALL}	Battery is removed	CELL_BATPRESZ falling			15%	
ANALOG INPUT (CO	MP1, COMP2)		'			
I _{LEAK_COMP1}	COMP1 Leakage		-120		120	nA
I _{LEAK COMP2}	COMP2 Leakage		-120		120	nA

7.6 Timing Requirements

	· .	MIN	NOM MAX	UNIT
I ² C TIMING	CHARACTERISTICS			
t _r	SCL/SDA rise time		300	ns
t _f	SCL/SDA fall time		300	ns
t _{HIGH}	SCL pulse width high	0.6	50	μs
t _{LOW}	SCL pulse width low	1.3		μs
t _{SU:STA}	Setup time for START condition	0.6		μs
t _{HD:STA}	Start condition hold time after which first clock pulse is generated	0.6		μs
t _{SU:DAT}	Data setup time	100		ns
t _{HD:DAT}	Data hold time	300		ns
t _{SU:STO}	Set up time for STOP condition	0.6		μs
t _{BUF}	Bus free time between START and STOP conditions	1.3		μs
f _{SCL}	Clock frequency	10	400	kHz
HOST COM	MUNICATION FAILURE			
t _{TIMEOUT}	I ² C bus release timeout ⁽¹⁾	25	35	ms
t _{BOOT}	Deglitch for watchdog reset signal	10		ms

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback




7.6 Timing Requirements (continued)

		MIN	NOM	MAX	UNIT
	Watchdog timeout period, REG0x01[6:5]=01	4	5.5	7	s
1	Watchdog timeout period, REG0x01[6:5]=10	70	88	105	S
	Watchdog timeout period, REG0x01[6:5]=11	140	175	210	S


(1) Devices participating in a transfer timeout when any clock low exceeds the 25-ms minimum timeout period. Devices that have detected a timeout condition must reset the communication no later than the 35-ms maximum timeout period. Both a host and a target must adhere to the maximum value specified because it incorporates the cumulative stretch limit for both a host (10 ms) and a target (25

7.7 Typical Characteristics

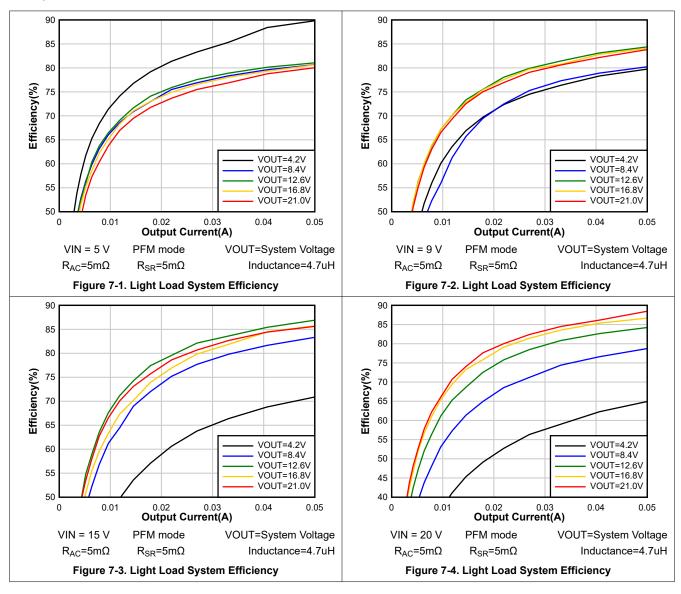




7.7 Typical Characteristics (continued)

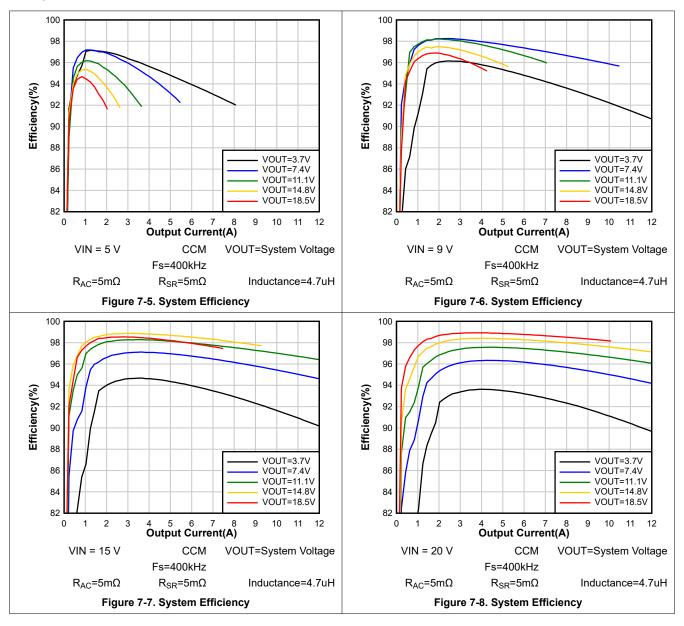



7.7 Typical Characteristics (continued)

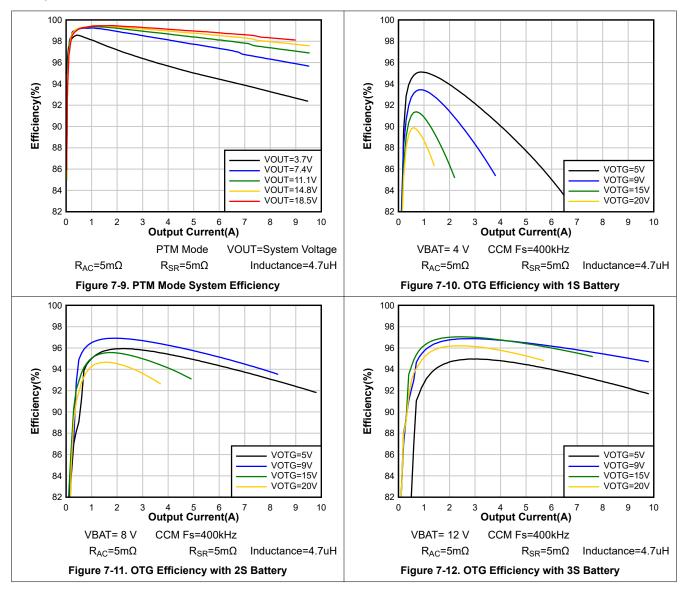



7.7 Typical Characteristics (continued)





Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated



8 Detailed Description

8.1 Overview

The BQ25730 is a narrow VDC buck-boost charger controller for oxygen concentrator, ventilator, and portable electronics such as tablet and other mobile devices with rechargeable batteries. It provides seamless transition between different converter operation modes (buck, boost, or buck-boost), fast transient response, and high light load efficiency.

The BQ25730 supports a wide range of power sources, including USB-C PD ports, legacy USB ports, traditional AC-DC adapters, and so forth. It takes input voltage from 3.5 V to 26 V and charges a battery of 1 to 5 cells in series. In the absence of an input source, the BQ25730 supports the USB On-the-Go (OTG) function from a 1- to 5-cell battery to generate an adjustable 3 V to 24 V at the USB port with 8-mV resolution.

The BQ25730 features Dynamic Power Management (DPM) to limit input power and avoid AC adapter overloading. During battery charging, as system power increases, charging current is reduced to maintain total input current below adapter rating. If system power demand temporarily exceeds adapter rating, the BQ25730 supports the NVDC architecture to allow battery discharge energy to supplement system power.

The latest version of the USB-C PD specification includes Fast Role Swap (FRS) to ensure power role swapping occurs in a timely fashion so that the device(s) connected to the dock never experience momentary power loss or glitching. The device integrates FRS with compliance to the USB-C PD specification.

The TI patented switching frequency dithering pattern can significantly reduce EMI noise over the entire conductive EMI frequency range (150 kHz to 30 MHz). Multiple dithering scale options are available to provide flexibility for different applications to simplify EMI noise filter design.


The I²C host controls input current, charge current, and charge voltage registers with high resolution, high accuracy regulation limits.

Product Folder Links: BQ25730

Copyright © 2024 Texas Instruments Incorporated



8.2 Functional Block Diagram

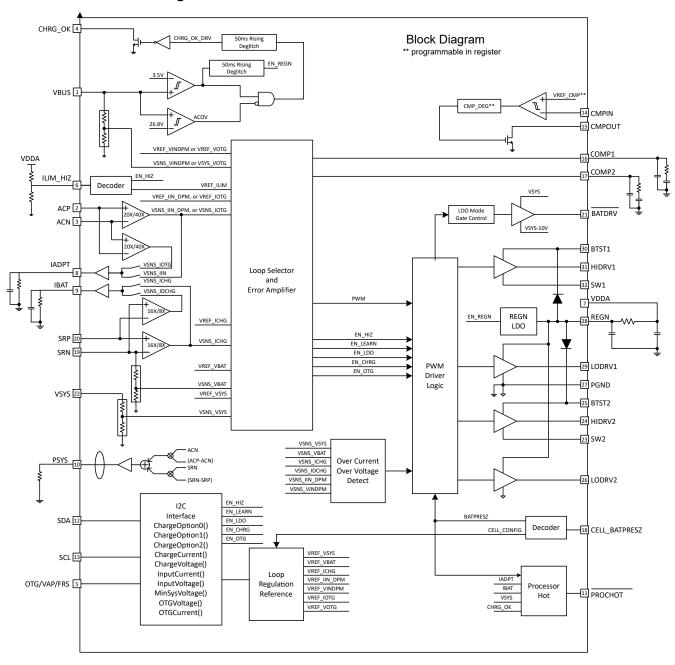



8.3 Feature Description

8.3.1 Power-Up Sequence

The device powers up from the higher voltage of VBUS or VBAT through integrated power selector. The charger starts POR (power on reset) when VBUS exceeds V_{VBUS_UVLOZ} or VBAT exceeds V_{VBAT_UVLOZ}. 5 ms after either VBUS or VBAT becomes valid, the charger resets all the registers to the default state. Another 5 ms later, the user registers become accessible to the host.

Power up sequence when the charger is powered up from VBUS:

- After VBUS above V_{VBUS_UVLOZ}, enable 6-V LDO REGN pin and VDDA pin voltage increase accordingly.
 CHRG OK pin goes HIGH and the AC STAT is configured to 1.
- After passing VBUS qualification, the REGN voltage is setup. VINDPM is detected in VBUS steady state voltage and IIN DPM is detected at ILIM HIZ pin steady state voltage.
- Battery CELL configuration is read at CELL_BATPRESZ pin voltage and compared to VDDA to determine cell configuration. Corresponding the default value of ChargeVoltage register (REG0x05/04()), ChargeCurrent register (Reg0x03/02), VSYS MIN register (Reg0x0D/0C) and SYSOVP threshold are loaded.
- · Converter powers up.

Power up sequence when the charger is powered up from VBAT:

- If only battery is present and the voltage is above V_{VBAT_UVLOZ}, charger wakes up and the BATFET is turned
 on and connecting the battery to system.
- By default, the charger is in low power mode (EN_LWPWR = 1b) with lowest quiescent current. The REGN LDO stays off. The Quiescent current is minimized. PROCHOT is available through the independent comparator by setting EN PROCHOT LPWR=1b.
- The adapter present comparator is activated, to monitor the VBUS voltage.
- SDA and SDL lines stand by waiting for host commands.
- Device can move to performance mode by configuring EN_LWPWR = 0b. The host can enable IBAT buffer through setting EN_IBAT=1b to monitor discharge current. The PSYS, PROCHOT or the independent comparator also can be enabled by the host.
- In performance mode, the REGN LDO is always available to provide an accurate reference and gate drive voltage for the converter.

8.3.2 Two-Level Battery Discharge Current Limit

To prevent the triggering of battery overcurrent protection and avoid battery wear-out, two battery current limit levels (IDCHG_TH1 and IDCHG_TH2) PROCHOT profiles are recommended to be enabled. Define IDCHG_TH1 through REG0x39h[7:2], IDCHG_TH2 is set through REG0x3Ch[5:3] for fixed percentage of IDCHG_TH1. There are dedicated de-glitch time setting registers(IDCHG_DEG1 and IDCHG_DEG2) for both IDCHG_TH1 and IDCHG_TH2.

- When battery discharge current is continuously higher than IDCHG_TH1 for more than IDCHG_DEG1 deglitch time, PROCHOT is asserted immediately. If the discharge current reduces to lower than IDCHG_TH1, then the time counter resets automatically. STAT_IDCHG1 bit will be set to 1 after PROCHOT is triggered.
 - Set PP IDCHG1=1b to enable IDCHG TH1 for triggering PROCHOT.
- When battery discharge current is continuously higher than IDCHG_TH2 for more than IDCHG_DEG2 deglitch time, PROCHOT is asserted immediately. If the discharge current reduces to lower than IDCHG_TH2, then the time counter resets automatically. STAT_IDCHG2 bit will be set to 1 after PROCHOT is triggered.

Product Folder Links: BQ25730

Set PP IDCHG2=1b to enable IDCHG TH2 for triggering PROCHOT.

Copyright © 2024 Texas Instruments Incorporated

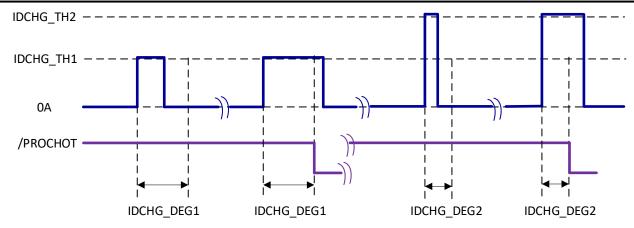


Figure 8-1. Two-Level Battery Discharging Current Trigger PROCHOT Diagram

8.3.3 Fast Role Swap Feature

Fast Role Swap (FRS) means charger quickly swaps from power sink role to power source role to provide an OTG output voltage to accessories when the original power source is disconnected. This feature is defined to transfer the charger from forward mode to OTG mode quickly without dropping VBUS voltage per USB-C PD specification requirement. Please contact factory for more detail information about FRS mode.

8.3.4 CHRG_OK Indicator

CHRG_OK is an active HIGH open drain indicator. It indicates the charger is in normal operation when the following conditions are valid:

- VBUS is above V_{VBUS} CONVEN
- VBUS is below V_{ACOV FALL}
- No faults triggered such as: SYSOVP/SYSUVP/ACOC/TSHUT/BATOVP/BATOC/force converter off.

8.3.5 Input and Charge Current Sensing

The charger supports 10 m Ω and 5 m Ω for both input current sensing and charge current sensing. By default, 5 m Ω is enabled by POR setting RSNS_RAC=1b and RSNS_RSR=1b, if 10-m Ω sensing is used please configure RSNS_RAC=0b and RSNS_RSR=0b. Lower current sensing resistor can help improve overall charge efficiency especially under heavy load. At same time PSYS,IADPT,IBAT pin accuracy and IINDPM/ICHG/IOTG regulation accuracy get worse due to effective signal reduction in comparison to error signal components.

When RSNS_RAC=RSNS_RSR=0b and 10 m Ω is used for both input and charge current sensing, the precharge current clamp is 384 mA (2 A for 1S if VSYS_MIN>VBAT>3 V), the maximum IIN_HOST setting is clamped at 6.35 A, and the maximum charge current is clamped at 8.128 A.

When RSNS_RAC=RSNS_RSR=1b and 5 m Ω is used for both input and charge current sensing, the charger will internally compensate pre-charge current clamp to be 384 mA (2 A for 1S if VSYS_MIN>VBAT>3 V) under 5-m Ω current sensing which keeps consistent between 10 m Ω and 5 m Ω . Under 5-m Ω current sensing application charge current range is doubled to 16.256 A. Based on EN_FAST_5MOHM register bit status and IADPT pin resistor the maximum input current can be configured referring to Table 8-1:

For defined current sense resistors (10 m Ω /5 m Ω), PSYS function is still valid when unsymmetrical input current sense and charge current sense resistors are used. But RSNS_RAC and RSNS_RSR bit status have to be consistent with practical resistors used in the system.

Table 8-1. Maximum Input Current Limit Configuratio			
		BA A VIBALI	

INDUCTANCE (IADPT Pin Resistance)	EN_FAST_5MOHM	RSR_RAC BIT	MAXIMUM INPUT CURRENT LIMIT (IINDPM)
1.0 uH(90.9 kΩ)	Xb	RSNS_RAC=0b	6.35 A
1.5 uH(121 kΩ)	1b	RSNS_RAC=1b	6.35 A
2.2 uH(137 kΩ)	0b	RSNS_RAC=1b	10 A
2.2 mH(160 kO)	Xb	RSNS_RAC=0b	6.35 A
3.3 uH(169 kΩ)	Xb	RSNS_RAC=1b	10 A

8.3.6 Input Voltage and Current Limit Setup

The actual input current limit being adopted by the device is the lower setting of IIN DPM and ILIM HIZ pin. Register IIN DPM input current limit setting will reset for below scenarios:

- When adapter is removed (CHRG OK is not valid). Note when adapter is removed IIN HOST will be reset one time to 3.25 A, under battery only host is still able to overwrite IIN_HOST register with a new value. If the adapter plug back in and CHRG OK is pulled up, IIN HOST will not be reset again.
- When input current optimization (ICO) is executed (EN ICO MODE=1b), the charger will automatically detect the optimized input current limit based on adapter output characteristic. The final IIN DPM register setting could be different from IIN HOST after ICO.

The voltage regulation loop of the charger regulates the input voltage to prevent the input adapter collapsing. The VINDPM threshold should be configured based on no load input voltage level. Charger initiates a VBUS voltage measurement without any load (VBUS at no load) right before the converter is enabled. The default VINDPM threshold is VBUS at no load - 1.28 V. Host can adjust VINDPM threshold after device POR through InputVoltage register(0x0B/0Ah[]), range from 3.2V to 19.52V with LSB 64mV.

After input current and voltage limits are set, the charger device is ready to power up. The host can always program the input current and voltage limit after the charger being powered up based on the input source type.

8.3.7 Battery Cell Configuration

Copyright © 2024 Texas Instruments Incorporated

CELL BATPRESZ pin is biased with a resistor divider from VDDA to GND. After REGN LDO is activated (VDDA rise up), the device detects the battery configuration through CELL BATPRESZ pin bias voltage. No external cap is allowed at CELL BATPRESZ pin. When CELL BATPRESZ pin is pulled down to GND (because of battery removal) at the beginning of startup process, VSYS MIN = 3.6 V and SYS OVP = 25 V and Maximum charge voltage (REG0x05/04)) follow 1 cell default setting 4.2 V. VSYS and VBAT ADC offset is also determined by CELL_BATPRESZ pin setting, under 1S-4S VSYS/VBAT ADC holds 2.88-V offset, however under 5S detection VSYS/VBAT ADC only holds 8.16-V offset to cover higher voltage range. Refer to Table 8-2 for CELL_BATPRESZ pin configuration typical voltage for swept cell count.

Table 8-2. Battery Cell Configuration

CELL COUNT	PIN VOLTAGE w.r.t. VDDA	CHARGEVOLTAGE (REG0x05/04h)	SYSOVP	VSYS_MIN	VSYS/VBAT ADC OFFSET
58	100%(Directly connect to VDDA)	21.000 V	25 V	15.4 V	8.16 V
4S	75%	16.800 V	19.5 V	12.3 V	2.88 V
3S	55%	12.600 V	19.5 V	9.2 V	2.88 V
28	40%	8.400 V	12 V	6.6 V	2.88 V
18	25%	4.200 V	6 V	3.6 V	2.88 V
Battery removal	0%	4.200 V	25 V	3.6 V	2.88 V

8.3.8 Device HIZ State

When input source is present, the charger can enter HIZ mode (converter shuts off) when ILIM_HIZ pin voltage is below 0.4 V or EN_HIZ is set to 1b. The charger is in the low quiescent current mode with REGN LDO enabled, ADC circuits are disactivated to reduce quiescent current. In order to exit HIZ mode, ILIM_HIZ pin voltage has to be higher than 0.8 V and EN_HIZ bit has to be set to 0b.

8.3.9 USB On-The-Go (OTG)

The device supports USB OTG operation to deliver power from the battery to other portable devices through USB port. The OTG mode output voltage is set in OTGVoltage register REG0x07/06() with 8-mV LSB range from 3.0 V to 24 V. The OTG mode output current is set in OTGCurrent register REG0x09() with 100-mA LSB range from 0 A to 12.7 A under 5-m Ω input current sensing. Both OTG voltage and OTG current are qualified for USB-CTM programed power supply (PPS) specification in terms of resolution and accuracy. The OTG mode can be enabled following below steps:

- Set target OTG current limit in OTGCurrent register, VBUS is below V_{VBUS CONVENZ}.
- Set OTG VAP MODE = 1b and EN OTG = 1b.
- OTG/VAP/FRS pin is pulled high.
- 15 ms after the above conditions are valid, converter starts and VBUS ramps up to target voltage. CHRG_OK pin goes HIGH if OTG_ON_CHRGOK= 1b.

OTG/VAP/FRS pin is used as multi-function to enable OTG and FRS mode.

8.3.10 Converter Operation

The charger operates in buck, buck-boost and boost mode under different VBUS and VSYS combination. The buck-boost can operate seamlessly across the three operation modes. The 4 main switches operating status under continuous conduction mode (CCM) are listed below for reference.

MODE **BUCK BUCK-BOOST BOOST** Q1 Switching Switching ON Q2 Switching Switching OFF OFF Q3 Switching Switching Q4 ON Switching Switching

Table 8-3. MOSFET Operation

8.3.11 Inductance Detection Through IADPT Pin

The charger reads both converter operation frequency and the inductance value through the resistance tied to IADPT pin before the converter starts up. The resistances recommended for 2.2-µH (800 kHz), 3.3-µH (800 kHz) and 4.7-µH (400 kHz) inductance refers to Table 8-4. A surface mount chip resistor with ±3% or better tolerance must to be used for an accurate inductance detection.

Table 8-4. Inductor Detection through IADPT Resistance

INDUCTOR IN USE	RESISTOR ON IADPT PIN		
2.2 μH (recommended for 800 kHz)	137 kΩ or 140 kΩ		
3.3 µH (recommended for 800 kHz)	169 kΩ		
4.7 μH (recommended for 400 kHz)	191 kΩ or 187 kΩ		

8.3.12 Converter Compensation

The charger employs two compensation pins COMP1 and COMP2 for converter compensation purpose, appropriate RC network is needed to guarantee converter steady state and transient operation. Under different operation frequency corresponding RC network value needs to be configured respectively as shown in below table. The definition of these RC components can be referred to Figure 8-2. It is not recommended to change the compensation network value due to the complexity of various operation modes.

Product Folder Links: BQ25730

30

Table 8-5.	Compensation	Configuration
-------------------	--------------	---------------

COMPONENT VALUE	INDUCTOR	COMP1 R1	COMP1 C11	COMP1 C12	COMP2 R2	COMP2 C21	COMP2 C22
400 kHz	4.7 µH	40.2 kΩ	4.7 nF	33 pF	15 kΩ	680 pF	15 pF
800 kHz	3.3 µH	16.9 kΩ	3.3 nF	33 pF	15 kΩ	1200 pF	15 pF
800 kHz	2.2 µH	16.9 kΩ	3.3 nF	33 pF	10 kΩ	1200 pF	15 pF




Figure 8-2. Compensation RC Network

8.3.13 Continuous Conduction Mode (CCM)

With sufficient charge or system current, the inductor current does not cross 0 A, which is defined as CCM. The controller starts a new cycle with ramp coming up from 200 mV. As long as the error amplifier output voltage is above the ramp voltage, the high-side MOSFET (HSFET) stays on. When the ramp voltage exceeds error amplifier output voltage, HSFET turns off and low-side MOSFET (LSFET) turns on. At the end of the cycle, ramp gets reset and LSFET turns off, ready for the next cycle. There is always break-before-make logic during transition to prevent cross-conduction and shoot-through. During the dead time when both MOSFETs are off, the body-diode of the low-side power MOSFET conducts the inductor current.

During CCM, the inductor current always flows. Having the LSFET turn-on when the HSFET is off keeps the power dissipation low and allows safe charging at high currents.

8.3.14 Pulse Frequency Modulation (PFM)

In order to improve converter light-load efficiency, BQ25730 switches to PFM operation at light load. The effective switching frequency will decrease accordingly when system load decreases. The minimum frequency can be limited to 25 kHz when the OOA feature is enabled (EN_OOA=1b) to avoid audible noise.

8.3.15 Switching Frequency and Dithering Feature

Normally, the IC switches in fixed frequency which can be adjusted through PWM_FREQ register bit. The Charger also support frequency dithering function to improve EMI performance. This function is disabled by default with setting EN_DITHER=00b. It can be enabled by setting EN_DITHER=01/10/11b, the switching frequency is not fixed when dithering is enabled. It varies within determined range by EN_DITHER setting, 01/10/11b is corresponding to $\pm 2\%/4\%/6\%$ switching frequency. Please contact factory for more detail information.

8.3.16 Current and Power Monitor

8.3.16.1 High-Accuracy Current Sense Amplifier (IADPT and IBAT)

A high-accuracy current sense amplifier (CSA) is used to monitor the input current during forward charging, or output current during OTG (IADPT) and the charge/discharge current (IBAT). IADPT voltage is 20× or 40× the differential voltage across ACP and ACN. IBAT voltage is 8×/16× of the differential across SRP and SRN. After input voltage or battery voltage is above UVLO, IADPT output becomes valid. To lower the voltage on current

monitoring, a resistor divider from CSA output to GND can be used and accuracy over temperature can still be achieved.

- V_{IADPT} = 20 or 40 × (V_{ACP} V_{ACN}) during forward mode, or 20 or 40 × (V_{ACN} V_{ACP}) during reverse OTG mode.
- $V_{IBAT} = 8$ or $16 \times (V_{SRP} V_{SRN})$ during forward charging mode.
- V_{IBAT} = 8 or 16 × (V_{SRN} V_{SRP}) during forward supplement mode, reverse OTG mode and battery only discharge scenario.

A maximum 100-pF capacitor is recommended to connect on the output for decoupling high-frequency noise. An additional RC filter is optional. Note that RC filtering has additional response delay. The CSA output voltage is clamped at 3.3 V.

8.3.16.2 High-Accuracy Power Sense Amplifier (PSYS)

The charger monitors total system power. During forward mode, the input adapter powers the system. During reverse OTG mode and battery only discharge scenario, the battery powers the system and VBUS output. The ratio of PSYS pin output current and total system power, K_{PSYS} , can be programmed in PSYS_RATIO register bit with default 1 μ A/W. The input and charge sense resistors (R_{AC} and R_{SR}) are selected in RSNS_RAC bit and RSNS_RSR bit. By default, PSYS_CONFIG=00b and PSYS voltage can be calculated with Equation 1, where $I_{IN}>0$ when the charger is in forward charging and $I_{IN}<0$ when charger is in OTG operation; where $I_{BAT}<0$ when battery is discharging.

$$V_{PSYS} = R_{PSYS} \cdot K_{PSYS} (V_{ACP} \cdot I_{IN} + V_{SYS} \cdot I_{BAT})$$

$$\tag{1}$$

 R_{AC} and R_{SR} values are not limited to symmetrical both 5 m Ω or both 10 m Ω . For defined current sense resistors (10 m Ω /5 m Ω), PSYS function is still valid when R_{AC} =5 m Ω (RSNS_RAC=1b) and R_{SR} =10 m Ω (RSNS_RAC=0b), vice versa. As long as RSNS_RAC and RSNS_RSR bit status are consistent with practical resistors used in the system.

Charger can block IBAT contribution to above equation by setting PSYS_CONFIG =01b in forward mode and block IBUS contribution to above equation by setting PSYS_OTG_IDCHG=1b in OTG mode.

To minimize the quiescent current, the PSYS function is disabled by default PSYS CONFIG = 11b.

CASE#	PSYS_CONFIG BITS	PSYS_OTG_IDCHG BITS	FORWARD MODE PSYS CONFIGURATION	OTG MODE PSYS CONFIGURATION
1	00b	0b	PSYS = PBUS+PBAT	PSYS = PBUS + PBAT
2	00b	1b	PSYS = PBUS+PBAT	PSYS =PBAT
3	01b	Xb	PSYS = PBUS	PSYS = 0
4	11b	Xb	PSYS = 0 (Disabled)	PSYS = 0 (Disabled)
5 (Reserved)	10b	Xb	PSYS = 0 (Reserved)	PSYS = 0 (Reserved)

Table 8-6. PSYS Configuration Table

8.3.17 Input Source Dynamic Power Management

The charger supports Dynamic Power Management (DPM). Normally, the input power source provides power for the system load and/or charging the battery. When the input current exceeds the input current setting (IIN_DPM), or the input voltage falls below the input voltage setting (VINDPM), the charger decreases the charge current to provide priority to the system load. As the system current rises, the available charge current drops accordingly towards zero. If the system load keeps increasing after the charge current drops down to zero, the system voltage starts to drop. As the system voltage drops below the battery voltage, the battery will discharge to supplement the heavy system load.

8.3.18 Input Current Optimizer (ICO)

For a recognized input adapter, IINDPM can be configured precisely to prevent adapter collapasing. When a third party unknown adapter is used, then input voltage regulation (VINDPM) feature can be leveraged to prevent input crash. With the increasing of input current, voltage drops along the input cable also increases and voltage measured it charger input port decreases accordingly. VINDPM feature can limit input power from adapter by regulating VBUS at certain value configured at InputVoltage register(0x0Bh/0Ah[]). However, the adapter may still overheat when it is kept running at its voltage limit for a long period of time. Therefore, it is preferred to operate the third party adapter slightly under its current rating. The Input Current Optimizer (ICO) feature can automatically maximize the power of unknown input adapter without continuously working under VINDPM. Note the ICO feature can only be employed when the adapter input current limit is at least 500 mA. Please contact factory for more detail information about ICO feature.

8.3.19 Two-Level Adapter Current Limit (Peak Power Mode)

Usually adapter can supply current higher than DC rating for a few milliseconds to tens of milliseconds. The charger employs two-level input current limit, or peak power mode, to fully utilize the overloading capability and minimize battery discharge during system load transient. The level 1 current limit, or I_{LIM1} , is the same as adapter DC current, set in IIN_DPM register. The level 2 overloading current, or I_{LIM2} , is set in ILIM2_VTH, as a percentage of I_{LIM1} .

When the charger detects input current surge and battery discharge due to load transient (both the adapter and battery support the system together), or when the charger detects the system voltage starts to drop below VSYS_MIN setting due to load transient (only the adapter supports the system), the charger will first apply I_{LIM2} for T_{OVLD} (PKPWR_TOVLD_DEG register bits), and then I_{LIM1} for up to $T_{MAX} - T_{OVLD}$ time. T_{MAX} is programmed in PKPWR_TMAX register bits. After T_{MAX} , if the load is still high, another peak power cycle starts. Charging is disabled during T_{MAX} and T_{OVLD} already expires; once T_{MAX} , expires, a new cycle starts and resumes charging automatically.

To prepare entering peak power follow below steps:

- Set EN IIN DPM=1b to enable input current dynamic power management.
- Set EN EXTILIM=0b to disable external current limit.
- Set register IIN HOST based on adapter output current rating as the level 1 current limit(I_{I IM1})
- Set register bits ILIM2 VTH according to the adapter overload capability as the level 2 current limit(I_{IM2}).
- Set register bits PKPWR_TOVLD_DEG as I_{LIM2} effective duration time for each peak power mode operation
 cycle based on adapter capability.
- Set register bits PKPWR_TMAX as each peak power mode operation cycling time based on adapter capability.

Depends on the battery existence and charge status peak power mode can be finally enabled with two different approaches:

- When battery is depleted in which VBAT is lower than VSYS_MIN setting or battery is removed, host need
 to set EN_PKPWR_VSYS=1b to enable peak power mode triggered by system voltage undershoot. The
 under-shoot threshold is the VSYS_MIN register setting which is the system regulation point before load
 transient happens. Typical application waveform refer to Figure 9-22.
- When battery is not depleted in which VBAT is higher than VSYS_MIN setting, host need to set EN_PKPWR_IIN_DPM=1b to enable peak power mode triggered by input current overshoot. The overshoot threshold is IIN_DPM register which is same as the level 1 current limit (I_{LIM1}). Typical application waveform refer to Figure 9-23.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



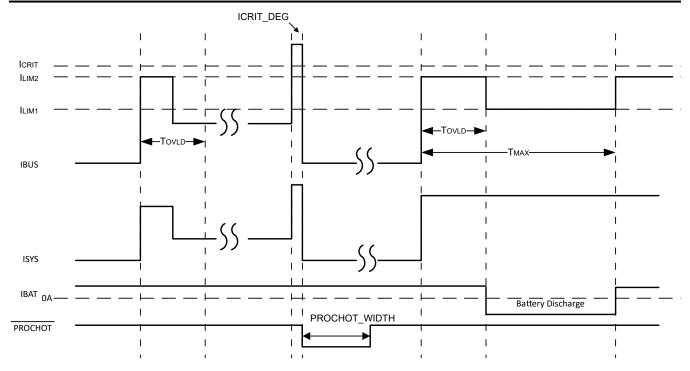


Figure 8-3. Two-Level Adapter Current Limit Timing Diagram

8.3.20 Processor Hot Indication

The events monitored by the processor hot function includes:

- ICRIT: adapter peak current, as 110% of ILIM2
- INOM: adapter average current (110% of IIN DPM)
- IDCHG1: battery discharge current level 1
- IDCHG2: battery discharge current level 2, note IDCHG2 threshold is always larger than IDCHG1 threshold determined by IDCHG TH2 register setting.
- VBUS VAP: VBUS threshold to trigger PROCHOT in VAP mode 2 and 3.
- VSYS: system voltage on VSYS pin
- Adapter Removal: upon adapter removal (VBUS is lower than ACOK_TH=3.2 V same as V_{VBUS CONVENZ} threshold)
- Battery Removal: upon battery removal (CELL BATPRESZ pin goes LOW)
- CMPOUT: Independent comparator output (CMPOUT pin HIGH to LOW)
- VINDPM: VBUS lower than 83%/91%/100% of VINDPM setting. The effective threshold PROCHOT VINDPM is determined by combination of register PROCHOT VINDPM 80 90 bit and LOWER PROCHOT VINDPM bit:
 - PROCHOT VINDPM=VINDPM register setting: LOWER PROCHOT VINDPM=0b;
 - PROCHOT_VINDPM=83% VINDPM register setting: LOWER PROCHOT VINDPM=1b;PROCHOT VINDPM 80 90=0b;
 - PROCHOT VINDPM=91% VINDPM register setting: LOWER_PROCHOT_VINDPM=1b;PROCHOT_VINDPM_80_90=1b;
- EXIT VAP: Every time when the charger exits VAP mode.

The threshold of ICRIT, IDCHG1,IDCHG2,VSYS or VINDPM, and the deglitch time of ICRIT, INOM, IDCHG1, IDCHG2, or CMPOUT are programmable through I²C register bits. Except the PROCHOT EXIT VAP is always enabled, the other triggering events can be individually enabled in ProchotOption1[7:0], PP IDCHG2 and PP_VBUS_VAP. When any enabled event in PROCHOT profile is triggered, PROCHOT is asserted low for a single pulse with minimal width programmable in PROCHOT WIDTH register bits. At the end of the single pulse, if the PROCHOT event is still active, the pulse gets extended until the event is removed.

If the PROCHOT pulse extension mode is enabled by setting EN_PROCHOT_EXT= 1b, the PROCHOT pin will be kept low until host writes PROCHOT CLEAR= 0b, even if the triggering event has been removed.

If the PROCHOT_VINDPM or PROCHOT_EXIT_VAP is triggered, PROCHOT pin will always stay low until the host clears it, no matter the PROCHOT is in one pulse mode or in extended mode. In order to clear PROCHOT_VINDPM, host needs to write 0 to STAT_VINDPM. In order to clear PROCHOT_EXIT_VAP, host needs to write 0 to STAT_EXIT_VAP.

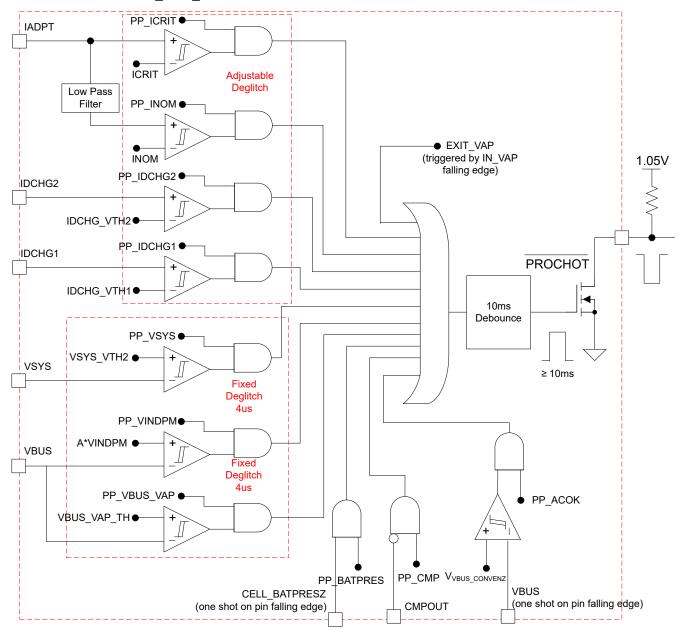


Figure 8-4. PROCHOT Profile

8.3.20.1 PROCHOT During Low Power Mode

During low power mode (EN_LWPWR = 1), the charger offers a low power $\overline{PROCHOT}$ function with very low quiescent current consumption (~35 µA), which uses the independent comparator to monitor the system voltage, and assert $\overline{PROCHOT}$ to CPU if the system power is too high and resulting system voltage is lower than specific threshold.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



Below lists the register setting to enable PROCHOT monitoring system voltage in low power mode.

- EN LWPWR = 1b to enable charger low power mode.
- REG0x38[7:0] = 00h
- REG0x30[6:4] = 000b
- Independent comparator threshold is always 1.2 V
- When EN PROCHOT LPWR = 1b, charger monitors system voltage. Connect CMPIN to voltage proportional to system voltage. PROCHOT triggers from HIGH to LOW when CMPIN voltage falls below 1.2 V.

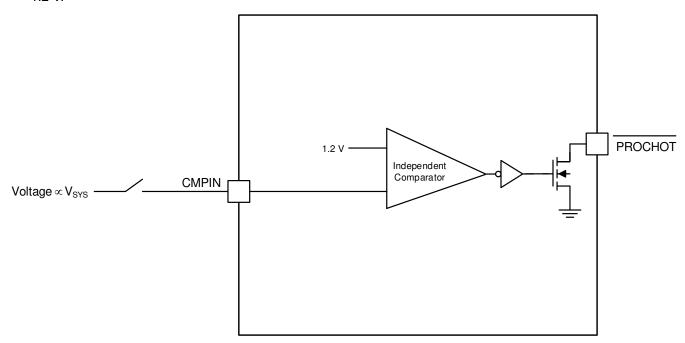


Figure 8-5. PROCHOT Low Power Mode Implementation

8.3.20.2 PROCHOT Status

report which event in the profile triggers PROCHOT if the corresponding bit is set to 1. The status bit can be reset back to 0 after it is read by the host, when the current PROCHOT event is not active any more.

Assume there are two PROCHOT events, event A and event B. Event A triggers PROCHOT first, but event B is also active. Both status bits will be HIGH. At the end of the 10-ms PROCHOT pulse, if any of the PROCHOT event is still active (either A or B), the PROCHOT pulse is extended.

8.3.21 Device Protection

8.3.21.1 Watchdog Timer

The charger includes a watchdog timer to terminate charging if the charger does not receive a write ChargeVoltage() or write ChargeCurrent() command within 175s (default value and adjustable via WDTMR_ADJ). When watchdog timeout occurs, all register values are kept unchanged except ChargeCurrent() resets to 0 A. Write ChargeVoltage() or write ChargeCurrent() commands must be resent to reset watchdog timer. Writing WDTMR ADJ = 00b to disable watchdog timer or update new watchdog timer values can also reset watchdog timer. New non-zero charge current value has to be written to ChargeCurrent() register to resume charging after watchdog timer expires.

8.3.21.2 Input Overvoltage Protection (ACOV)

The charger has fixed ACOV voltage threshold with hysteresis. When VBUS pin voltage is higher than V_{ACOV RISE} for more than 100 µs, it is considered as adapter overvoltage. CHRG OK pin will be pulled low by the charger, and the converter will be disabled. As system falls below battery voltage, BATFET will be turned

on. When VBUS pin voltage falls below V_{ACOV_FALL} for more than 1 ms, it is considered as adapter voltage returns back to normal voltage. CHRG_OK pin is pulled high by external pull-up resistor. The converter resumes if enable conditions are valid.

8.3.21.3 Input Overcurrent Protection (ACOC)

If the input current exceeds the 1.33× or 2× of ILIM2_VTH set point ACOC_TH (adjustable through ACOC_VTH), after 250-µs rising edge de-glitch time converter stops switching because of input overcurrent protection (ACOC). ACOC is a non-latch fault, if input current falls below set point, after 250-ms falling edge de-glitch time converter starts switching again. ACOC is disabled by default and need to be enabled by configuring EN_ACOC=1b. When ACOC is triggered, its corresponding status bit Fault ACOC will be set and it can be cleared by host read.

8.3.21.4 System Overvoltage Protection (SYSOVP)

When the converter starts up, the BQ25730 reads CELL_BATPRESZ pin configuration and sets ChargeVoltage() and SYSOVP threshold (1s-6 V, 2s-12 V, 3s/4s-19.5 V and 5s-25 V). Before ChargeVoltage() is written by the host, the battery configuration will change with CELL pin voltage. When SYSOVP happens, the device latches off the converter. Fault SYSOVP status bit is set to 1. The user can clear latch-off by either writing 0 to the Fault SYSOVP status bit or removing and plugging in the adapter again. After latch-off is cleared, the converter starts again.

8.3.21.5 Battery Overvoltage Protection (BATOVP)

Battery overvoltage may happen when user plugs in a wrong battery or a wrong regulation voltage is written into ChargeVoltage() register. The BATOVP rising threshold is 104% of regulation voltage set in ChargeVoltage() register, and falling threshold is 102% of regulation voltage set in ChargeVoltage() register. When BATOVP rising condition is triggered: if charge is enabled (charge current is not 0A) converter should shut down with both HS MOSFET and LS MOSFET turned off; if charge is disabled the converter should keep operating without disturbance until battery rise up system voltage to be high enough trigger SYSOVP. There is no user status bit to monitor. Note VBAT voltage used for BATOVP detection is based on SRN pin measurement. When BATOVP is triggered with charge enabled, 40-mA discharge current is added on VSYS pin will help discharge battery voltage.

8.3.21.6 Battery Discharge Overcurrent Protection (BATOC)

The charger monitors the battery discharge current to provide the battery overcurrent protection (BATOC) through voltage across SRN and SRP. BATOC can be enabled by configuring EN_BATOC=1b. BATOC threshold is selected either 133% of IDCHG_TH2 or 200% IDCHG_TH2 through BATOC_VTH bit. The threshold is also clamped between 100 mV and 360 mV SRN-SRP cross voltage.

When discharge current is higher than the threshold after 250-µs deglitch time, BATOC fault is triggered, status bit Fault BATOC is set accordingly. Converter shuts down when BATOC is asserted to disable OTG operation and reduce discharge current. BATFET status is not impacted if need to supplement power to system.

BATOC is not a latch fault, therefore after BATOC fault is removed, with 250-ms relax time, converter resume switching automatically. But status bit Fault BATOC is only cleared by host read.

8.3.21.7 Battery Short Protection (BATSP)

For multicell operation, if BAT voltage falls below VSYS_MIN during charging, the maximum charger current is limited to 384 mA. For single-cell operation, if BAT voltage falls below 3.0 V during charging, the maximum charge current is limited to 384 mA; if BAT voltage is between 3.0 V and VSYS_MIN then maximum charge current is limited to 2 A. Note VBAT voltage used for battery short detection is based on SRN pin measurement.

8.3.21.8 System Undervoltage Lockout (VSYS_UVP) and Hiccup Mode

The charger VSYS_UVP is enabled by POR (VSYS_UVP_ENZ=0b) and can be disabled by writing VSYS_UVP_ENZ=1b. This protection is mainly defined to protect converter from system short circuit under both startup and steady state process. VSYS pin is used to monitor the system voltage, when VSYS is lower



than 2.4 V (configurable through VSYS_UVP register bits), there is 2-ms deglitch time, the IIN_DPM is clamped to 0.5 A by the charger itself.

If hiccup mode is enabled with VSYS_UVP_NO_HICCUP = 0b, after 2-ms deglitch time, the charger should shut down for 500 ms. The charger will restart for 10 ms if VSYS is still lower than 2.4 V, the charger should shut down again. This hiccup mode will be tried continuously, if the charger restart failed for 7 times in 90 second, the charger will be latched off. Fault VSYS_UVP bit will be set to 1 to report a system short fault. The charger only can be enabled again by writing Fault VSYS_UVP bit to 0b.

If hiccup mode is disabled VSYS_UVP_NO_HICCUP = 1b. After 2-ms deglitch time, the charger should shut down and latched off. Fault VSYS_UVP bit will be set to 1 to report a system short fault. The charger only can be enabled again once the host writes Fault VSYS_UVP bit to 0b.

8.3.21.9 Thermal Shutdown (TSHUT)

The WQFN package has low thermal impedance, which provides good thermal conduction from the silicon to the ambient, to keep junction temperatures low. As added level of protection, the charger converter turns off for self-protection whenever the junction temperature reaches the 155°C. The charger stays off until the junction temperature falls below 135°C. During thermal shut down, the REGN LDO current limit is reduced to 16 mA and stays on. When the temperature falls below 135°C, charge can be resumed with soft start.

When thermal shut down is triggered, TSHUT status bit will be triggered. This status bit keep triggered until host read to clear it. If TSHUT is still present during host read, then this bit will try to be cleared when host read but finally keep triggered because TSHUT still exists.

8.4 Device Functional Modes

8.4.1 Forward Mode

When input source is connected to VBUS, BQ25730 is in forward mode to regulate system and charge battery.

8.4.1.1 System Voltage Regulation with Narrow VDC Architecture

The device employs Narrow VDC architecture (NVDC) with BATFET separating the system from the battery. The minimum system voltage is set by VSYS_MIN register REG0x0D/0C(). Even with a depleted battery, the system is regulated above the minimum system voltage.

When the battery is below minimum system voltage setting, the BATFET operates in linear mode (LDO mode), and the system is regulated at VSYS_MIN register value. As the battery voltage rises above the minimum system voltage, system voltage is regulated 150 mV above battery voltage when BATFET is turned off (no charging or no supplement current). When in charging or in supplement mode, the voltage difference between the system and battery is the V_{DS} of the BATFET and the BATFET is fully on.

8.4.1.2 Battery Charging

The BQ25730 charges 1- to 5-cell battery in constant current (CC), and constant voltage (CV) mode. Based on CELL_BATPREZ pin setting, the charger sets default battery voltage 4.2 V/cell to ChargeVoltage(). According to battery capacity, the host programs appropriate charge current to ChargeCurrent() register. When battery is full or battery is not in good condition to charge, host terminates charge by setting CHRG_INHIBIT bit to 1b, or setting ChargeCurrent() to zero.

8.4.2 USB On-The-Go

The BQ25730 supports USB OTG functionality to deliver power from the battery to other portable devices through USB port (reverse mode). The OTG output voltage is compliant with USB-C PD specification, including 5 V, 9 V, 15 V, and 20 V. The output current regulation is compliant with USB-C PD specification, including 500 mA, 1.5 A, 3 A and 5 A, and so forth.

Similar to forward operation, the device switches from PWM operation to PFM operation at light load to improve efficiency.

8.4.3 Pass Through Mode (PTM)-Patented Technology

The charger can be operated in the pass through mode (PTM) to improve efficiency. In PTM, the Buck and Boost high-side FETs (Q1 and Q4) are both turned on, while the Buck and Boost low-side FETs are both turned off. The input power is directly passed through the charger to the system. The switching losses of MOSFETs and the inductor core loss are saved. The charger quiescent current under PTM mode is also minimized to further increase light load efficiency. Charger will be transition from normal Buck-Boost operation to PTM operation by setting EN_PTM = 1b; and will transition out of PTM mode with host control by setting EN_PTM =0b. Please contact factory for more detail information about PTM mode.

8.5 Programming

The charger supports battery-charger commands that use either Write-Word or Read-Word protocols, as summarized in Section 8.5.1.7. The I²C address is 6Bh(0b1101011) consist of 7 bits. Adding read(1b) and write(0b) to the end of address 7bits, the total 8bits data format address should be D6h (1101011_0 for write)/D7h(1101011_1 for read). The ManufacturerID and DeviceID registers are assigned to identify the charger device. The ManufacturerID register command always returns 40h.

8.5.1 I²C Serial Interface

The BQ25730 uses I²C compatible interface for flexible charging parameter programming and instantaneous device status reporting. I²C is a bi-directional 2-wire serial interface. Only two bus lines are required: a serial data line (SDA) and a serial clock line (SCL). Devices can be considered as host or target when performing data transfers. A host is the device which initiates a data transfer on the bus and generates the clock signals to permit that transfer. At that time, any device addressed is considered a target device.

The device operates as a target device with address D6h, receiving control inputs from the host device like micro controller or a digital signal processor through REG00-REG3F. The I²C interface supports both standard mode (up to 100 kHz), and fast mode (up to 400 kHz). connecting to the positive supply voltage via a current source or pull-up resistor. When the bus is free, both lines are HIGH. The SDA and SCL pins are open drain.

8.5.1.1 Timing Diagrams

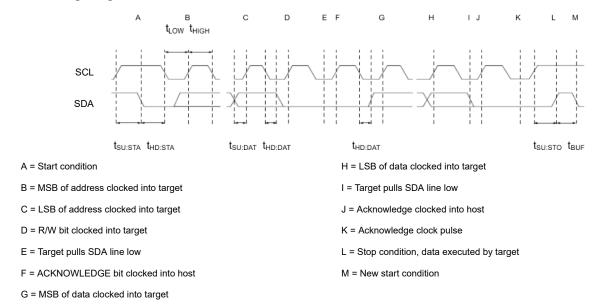


Figure 8-6. I²C Write Timing

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



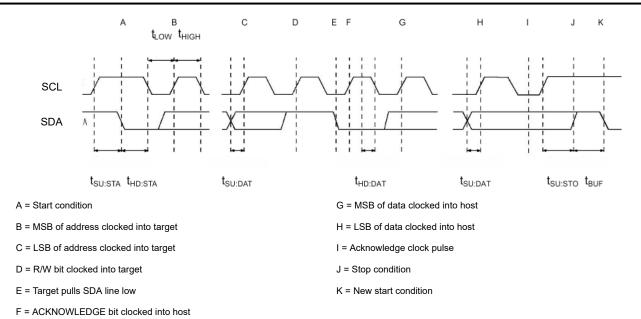


Figure 8-7. I²C Read Timing

8.5.1.2 Data Validity

The data on the SDA line must be stable during the HIGH period of the clock. The HIGH or LOW state of the data line can only change when the clock signal on the SCL line is LOW. One clock pulse is generated for each data bit transferred.

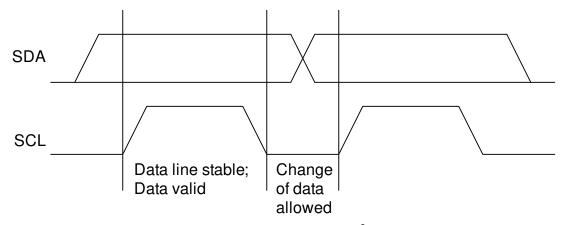


Figure 8-8. Bit Transfer on the I²C Bus

8.5.1.3 START and STOP Conditions

All transactions begin with a START (S) and can be terminated by a STOP (P). A HIGH to LOW transition on the SDA line while SCL is HIGH defines a START condition. A LOW to HIGH transition on the SDA line when the SCL is HIGH defines a STOP condition.

START and STOP conditions are always generated by the host. The bus is considered busy after the START condition, and free after the STOP condition.

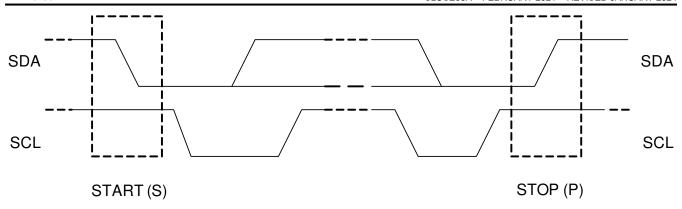


Figure 8-9. START and STOP Conditions

8.5.1.4 Byte Format

Every byte on the SDA line must be 8 bits long. The number of bytes to be transmitted per transfer is unrestricted. Each byte has to be followed by an Acknowledge bit. Data is transferred with the Most Significant Bit (MSB) first. If a target cannot receive or transmit another complete byte of data until it has performed some other function, it can hold the clock line SCL low to force the host into a wait state (clock stretching). Data transfer then continues when the target is ready for another byte of data and release the clock line SCL.

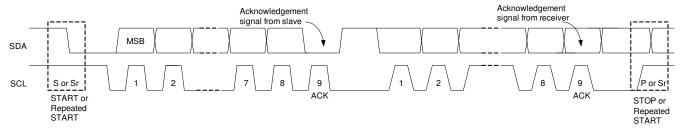


Figure 8-10. Data Transfer on the I²C Bus

8.5.1.5 Acknowledge (ACK) and Not Acknowledge (NACK)

The acknowledge takes place after every byte. The acknowledge bit allows the receiver to signal the transmitter that the byte was successfully received and another byte may be sent. All clock pulses, including the acknowledge 9th clock pulse, are generated by the host.

The transmitter releases the SDA line during the acknowledge clock pulse so the receiver can pull the SDA line LOW and it remains stable LOW during the HIGH period of this clock pulse.

When SDA remains HIGH during the 9th clock pulse, this is the Not Acknowledge signal. The host can then generate either a STOP to abort the transfer or a repeated START to start a new transfer.

8.5.1.6 Target Address and Data Direction Bit

After the START, a target address is sent. This address is 7 bits long followed by the eighth bit as a data direction bit (bit R/W). A zero indicates a transmission (WRITE) and a one indicates a request for data (READ).




Figure 8-11. Complete Data Transfer



8.5.1.7 Single Read and Write




Figure 8-12. Single Write

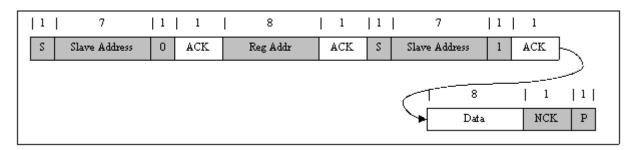


Figure 8-13. Single Read

If the register address is not defined, the charger IC send back NACK and go back to the idle state.

8.5.1.8 Multi-Read and Multi-Write

The charger device supports multi-read and multi-write.

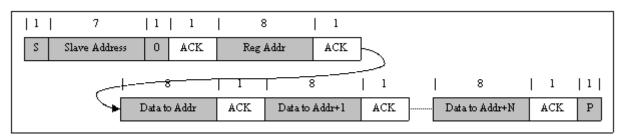


Figure 8-14. Multi Write

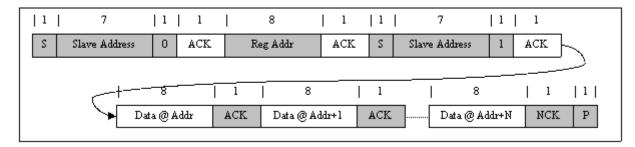


Figure 8-15. Multi Read

8.5.1.9 Write 2-Byte I²C Commands

A few I²C commands combine two 8-bit registers together to form a complete value. These commands include:

- ChargeCurrent()
- ChargeVoltage()
- IIN_DPM()
- OTGVoltage()
- InputVoltage()



Host has to write LSB bit first and then move on to MSB bit. No other command can be inserted in between these two writes. The charger waits for the complete write to the two registers to decide whether to accept or ignore the new value.

After the completion of LSB and MSB bytes, the two bytes will be updated at the same time. If host writes MSB byte first, the command will be ignored. If the time between write of LSB and MSB bytes exceeds watchdog timer, both the LSB and MSB commands will be ignored.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



8.6 Register Map

Table 8-7. Charger Command Summary

(MSB/LSB)	DR SB) REGISTER NAME TYPE DESCRIPTION		LINKS	
01/00h	ChargeOption0()	R/W	Charge Option 0	Go
03/02h	ChargeCurrent()	R/W	7-bit charge current setting LSB 128 mA, Range 0 mA – 16256 mA (R _{SR} =5mΩ)	Go
05/04h	ChargeVoltage()	R/W	12-bit charge voltage setting LSB 8 mV, Default: 1S-4200mV, 2S-8400mV, 3S-12600mV, 4S-16800mV, 5S-21000mV	Go
07/06h	OTGVoltage()	R/W	12-bit OTG voltage setting LSB 8 mV, Range: 3000 mV – 24000 mV	Go
09/08h	OTGCurrent()	R/W	7-bit OTG output current setting LSB 100 mA, Range: 0 A $-$ 12700 mA $(R_{AC}$ =5m $\Omega)$	Go
0B/0Ah	InputVoltage()	R/W	8-bit input voltage setting LSB 64 mV, Range: 3200 mV – 19520 mV	Go
0D/0Ch	VSYS_MIN()	R/W	8-Bit minimum system voltage setting LSB: 100 mV, Range: 1000 mV - 23000 mV Default: 1S-3.6V, 2S-6.6V, 3S-9.2V, 4S-12.3V, 5S-15.4V	Go
0F/0Eh	IIN_HOST()	R/W	6-bit Input current limit set by host LSB: 100 mA, Range: 100 mA - 10000 mA with 100 mA offset (R_{AC} =5m Ω)	Go
21/20h	ChargerStatus()	R with R/W bits	Charger Status	Go
23/22h	ProchotStatus()	R and R/W bits	Prochot Status	Go
25/24h	IIN_DPM()	R	7-bit input current limit in use LSB: 100 mA, Range: 100 mA - 10000 mA (R _{AC} =5mΩ)	Go
27/26h	ADCVBUS/PSYS()	R	8-bit digital output of input voltage, 8-bit digital output of system power PSYS: Full range: 3.06 V, LSB: 12 mV VBUS: Full range: 0 V - 24.48 V, LSB 96 mV	Go
29/28h	ADCIBAT()	R	7-bit digital output of battery charge current, 7-bit digital output of battery discharge current ICHG: Full range 16.256 A, LSB 128 mA IDCHG: Full range: 65.024 A, LSB: 512 mA $(R_{SR}=5m\Omega)$	Go
2B/2Ah	ADCIINCMPIN()	R	8-bit digital output of input current, 8-bit digital output of CMPIN voltage POR State - IIN: Full range: 25.5 A, LSB 100 mA (R_{AC} =5m Ω) CMPIN: Full range 3.06 V, LSB: 12 mV	Go
2D/2Ch	ADCVSYSVBAT()	R	8-bit digital output of system voltage, 8-bit digital output of battery voltage VSYS: Full range: 2.88 V - 19.2 V, LSB: 64 mV (1S-4S) VSYS: Full range: 8.16 V - 24.48 V, LSB: 64 mV (5S) VBAT: Full range: 2.88 V - 19.2 V, LSB 64 mV (1S-4S) VBAT: Full range: 8.16 V - 24.48 V, LSB 64 mV (5S)	Go
			M f t ID	0.
2Eh	ManufacturerID()	R	Manufacturer ID - 0x0040H	Go

Table 8-7. Charger Command Summary (continued)

rabio o 11 onargo: commana cammary (commaca)								
I ² C ADDR (MSB/LSB)	REGISTER NAME	TYPE	DESCRIPTION	LINKS				
31/30h	ChargeOption1()	R/W	Charge Option 1	Go				
33/32h	ChargeOption2()	R/W	Charge Option 2	Go				
35/34h	ChargeOption3()	R/W	Charge Option 3	Go				
37/36h	ProchotOption0()	R/W	PROCHOT Option 0	Go				
39/38h	ProchotOption1()	R/W	PROCHOT Option 1	Go				
3B/3Ah	ADCOption()	R/W	ADC Option	Go				
3D/3Ch	ChargeOption4()	R/W	Charge Option 4	Go				
3F/3Eh	Vmin Active Protection()	R/W	Vmin Active Protection	Go				



8.6.1 ChargeOption0 Register (I²C address = 01/00h) [reset = E70Eh]

Figure 8-16. ChargeOption0 Register (I²C address = 01/00h) [reset = E70Eh]

	i igaic o io	. Onargeopti	one register	(i o addicoo	o irodii, Lico	Ct	
7	6	5	4	3	2	1	0
EN_LWPWR	WDTM	R_ADJ	IIN_DPM_AUT O_DISABLE	OTG_ON_CH RGOK	EN_OOA	PWM_FREQ	LOW_PTM_RIP PLE
R/W	R/	W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
EN_CMP_LAT CH	VSYS_UVP_E NZ	EN_LEARN	IADPT_GAIN	IBAT_GAIN	EN_LDO	EN_IIN_DPM	CHRG_INHIBIT
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-8. ChargeOption0 Register (I²C address = 01h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	EN_LWPWR	R/W	1b	Low Power Mode Enable, under low power mode lowest quiescent current is achieved when only battery exist. It is not recommended to enable low power mode when adapter present. Ob: Disable Low Power Mode. Device in performance mode with battery only. The PROCHOT, current/power monitor buffer and comparator follow register setting. 1b: Enable Low Power Mode. Device in low power mode with battery only for lowest quiescent current. The REGN is off. The PROCHOT, discharge current monitor buffer, power monitor buffer and independent comparator are disabled. ADC is not available in Low Power Mode. Independent comparator and its low power mode PROCHOT profile can be enabled by setting EN_PROCHOT_LPWR bit to 1b. <default at="" por=""></default>
6-5	WDTMR_ADJ	R/W	11b	WATCHDOG Timer Adjust Set maximum delay between consecutive Host write of charge voltage or charge current command. If device does not receive a write on the REG0x04() or the REG0x02() within the watchdog time period, the charger will be suspended by setting the REG0x02() to 0 mA. After expiration, the timer will resume upon the write of REG0x02(), REG0x04() or REG0x00[14:13]. 00b: Disable Watchdog Timer 01b: Enabled, 5 sec 10b: Enabled, 88 sec 11b: Enable Watchdog Timer, 175 sec < default at POR>
4	IIN_DPM_AUTO_DISAB LE	R/W	Ob	IIN_DPM Auto Disable When CELL_BATPRESZ pin is LOW, the charger automatically disables the IIN_DPM function by setting EN_IIN_DPM (REG0x00[1]) to 0. The host can enable IIN_DPM function later by writing EN_IIN_DPM bit (REG0x00[1]) to 1. 0b: Disable this function. IIN_DPM is not disabled when CELL_BATPRESZ goes LOW. <default at="" por=""> 1b: Enable this function. IIN_DPM is disabled when CELL_BATPRESZ goes LOW.</default>
3	OTG_ON_CHRGOK	R/W	0b	Add OTG to CHRG_OK Drive CHRG_OK to HIGH when the device is in OTG mode. 0b: Disable <default at="" por=""> 1b: Enable</default>

Table 8-8. ChargeOption0 Register (I²C address = 01h) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
2	EN_OOA	R/W	1b	Out-of-Audio Enable In both forward mode and OTG mode, switching frequency reduces with diminishing load, under extreme light load condition the switching frequency could be lower than 25 kHz which is already in audible frequency range. By configuring EN_OOA=1b, the minimum PFM burst frequency is clamped at around 25 kHz to avoid any audible noise. Ob: No limit of PFM burst frequency 1b: Set minimum PFM burst frequency to above 25 kHz to avoid audio noise <default at="" por=""></default>
1	PWM_FREQ	R/W	1b	Switching Frequency Selection: Recommend 800 kHz with 2.2 μH, and 400 kHz with 4.7 μH. 0b: 800kHz 1b: 400 kHz
0	LOW_PTM_RIPPLE	R/W	1b	PTM mode input voltage and current ripple reduction 0b: Disable 1b: Enable <default at="" por=""></default>

Table 8-9. ChargeOption0 Register (I^2C address = 00h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	EN_CMP_LATCH	R/W	Ob	The EN_CMP_LATCH bit, will latch the independent comparator output after it is triggered at low state. If enabled in PROCHOT profile REG0x38[6]=1, STAT_COMP bit REG0x22[6] keep 1b after triggered until read by host and clear 0b: Independent comparator output will not latch when it is low <default at="" por=""> 1b: Independent comparator output will latch when it is low, host can clear CMPOUT pin by toggling this EN_CMP_LATCH bit.</default>
6	VSYS_UVP_ENZ	R/W	0b	To disable system under voltage protection. 0b: VSYS under voltage protection is enabled <default at="" por=""> 1b: VSYS under voltage protection is disabled</default>
5	EN_LEARN	R/W	ОЬ	LEARN mode allows the battery to discharge and converter to shut off while the adapter is present. It calibrates the battery gas gauge over a complete discharge/charge cycle. When the host determines the battery voltage is below battery depletion threshold, the host switch the system back to adapter input by writing this bit back to 0b. 0b: Disable LEARN Mode <default at="" por=""> 1b: Enable LEARN Mode</default>
4	IADPT_GAIN	R/W	0b	IADPT Amplifier Ratio The ratio of voltage on IADPT and voltage across ACP and ACN. 0b: 20× <default at="" por=""> 1b: 40×</default>
3	IBAT_GAIN	R/W	1b	IBAT Amplifier Ratio The ratio of voltage on IBAT and voltage across SRP and SRN 0b: 8× 1b: 16× <default at="" por=""></default>

Copyright © 2024 Texas Instruments Incorporated



Table 8-9. ChargeOption0 Register (I^2C address = 00h) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
2	EN_LDO	R/W	1b	LDO Mode Enable When battery voltage is below minimum system voltage (REG0x0C()), the charger is in pre-charge with LDO mode enabled. 0b: Disable LDO mode, BATFET fully ON. Precharge current is set by battery pack internal resistor. 1b: Enable LDO mode, Precharge current is set by the ChargeCurrent register and clamped below 384 mA (2 cell – 4 cell, 1cell VBAT<3.0V) or 2A (1cell 3.0V <vbat<3.6v). <default="" at="" by="" is="" por="" register.="" regulated="" system="" the="" vsys_min=""></vbat<3.6v).>
1	EN_IIN_DPM	R/W	1b	IIN_DPM Enable Host writes this bit to enable IIN_DPM regulation loop. When the IIN_DPM is disabled by the charger (refer to IIN_DPM_AUTO_DISABLE), this bit goes LOW. 0b: IIN_DPM disabled 1b: IIN_DPM enabled <default at="" por=""></default>
0	CHRG_INHIBIT	R/W	0b	Charge Inhibit When this bit is 0, battery charging will start with valid values in the ChargeVoltage() register and the ChargeCurrent register. 0b: Enable Charge <default at="" por=""> 1b: Inhibit Charge</default>

8.6.2 ChargeCurrent Register (I²C address = 03/02h) [reset = 0000h]

To set the charge current, write 16-bit ChargeCurrent() command (REG0x03/02h()) using the data format listed Figure 8-17.

With 5-m Ω sense resistor, the charger provides charge current range of 0 A to 16.256 A, with a 128-mA step resolution. With 10-m Ω sense resistor, the charger provides charge current range of 0 A to 8.128 A, with a 64-mA step resolution.

Upon POR, ChargeCurrent() is 0 A. Below scenarios will also reset Charge current to zero:

- · CELL_BATPRESZ going LOW (battery removal).
- STAT_AC is not valid(Adapter removal).
- · RESET REG is asserted and reset all registers.
- Charge voltage is written to be 0 V.
- · Watch dog event is triggered.

Charge current is not reset in force converter latch off fault (REG0x20[2]), and ACOC/TSHUT/SYSOVP/ACOV/VSYS_UVP/BATOVP/BATOC faults.

Figure 8-17. ChargeCurrent Register (I²C address = 03/02h) [reset = 0000h]

				•			
7	6	5	4	3	2	1	0
	Reserved		Charge Current, bit 6	Charge Current, bit 5	Charge Current, bit 4	Charge Current, bit 3	Charge Current, bit 2
	R/W		R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
Charge Current, bit 1	Charge Current, bit 0	Reserved			Reserved		
R/W	R/W	R/W			R/W		

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-10. Charge Current Register with 5-m Ω Sense Resistor (I²C address = 03h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-5	Reserved	R/W	000b	Not used. 1 = invalid write.
4	Charge Current, bit 6	R/W	0b	0 = Adds 0 mA of charger current. 1 = Adds 8192 mA of charger current.
3	Charge Current, bit 5	R/W	0b	0 = Adds 0 mA of charger current. 1 = Adds 4096 mA of charger current.
2	Charge Current, bit 4	R/W	0b	0 = Adds 0 mA of charger current. 1 = Adds 2048 mA of charger current.
1	Charge Current, bit 3	R/W	0b	0 = Adds 0 mA of charger current. 1 = Adds 1024 mA of charger current.
0	Charge Current, bit 2	R/W	0b	0 = Adds 0 mA of charger current. 1 = Adds 512 mA of charger current.

Table 8-11. Charge Current Register with 5-m Ω Sense Resistor (I²C address = 02h) Field Descriptions

				· · · · · · · · · · · · · · · · · · ·
BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Charge Current, bit 1	R/W	0b	0 = Adds 0 mA of charger current. 1 = Adds 256 mA of charger current.
6	Charge Current, bit 0	R/W	0b	0 = Adds 0 mA of charger current. 1 = Adds 128 mA of charger current.
5-0	Reserved	R/W	000000b	Not used. Value Ignored.



8.6.2.1 Battery Pre-Charge Current Clamp

During pre-charge, BATFET works in linear mode (LDO mode) (default EN_LDO= 1b). For 2-4 cell battery, the system is regulated at VSYS_MIN register and the pre-charge current is clamped at 384 mA. For 1 cell battery, the pre-charge to fast charge threshold is 3 V, and the pre-charge current is clamped at 384 mA. However, the BATFET stays in LDO mode operation untill battery voltage is above minimum system voltage (~3.6 V). During battery voltage from 3 V to 3.6 V, the fast charge current is clamped at 2 A.

Copyright © 2024 Texas Instruments Incorporated Product Folder Links: BQ25730

8.6.3 ChargeVoltage Register (I²C address = 05/04h) [reset value based on CELL BATPRESZ pin setting]

To set the output charge voltage, write a 16-bit ChargeVoltage register command (REG0x05/04h()) using the data format listed in Figure 8-18, Table 8-12, and Table 8-13. The charger provides charge voltage range from 1.024 V to 23.000 V, with 8-mV step resolution. Any write below 1.024 V or above 23.000 V is ignored.

Upon POR, ChargeVoltage() is by default set as 4200 mV for 1 s, 8400 mV for 2 s, 12600 mV for 3 s or 16800 mV for 4 s, 21000 mV for 5s. After CHRG_OK goes high, the charge will start when the host writes the charging current to ChargeCurrent() register, the default charging voltage is used if ChargeVoltage() is not programmed. If the battery is different from 4.2 V/cell, the host has to write to ChargeVoltage() before ChargeCurrent() register for correct battery voltage setting. Writing ChargeVoltage() to 0 should keep ChargeVoltage() value unchanged, and force ChargeCurrent() register to zero to disable charge.

The SRN pin senses the battery voltage for voltage regulation and should be connected as close to the battery as possible.

Figure 8-18. ChargeVoltage Register (I²C address = 05/04h) [reset value based on CELL_BATPRESZ pin setting]

				<u> </u>			
7	6	5	4	3	2	1	0
Reserved	Charge Voltage, bit 11	Charge Voltage, bit 10	Charge Voltage, bit 9	Charge Voltage, bit 8	Charge Voltage, bit 7	Charge Voltage, bit 6	Charge Voltage, bit 5
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
Charge Voltage, bit 4	Charge Voltage, bit 3	Charge Voltage, bit 2	Charge Voltage, bit 1	Charge Voltage, bit 0		Reserved	
R/W	R/W	R/W	R/W	R/W		R/W	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-12. ChargeVoltage Register (I²C address = 05h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Reserved	R/W	0b	Not used. 1 = invalid write.
6	Charge Voltage, bit 11	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 16384 mV of charger voltage.
5	Charge Voltage, bit 10	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 8192 mV of charger voltage
4	Charge Voltage, bit 9	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 4096 mV of charger voltage.
3	Charge Voltage, bit 8	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 2048 mV of charger voltage.
2	Charge Voltage, bit 7	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 1024 mV of charger voltage.
1	Charge Voltage, bit 6	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 512 mV of charger voltage.
0	Charge Voltage, bit 5	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 256 mV of charger voltage.

Table 8-13. ChargeVoltage Register (I²C address = 04h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Charge Voltage, bit 4	R/W	Ob	0 = Adds 0 mV of charger voltage. 1 = Adds 128 mV of charger voltage.
6	Charge Voltage, bit 3	R/W	Ob	0 = Adds 0 mV of charger voltage. 1 = Adds 64 mV of charger voltage.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



Table 8-13. ChargeVoltage Register (I²C address = 04h) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
5	Charge Voltage, bit 2	R/W	0b	0 = Adds 0 mV of charger voltage. 1 = Adds 32 mV of charger voltage.
				1 – Adds 32 IIIV of charger voltage.
4	Charge Voltage, bit 1	R/W	0b	0 = Adds 0 mV of charger voltage.
				1 = Adds 16 mV of charger voltage.
3	Charge Voltage, bit 0	R/W	0b	0 = Adds 0 mV of charger voltage.
				1 = Adds 8 mV of charger voltage.
2-0	Reserved	R/W	000b	Not used. Value Ignored.



8.6.4 ChargerStatus Register (I²C address = 21/20h) [reset = 0000h]

Figure 8-19. ChargerStatus Register (I^2C address = 21/20h) [reset = 0000h]

				•			
7	6	5	4	3	2	1	0
STAT_AC	ICO_DONE	IN_VAP	IN_VINDPM	IN_IIN_DPM	IN_FCHRG	IN_PCHRG	IN_OTG
R	R	R	R	R	R	R	R
7	6	5	4	3	2	1	0
Fault ACOV	Fault BATOC	Fault ACOC	FAULT SYSOVP	Fault VSYS _UVP	Fault Force_Converte r_Off	Fault_OTG _OVP	Fault_OTG _UVP
R	R	R	R/W	R/W	R	R	R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-14. ChargerStatus Register (I²C address = 21h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	STAT_AC	R	0b	Input source status. STAT_AC is valid as long as VBUS go within 3.5-V to 26-V range. It is different from CHRG_OK bit, When CHRG_OK is valid, STAT_AC must be valid, but if STAT_AC is valid, it is not necessary CHRG_OK is valid. There are Force converter off, ACOC, TSHUT, SYSOVP, VSYS_UVP, BATOVP can pull low CHRG_OK. 0b: Input not present 1b: Input is present
6	ICO_DONE	R	0b	After the ICO routine is successfully executed, the bit goes 1. 0b: ICO is not complete 1b: ICO is complete
5	IN_VAP	R	0b	0b: Charger is not operated in VAP mode 1b: Charger is operated in VAP mode Digital status bit indicates VAP has enabled(1) or disabled(0). The enable of VAP mode only follows the host command, which is not blocked by any status of /PROCHOT. The exit of VAP mode also follows the host command, except that any faults will exit VAP mode automatically. STAT_EXIT_VAP (REG0x22[8]) becomes 1 which will pull low /PROCHOT until host clear. The host can enable VAP by setting OTG/VAP/FRS pin high and 0x32[5]=0, disable VAP by setting either OTG/VAP/FRS pin low or 0x32[5]=1. Any faults in VAP When IN_VAP bit goes 0->1, charger should disable VINDPM, IIN_DPM, ICRIT, ILIM pin, disable PP_ACOK if it is enabled, enable PP_VSYS if it is disabled. When IN_VAP bit goes 1->0, charger should enable VINDPM, IIN_DPM, ICRIT, ILIM pin function.
4	IN_VINDPM	R	0b	0b: Charger is not in VINDPM during forward mode, or voltage regulation during OTG mode 1b: Charger is in VINDPM during forward mode, or voltage regulation during OTG mode
3	IN_IIN_DPM	R	0b	0b: Charger is not in IIN_DPM during forward mode. 1b: Charger is in IIN_DPM during forward mode.
2	IN_FCHRG	R	0b	0b: Charger is not in fast charge 1b: Charger is in fast charger
1	IN_PCHRG	R	0b	0b: Charger is not in pre-charge 1b: Charger is in pre-charge

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



Table 8-14. ChargerStatus Register (I²C address = 21h) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION		
0	IN_OTG	R	0b	0b: Charger is not in OTG		
				1b: Charge is in OTG		

Table 8-15. ChargerStatus Register (I²C address = 20h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION DESCRIPTION
7	Fault ACOV	R	0b	The status are latched if triggered until a read from host. 0b: No fault 1b: ACOV
6	Fault BATOC	R	Ob	The status is latched if triggered until a read from host. Fault indicator for BATOC only during normal operation. However, in PTM mode when EN_BATOC=1b, this status bit is fault indicator for both BATOVP and BATOC; when EN_BATOC=0b, this status bit is not effective. 0b: No fault 1b: BATOC is triggered
5	Fault ACOC	R	0b	The status is latched if triggered until a read from host. 0b: No fault 1b: ACOC
4	Fault SYSOVP	R/W	Ob	SYSOVP Status and Clear. SYSOVP fault is latched until a clear from host by writing this bit to 0. When the SYSOVP occurs, this bit is HIGH. During the SYSOVP, the converter is disabled. After the SYSOVP is removed, the user must write a 0 to this bit or unplug the adapter to clear the SYSOVP condition to enable the converter again. 0b: Not in SYSOVP <default at="" por=""> 1b: In SYSOVP. When SYSOVP is removed, write 0 to clear the SYSOVP latch.</default>
3	Fault VSYS_UVP	R/W	0b	VSYS_UVP fault status and clear. VSYS_UVP fault is latched until a clear from host by writing this bit to 0. 0b: No fault <default at="" por=""> 1b: When system voltage is lower than VSYS_UVP, then 7 times restart tries are failed.</default>
2	Fault Force_Converter_Off	R	0b	The status is latched if triggered until a read from host. 0b: No fault 1b: Force converter off triggered (when FORCE_CONV_OFF (REG0x30[3])=1b)
1	Fault_OTG_OVP	R	0b	The status is latched if triggered until a read from host. 0b: No fault 1b: OTG OVP fault is triggered
0	Fault_OTG_UVP	R	Ob	The status is latched if triggered until a read from host. 0b: No fault 1b: OTG UVP fault is triggered

Product Folder Links: BQ25730

Submit Document Feedback

8.6.5 ProchotStatus Register (I²C address = 23/22h) [reset = B800h]

All the status bits in REG0x22[6:0] will be reset after host read.

Figure 8-20. ProchotStatus Register (I²C address = 23/22h) [reset = B800h]

	9			(
7	6	5	4	3	2	1	0
Reserved	EN_PROCHOT _EXT	PROCHO	T_WIDTH	PROCHOT_CL EAR	Reserved	STAT_VAP_FAI L	STAT_EXIT_VA P
R	R/W	R/W		R/W	R	R/W	R/W
7	6	5	4	3	2	1	0
STAT_VINDPM	STAT_COMP	STAT_ICRIT	STAT_INOM	STAT_IDCHG1	STAT_VSYS	STAT_BAT_Re moval	STAT_ADPT_R emoval
R/W	R	R	R	R	R	R	R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-16. ProchotStatus Register (I²C address = 23h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION Descriptions
7	Reserved	R	1b	Reserved
6	EN_PROCHOT_EXT	R/W	Ob	PROCHOT Pulse Extension Enable. When pulse extension is enabled, keep the PROCHOT pin voltage LOW until host writes PROCHOT _CLEAR = 0b. 0b: Disable pulse extension <default at="" por=""> 1b: Enable pulse extension</default>
5-4	PROCHOT_WIDTH	R/W	11b	PROCHOT Pulse Width Minimum PROCHOT pulse width when EN_PROCHOT _EXT = 0b 00b: 100 us 01b: 1 ms 10b: 5 ms 11b: 10 ms <default at="" por=""></default>
3	PROCHOT_CLEAR	R/W	1b	PROCHOT Pulse Clear. Clear PROCHOT pulse when EN_PROCHOT _EXT = 1b. 0b: Clear PROCHOT pulse and drive PROCHOT pin HIGH 1b: Idle <default at="" por=""></default>
2	Reserved	R	0b	Reserved
1	STAT_VAP_FAIL	R/W	ОЬ	This status bit reports a failure to load VBUS 7 consecutive times in VAP mode, which indicates the battery voltage might be not high enough to enter VAP mode, or the VAP loading current settings are too high. Ob: Not is VAP failure <default at="" por=""> 1b: In VAP failure, the charger exits VAP mode, and latches off until the host writes this bit to 0.</default>
0	STAT_EXIT_VAP	R/W	Ob	When the charger is operated in VAP mode, it can exit VAP by either host or ACOV/ACOC/SYSOVP/BATOVP/VSYS_UVP faults. 0b: STAT_EXIT_VAP is not active <default at="" por=""> 1b: STAT_EXIT_VAP is active, PROCHOT pin is low until host writes this status bit to 0.</default>



Table 8-17. ProchotStatus Register (I²C address = 22h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	STAT_VINDPM	R/W	0b	PROCHOT Profile VINDPM status bit 0b: Not triggered 1b: Triggered, PROCHOT pin is low until host writes this status bit to 0 when PP_VINDPM = 1b
6	STAT_COMP	R	0b	PROCHOT Profile CMPOUT status bit. The status is latched until a read from host. 0b: Not triggered 1b: Triggered
5	STAT_ICRIT	R	0b	PROCHOT Profile ICRIT status bit. The status is latched until a read from host. 0b: Not triggered 1b: Triggered
4	STAT_INOM	R	0b	PROCHOT Profile INOM status bit. The status is latched until a read from host. 0b: Not triggered 1b: Triggered
3	STAT_IDCHG1	R	0b	PROCHOT Profile IDCHG1 status bit. The status is latched until a read from host. 0b: Not triggered 1b: Triggered
2	STAT_VSYS	R	0b	PROCHOT Profile VSYS status bit. The status is latched until a read from host. 0b: Not triggered 1b: Triggered
1	STAT_Battery_Removal	R	0b	PROCHOT Profile Battery Removal status bit. The status is latched until a read from host. 0b: Not triggered 1b: Triggered
0	STAT_Adapter_Removal	R	0b	PROCHOT Profile Adapter Removal status bit. The status is latched until a read from host. 0b: Not triggered 1b: Triggered

8.6.6 IIN_DPM Register (I^2C address = 25/24h) [reset = 4100h]

IIN_DPM register reflects the actual input current limit programmed in the register, either from IIN_HOST register or from ICO.

After ICO, the current limit used by DPM regulation may differ from the IIN_HOST register settings. The actual DPM limit is reported in IIN_DPM register.

To read the nominal or typical input current limit

- When using a $10\text{-m}\Omega$ sense resistor (RSNS_RAC=0b). There is 50-mA offset at code 0. Note this offset is only applied to code 0, not applied to other codes.
- When using a 5-mΩ sense resistor (RSNS_RAC=1b). There is 100-mA offset at code 0. Note this offset is only applied to code 0, not applied to other codes.

To read the maximum input current limit, need to add 100 mA/200 mA offset based on above nominal input current limit reading approach.

- When using a 10-mΩ sense resistor (RSNS_RAC=0b). There is 150-mA offset at code 0 and this 150 mA offset is only applied to code 0, 100-mA offset should be added for all other non-zero codes.
- When using a 5-m Ω sense resistor (RSNS_RAC=1b). There is 300-mA offset at code 0 and this 300 mA offset is only applied to code 0, 200-mA offset should be added for all other non-zero codes

Figure 8-21. IIN_DPM Register with 10-m Ω Sense Resistor (I²C address = 25/24h) [reset = 4100h]

						<u> </u>			
7	6	5	4	3	2	1	0		
Reserved	Input Current in DPM, bit 6	Input Current in DPM, bit 5	Input Current in DPM, bit 4	Input Current in DPM, bit 3	Input Current in DPM, bit 2	Input Current in DPM, bit 1	Input Current in DPM, bit 0		
R	R	R	R	R	R	R	R		
7	7 6 5 4				2	1	0		
Reserved									
	R								

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-18. IIN_DPM Register with 5-m Ω Sense Resistor (I²C address = 25h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Reserved	R	0b	Not used. 1 = invalid write.
6	Input Current in DPM, bit 6	R	0b	0 = Adds 0 mA of input current. 1 = Adds 6400 mA of input current.
5	Input Current in DPM, bit 5	R	0b	0 = Adds 0 mA of input current. 1 = Adds 3200 mA of input current.
4	Input Current in DPM, bit 4	R	0b	0 = Adds 0 mA of input current. 1 = Adds 1600 mA of input current.
3	Input Current in DPM, bit 3	R	0b	0 = Adds 0 mA of input current. 1 = Adds 800mA of input current
2	Input Current in DPM, bit 2	R	0b	0 = Adds 0 mA of input current. 1 = Adds 400 mA of input current.
1	Input Current in DPM, bit 1	R	0b	0 = Adds 0 mA of input current. 1 = Adds 200 mA of input current.
0	Input Current in DPM, bit 0	R	Ob	0 = Adds 0 mA of input current. 1 = Adds 100 mA of input current.



Table 8-19. IIN_DPM Register with 5-m Ω Sense Resistor (I²C address = 24h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0	Reserved	R	0000000b	Not used. Value Ignored.

8.6.7 ADCVBUS/PSYS Register (I²C address = 27/26h)

PSYS: Full range: 3.06 V, LSB: 12 mV (ADC_FULLSCALE=1b)

PSYS: Full range: 2.04 V, LSB: 8 mV (ADC_FULLSCALE=0b)

VBUS: Full range: 0 mV to 24480 mV, LSB: 96 mV

Figure 8-22. ADCVBUS/PSYS Register (I²C address = 27/26h)

				3 (,	
7	6	5	4	3	2	1	0
R	R	R	R	R	R	R	R
7	6	5	4	3	2	1	0
R	R	R	R	R	R	R	R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-20. ADCVBUS Register (I²C address = 27h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0		R		8-bit Digital Output of Input Voltage

Table 8-21. ADCPSYS Register (I²C address = 26h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0		R		8-bit Digital Output of System Power

8.6.8 ADCIBAT Register (I²C address = 29/28h)

- ICHG: Full range when using a 10-mΩ sense resistor (RSNS_RSR=0b):8.128 A, LSB: 64 mA.
- ICHG: Full range when using a 5-mΩ sense resistor (RSNS_RSR=1b):16.256A,LSB: 128 mA.
- IDCHG: Full range when using a 10-mΩ sense resistor (RSNS_RSR=0b):32.512 A, LSB: 256 mA. Note when discharge current is higher than 32.512 A, the ADC will report 32.512 A
- IDCHG: Full range when using a 5-mΩ sense resistor (RSNS_RSR=1b):65.024A,LSB: 512 mA. Note when discharge current is higher than 65.024 A, the ADC will report 65.024 A

Figure 8-23. ADCIBAT Register (I²C address = 29/28h)

		9			,		
7	6	5	4	3	2	1	0
Reserved	R	R	R	R	R	R	R
7	6	5	4	3	2	1	0
Reserved	R	R	R	R	R	R	R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-22. ADCICHG Register (I²C address = 29h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Reserved	R		Not used. Value ignored.
6-0		R		7-bit Digital Output of Battery Charge Current

Table 8-23. ADCIDCHG Register (I²C address = 28h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Reserved	R		Not used. Value ignored.
6-0		R		7-bit Digital Output of Battery Discharge Current

8.6.9 ADCIIN/CMPIN Register (I^2C address = 2B/2Ah)

- IIN Full range: When using a 10-mΩ sense resistor (RSNS_RAC=0b): 12.75 A, LSB: 50 mA.
- IIN Full range: When using a 5-mΩ sense resistor (RSNS_RAC=1b): 25.5A, LSB:100 mA.
- CMPIN Full range: 3.06 V, LSB: 12 mV (ADC_FULLSCALE=1b)
- CMPIN Full range: 2.04 V, LSB: 8 mV (ADC_FULLSCALE=0b)

Figure 8-24. ADCIIN/CMPIN Register (I^2C address = 2B/2Ah)

7	6	5	4	3	2	1	0
R	R	R	R	R	R	R	R
7	6	5	4	3	2	1	0
R	R	R	R	R	R	R	R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-24. ADCIIN Register (I²C address = 2Bh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0		R		8-bit Digital Output of Input Current

Table 8-25. ADCCMPIN Register (I²C address = 2Ah) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0		R		8-bit Digital Output of CMPIN voltage

8.6.10 ADCVSYS/VBAT Register (I²C address = 2D/2Ch)

- VSYS: Full range: 2.88 V to 19.2 V, LSB: 64 mV (1S-4S)
- VSYS: Full range: 8.16 V to 24.48 V, LSB: 64 mV (5S)
- VBAT: Full range: 2.88 V to 19.2 V, LSB: 64 mV (1S-4S)
- VBAT: Full range: 8.16 V to 24.48 V, LSB: 64 mV (5S)

Figure 8-25. ADCVSYS/VBAT Register (I²C address = 2D/2Ch)

	J -			- 3 1		,	
7	6	5	4	3	2	1	0
R	R	R	R	R	R	R	R
7	6	5	4	3	2	1	0
R	R	R	R	R	R	R	R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-26. ADCVSYS Register (I²C address = 2Dh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0		R		8-bit Digital Output of System Voltage

Table 8-27. ADCVSYSVBAT Register (I²C address = 2Ch) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0		R		8-bit Digital Output of Battery Voltage



8.6.11 ChargeOption1 Register (I²C address = 31/30h) [reset = 3F00h]

Figure 8-26. ChargeOption1 Register (I²C address = 31/30h) [reset = 3300h]

	ga. 0 0 2 0	. Giiai goopiic	rtog.ott), (i	0 1/0011, [10t		
7	6	5	4	3	2	1	0
EN_IBAT	EN_PROCHOT _LPWR	PSYS_CONFIG		RSNS_RAC	RSNS_RSR	PSYS_RATIO	RESERVED
R/W	R/W	R/V	R/W		R/W	R/W	R/W
7	6	5	4	3	2	1	0
CMP_REF	CMP_POL	CMP_I	CMP_DEG		EN_PTM	EN_SHIP_DCH G	AUTO_WAKEU P_EN
R/W	R/W	R/V	V	R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-28. ChargeOption1 Register (I²C address = 31h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	EN_IBAT	R/W	Ob	IBAT Enable Enable the IBAT output buffer. In low power mode (EN_LWPWR=1b), IBAT buffer is always disabled regardless of this bit value. 0b Turn off IBAT buffer to minimize Iq <default at="" por=""> 1b: Turn on IBAT buffer</default>
6	EN_PROCHOT_LPWR	R/W	Ob	Enable PROCHOT during battery only low power mode With battery only, enable VSYS in PROCHOT with low power consumption. Do not enable this function with adapter present. Refer to Section 8.3.20.1 for more details. 0b: Disable Independent Comparator low power PROCHOT <default at="" por=""> 1b: Enable Independent Comparator low power PROCHOT</default>
5-4	PSYS_CONFIG	R/W	11b	PSYS Enable and Definition Register Enable PSYS sensing circuit and output buffer (whole PSYS circuit). In low power mode (EN_LWPWR=1b), PSYS sensing and buffer are always disabled regardless of this bit value. 00b: PSYS=PBUS+PBAT 01b: PSYS=PBUS 10b: Reserved 11b: Turn off PSYS buffer to minimize Iq <default at="" por=""></default>
3	RSNS_RAC	R/W	1b	Input sense resistor R_{AC} 0b: 10 m Ω 1b: 5 m Ω <default at="" por=""></default>
2	RSNS_RSR	R/W	1b	Charge sense resistor R_{SR} 0b: 10 m Ω 1b: 5 m Ω <default at="" por=""></default>
1	PSYS_RATIO	R/W	1b	PSYS Gain Ratio of PSYS output current vs total system power 0b: 0.25 μA/W 1b: 1 μA/W <default at="" por=""></default>
0	RESERVED	R/W	1b	RESERVED

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



Table 8-29. ChargeOption1 Register (I²C address = 30h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	CMP_REF	R/W	0b	Independent Comparator internal Reference 0b: 2.3 V <default at="" por=""> 1b: 1.2 V</default>
6	CMP_POL	R/W	Ob	Independent Comparator output Polarity 0b: When CMPIN is above internal threshold, CMPOUT is LOW (internal hysteresis) <default at="" por=""> 1b: When CMPIN is below internal threshold, CMPOUT is LOW (external hysteresis)</default>
5-4	CMP_DEG	R/W	00b	Independent comparator deglitch time, only applied to the falling edge of CMPOUT (HIGH \rightarrow LOW). 00b: Independent comparator is enabled with output deglitch time 5 μ s <default at="" por=""> 01b: Independent comparator is enabled with output deglitch time of 2 ms 10b: Independent comparator is enabled with output deglitch time of 20 ms 11b: Independent comparator is enabled with output deglitch time of 5 sec</default>
3	FORCE_CONV_OFF	R/W	Ob	Force Converter Off function When independent comparator triggers, (CMPOUT pin pulled down) converter latches off, at the same time, CHRG_OK signal goes LOW to notify the system. Charge current is also set to zero internally, but charge current register setting keeps the same. To get out of converter latches off, firstly the CMPOUT should be released to high and secondly FORCE_CONV_OFF bit should be cleared (=0b). 0b: Disable this function <default at="" por=""> 1b: Enable this function</default>
2	EN_PTM	R/W	0b	PTM enable register bit, it will automatically reset to zero 0b: disable PTM. <default at="" por=""> 1b: enable PTM.</default>
1	EN_SHIP_DCHG	R/W	ОЬ	Discharge SRN for Shipping Mode. Used to discharge VBAT pin capacitor voltage which is necessary for battery gauge device shipping mode. When this bit is 1, discharge SRN pin down in 140 ms 20 mA. When 140 ms is over, this bit is reset to 0b automatically. If this bit is written to 0b by host before 140 ms expires, VSYS should stop discharging immediately. Note if after 140-ms SRN voltage is still not low enough for battery gauge device entering ship mode, the host may need to start a new 140-ms discharge cycle. 0b: Disable shipping mode <default at="" por=""> 1b: Enable shipping mode</default>
0	AUTO_WAKEUP_EN	R/W	0b	Auto Wakeup Enable When this bit is HIGH, if the battery is below VSYS_MIN, the device should automatically enable 256-mA charging current for 30 mins. When the battery is charged up above minimum system voltage, charge will terminate and the bit is reset to LOW. The charger will also exit auto wake up if host write a new charge current value to charge current register Reg0x02(). 0b: Disable <default at="" por=""> 1b: Enable</default>

8.6.12 ChargeOption2 Register (I²C address = 33/32h) [reset = 00B7]

Figure 8-27. ChargeOption2 Register (I²C address = 33/32h) [reset = 00B7]

				(00/02/1/ [100	700 002.1	
7	6	5	4	3	2	1	0
PKPWR_T	OVLD_DEG	EN_PKPWR_II N_DPM	EN_PKPWR_V SYS	PKPWR_OVLD _STAT	PKPWR_RELA X_STAT	PKPWR_	TMAX[1:0]
R	/W	R/W	R/W	R/W	R/W	R	W
7	6	5	4	3	2	1	0
EN_EXTILIM	EN_ICHG_IDC HG	Q2_OCP	ACX_OCP	EN_ACOC	ACOC_VTH	EN_BATOC	BATOC_VTH
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-30. ChargeOption2 Register (I²C address = 33h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-6	PKPWR_TOVLD_DEG	R/W	00b	Input Overload time in Peak Power Mode 00b: 1 ms <default at="" por=""> 01b: 2 ms 10b: 5 ms 11b: 10 ms</default>
5	EN_PKPWR_IIN_DPM	R/W	0b	Enable Peak Power Mode triggered by input current overshoot If REG0x33[5:4] are 00b, peak power mode is disabled. Upon adapter removal, the bits are reset to 00b. 0b: Disable peak power mode triggered by input current overshoot <default at="" por=""> 1b: Enable peak power mode triggered by input current overshoot.</default>
4	EN_PKPWR_VSYS	R/W	0b	Enable Peak Power Mode triggered by system voltage under-shoot If REG0x33[5:4] are 00b, peak power mode is disabled. Upon adapter removal, the bits are reset to 00b. 0b: Disable peak power mode triggered by system voltage under-shoot <default at="" por=""> 1b: Enable peak power mode triggered by system voltage under-shoot.</default>
3	STAT_PKPWR_OVLD	R/W	0b	Indicator that the device is in overloading cycle. Write 0 to get out of overloading cycle. 0b: Not in peak power mode. <default at="" por=""> 1b: In peak power mode.</default>
2	STAT_PKPWR_RELAX	R/W	Ob	Indicator that the device is in relaxation cycle. Write 0 to get out of relaxation cycle. Ob: Not in relaxation cycle. <default at="" por=""> 1b: In relaxation mode.</default>
1-0	PKPWR_TMAX[1:0]	R/W	00b	Peak power mode overload and relax cycle time. 00b: 20 ms <default at="" por=""> 01b: 40 ms 10b: 80 ms 11b: 1 sec</default>

Copyright © 2024 Texas Instruments Incorporated



Table 8-31. ChargeOption2 Register (I²C address = 32h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	EN_EXTILIM	R/W	1b	Enable ILIM_HIZ pin to set input current limit 0b: Input current limit is set by IIN_DPM register 1b: Input current limit is set by the lower value of ILIM_HIZ pin and IIN_DPM register <default at="" por=""></default>
6	EN_ICHG_IDCHG	R/W	0b	0b: IBAT pin as discharge current. <default at="" por=""> 1b: IBAT pin as charge current.</default>
5	Q2_OCP	R/W	1b	Q2 OCP threshold by sensing Q2 VDS 0b: 210 mV 1b: 150 mV <default at="" por=""></default>
4	ACX_OCP	R/W	1b	Fixed Input current OCP threshold by sensing ACP-ACN, converter is disabled immediately when triggered non latch protection resume switching automatically after ACX comparator release. 0b: 280 mV(RSNS_RAC=0b)/200 mV(RSNS_RAC=1b) 1b: 150 mV(RSNS_RAC=0b)/100 mV(RSNS_RAC=1b) <default at="" por=""></default>
3	EN_ACOC	R/W	0b	ACOC Enable Configurable Input overcurrent (ACOC) protection by sensing the voltage across ACP and ACN. Upon ACOC (after 250-µs blank-out time), converter is disabled. Non latch fault, after 250-ms falling edge de-glitch time converter starts switching automatically. 0b: Disable ACOC <default at="" por=""> 1b: ACOC threshold 133% or 200% ILIM2</default>
2	ACOC_VTH	R/W	1b	ACOC Limit Set MOSFET OCP threshold as percentage of IIN_DPM with current sensed from R _{AC} . 0b: 133% of ILIM2 1b: 200% of ILIM2 <default at="" por=""></default>
1	EN_BATOC	R/W	1b	BATOC Battery discharge overcurrent (BATOC) protection by sensing the voltage across SRN and SRP. Upon BATOC, converter is disabled. 0b: Disable BATOC 1b: Enable BATOC threshold 133% or 200% PROCHOT IDCHG_TH2 <default at="" por=""></default>
0	BATOC_VTH	R/W	1b	Set battery discharge overcurrent threshold as percentage of PROCHOT battery discharge current limit. Note when SRN and SRP common voltage is low for 1S application, the BATOC threshold could be derating. 0b: 133% of PROCHOT IDCHG_TH2 1b: 200% of PROCHOT IDCHG_TH2



8.6.13 ChargeOption3 Register (I²C address = 35/34h) [reset = 0434h]

Figure 8-28. ChargeOption3 Register (I²C address = 35/34h) [reset = 0434h]

	i igaic o zo	. Onargeoptic	one regiote.	(1 0 aaa1033		,ct 0-10-111j	
7	6	5	4	3	2	1	0
EN_HIZ	RESET_REG	RESET_VINDP M	EN_OTG	EN_ICO_MOD E	EN_PORT_CT RL	EN_VSYS_MIN _SOFT_SR	EN_OTG_BIGC AP
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
BATFET_ENZ	EN_VBUS_VAP	OTG_VAP_MO DE	IL_/	AVG	CMP_EN	BATFETOFF_H IZ	PSYS_OTG_ID CHG
R/W	R/W	R/W	R/	W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-32. ChargeOption3 Register (I²C address = 35h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	EN_HIZ	R/W	Ob	Device HIZ Mode Enable When the charger is in HIZ mode, the device draws minimal quiescent current. With VBUS above UVLO. REGN LDO stays on, and system powers from battery. 0b: Device not in HIZ mode <default at="" por=""> 1b: Device in HIZ mode</default>
6	RESET_REG	R/W	ОЬ	Reset Registers All the registers are reset to POR default setting except the VINDPM register. 0b: Idle <default at="" por=""> 1b: Reset all the registers to default values. After reset, this bit goes back to 0.</default>
5	RESET_VINDPM	R/W	ОЬ	Reset VINDPM Threshold 0b: Idle 1b: Converter is disabled to measure VINDPM threshold. After VINDPM measurement is done, this bit goes back to 0 and converter starts. (When battery voltage is lower than VSYS_MIN this function is not recommended due to potential risk to crash system during VINDPM measurement.)
4	EN_OTG	R/W	0b	OTG Mode Enable Enable device in OTG mode when OTG/VAP/FRS pin is HIGH. 0b: Disable OTG <default at="" por=""> 1b: Enable OTG mode to supply VBUS from battery.</default>
3	EN_ICO_MODE	R/W	Ob	Enable ICO Algorithm 0b: Disable ICO algorithm. <default at="" por=""> 1b: Enable ICO algorithm.</default>
2	EN_PORT_CTRL	R/W	1b	Enable BATFET control 0b: Disable BATFET control pin by HIZ BATDRV pin 1b: Enable BATFET control pin by activate BATDRV pin
1	EN_VSYS_MIN_SOFT_SR	R/W	Ob	Enable VSYS_MIN soft slew rate transition 0b: Disable VSYS_MIN soft slew rate transition <default at="" por=""> 1b:Enable VSYS_MIN soft slew rate transition (1LSB/8μs=12.5mV/μs)</default>

Copyright © 2024 Texas Instruments Incorporated

Product Folder Links: BQ25730



Table 8-32. ChargeOption3 Register (I²C address = 35h) Field Descriptions (continued)

	U .		•	, , , , , , , , , , , , , , , , , , , ,
BIT	FIELD	TYPE	RESET	DESCRIPTION
0	EN_OTG_BIGCAP	R/W	0b	Enable OTG compensation for VBUS effective capacitance larger than 33
				μF
				0b: Disable OTG large VBUS capacitance compensation (Recommended
				for VBUS effective capacitance smaller than 33 μF) <default at="" por=""></default>
				1b: Enable OTG large VBUS capacitance compensation (Recommended
				for VBUS effective capacitance larger than 33 μF)

Table 8-33. ChargeOption3 Register (I²C address = 34h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	BATFET_ENZ	R/W	Ob	Turn off BATFET under battery only mode. If charger is not in battery only mode this bit is not allowed to be written to 1. Under battery only OTG mode, this bit is forced to be 0b. 0b: Not force turn off BATFET <default at="" por=""> 1b: Force turn off BATFET</default>
6	EN_VBUS_VAP	R/W	0b	Enable the VBUS VAP for VAP operation mode 2&3 0b: Disabled <default at="" por=""> 1b: Enabled</default>
5	OTG_VAP_MODE	R/W	1b	The selection of the external OTG/VAP/FRS pin control. Don't recommend to change pin control after OTG/VAP/FRS pin is pulled high. 0b: the external OTG/VAP/FRS pin controls the EN/DIS VAP mode 1b: the external OTG/VAP/FRS pin controls the EN/DIS OTG mode <default at="" por=""></default>
4-3	IL_AVG	R/W	10b	Converter inductor average current clamp. It is recommended to choose the smallest option which is higher than maximum possible converter average inductor current. 00b: 6A 01b: 10A 10b: 15A < default at POR> 11b: Disabled
2	CMP_EN	R/W	1b	Enable Independent Comparator with effective low. 0b: Disabled 1b: Enabled <default at="" por=""></default>
1	BATFETOFF_HIZ	R/W	0b	Control BATFET on/off during charger HIZ mode. 0b: BATFET on during charger HIZ mode <default at="" por=""> 1b: BATFET off during charger HIZ mode</default>
0	PSYS_OTG_IDCHG	R/W	Ob	PSYS function during OTG mode. 0b: PSYS as battery discharge power minus OTG output power <default at="" por=""> 1b: PSYS as battery discharge power only</default>

8.6.14 ProchotOption0 Register (I^2C address = 37/36h) [reset = 4A81h(2S~5s) 4A09(1S)]

To set VSYS_TH1 threshold to trigger discharging VBUS in VAP mode, write a 6-bit VSYS_TH1 register command (REG0x36<7:2>()) using the data format listed in Figure 8-29, Table 8-34, and Table 8-35. The charger Measure on VSYS with fixed 5-µs deglitch time. Trigger when SYS pin voltage is below the thresholds. The threshold range from 3.2 V (000000b) to 9.5 V (1111111b) for 2s~5s and 3.2 V (000000b) to 3.9 V (000111b) for 1S, with 100-mV step resolution. There is a fixed DC offset which is 3.2 V. Under 1S application writing beyond 3.9 V will be ignored. For example 000111b and xxx111b result in same VSYS_TH1 setting 3.9 V. Upon POR, the VSYS_TH1 threshold to trigger VBUS discharge in VAP mode is 3.4 V (000010b) for 1S and 6.400 V (100000b) for 2s~5s.

Figure 8-29. ProchotOption0 Register (I²C address = 37/36h) [reset = 4A81h(2S~5s) 4A09(1S)]

7	6	5	4	3	2	1	0
		ILIM2_VTH			ICRIT	_DEG	PROCHOT_VI NDPM_80_90
R/W	R/W	R/W	R/W	R/W	R	/W	R/W
7	6	5	4	3	2	1	0
		VSYS_	TH1			INOM_DEG	LOWER_PRO CHOT_VINDP M
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-34. ProchotOption0 Register (I²C address = 37h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
DII	LIELD	ITPE	RESET	DESCRIPTION
7-3	ILIM2_VTH	R/W	01001b	I _{LIM2} Threshold 5 bits, percentage of IIN_DPM in 0x25/24. Measure current between ACP and ACN. Trigger when the current is above this threshold: 00001b - 11001b: 110% - 230%, step 5% 11010b - 11110b: 250% - 450%, step 50% 11111b: Out of Range (Ignored) Default 150%, or 01001
2-1	ICRIT_DEG	R/W	01b	ICRIT Deglitch time ICRIT threshold is set to be 110% of ILIM2. Typical ICRIT deglitch time to trigger PROCHOT. 00b: 15 µs 01b: 100 µs <default at="" por=""> 10b: 400 µs (max 500 µs) 11b: 800 µs (max 1 ms)</default>
0	PROCHOT_VINDPM_ 80_90	R/W	0b	Lower threshold of the PROCHOT_VINDPM comparator When REG0x36[0]=1, the threshold of the PROCHOT_VINDPM comparator is determined by this bit setting. 0b: 83% of VinDPM threshold <default at="" por="">. 1b: 91% of VinDPM threshold</default>



Table 8-35. ProchotOption0 Register (I²C address = 36h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-2	VSYS_TH1	R/W	100000b(2S~5s) 000010b(1S)	VSYS Threshold to trigger discharging VBUS in VAP mode. Measure on VSYS with fixed 5-µs deglitch time. Trigger when SYS pin voltage is below the thresholds. There is a fixed DC offset which is 3.2 V. 2S - 5s battery (Default: 6.4 V) 000000b- 111111b: 3.2 V - 9.5 V with 100-mV step size. 1S battery (Default: 3.4 V) XXX000b - XXX111b: 3.2 V - 3.9 V with 100-mV step size.
1	INOM_DEG	R/W	0b	INOM Deglitch Time INOM is always 10% above IIN_DPM register setting. Measure current between ACP and ACN. Trigger when the current is above this threshold. 0b: 1 ms(max) <default at="" por=""> 1b: 60 ms(max)</default>
0	LOWER_PROCHOT_ VINDPM	R/W	1b	Enable the lower threshold of the PROCHOT_VINDPM comparator 0b: the threshold of the PROCHOT_VINDPM comparator follows the same VINDPM REG0x0B/0A() setting. 1b: the threshold of the PROCHOT_VINDPM comparator is lower and determined by PROCHOT_VINDPM_80_90 bit setting. <default at="" por=""></default>



8.6.15 ProchotOption1 Register (I²C address = 39/38h) [reset = 41A0h]

Figure 8-30. ProchotOption1 Register (I²C address = 39/38h) [reset = 41A0h]

	J				, .	•	
7	6	5	4	3	2	1	0
		IDCHG	S_TH1	IDCHG_DEG1			
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
PP_VINDPM	PP_COMP	PP_ICRIT	PP_INOM	PP_IDCHG1	PP_VSYS	PP_BATPRES	PP_ACOK
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

When the REG0x38h[7:0] are set to be disabled, the $\overline{PROCHOT}$ event associated with that bit will not be reported in the $\overline{PROCHOT}$ status register REG0x22h[7:0] any more, and the $\overline{PROCHOT}$ pin will not be pulled low any more if the event happens.

Table 8-36. ProchotOption1 Register (I²C address = 39h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-2	IDCHG_TH1	R/W	010000b	IDCHG level 1 Threshold
				6 bit, range, range 0 A to 64512 mA, step 1024 mA.
				Measure current between SRN and SRP.
				Trigger when the discharge current is above the threshold.
				If the value is programmed to 000000b PROCHOT is always triggered.
				Default: 16256 mA or 010000b
1-0	IDCHG_DEG1	R/W	01b	IDCHG level 1 Deglitch Time
				00b: 78 ms
				01b: 1.25s <default at="" por=""></default>
				10b: 5s
				11b: 20s

Table 8-37. ProchotOption1 Register (I²C address = 38h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	PP_VINDPM	R/W	1b	VINDPM PROCHOT Profile When all the REG0x38[7:0], REG0x3D[1], REG0x3C[2]bits are 0, PROCHOT function is disabled. 0b: disable 1b: enable <default at="" por=""></default>
6	PP_COMP	R/W	0b	Independent comparator PROCHOT Profile When not in low power mode(Battery only), use this bit to control independent comparator PROCHOT profiles. When in low power mode(Battery only), this bit will lose controllability to independent comparator PROCHOT profiles. Need to use EN_PROCHOT_LPWR to enable independent comparator and its PROCHOT profile. 0b: disable <default at="" por=""> 1b: enable</default>
5	PP_ICRIT	R/W	1b	ICRIT PROCHOT Profile 0b: disable 1b: enable <default at="" por=""></default>
4	PP_INOM	R/W	0b	INOM PROCHOT Profile 0b: disable <default at="" por=""> 1b: enable</default>

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



Table 8-37. ProchotOption1 Register (I²C address = 38h) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
3	PP_IDCHG1	R/W	0b	IDCHG1 PROCHOT Profile
				0b: disable <default at="" por=""></default>
				1b: enable
2	PP_VSYS	R/W	0b	VSYS PROCHOT Profile
				0b: disable <default at="" por=""></default>
				1b: enable
1	PP_BATPRES	R/W	0b	Battery removal PROCHOT Profile
				0b: disable <default at="" por=""></default>
				1b: enable (one-shot falling edge triggered)
				If BATPRES is enabled in PROCHOT after the battery is removed, it will
				immediately send out one-shot PROCHOT pulse.
0	PP_ACOK	R/W	0b	Adapter removal PROCHOT Profile
				0b: disable <default at="" por=""></default>
				1b: enable
				EN_LWPWR= 0b to assert PROCHOT pulse after adapter removal.
				If PP_ACOK is enabled in PROCHOT after the adapter is removed, it will be
				pulled low.



8.6.16 ADCOption Register (I²C address = 3B/3Ah) [reset = 2000h]

Figure 8-31. ADCOption Register (I²C address = 3B/3Ah) [reset = 2000h]

			9 (.				
7	6	5	4	3	2	1	0
ADC_CONV	ADC_START	ADC_FULLSCA LE			Reserved		
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
EN_ADC_CMPI N	EN_ADC_VBU S	EN_ADC_PSY S	EN_ADC_IIN	EN_ADC_IDCH G	EN_ADC_ICHG	EN_ADC_VSY S	EN_ADC_VBAT
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

The ADC registers are read in the following order: VBAT, VSYS, ICHG, IDCHG, IIN, PSYS, VBUS, CMPIN. ADC is disabled in low power mode. Before enabling ADC, low power mode should be disabled first.

Table 8-38. ADCOption Register (I²C address = 3Bh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	ADC_CONV	R/W	Ob	Typical each ADC channel conversion time is 25 ms maximum. Total ADC conversion time is the product of 25 ms and enabled channel counts. 0b: One-shot update. Do one set of conversion updates to registers REG0x29/28(), REG0x27/26(), REG0x2B/2A(), and REG0x2D/2C() after ADC_START = 1. 1b: Continuous update. Do a set of conversion updates to registers REG0x29/28(), REG0x27/26(), REG0x2B/2A(), and REG0x2D/2C()every 1 sec.
6	ADC_START	R/W	0b	0b: No ADC conversion 1b: Start ADC conversion. After the one-shot update is complete, this bit automatically resets to zero
5	ADC_FULLSCALE	R/W	1b	ADC input voltage range adjustment for PSYS and CMPIN ADC Channels. 2.04-V full scale holds 8 mV/LSB resolution and 3.06-V full scale holds 12 mV/LSB resolution 0b: 2.04 V 1b: 3.06 V <default at="" por="">(Not accurate for REGN<6-V application (VBUS & VSYS<6V))</default>
4-0	Reserved	R/W	00000b	Reserved

Table 8-39. ADCOption Register (I²C address = 3Ah) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	EN_ADC_CMPIN	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>
6	EN_ADC_VBUS	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>
5	EN_ADC_PSYS	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>
4	EN_ADC_IIN	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>
3	EN_ADC_IDCHG	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



Table 8-39. ADCOption Register (I²C address = 3Ah) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
2	EN_ADC_ICHG	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>
1	EN_ADC_VSYS	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>
0	EN_ADC_VBAT	R/W	0b	0b: Disable <default at="" por=""> 1b: Enable</default>

8.6.17 ChargeOption4 Register (I²C address = 3D/3Ch) [reset = 0048h]

Figure 8-32. ChargeOption4 Register (I²C address = 3D/3Ch) [reset = 0048h]

	<u> </u>	<u> </u>				
7 6	5	4	3	2	1	0
VSYS_UVP	EN_Dither		VSYS_UVP_N O_HICCUP	PP_VBUS_VAP	STAT_VBUS_V AP	
R/W		R/\	N	R/W	R/W	R
7 6	5	4	3	2	1	0
IDCHG_DEG2	IDCHG_TH2		PP_IDCHG2	STAT_IDCHG2	STAT_PTM	
R/W	R/W		R/W	R	R	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-40. ChargeOption4 Register (I²C address = 3Dh) Field Descriptions

	Table 8-40. ChargeOption4 Register (I ² C address = 3Dh) Field Descriptions										
BIT	FIELD	TYPE	RESET	DESCRIPTION	l						
7-5	VSYS_UVP	R/W	000b	VSYS Under Voltage Lock Out After UVP is triggered the charger enters hiccup mode, and then the charger is latched off if the restart fails 7 times in 90s The hiccup mode during the UVP can be disabled by setting 0x37[10]=1.							
				VSYS_UVP	1S~5s	VSYS_UVP	1S~5s				
				000b	2.4 V(Default)	100b	5.6 V				
				001b	3.2 V	101b	6.4 V				
				010b	4.0 V	110b	7.2 V				
				011b	4.8 V	111b	8.0 V				
4-3	EN_DITHER	R/W	00b	00b: Disable Di 01b: Dither 1X 10b: Dither 2X	ner configuration ithering <default at="" p0<br="">(±2% Fs dithering ra (±4% Fs dithering ra (±6% Fs dithering ral</default>	nge) nge)					
2	VSYS_UVP_NO_HICCUP	R/W	Ob	0b: Enable VS	_UVP Hiccup mode o YS_UVP Hiccup mod YS_UVP Hiccup mod	le <default at="" por<="" td=""><td>></td></default>	>				
1	PP_VBUS_VAP	R/W	Ob	VBUS_VAP PROCHOT Profile 0b: disable <default at="" por=""> 1b: enable</default>							
0	STAT_VBUS_VAP	R	Ob	from host.	ofile VBUS_VAP statued	ıs bit. The status is	s latched until a read				

Table 8-41. ChargeOption4 Register (I²C address = 3Ch) Field Descriptions

	BIT	FIELD	TYPE	RESET	DESCRIPTION
	7-6	IDCHG_DEG2	R/W	01b	Battery discharge current limit 2 deglitch time(minimum value)
					00b: 100 μs
					01b: 1.6 ms <default at="" por=""></default>
					10b: 6 ms
					11b: 12 ms
- 1			1	1	



Table 8-41. ChargeOption4 Register (I²C address = 3Ch) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
5-3	IDCHG_TH2	R/W	001b	Battery discharge current limit2 based on percentage of IDCHG_TH1. Note IDCHG_TH2 setting higher than 32256 mA should lose accuracy de-rating between target value and 32256 mA. (Recommend not to set higher than 20 A for 1S OTG boost operation) 000b: 125% IDCHG_TH1 001b: 150% IDCHG_TH1 <default at="" por=""> 010b: 175% IDCHG_TH1 111b: 200% IDCHG_TH1 100b: 250% IDCHG_TH1 110b: 350% IDCHG_TH1 111b: 400% IDCHG_TH1</default>
2	PP_IDCHG2	R/W	0b	IDCHG2 PROCHOT Profile 0b: disable <default at="" por=""> 1b: enable</default>
1	STAT_IDCHG2	R	0b	The status is latched until a read from host. 0b: Not triggered <default at="" por=""> 1b: Triggered</default>
0	STAT_PTM	R	0b	PTM operation status bit monitor 0b: Not in PTM Operation <default at="" por=""> 1b: In PTM Operation</default>

8.6.18 Vmin Active Protection Register (I^2C address = 3F/3Eh) [reset = $006Ch(2s\sim5s)/0004h(1S)$]

To set the VAP VBUS PROCHOT trigger threshold, write a 7-bit Vmin Active Protection register command (REG0x3F[7:1]) using the data format listed in Figure 8-33 and Table 8-42. The charger provides VAP mode VBUS PROCHOT trigger threshold range from 3.2 V (0000000b) to 15.9 V (11111111b), with 100-mV step resolution. There is a fixed offset of 3.2 V. Upon POR, the VBUS PROCHOT trigger threshold is 3.2 V (0000000b).

To set VSYS_TH2 Threshold to assert STAT_VSYS, write a 6-bit Vmin Active Protection register command (REG0x3E[7:2]) using the data format listed in Figure 8-33 and Table 8-43. The charger Measure on VSYS with fixed 5-µs deglitch time. Trigger when SYS pin voltage is below the thresholds. The threshold range from 3.2 V (000000b) to 9.5 V (111111b) for 2s~5s and 3.2 V (000000b) to 3.9 V (000111b) for 1S, with 100-mV step resolution. There is a fixed DC offset which is 3.2 V. Under 1S application writing beyond 3.9 V will be ignored. For example, xxx111b and 000111b result in same VSYS_TH2 setting 3.9 V. Upon POR, the VSYS PROCHOT trigger threshold is 3.2 V (000000b) for 1S and 5.9 V (011011b) for 2s~5s .

Figure 8-33. Vmin Active Protection Register (I²C address = 3F/3Eh) [reset = 0070h/0004h]

9	 		tion itogicus.	(o. /o=, [. o		••		
7 6 5		4	3	2	1	0			
VBUS_VAP_TH Bit6	VBUS_VAP_TH Bit5	VBUS_VAP_TH Bit4	VBUS_VAP_TH Bit3	VBUS_VAP_T H Bit2	VBUS_VAP_TH Bit1	VBUS_VAP_TH Bit0	Reserved		
	R/W								
7	6	5	4	3	2	1	0		
VSYS_TH2 Bit6	VSYS_TH2 Bit5	VSYS_TH2 Bit4	VSYS_TH2 Bit3	VSYS_TH2 Bit2	VSYS_TH2 Bit1	EN_TH2_FOLL OW_TH1	EN_FRS		
		R	W			R/W	R/W		

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-42. Vmin Active Protection Register (I²C address = 3Fh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	VBUS_VAP_TH, Bit6	R/W	0b	0 = Adds 0 mV of VAP Mode VBUS PROCHOT trigger voltage threshold 1 = Adds 6400 mV of VAP Mode VBUS PROCHOT trigger voltage threshold
6	VBUS_VAP_TH, Bit5	R/W	0b	0 = Adds 0 mV of VAP Mode VBUS PROCHOT trigger voltage threshold 1 = Adds 3200 mV of VAP Mode VBUS PROCHOT trigger voltage threshold
5	VBUS_VAP_TH, Bit4	R/W	0b	0 = Adds 0 mV of VAP Mode VBUS PROCHOT trigger voltage threshold 1 = Adds 1600 mV of VAP Mode VBUS PROCHOT trigger voltage threshold
4	VBUS_VAP_TH, Bit3	R/W	0b	0 = Adds 0 mV of VAP Mode VBUS PROCHOT trigger voltage threshold 1 = Adds 800 mV of VAP mode VBUS PROCHOT trigger voltage threshold
3	VBUS_VAP_TH, Bit2	R/W	0b	0 = Adds 0 mV of VAP mode VBUS PROCHOT trigger voltage threshold 1 = Adds 400 mV of VAP mode VBUS PROCHOT trigger voltage threshold
2	VBUS_VAP_TH, Bit1	R/W	0b	0 = Adds 0 mV of VAP mode VBUS PROCHOT trigger voltage threshold 1 = Adds 200 mV of VAP mode VBUS PROCHOT trigger voltage threshold
1	VBUS_VAP_TH, Bit0	R/W	0b	0 = Adds 0 mV of VAP mode VBUS PROCHOT trigger voltage threshold 1 = Adds 100 mV of VAP mode VBUS PROCHOT trigger voltage threshold
0	Reserve	R/W	0b	Reserve



Table 8-43. Vmin Active Protection Register (I²C address = 3Eh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	VSYS_TH2, Bit5	R/W	0b	0 = Adds 0 mV of VAP mode VSYS PROCHOT trigger voltage threshold 1 = Adds 3200 mV of VAP mode VSYS PROCHOT trigger voltage threshold
6	VSYS_TH2, Bit4	R/W	1b(2S~5s) 0b(1S)	0 = Adds 0 mV of VAP mode VSYS PROCHOT trigger voltage threshold 1 = Adds 1600 mV of VAP mode VSYS PROCHOT trigger voltage threshold
5	VSYS_TH2, Bit3	R/W	1b(2S~5s) 0b(1S)	0 = Adds 0 mV of VAP mode VSYS PROCHOT trigger voltage threshold 1 = Adds 800 mV of VAP mode VSYS PROCHOT trigger voltage threshold
4	VSYS_TH2, Bit2	R/W	Ob	0 = Adds 0 mV of VAP mode VSYS PROCHOT trigger voltage threshold 1 = Adds 400 mV of VAP mode VSYS PROCHOT trigger voltage threshold
3	VSYS_TH2, Bit1	R/W	0b(1S) 1b(2S~5s)	0 = Adds 0 mV of VAP mode VSYS PROCHOT trigger voltage threshold 1 = Adds 200 mV of VAP mode VSYS PROCHOT trigger voltage threshold
2	VSYS_TH2, Bit0	R/W	1b	0 = Adds 0 mV of VAP mode VSYS PROCHOT trigger voltage threshold 1 = Adds 100 mV of VAP mode VSYS PROCHOT trigger voltage threshold
1	EN_VSYSTH2_FOLLOW_VS YSTH1	R/W	0b	Enable internal VSYS_TH2 follow VSYS_TH1 setting neglecting register REG0x3E[7:2] setting 0b: disable <default at="" por=""> 1b: enable</default>
0	EN_FRS	R/W	0b	Fast Role Swap feature enable (note not recommend to change EN_FRS during OTG operation, the FRS bit from 0 to 1 change will disable power stage for about 200 µs (Fs = 400 kHz). HIZ mode holds higher priority, If EN_HIZ=1b, this EN_FRS bit should be forced to 0b. 0b: disable <default at="" por=""> 1b: enable</default>

8.6.19 OTGVoltage Register (I²C address = 07/06h) [reset = 09C4h]

To set the OTG output voltage limit, write to REG0x07/06h() using the data format listed in Figure 8-34, Table 8-44, and Table 8-45.

The DAC is clamped in digital core at minimal 3 V and maximum 24.0 V during normal OTG operation. Any register writing lower than the minimal or higher than the maximum will be ignored.

Figure 8-34. OTGVoltage Register (I²C address = 07/06h) [reset = 09C4h]

			,				
7	6	5	4	3	2	1	0
Rese	erved	OTG Voltage, bit 11	OTG Voltage, bit 10	OTG Voltage, bit 9	OTG Voltage, bit 8	OTG Voltage, bit 7	OTG Voltage, bit 6
R/	W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
OTG Voltage, bit 5	OTG Voltage, bit 4	OTG Voltage, bit 3	OTG Voltage, bit 2	OTG Voltage, bit 1	OTG Voltage, bit 0	Rese	erved
R/W	R/W	R/W	R/W	R/W	R/W	R/	W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-44. OTGVoltage Register (I²C address = 07h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
15-14	Reserved	R/W	00b	Not used. 1 = invalid write.
13	OTG Voltage, bit 11	R/W	0b	0 = Adds 0 mV of OTG voltage. 1 = Adds 16384 mV of OTG voltage.
12	OTG Voltage, bit 10	R/W	0b	0 = Adds 0 mV of OTG voltage. 1 = Adds 8192 mV of OTG voltage.
11	OTG Voltage, bit 9	R/W	1b	0 = Adds 0 mV of OTG voltage. 1 = Adds 4096 mV of OTG voltage.
10	OTG Voltage, bit 8	R/W	0b	0 = Adds 0 mV of OTG voltage. 1 = Adds 2048 mV of OTG voltage.
9	OTG Voltage, bit 7	R/W	0b	0 = Adds 0 mV of OTG voltage. 1 = Adds 1024 mV of OTG voltage.
8	OTG Voltage, bit 6	R/W	1b	0 = Adds 0 mV of OTG voltage. 1 = Adds 512 mV of OTG voltage.

Table 8-45. OTGVoltage Register (I²C address = 06h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	OTG Voltage, bit 5	R/W	1b	0 = Adds 0 mV of OTG voltage. 1 = Adds 256 mV of OTG voltage.
6	OTG Voltage, bit 4	R/W	1b	0 = Adds 0 mV of OTG voltage. 1 = Adds 128 mV of OTG voltage.
5	OTG Voltage, bit 3	R/W	0b	0 = Adds 0 mV of OTG voltage. 1 = Adds 64 mV of OTG voltage.
4	OTG Voltage, bit 2	R/W	0b	0 = Adds 0 mV of OTG voltage. 1 = Adds 32 mV of OTG voltage.
3	OTG Voltage, bit 1	R/W	0b	0 = Adds 0 mV of OTG voltage. 1 = Adds 16 mV of OTG voltage.
2	OTG Voltage, bit 0	R/W	1b	0 = Adds 0 mV of OTG voltage. 1 = Adds 8 mV of OTG voltage.



Table 8-45. OTGVoltage Register (I²C address = 06h) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
1-0	Reserved	R/W	00b	Not used. Value Ignored.

8.6.20 OTGCurrent Register (I²C address = 09/08h) [reset = 3C00h]

To set the OTG output current limit, write to REG0x09/08() using the data format listed in Figure 8-35 and Table 8-46.

Figure 8-35. OTGCurrent Register (I²C address = 09/08h) [reset = 3C00h]

	J · · · ·				, .	-		
7	6	5	4	3	2	1	0	
Reserved	OTG Current set by host, bit 6	OTG Current set by host, bit 5	OTG Current set by host, bit 4	OTG Current set by host, bit 3	OTG Current set by host, bit 2	OTG Current set by host, bit 1	OTG Current set by host, bit 0	
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
7	6	5	4	3	2	1	0	
	Reserved							
	R/W							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-46. OTGCurrent Register (I²C address = 09h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Reserved	R/W	0b	Not used. 1 = invalid write.
6	OTG Current set by host, bit 6	R/W	0b	0 = Adds 0 mA of OTG current.
				1 = Adds 6400 mA of OTG current.
5	OTG Current set by host, bit 5	R/W	1b	0 = Adds 0 mA of OTG current.
				1 = Adds 3200 mA of OTG current.
4	OTG Current set by host, bit 4	R/W	1b	0 = Adds 0 mA of OTG current.
				1 = Adds 1600 mA of OTG current.
3	OTG Current set by host, bit 3	R/W	1b	0 = Adds 0 mA of OTG current.
				1 = Adds 800 mA of OTG current.
2	OTG Current set by host, bit 2	R/W	1b	0 = Adds 0 mA of OTG current.
				1 = Adds 400 mA of OTG current.
1	OTG Current set by host, bit 1	R/W	0b	0 = Adds 0 mA of OTG current.
				1 = Adds 200 mA of OTG current.
0	OTG Current set by host, bit 0	R/W	0b	0 = Adds 0 mA of OTG current.
				1 = Adds 100 mA of OTG current.

Table 8-47. OTGCurrent Register (I²C address = 08h) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0	Reserved	R/W	0000000b	Not used. Value Ignored.



8.6.21 InputVoltage(VINDPM) Register (I²C address = 0B/0Ah) [reset =VBUS-1.28V]

To set the input voltage limit, write a 16-bit InputVoltage register command (REG0x0B/0A()) using the data format listed in Figure 8-36, Table 8-48, and Table 8-49.

If the input voltage drops more than the InputVoltage register allows, the device enters VINDPM and reduces the charge current. The default setting is 1.28 V below the no-load VBUS voltage. There is a fixed DC offset 3.2 V for all codes.

Figure 8-36. InputVoltage Register (I²C address = 0B/0Ah) [reset = VBUS-1.28V]

		<u> </u>					
7	6	5	4	3	2	1	0
Rese	erved	Input Voltage, bit 7	Input Voltage, bit 6	Input Voltage, bit 5	Input Voltage, bit 4	Input Voltage, bit 3	Input Voltage, bit 2
R/	W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
Input Voltage, bit 1	Input Voltage, bit 0	Reserved					
R/W	R/W			R/	W		

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-48. InputVoltage Register (I²C address = 0Bh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-6	Reserved	R/W	00b	Not used. 1 = invalid write.
5	Input Voltage, bit 7	R/W	0b	0 = Adds 0 mV of input voltage. 1 = Adds 8192 mV of input voltage.
4	Input Voltage, bit 6	R/W	0b	0 = Adds 0 mV of input voltage. 1 = Adds 4096 mV of input voltage.
3	Input Voltage, bit 5	R/W	0b	0 = Adds 0 mV of input voltage. 1 = Adds 2048 mV of input voltage.
2	Input Voltage, bit 4	R/W	0b	0 = Adds 0 mV of input voltage. 1 = Adds 1024 mV of input voltage.
1	Input Voltage, bit 3	R/W	0b	0 = Adds 0 mV of input voltage. 1 = Adds 512 mV of input voltage.
0	Input Voltage, bit 2	R/W	0b	0 = Adds 0 mV of input voltage. 1 = Adds 256 mV of input voltage.

Table 8-49. InputVoltage Register (I²C address = 0Ah) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Input Voltage, bit 1	R/W	0b	0 = Adds 0 mV of input voltage.
				1 = Adds 128 mV of input voltage.
6	Input Voltage, bit 0	R/W	0b	0 = Adds 0 mV of input voltage.
				1 = Adds 64 mV of input voltage
5-0	Reserved	R/W	000000b	Not used. Value Ignored.

8.6.22 VSYS_MIN Register (I²C address = 0D/0Ch) [reset value based on CELL_BATPRESZ pin setting]

To set the minimum system voltage, write a 16-bit VSYS_MIN register command (REG0x0D/0C()) using the data format listed in Figure 8-37, Table 8-50 , and Table 8-51 . The charger provides minimum system voltage range from 1.0V to 23.0V, with 100-mV step resolution. Any write below 1.0V or above 23.0V is ignored. Upon POR, the VSYS_MIN register is 3.6 V for 1 S, 6.6V for 2 S and 9.2 V for 3 S, and 12.3 V for 4 S, and 15.4 V for 5S. Writing VSYS_MIN to 0 will set it to the default value based on CELL_BATPRESZ pin.

Figure 8-37. VSYS_MIN Register (I²C address = 0D/0Ch) [reset value based on CELL_BATPRESZ pin setting]

7	6	5	4	3	2	1	0
VSYS_MIN, bit 7	VSYS_MIN, bit 6	VSYS_MIN, bit 5	VSYS_MIN, bit 4	VSYS_MIN, bit 3	VSYS_MIN, bit 2	VSYS_MIN, bit 1	VSYS_MIN, bit 0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
Reserved							
			R/	W			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-50. VSYS_MIN Register (I²C address = 0Dh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Min System Voltage, bit 7	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 12800 mV of system voltage.
6	Min System Voltage, bit 6	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 6400mV of system voltage.
5	Min System Voltage, bit 5	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 3200 mV of system voltage.
4	Min System Voltage, bit 4	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 1600 mV of system voltage.
3	Min System Voltage, bit 3	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 800 mV of system voltage.
2	Min System Voltage, bit 2	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 400 mV of system voltage.
1	Min System Voltage, bit 1	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 200 mV of system voltage.
0	Min System Voltage, bit 0	R/W	0b	0 = Adds 0 mV of system voltage. 1 = Adds 100 mV of system voltage.

Table 8-51. VSYS_MIN Register (I²C address = 0Ch) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0	Reserved	R/W	00000000 b	Not used. Value Ignored.



8.6.23 IIN HOST Register (I^2C address = 0F/0Eh) [reset = 2000h]

To set the nominal or typical input current limit based on the adapter rated current. Write a 7-bit IIN_HOST register command using the data format listed below.

When using a $10\text{-m}\Omega$ sense resistor (RSNS_RAC=0b), the charger provides a nominal input-current limit range of 50 mA to 6350 mA, with 50-mA resolution. The upper boundary is implemented through DAC clamp, writing value higher than limitation will be neglected. The lower boundary is implemented through 50-mA offset at code 0. Note this offset is only applied to code 0, not applied to other codes. The default nominal input current limit is 3.25 A. Upon adapter removal, the input current limit is reset to the default value of 3.25 A.

When using a 5-m Ω sense resistor (RSNS_RAC=1b) referring to Section 8.3.5, the input-current limit range can be found under certain IADPT pin, EN_FAST_5MOHM bit status. The lower boundary is implemented through 100-mA offset at code 0. Note this offset is only applied to code 0, not applied to other codes. The default current limit is 3.2 A. Due to the USB current setting requirement, the register setting specifies the maximum current instead of the typical current. Upon adapter removal, the nominal input current limit is reset to the default value of 3.2 A.

To set the maximum input current limit based on adapter rated current. Additional 100-mA (10-m Ω sense resistor)/200-mA (5-m Ω sense resistor) offset should be added based on above nominal input current limit to obtain the maximum input current limit.

The ACP and ACN pins are used to sense R_{AC} with the default value of 5 m Ω . For a 10-m Ω sense resistor, a larger sense voltage is given and a better regulation accuracy, but at the cost of higher conduction loss.

Instead of using the internal IIN_DPM loop, the user can build up an external input current regulation loop and have the feedback signal on the ILIM HIZ pin.

In order to disable ILIM_HIZ pin, the host can write EN_EXTILIM=0b to disable ILIM_HIZ pin, or pull ILIM_HIZ pin above 4.0 V.

Figure 8-38. IIN_HOST Register (I²C address = 0F/0Eh) [reset = 4100h]

	•	_	•		, .	•	
7	6	5	4	3	2	1	0
Reserved	Input Current set by host, bit 6	Input Current set by host, bit 5	Input Current set by host, bit 4	Input Current set by host, bit 3	Input Current set by host, bit 2	Input Current set by host, bit 1	Input Current set by host, bit 0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
Reserved							
			F	२			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-52. IIN HOST Register With 5-m Ω Sense Resistor (I²C address = 0Fh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7	Reserved	R/W	0b	Not used. 1 = invalid write.
6	Input Current set by host, bit 6	R/W	0b	0 = Adds 0 mA of input current. 1 = Adds 6400 mA of input current.
5	Input Current set by host, bit 5	R/W	1b	0 = Adds 0 mA of input current. 1 = Adds 3200 mA of input current.
4	Input Current set by host, bit 4	R/W	0b	0 = Adds 0 mA of input current. 1 = Adds 1600 mA of input current.
3	Input Current set by host, bit 3	R/W	0b	0 = Adds 0 mA of input current. 1 = Adds 800 mA of input current.



Table 8-52. IIN_HOST Register With 5-m Ω Sense Resistor (I²C address = 0Fh) Field Descriptions (continued)

BIT	FIELD	TYPE	RESET	DESCRIPTION
2	Input Current set by host, bit 2	R/W	0b	0 = Adds 0 mA of input current. 1 = Adds 400 mA of input current.
1	Input Current set by host, bit 1	R/W	0b	0 = Adds 0 mA of input current. 1 = Adds 200 mA of input current.
0	Input Current set by host, bit 0	R/W	0b	0 = Adds 0 mA of input current. 1 = Adds 100 mA of input current.

Table 8-53. IIN_HOST Register With 5-m Ω Sense Resistor (I²C address = 0Eh) Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0	Reserved	R	00000000 b	Not used. Value Ignored.



8.6.24 ID Registers

8.6.24.1 ManufactureID Register (I^2C address = 2Eh) [reset = 40h]

Figure 8-39. ManufactureID Register (I²C address = 2Eh) [reset = 40h]

7-0
Manufacturer ID
R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-54. ManufactureID Register Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION (READ ONLY)
7-0	MANUFACTURE_ID	R	40h	40h

8.6.24.2 Device ID (DeviceAddress) Register (I^2C address = 2Fh) [reset = D5h]

Figure 8-40. Device ID (DeviceAddress) Register (I²C address = 2Fh) [reset = D5h]

J
7-0
DEVICE_ID
R

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 8-55. Device ID (DeviceAddress) Register Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
7-0	DEVICE_ID	R	BQ25730: 11 01 0101b (D5h)	BQ25730: 11 01 0101b (D5h)

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The BQ2573xEVM evaluation module (EVM) is a complete charger module for evaluating the BQ25730. The application curves were taken using the BQ2573xEVM.

As shown in Figure 9-1, at the charger VSYS terminal, a minimum 7- μ F effective MLCC capacitance (7 × 10- μ F 0603 package MLCC) is suggested for a 45-W to 65-W adapter, and two more 10- μ F MLCC capacitors are needed when power reaches 90 W. Overall 50- μ F effective capacitance on VSYS net is necessary (POSCAP is preferred). These capacitors do not have to be placed at the charger VSYS output terminal; all capacitors connected to VSYS net can be counted including the input capacitor of the next stage converters.

9.2 Typical Application

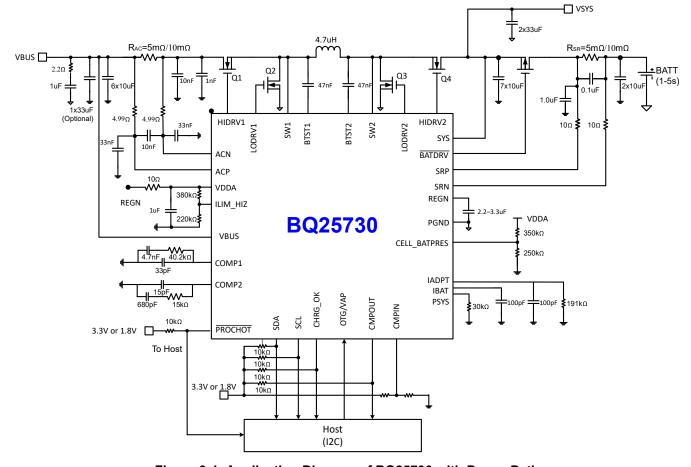


Figure 9-1. Application Diagram of BQ25730 with Power Path

9.2.1 Design Requirements

Copyright © 2024 Texas Instruments Incorporated

DESIGN PARAMETER	EXAMPLE VALUE	
Input Voltage ⁽²⁾	3.5 V < Adapter Voltage < 26V	

Due dook Folden Limber BOO



DESIGN PARAMETER	EXAMPLE VALUE	
Input Current Limit (2)	3.2 A for 65-W adapter	
Battery Charge Voltage ⁽¹⁾	8400 mV for 2s battery	
Battery Charge Current ⁽¹⁾	3072 mA for 2s battery	
Minimum System Voltage ⁽¹⁾	6600 mV for 2s battery	

- Refer to battery specification for settings. (1)
- Refer to adapter specification for settings for Input Voltage and Input Current Limit. (2)

9.2.2 Detailed Design Procedure

The parameters are configurable using the evaluation software. The simplified application circuit (see Figure 9-1, as the application diagram) shows the minimum component requirements. Inductor, capacitor, and MOSFET selection are explained in the rest of this section. Refer to the EVM user's guide for the complete application schematic.

9.2.2.1 Input Snubber and Filter for Voltage Spike Damping

During adapter hot plug-in, the parasitic inductance and input capacitor from the adapter cable form a second order system. The voltage spike at VBUS pin maybe beyond IC maximum voltage rating and damage IC. The input filter must be carefully designed and tested to prevent overvoltage event on VBUS pin.

There are several methods to damp or limit the overvoltage spike during adapter hot plug-in. An electrolytic capacitor with high ESR as an input capacitor can damp the overvoltage spike well below the IC maximum pin voltage rating. A high current capability TVS Zener diode can also limit the overvoltage level to an IC safe level. However these two solutions may not save cost or have small size.

A cost effective and small size solution is shown in Figure 9-2. The R1 and C1 are composed of a damping RC network to damp the hot plug-in oscillation. As a result the over voltage spike is limited to a safe level. D1 is used for reverse voltage protection for VBUS pin. C2 is VBUS pin decoupling capacitor and it should be placed as close as possible to VBUS pin. C2 value should be less than C1 value so R1 can dominate the equivalent ESR value to get enough damping effect. R2 is used to limit inrush current of D1 to prevent D1 getting damage when adapter hot plug-in. R2 and C2 should have 10-us time constant to limit the dv/dt on VBUS pin to reduce inrush current when adapter hot plug in. R1 has high inrush current. R1 package must be sized enough to handle inrush current power loss according to resistor manufacturer's data sheet. The filter components' value always need to be verified with real application and minor adjustments may need to fit in the real application circuit.




Figure 9-2. Input Filter

9.2.2.2 ACP-ACN Input Filter

The BQ25730 has average current mode control. The input current sensing through ACP/ACN is critical to recover inductor current ripple. Parasitic inductance on board will generate high frequency ringing on ACP-ACN which overwhelms converter sensed inductor current information. It is also difficult to manage parasitic inductance created based on different PCB layout. Larger parasitic inductance will generate larger sense current ringing which could cause the average current control loop to go into oscillation. Therefore ACP-ACN sensing information need to be conditioned.

For real system board condition, we suggest using below circuit design to get best result and filter noise induced from different PCB parasitic factor. With time constant of filter from 47 ns to 200 ns, the filter is effective and the delay of on the sensed signal is small, therefore there is no concern for average current mode control. If 400-kHz

switching frequency is employed, 10 nF is recommended for C_{DIFF} ; if 800-kHz switching frequency is chosen, then C_{DIFF} can be left open.

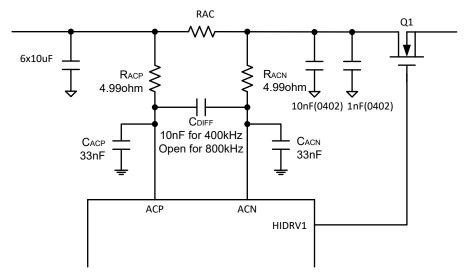


Figure 9-3. ACN-ACP Input Filter

9.2.2.3 Inductor Selection

The BQ25730 has two selectable fixed switching frequency. Higher switching frequency allows the use of smaller inductor and capacitor values. Inductor saturation current should be higher than the charging current (I_{CHG}) plus half the ripple current (I_{RIPPLE}) :

$$I_{SAT} \ge I_{CHG} + (1/2)I_{RIPPLE}$$
 (2)

The inductor ripple current in buck operation depends on input voltage (V_{IN}), duty cycle ($D_{BUCK} = V_{OUT}/V_{IN}$), switching frequency (f_S) and inductance (L):

$$I_{RIPPLE BUCK} = V_{IN} \times D_{BUCK} \times (1-D_{BUCK}) / (f_S \times L)$$
(3)

During boost operation, the duty cycle is:

 $D_{BOOST} = 1 - (V_{IN}/V_{BAT})$

and the ripple current is:

$$I_{RIPPLE BOOST} = (V_{IN} \times D_{BOOST}) / (f_S \times L)$$

The maximum inductor ripple current happens with D = 0.5 or close to 0.5. For example, the battery charging voltage range is from 9 V to 12.6 V for 3-cell battery pack. For 20-V adapter voltage, 10-V battery voltage gives the maximum inductor ripple current. Another example is 4-cell battery, the battery voltage range is from 12 V to 16.8 V, and 12-V battery voltage gives the maximum inductor ripple current.

Usually inductor ripple is designed in the range of (20 - 40%) maximum charging current as a trade-off between inductor size and efficiency for a practical design.

9.2.2.4 Input Capacitor

Input capacitor should have enough ripple current rating to absorb input switching ripple current. The worst case RMS ripple current is half of the charging current (plus system current there is any system load) when duty cycle is 0.5 in buck mode. If the converter does not operate at 50% duty cycle, then the worst case capacitor RMS current occurs where the duty cycle is closest to 50% and can be estimated by Equation 4:

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



$$I_{CIN} = I_{CHG} \times \sqrt{D \times (1 - D)}$$
(4)

Low ESR ceramic capacitor such as X7R or X5R is preferred for input decoupling capacitor and should be placed in front of R_{AC} current sensing and as close as possible to the power stage half bridge MOSFETs. Capacitance after R_{AC} before power stage half bridge should be limited to 10 nF + 1 nF referring to Figure 9-3 diagram. Because too large capacitance after R_{AC} could filter out R_{AC} current sensing ripple information. Voltage rating of the capacitor must be higher than normal input voltage level, 25-V rating or higher capacitor is preferred for 19-V to 20-V input voltage.

Ceramic capacitors (MLCC) show a dc-bias effect. This effect reduces the effective capacitance when a dc-bias voltage is applied across a ceramic capacitor, as on the input capacitor of a charger. The effect may lead to a significant capacitance drop, especially for high input voltages and small capacitor packages. See the manufacturer's data sheet about the derating performance with a dc bias voltage applied. It may be necessary to choose a higher voltage rating or nominal capacitance value in order to get the required effective capacitance value at the operating point.

9.2.2.5 Output Capacitor

Output capacitor also should have enough ripple current rating to absorb output switching ripple current. To get good loop stability, the resonant frequency of the output inductor and output capacitor should be designed between 10 kHz and 20 kHz. The preferred ceramic capacitor is 25-V X7R or X5R for output capacitor. Minimum 7 pcs of 10- μ F 0603 package capacitor is suggested to be placed as close as possible to Q3&Q4 half bridge (between Q4 drain and Q3 source terminal). Total minimum output effective capacitance along VSYS distribution line is 50 μ F refers to Table 9-1. Recommend to place minimum 20- μ F MLCC capacitors after the charge current sense resistor for best stability.

Ceramic capacitors show a dc-bias effect. This effect reduces the effective capacitance when a dc-bias voltage is applied across a ceramic capacitor, as on the output capacitor of a charger. The effect may lead to a significant capacitance drop, especially for high output voltages and small capacitor packages. See the manufacturer's data sheet about the derating performance with a dc bias voltage applied. It may be necessary to choose a higher voltage rating or nominal capacitance value in order to get the required capacitance value at the operating point. Considering the 25-V 0603 package MLCC capacitance derating under 21-V to 23-V output voltage, the recommended practical capacitors configuration at VSYS output terminal can also be found in Table 9-1. Tantalum capacitors (POSCAP) can avoid dc-bias effect and temperature variation effect which are recommend to be used along VSYS output distribution line to meet total minimum effective output capacitance requirement.

OUTPUT CAPACITORS vs TOTAL INPUT 65 W 90 W 130 W **POWER** Minimum Effective Output Capacitance 50 µF 50 µF 50 µF 7*10 µF (0603 25 V MLCC) 9*10 µF (0603 25 V MLCC) Minimum output capacitors at charger VSYS 9*10 µF (0603 25 V MLCC) output terminal Additional output capacitors along VSYS 2*22 µF (25 V~35 V 2*22 µF (25 V~35 V 2*22 µF (25 V~35 V distribution line POSCAP) POSCAP) POSCAP)

Table 9-1. Minimum Output Capacitance Requirement

9.2.2.6 Power MOSFETs Selection

Four external N-channel MOSFETs are used for a synchronous switching battery charger. The gate drivers are integrated into the IC with 6 V of gate drive voltage. 30 V or higher voltage rating MOSFETs are preferred for 19-V to 20-V input voltage.

Figure-of-merit (FOM) is usually used for selecting proper MOSFET based on a tradeoff between the conduction loss and switching loss. For the top side MOSFET, FOM is defined as the product of a MOSFET's on-resistance, $R_{DS(ON)}$, and the gate-to-drain charge, Q_{GD} . For the bottom side MOSFET, FOM is defined as the product of the MOSFET's on-resistance, $R_{DS(ON)}$, and the total gate charge, Q_{G} .

$$FOM_{top} = R_{DS(on)} \cdot Q_{GD}; FOM_{bottom} = R_{DS(on)} \cdot Q_{G}$$
(5)

The lower the FOM value, the lower the total power loss. Usually lower $R_{DS(ON)}$ has higher cost with the same package size.

The top-side MOSFET loss includes conduction loss and switching loss. Taking buck mode operation as an example the power loss is a function of duty cycle ($D=V_{OUT}/V_{IN}$), charging current (I_{CHG}), MOSFET's onresistance ($R_{DS(ON) \ top}$), input voltage (V_{IN}), switching frequency (f_S), turn-on time (f_{CHG}) and turn-off time (f_{CHG}):

$$P_{\text{top}} = P_{\text{con top}} + P_{\text{sw top}} \tag{6}$$

$$P_{con_top} = D \cdot I_{L_RMS}^{2} \cdot R_{DS(on)_top}; \tag{7}$$

$$I_{L RMS}^{2} = I_{L DC}^{2} + I_{ripple}^{2} / 12$$
 (8)

- I_{L DC} is the average inductor DC current under buck mode;
- I_{ripple} is the inductor current ripple peak-to-peak value;

$$P_{\text{sw top}} = P_{\text{IV top}} + P_{\text{Qoss top}} + P_{\text{Gate top}}; \tag{9}$$

The first item P_{con_top} represents the conduction loss which is straight forward. The second term P_{sw_top} represents the multiple switching loss items in top MOSFET including voltage and current overlap losses (P_{IV_top}) , MOSFET parasitic output capacitance loss (P_{Qoss_top}) and gate drive loss (P_{Gate_top}) . To calculate voltage and current overlap losses (P_{IV_top}) :

$$P_{IV top} = 0.5x V_{IN} \cdot I_{valley} \cdot t_{on} \cdot f_S + 0.5x V_{IN} \cdot I_{peak} \cdot t_{off} \cdot f_S$$

$$\tag{10}$$

$$I_{\text{vallev}} = I_{\text{L DC}} = 0.5 \cdot I_{\text{ripple}}$$
 (inductor current valley value); (11)

$$I_{peak} = I_{L DC} + 0.5 \cdot I_{ripple}$$
 (inductor current peak value); (12)

- t_{on} is the MOSFET turn-on time that V_{DS} falling time from V_{IN} to almost zero (MOSFET turn on conduction voltage);
- t_{off} is the MOSFET turn-off time that I_{DS} falling time from I_{peak} to zero;

The MOSFET turn-on and turn-off times are given by:

$$t_{on} = \frac{Q_{SW}}{I_{on}}, \quad t_{off} = \frac{Q_{SW}}{I_{off}}$$
(13)

where Q_{sw} is the switching charge, I_{on} is the turn-on gate driving current, and I_{off} is the turn-off gate driving current. If the switching charge is not given in MOSFET datasheet, it can be estimated by gate-to-drain charge (Q_{GD}) and gate-to-source charge (Q_{GS}) :

$$Q_{SW} = Q_{GD} + Q_{GS} \tag{14}$$

Gate driving current can be estimated by REGN voltage (V_{REGN}), MOSFET plateau voltage (V_{plt}), total turn-on gate resistance (R_{on}), and turn-off gate resistance (R_{off}) of the gate driver:

$$I_{on} = \frac{V_{REGN} - V_{plt}}{R_{on}}, \quad I_{off} = \frac{V_{plt}}{R_{off}}$$
(15)

To calculate top MOSFET parasitic output capacitance loss (PQoss top):

$$P_{\text{Ooss top}} = 0.5 \cdot V_{\text{IN}} \cdot Q_{\text{oss}} \cdot f_{\text{S}} \tag{16}$$

Q_{oss} is the MOSFET parasitic output charge which can be found in MOSFET datasheet;



To calculate top MOSFET gate drive loss (P_{Gate top}):

$$P_{Gate top} = V_{IN} \cdot Q_{Gate top} \cdot f_{S}$$
(17)

- Q_{Gate top} is the top MOSFET gate charge which can be found in MOSFET datasheet;
- Note here V_{IN} is used instead of real gate drive voltage 6 V because, the gate drive 6 V is generated based on LDO from V_{IN} under buck mode, the total gate drive related loss are all considered when V_{IN} is used for gate drive loss calculation

The bottom-side MOSFET loss also includes conduction loss and switching loss:

$$P_{bottom} = P_{con\ bottom} + P_{sw\ bottom}$$
 (18)

$$P_{con\ bottom} = (1 - D) \cdot I_{L\ RMS}^{2} \cdot R_{DS(on)\ bottom}; \tag{19}$$

$$P_{\text{sw_bottom}} = P_{\text{RR_bottom}} + P_{\text{Dead_bottom}} + P_{\text{Gate_bottom}}; \tag{20}$$

The first item P_{con_bottom} represents the conduction loss which is straight forward. The second term P_{sw_bottom} represents the multiple switching loss items in bottom MOSFET including reverse recovery losses (P_{RR_bottom}), Dead time body diode conduction loss (P_{Dead_bottom}) and gate drive loss (P_{Gate_bottom}). The detail calculation can be found below:

$$P_{RR bottom} = V_{IN} \cdot Q_{rr} \cdot f_{S}$$
 (21)

Q_{rr} is the bottom MOSFET reverse recovery charge which can be found in MOSFET data sheet;


$$P_{Dead\ bottom} = V_F \cdot I_{valley} \cdot f_S \cdot t_{dead\ rise} + V_F \cdot I_{peak} \cdot f_S \cdot t_{dead\ fall}$$
(22)

- V_F is the body diode forward conduction voltage drop;
- t_{dead rise} is the SW rising edge deadtime between top and bottom MOSFETs which is around 40 ns;
- t_{dead fall} is the SW falling edge deadtime between top and bottom MOSFETs which is around 30 ns;


P_{Gate_bottom} can follow the same method as top MOSFET gate drive loss calculation approach refer to Equation 17

P-channel MOSFETs is used for battery charging BATFET. The gate drivers are internally integrated into the IC with 10 V of gate drive voltage. 20 V or higher voltage rating MOSFETs are preferred for 1- to 4-cell battery application, 30 V or higher voltage rating MOSFETs are preferred for 5-cell battery application, the Ciss of P-channel MOSFET should be chosen less than 5 nF.

9.2.3 Application Curves

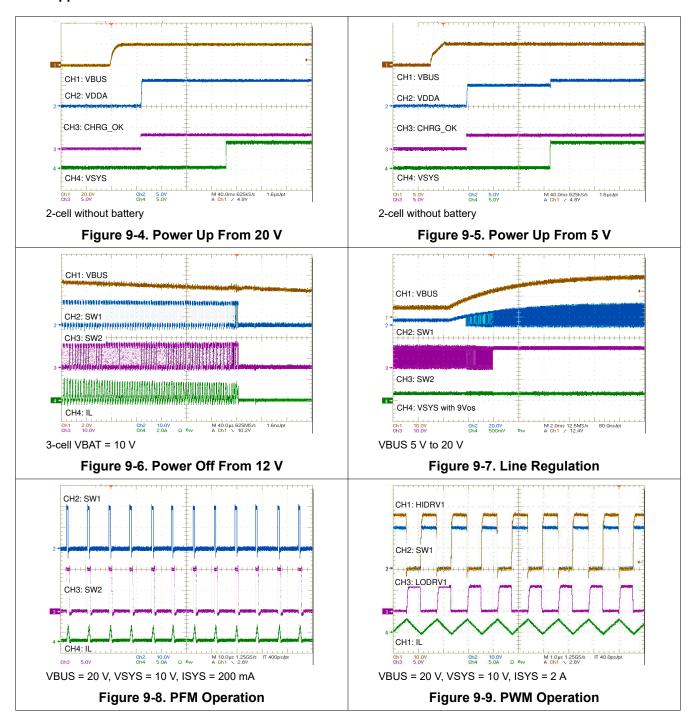




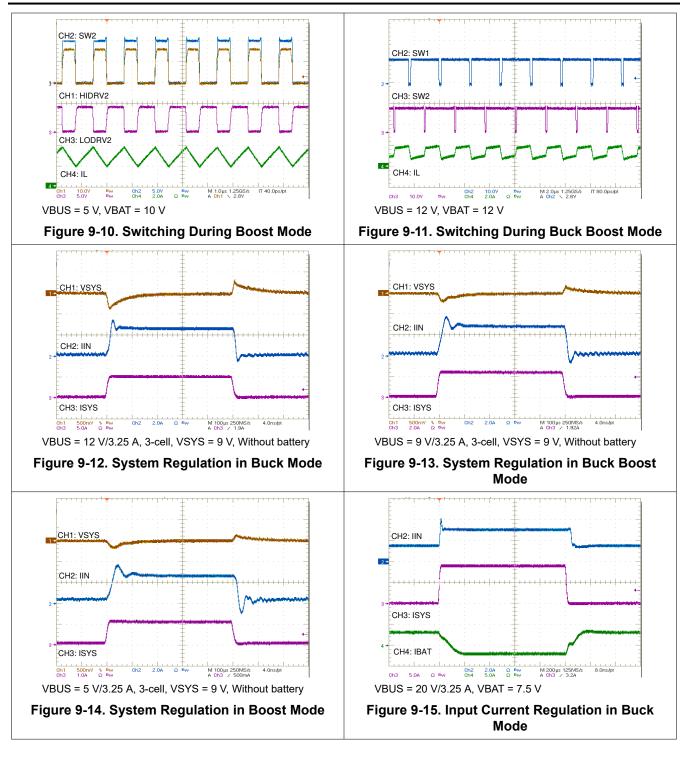


Product Folder Links: BQ25730

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

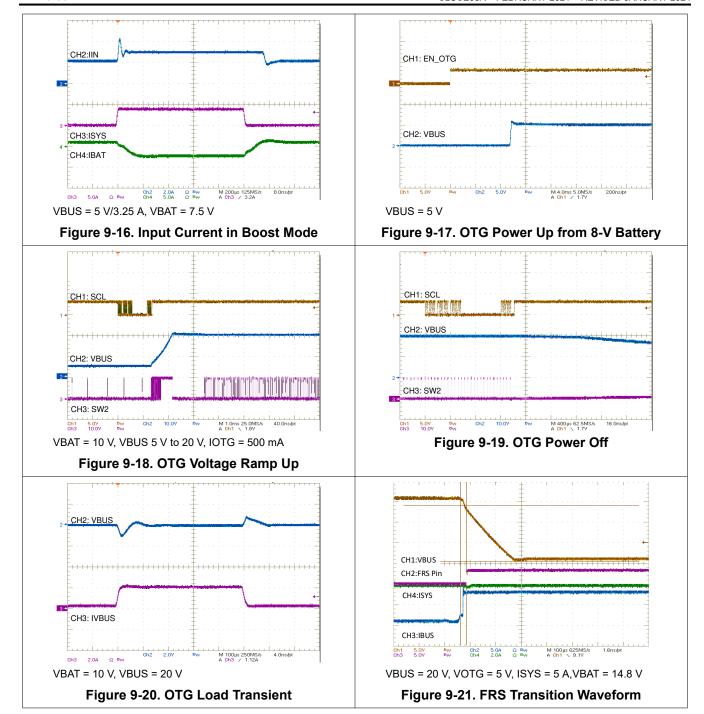



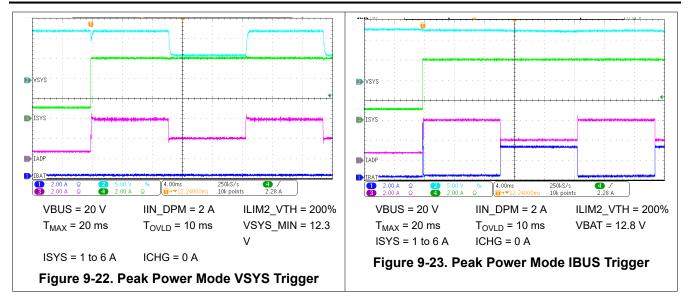



10 Power Supply Recommendations

The valid adapter range is from 3.5 V (V_{VBUS_CONVEN}) to 26 V with at least 500-mA current rating. When CHRG_OK goes HIGH, the system is powered from adapter through the charger. When adapter is removed, the system is connected to battery through BATFET. Typically the battery depletion threshold should be greater than the VSYS_MIN so that the battery capacity can be fully utilized for maximum battery run time.

Copyright © 2024 Texas Instruments Incorporated



11 Layout

11.1 Layout Guidelines

Proper layout of the components to minimize high frequency current path loop (see Section 11.2) is important to prevent electrical and magnetic field radiation and high frequency resonant problems. Here is a PCB layout priority list for proper layout.

Table 11-1. PCB Layout Guidelines

RULES	COMPONENTS	FUNCTION	IMPACT	GUIDELINES
1		PCB layer stack up	Thermal, efficiency, signal integrity	Multi- layer PCB is suggested. Allocate at least one ground layer. The BQ257XXEVM uses a 4-layer PCB (top layer, ground layer, signal layer and bottom layer).
2	CBUS, RAC, Q1, Q2	Input loop	High frequency noise, ripple	VBUS capacitors, RAC, Q1 and Q2 form a small loop 1. It is best to put them on the same side. Connect them with large copper to reduce the parasitic resistance. Move part of CBUS to the other side of PCB for high density design. After RAC before Q1 and Q2 power stage recommend to put 10 nF + 1 nF (0402 package) decoupling capacitors as close as possible to IC to decoupling switching loop high frequency noise.
3	R _{AC} , Q1, L1, Q4	Current path	Efficiency	The current path from VBUS to VSYS, through R _{AC} , Q1, L1, Q4, has low impedance. Pay attention to via resistance if they are not on the same side. The number of vias can be estimated as 1 to 2A/via for a 10-mil via with 1 oz. copper thickness.
4	CSYS, Q3, Q4	Output loop	High frequency noise, ripple	VSYS capacitors, Q3 and Q4 form a small loop 2. It is best to put them on the same side. Connect them with large copper to reduce the parasitic resistance. Move part of CSYS to the other side of PCB for high density design.
5	QBAT, R _{SR}	Current path	Efficiency, battery voltage detection	Place QBAT and R_{SR} near the battery terminal. The current path from VBAT to VSYS, through R_{SR} and QBAT, has low impedance. Pay attention to via resistance if they are not on the same side. The device detects the battery voltage through SRN near battery terminal.
6	Q1, Q2, L1, Q3, Q4	Power stage	Thermal, efficiency	Place Q1, Q2, L1, Q3 and Q4 next to each other. Allow enough copper area for thermal dissipation. The copper area is suggested to be 2x to 4x of the pad size. Multiple thermal vias can be used to connect more copper layers together and dissipate more heat.
7	R _{AC} , R _{SR}	Current sense	Regulation accuracy	Use Kelvin-sensing technique for R_{AC} and R_{SR} current sense resistors. Connect the current sense traces to the center of the pads, and run current sense traces as differential pairs.
8	Small capacitors	IC bypass caps	Noise, jittering, ripple	Place VBUS cap, VCC cap, REGN caps near IC.
9	BST capacitors	HS gate drive	High frequency noise, ripple	Place HS MOSFET boost strap circuit capacitor close to IC and on the same side of PCB board. Capacitors SW1/2 nodes are recommended to use wide copper polygon to connect to power stage and capacitors BST1/2 node are recommended to use at least 8mil trace to connected to IC BST1/2 pins.

Table 11-1. PCB Layout Guidelines (continued)

RULES	COMPONENTS	FUNCTION	IMPACT	GUIDELINES
10		Ground partition	Measurement accuracy, regulation accuracy, jitters, ripple	Separate analog ground(AGND) and power grounds(PGND) is preferred. PGND should be used for all power stage related ground net. AGND should be used for all sensing, compensation and control network ground for example ACP/ACN/COMP1/COMP2/CMPIN/CMPOUT/IADPT/IBAT/PSYS. Connect all analog grounds to a dedicated low-impedance copper plane, which is tied to the power ground underneath the IC exposed pad. If possible, use dedicated COMP1, COMP2 AGND traces. Connect analog ground and power ground together using power pad as the single ground connection point.

11.2 Layout Example

11.2.1 Layout Example Reference Top View

Based on the above layout guidelines, the buck-boost charger layout example top view is shown below including all the key power components.

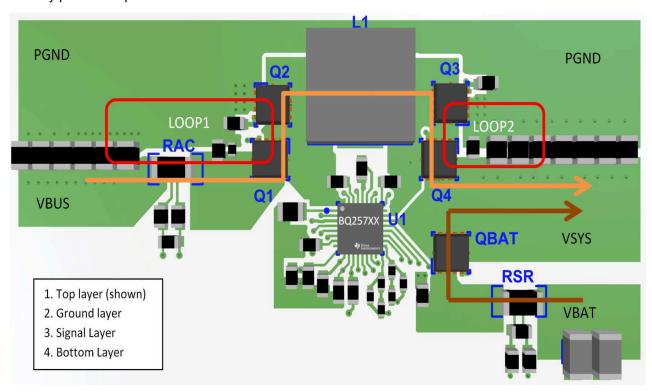


Figure 11-1. Buck-Boost Charger Layout Reference Example Top View

11.2.2 Inner Layer Layout and Routing Example

For both input sensing resistor and charging current sensing resistor, differential sensing and routing method are suggested and highlighted in below figure. Use wide trace for gate drive traces, minimum 15 mil trace width. Connect all analog grounds to a dedicated low-impedance copper plane, which is tied to the power ground underneath the IC exposed pad. Suggest using dedicated COMP1, COMP2 analog ground traces shown in below figure.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



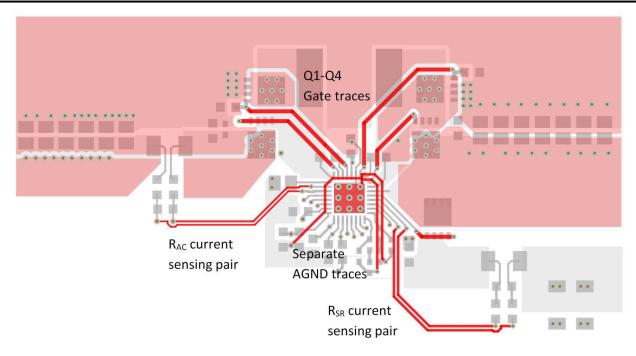


Figure 11-2. Buck-Boost Charger Gate Drive/Current Sensing/AGND Signal Layer Routing Example

Product Folder Links: BQ25730

Submit Document Feedback

100

12 Device and Documentation Support

12.1 Device Support

12.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

12.2 Documentation Support

12.2.1 Related Documentation

For related documentation see the following:

- Semiconductor and IC Package Thermal Metrics Application Report
- BQ2571x Evaluation Module User's Guide
- QFN/SON PCB Attachment Application Report

12.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.4 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

12.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

12.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.7 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.



13 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

C	hanges from Revision * (February 2021) to Revision A (January 2024)	Page
•	Added IEC 62368-1 CB Certification to Features	1
•	Changed pin name from OT/VAP/FRS to OTG/VAP/FRS in Table 6-1	<mark>5</mark>
•	Changed V _{SYS MIN REG ACC} from REG0x3E to REG0x0D/0C in Section 7.5	<mark>9</mark>
•	Updated Section 8.3.5	28
•	Changed from REG0x15 to REG0x04 in Section 8.3.7	29
•	Changed < and > in Section 8.3.16.2	32
•	Changed from REG0x34 to REG0x38 and voltage rises above to voltage falls below in Section 8.3.20.	1 <mark>35</mark>
•	Changed IIN_DPM() Description from 50 mA to 100 mA in Table 8-7	
•	Updated WDTMR_ADJ and IIN_DPM_AUTO_DISABLE Descriptions in Table 8-8	46
•	Updated EN_CMP_LATCH and EN_LDO Descriptions in Table 8-9	46
•	Changed from REG0x15 to REG0x05/04 in Section 8.6.3	
•	Changed from REG0x21 to REG0x22 in IN_VAP Description in Table 8-14	53
•	Deleted not from 1b in IN_IIN_DPM Description in Table 8-14	
•	Changed from REG0x23[7,2],REG0x23[6:0] to REG0x22 and cleared to reset in Section 8.6.5	
•	Changed from TSHUT to Reserved and updated STAT_EXIT_VAP Description in Table 8-16	<mark>55</mark>
•	Changed from 128mA to 256mA and REG0x14 to REG0x02 in AUTO_WAKEUP_EN Description in Tall	ble
	8-29	<mark>63</mark>
•	Changed from Vmin Active Protection to VSYS_TH1 and from REG0x37 to REG0x36 in Section 8.6.14	1 69
•	Changed from 0x22H to 0x25/24 in ILIM2_VTH Description and from REG0x33 to REG0x36 in	
	PROCHOT_VINDPM_ 80_90 Description in Table 8-34	
•	Changed from REG0x3D to REG0x0B/0A in LOWER_PROCHOT_ VINDPM Description in Table 8-35	
•	Changed IDCHG_DEG1 Reset from 00b to 01b in Table 8-36	
•	Changed from 0b to 1b in PP_VBUS_VAP Description in Table 8-40	
•	Changed from REG37 to REG0x3E in EN_VSYSTH2_FOLLOW_VS YSTH1 Description in Table 8-43	
•	Changed from REG0x09 to REG0x09/08 in Section 8.6.20 and values in bit descriptions in Table 8-46	
•	Changed from REG0x3E to REG0x0D/0C in Section 8.6.22	
•	Updated third paragraph in Section 8.6.23	84
_		

14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Deadwat Falden Links ROO

Copyright © 2024 Texas Instruments Incorporated

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
BQ25730RSNR	Active	Production	QFN (RSN) 32	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25730
BQ25730RSNR.A	Active	Production	QFN (RSN) 32	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25730
BQ25730RSNRG4	Active	Production	QFN (RSN) 32	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25730
BQ25730RSNRG4.A	Active	Production	QFN (RSN) 32	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25730

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE MATERIALS INFORMATION

www.ti.com 18-Jun-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
BQ25730RSNR	QFN	RSN	32	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
BQ25730RSNRG4	QFN	RSN	32	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

www.ti.com 18-Jun-2025




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
BQ25730RSNR	QFN	RSN	32	3000	367.0	367.0	35.0	
BQ25730RSNRG4	QFN	RSN	32	3000	367.0	367.0	35.0	

4 x 4, 0.4 mm pitch


PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

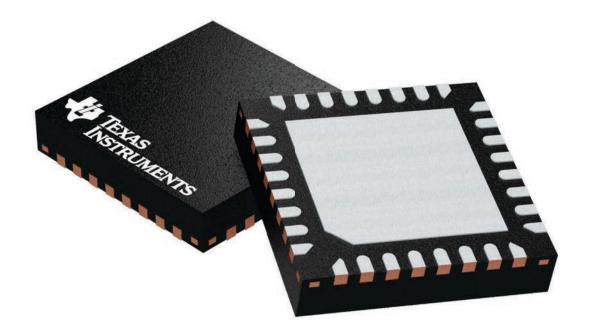



PLASTIC QUAD FLATPACK - NO LEAD

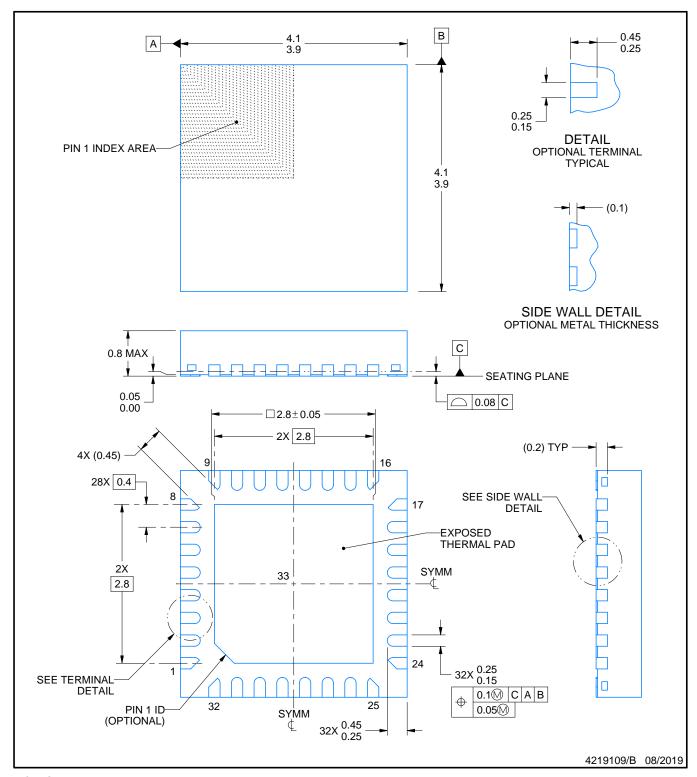


NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD

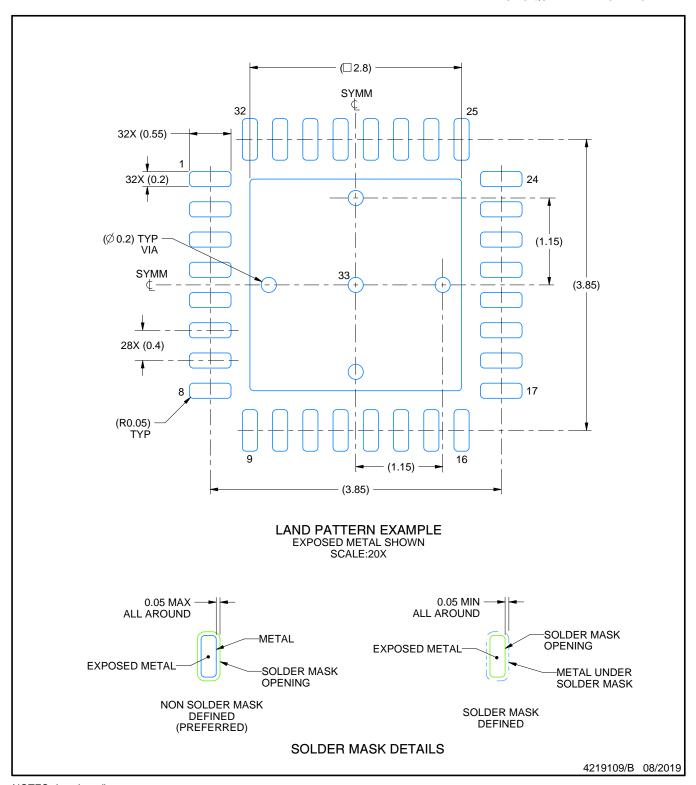


NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD

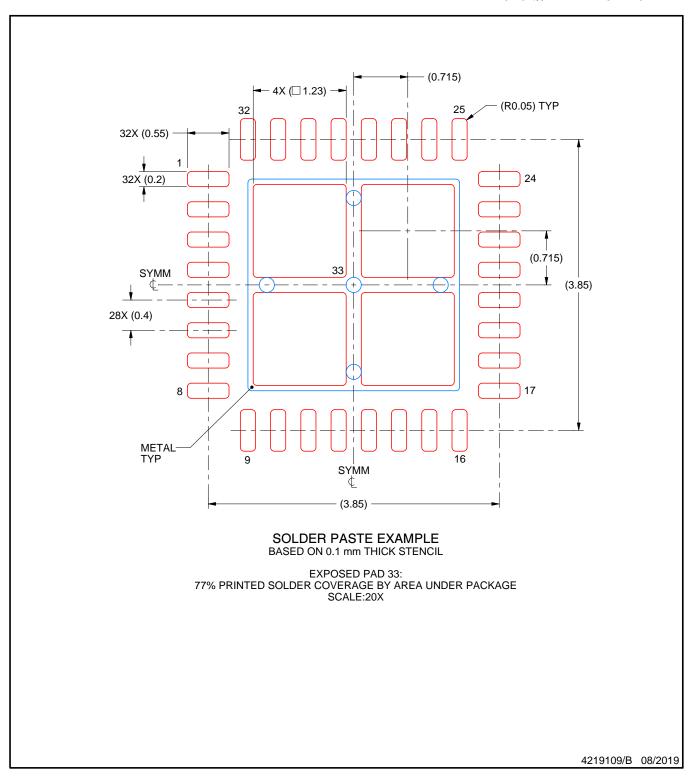

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025