











**DRV5056** SBAS644B - APRIL 2018 - REVISED JUNE 2020

# **DRV5056 Unipolar Ratiometric Linear Hall Effect Sensor**


#### **Features**

- Unipolar linear hall effect magnetic sensor
- Operates from 3.3-V and 5-V power supplies
- Analog output with 0.6-V guiescent offset:
  - Maximizes voltage swing for high accuracy
- Magnetic sensitivity options (at  $V_{CC} = 5 \text{ V}$ ):
  - A1/Z1: 200 mV/mT, 20-mT range
  - A2/Z2: 100 mV/mT, 39-mT range
  - A3/Z3: 50 mV/mT, 79-mT range
  - A4/Z4: 25 mV/mT, 158-mT range
  - A6: 100 mV/mT, 39-mT range
- Fast 20-kHz sensing bandwidth
- Low-noise output with ±1-mA drive
- Compensation for magnet temperature drift for A1/A2/A3/A4/A6 versions and None for the Z1/Z2/Z3/Z4 versions
- Standard industry packages:
  - Surface-mount SOT-23
  - Through-hole TO-92

## **Applications**

- Precise position sensing
- Industrial automation and robotics
- Home appliances
- Gamepads, pedals, keyboards, triggers
- Height leveling, tilt and weight measurement
- Fluid flow rate measurement
- Medical devices
- Current sensing

## Typical Schematic

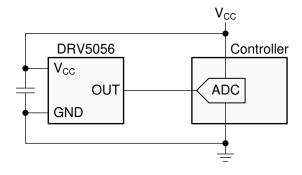

## 3 Description

The DRV5056 is a linear Hall effect sensor that responds proportionally to flux density of a magnetic south pole. The device can be used for accurate position sensing in a wide range of applications.

Featuring a unipolar magnetic response, the analog output drives 0.6 V when no magnetic field is present, and increases when a south magnetic pole is applied. This response maximizes the output dynamic range in applications that sense one magnetic pole. Four sensitivity options further maximize the output swing based on the required sensing range.

The device operates from 3.3-V or 5-V power supplies. Magnetic flux perpendicular to the top of the package is sensed, and the two package options provide different sensing directions.

The device uses a ratiometric architecture that can minimize error from V<sub>CC</sub> tolerance when the external analog-to-digital converter (ADC) uses the same V<sub>CC</sub> for its reference. Additionally, the device features magnet temperature compensation to counteract how magnets drift for linear performance across a wide temperature range. Device options for no temperature compensation of magnet drift are also available.


The A1 to A4 options support a temperature range of -40°C to +125°C. The A6 version supports a temperature range of 0°C to 85°C.

## Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)	
DDV5050	SOT-23 (3)	2.92 mm × 1.30 mm	
DRV5056	TO-92 (3)	4.00 mm × 3.15 mm	

(1) For all available packages, see the package option addendum at the end of the data sheet.

#### **Magnetic Response**

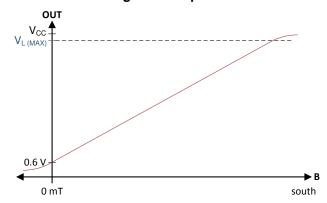



# **Table of Contents**

1	Features 1		7.4 Device Functional Modes	15
2	Applications 1	8	Application and Implementation	16
3	Description 1		8.1 Application Information	16
4	Revision History2		8.2 Typical Application	17
5	Pin Configuration and Functions		8.3 What to Do and What Not to Do	19
6	Specifications	9	Power Supply Recommendations	21
•	6.1 Absolute Maximum Ratings	10	Layout	21
	6.2 ESD Ratings		10.1 Layout Guidelines	21
	6.3 Recommended Operating Conditions		10.2 Layout Examples	21
	6.4 Thermal Information	11	Device and Documentation Support	22
	6.5 Electrical Characteristics		11.1 Documentation Support	22
	6.6 Magnetic Characteristics		11.2 Receiving Notification of Documentation Update	es <mark>22</mark>
	6.7 Typical Characteristics		11.3 Community Resources	22
7	Detailed Description 11		11.4 Trademarks	22
-	7.1 Overview		11.5 Electrostatic Discharge Caution	22
	7.2 Functional Block Diagram 11		11.6 Glossary	22
	7.3 Feature Description	12	Mechanical, Packaging, and Orderable Information	22


# 4 Revision History


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

CI	hanges from Original (February 2019) to Revision B	Page
•	Added Zero TC sensitivity options	1
•	Added Zero TC information to Recommended Operating Conditions section	4
•	Added Zero TC information to Electrical Characterstics	4
•	Added Zero TC information to Magnetic Characterstics	5
•	Added graphs for DRV5056Z1/Z2/Z3/Z4 options in the Typical Characteristics section	6
•	Updated S <sub>TC</sub> definition in Equation 1	12
<u>•</u>	Updated the Sensitivity Temperature Compensation For Magnets section for Zero TC options	14
CI	hanges from Original (April 2018) to Revision A	Page
•	Added new A6 magnetic sensitivity option to the data sheet	1



# 5 Pin Configuration and Functions



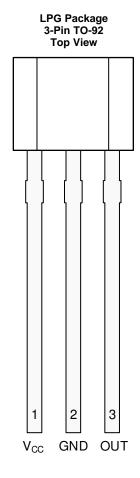

#### **Pin Functions**

	PIN		1/0	DESCRIPTION
NAME	SOT-23	TO-92	I/O	DESCRIPTION
GND	3	2	_	Ground reference
OUT	2	3	0	Analog output
V <sub>CC</sub>	1	1	_	Power supply. TI recommends connecting this pin to a ceramic capacitor to ground with a value of at least 0.1 $\mu$ F.

# 6 Specifications

## 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
Power supply voltage	V <sub>CC</sub>	-0.3	7	V
Output voltage	OUT	-0.3	V <sub>CC</sub> + 0.3	V
Magnetic flux density, B <sub>MAX</sub>		Unlimited		Т
Operating junction temperature, T <sub>J</sub>		-40	150	°C
Storage temperature, T <sub>stg</sub>		-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.



### 6.2 ESD Ratings

			VALUE	UNIT
V	Cleatroptotic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±2500	V
V <sub>(ESD)</sub>	Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	±750	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

#### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
\/	Power supply voltage <sup>(1)</sup>	3	3.6	\/
V <sub>CC</sub>	Fower supply voltage */	4.5	5.5	V
Io	Output continuous current	-1	1	mA
T <sub>A</sub>	A1/Z1-A4/Z4 versions operating ambient temperature (2)	-40	125	°C
$T_A$	A6 version operating ambient temperature <sup>(2)</sup>	0	85	°C

- (1) There are two isolated operating  $V_{CC}$  ranges. For more information see the *Operating V\_{CC} Ranges* section.
- (2) Power dissipation and thermal limits must be observed.

#### 6.4 Thermal Information

		DRV5056			
	THERMAL METRIC <sup>(1)</sup>	SOT-23 (DBZ)	TO-92 (LPG)	UNIT	
		3 PINS	3 PINS		
$R_{\theta JA}$	Junction-to-ambient thermal resistance	170	121	°C/W	
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	66	67	°C/W	
$R_{\theta JB}$	Junction-to-board thermal resistance	49	97	°C/W	
$Y_{JT}$	Junction-to-top characterization parameter	1.7	7.6	°C/W	
$Y_{JB}$	Junction-to-board characterization parameter	48	97	°C/W	

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

## 6.5 Electrical Characteristics

for V<sub>CC</sub> = 3 V to 3.63 V and 4.5 V to 5.5 V, over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONI	DITIONS <sup>(1)</sup>	MIN	TYP	MAX	UNIT
I <sub>CC</sub>	Operating supply current				6	10	mA
t <sub>ON</sub>	Power-on time (see Figure 30)	B = 0 mT, no load on	OUT		150	300	μs
$f_{\text{BW}}$	Sensing bandwidth				20		kHz
t <sub>d</sub>	Propagation delay time	From change in B to o	change in OUT		10		μs
В	Input referred DMC naine density	$V_{CC} = 5 V$			130		nT/√ <del>Hz</del>
B <sub>ND</sub>	Input-referred RMS noise density	$V_{CC} = 3.3 \text{ V}$			215		111/1/12
_	land the formation of	,	V <sub>CC</sub> = 5 V		0.12		T
B <sub>N</sub>	Input-referred noise	$B_{ND} \times 6.6 \times \sqrt{20 \text{ kHz}}$	$V_{CC} = 3.3 \text{ V}$		0.2		$mT_PP$
			DRV5056A1/Z1		24		
V <sub>N</sub>	Output-referred noise (2)	B <sub>N</sub> × S	DRV5056A2/Z2, DRV5056A6		12		$mV_PP$
.,	,	,,	DRV5056A3/Z3		6		
			DRV5056A4/Z4		3		

(1) B is the applied magnetic flux density.

(2) V<sub>N</sub> describes voltage noise on the device output. If the full device bandwidth is not needed, noise can be reduced with an RC filter.



## 6.6 Magnetic Characteristics

for V<sub>CC</sub> = 3 V to 3.63 V and 4.5 V to 5.5 V, over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONI	DITIONS <sup>(1)</sup>	MIN	TYP	MAX	UNIT
			DRV5056A1/Z1	0.535	0.6	0.665	
$V_{Q}$	Quiescent voltage	B = 0 mT, T <sub>A</sub> = 25°C	DRV5056A2/Z2, DRV5056A6	0.54	0.6	0.66	V
			DRV5056A3/Z3, DRV5056A4/Z4	0.55	0.6	0.65	
		B = 0  mT,	V <sub>CC</sub> = 5 V		0.08		
$V_{Q\Delta T}$	Quiescent voltage temperature drift	$T_A = -40$ °C to 125°C versus 25°C	V <sub>CC</sub> = 3.3 V		0.04		V
$V_{Q\Delta L}$	Quiescent voltage lifetime drift	High-temperature oper 1000 hours	rating stress for		< 0.5%		
			DRV5056A1/Z1	190	200	210	
		V <sub>CC</sub> = 5 V,	DRV5056A2/Z2, DRV5056A6	95	100	105	
		T <sub>A</sub> = 25°C	DRV5056A3/Z3	47.5	50	52.5	
S	Consitivity		DRV5056A4/Z4	23.8	25	26.2	mV/mT
3	Sensitivity		DRV5056A1/Z1	114	120	126	IIIV/IIII
		$V_{CC} = 3.3 \text{ V},$ $T_A = 25^{\circ}\text{C}$	DRV5056A2/Z2, DRV5056A6	57	60	63	
			DRV5056A3/Z3	28.5	30	31.5	
			DRV5056A4/Z4	14.3	15	15.8	
	Linear magnetic sensing range <sup>(2)</sup>	V <sub>CC</sub> = 5 V, T <sub>A</sub> = 25°C	DRV5056A1/Z1	20			mT
			DRV5056A2/Z2, DRV5056A6	39			
			DRV5056A3/Z3	79			
Б.			DRV5056A4/Z4	158			
$B_L$		V <sub>CC</sub> = 3.3 V, T <sub>A</sub> = 25°C	DRV5056A1/Z1	19			
			DRV5056A2/Z2, DRV5056A6	39			
			DRV5056A3/Z3	78			
			DRV5056A4/Z4	155			
$V_{L}$	Linear range of output voltage (3)			$V_{Q}$		$V_{CC} - 0.2$	V
S <sub>TC</sub>	Sensitivity temperature compensation for magnets (4)	DRV5056A6		0.05	0.12	0.19	%/°C
S <sub>TC</sub>	Sensitivity temperature compensation for magnets (4)	DRV5056A1, DRV5056A2, DRV5056A3, DRV5056A4			0.12		%/°C
S <sub>TCz</sub>	Sensitivity temperature compensation for magnets (4)	DRV5056Z1, DRV5056Z2, DRV5056Z3, DRV5056Z4			0		%/°C
S <sub>LE</sub>	Sensitivity linearity error <sup>(3)</sup>	V <sub>OUT</sub> is within V <sub>L</sub>			±1%		
S <sub>RE</sub>	Sensitivity ratiometry error <sup>(5)</sup>	$T_A = 25$ °C, with respect to $V_{CC} = 3.3$ V or 5 V		-2.5%		2.5%	
S <sub>ΔL</sub>	Sensitivity lifetime drift	High-temperature operating stress for 1000 hours			< 0.5%		

<sup>(1)</sup> B is the applied magnetic flux density.


 <sup>(2)</sup> B<sub>L</sub> describes the minimum linear sensing range at 25°C taking into account the maximum V<sub>Q</sub> and Sensitivity tolerances.
 (3) See the Sensitivity Linearity section.

S<sub>TC</sub> describes the rate the device increases Sensitivity with temperature. For more information, see the Sensitivity Temperature Compensation For Magnets section. See the Ratiometric Architecture section.



## 6.7 Typical Characteristics


at T<sub>A</sub> = 25°C (unless otherwise noted)

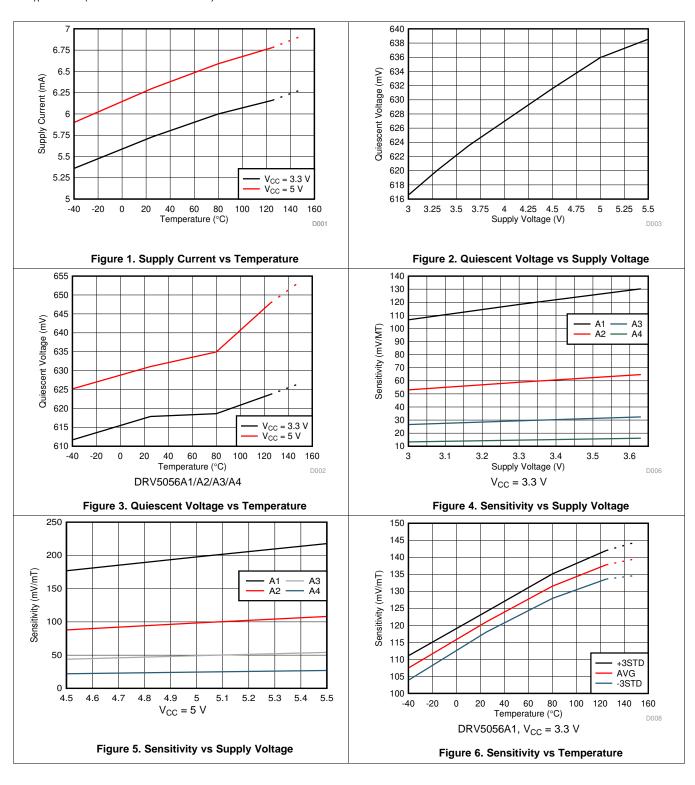



## **Typical Characteristics (continued)**

at T<sub>A</sub> = 25°C (unless otherwise noted)

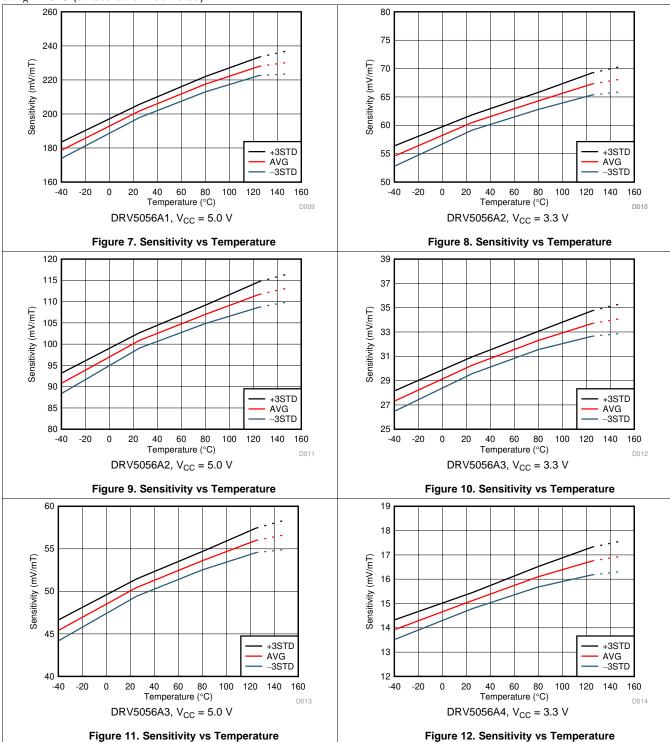


Copyright © 2018–2020, Texas Instruments Incorporated

Submit Documentation Feedback

# TEXAS INSTRUMENTS

## **Typical Characteristics (continued)**

at T<sub>A</sub> = 25°C (unless otherwise noted)

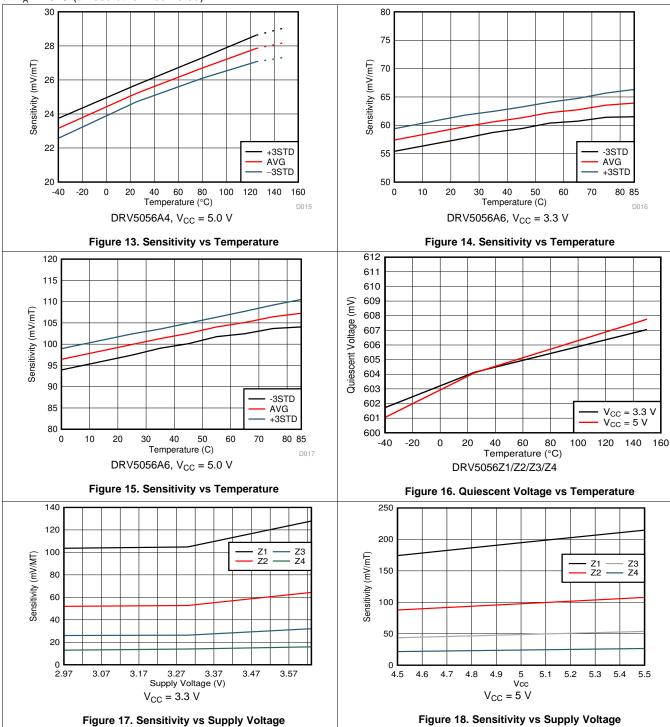


Submit Documentation Feedback

Copyright © 2018–2020, Texas Instruments Incorporated



## **Typical Characteristics (continued)**

at T<sub>A</sub> = 25°C (unless otherwise noted)

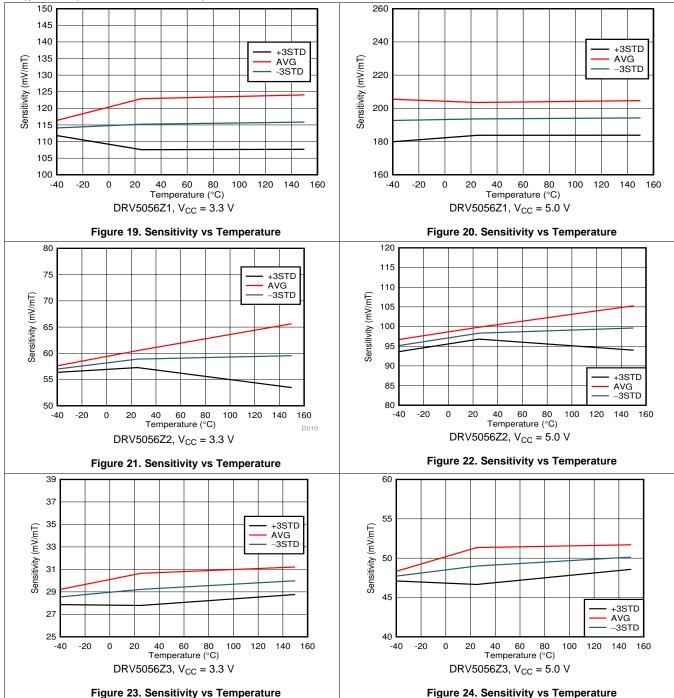


Copyright © 2018–2020, Texas Instruments Incorporated


Submit Documentation Feedback



# **Typical Characteristics (continued)**

at T<sub>A</sub> = 25°C (unless otherwise noted)

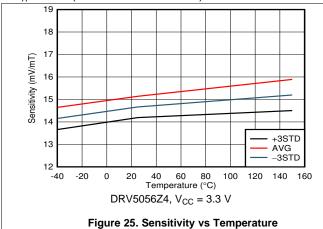

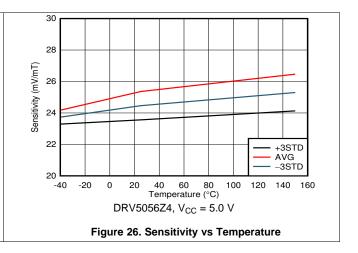




## 7 Detailed Description

#### 7.1 Overview

The DRV5056 is a 3-pin linear Hall effect sensor with fully integrated signal conditioning, temperature compensation circuits, mechanical stress cancellation, and amplifiers. The device operates from 3.3-V and 5-V ( $\pm 10\%$ ) power supplies, measures magnetic flux density, and outputs a proportional analog voltage that is referenced to  $V_{CC}$ .

#### 7.2 Functional Block Diagram

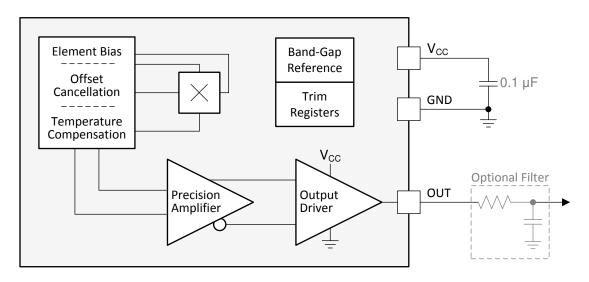

#### 7.3 Feature Description

#### 7.3.1 Magnetic Flux Direction

As shown in Figure 27, the DRV5056 is sensitive to the magnetic field component that is perpendicular to the die inside the package.

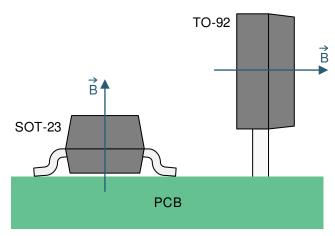


Figure 27. Direction of Sensitivity



Magnetic flux that travels from the bottom to the top of the package is considered positive. This condition exists when a south magnetic pole is near the top (marked-side) of the package. Magnetic flux that travels from the top to the bottom of the package results in negative millitesla values.

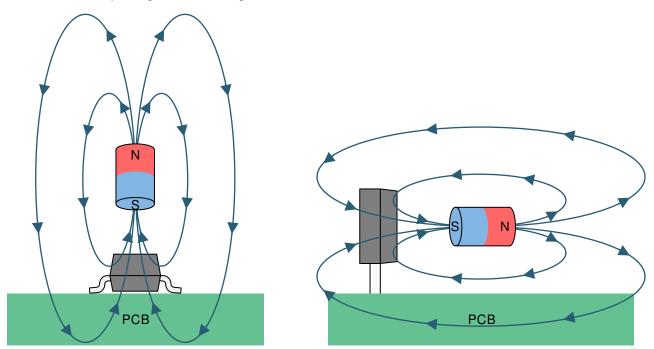


Figure 28. The Flux Direction for Positive B

#### 7.3.2 Magnetic Response

The DRV5056 outputs an analog voltage according to Equation 1 when in the presence of a magnetic field:

$$V_{OUT} = V_Q + B \times \left( Sensitivity_{(25^{\circ}C)} \times (1 + S_{TC} \times (T_A - 25^{\circ}C)) \right)$$

#### where

- V<sub>O</sub> is typically 600 mV
- · B is the applied magnetic flux density
- Sensitivity<sub>(25°C)</sub> depends on the device option and V<sub>CC</sub>
- S<sub>TC</sub> is typically 0.12%/°C for device options DRV5056A1 DRV5056A4 and is 0%/°C for DRV5056Z1 DRV5056Z4 options
- T<sub>A</sub> is the ambient temperature
- $V_{OUT}$  is within the  $V_L$  range (1)

As an example, consider the DRV5056A3 with  $V_{CC}=3.3$  V, a temperature of 50°C, and 67 mT applied. Excluding tolerances,  $V_{OUT}=600$  mV + 67 mT × (30 mV/mT × [1 + 0.0012/°C × (50°C - 25°C)]) = 2.67 V.

The DRV5056 only responds to the flux density of a magnetic south pole.

Submit Documentation Feedback



#### 7.3.3 Sensitivity Linearity

The device produces a linear response when the output voltage is within the specified  $V_L$  range. Outside this range, sensitivity is reduced and nonlinear. Figure 29 graphs the magnetic response.

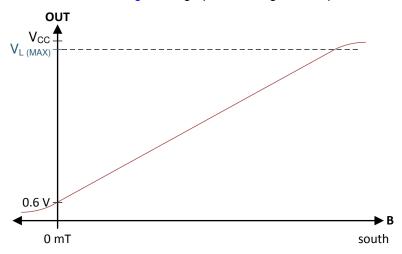


Figure 29. Magnetic Response

Equation 2 calculates parameter B<sub>L</sub>, the minimum linear sensing range at 25°C taking into account the maximum quiescent voltage and sensitivity tolerances.

$$B_{L(MIN)} = \frac{V_{L(MAX)} - V_{Q(MAX)}}{S_{(MAX)}}$$
(2)

The parameter  $S_{LE}$  defines linearity error as the difference in sensitivity between any two positive B values when the output is within the  $V_L$  range.

#### 7.3.4 Ratiometric Architecture

The DRV5056 has a ratiometric analog architecture that scales the sensitivity linearly with the power-supply voltage. For example, the sensitivity is 5% higher when  $V_{CC}$  = 5.25 V compared to  $V_{CC}$  = 5 V. This behavior enables external ADCs to digitize a more consistent value regardless of the power-supply voltage tolerance, when the ADC uses  $V_{CC}$  as its reference.

Equation 3 calculates sensitivity ratiometry error:

$$S_{RE} = 1 - \frac{S_{(VCC)} / S_{(5V)}}{V_{CC} / 5V} \text{ for } V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}, \qquad S_{RE} = 1 - \frac{S_{(VCC)} / S_{(3.3V)}}{V_{CC} / 3.3V} \text{ for } V_{CC} = 3 \text{ V to } 3.6 \text{ V}$$

where

- S<sub>(VCC)</sub> is the sensitivity at the current V<sub>CC</sub> voltage
- $S_{(5V)}$  or  $S_{(3.3V)}$  is the sensitivity when  $V_{CC} = 5 \text{ V}$  or 3.3 V
- V<sub>CC</sub> is the current V<sub>CC</sub> voltage (3)



#### 7.3.5 Operating V<sub>CC</sub> Ranges

The DRV5056 has two recommended operating  $V_{CC}$  ranges: 3 V to 3.6 V and 4.5 V to 5.5 V. When  $V_{CC}$  is in the middle region between 3.6 V to 4.5 V, the device continues to function, but sensitivity is less known because there is a crossover threshold near 4 V that adjusts device characteristics.

#### 7.3.6 Sensitivity Temperature Compensation For Magnets

Magnets generally produce weaker fields as temperature increases. The DRV5056 can either compensate by increasing sensitivity with temperature or keep the sensitivity constant, as defined by the parameters  $S_{TC}$  and  $S_{TCz}$  respectively. For device options DRV5055A1 - DRV5055A4, the sensitivity at  $T_A$  = 125°C is typically 12% higher than at  $T_A$  = 25°C. For device options DRV5055Z1 - DRV5055Z4, the sensitivity at  $T_A$  = 125°C is typically same as the value at  $T_A$  = 25°C.

#### 7.3.7 Power-On Time

After the  $V_{CC}$  voltage is applied, the DRV5056 requires a short initialization time before the output is set. The parameter  $t_{ON}$  describes the time from when  $V_{CC}$  crosses 3 V until OUT is within 5% of  $V_{Q}$ , with 0 mT applied and no load attached to OUT. Figure 30 shows this timing diagram.

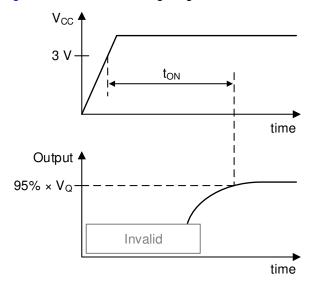


Figure 30. t<sub>ON</sub> Definition



## 7.3.8 Hall Element Location

Figure 31 shows the location of the sensing element inside each package option.

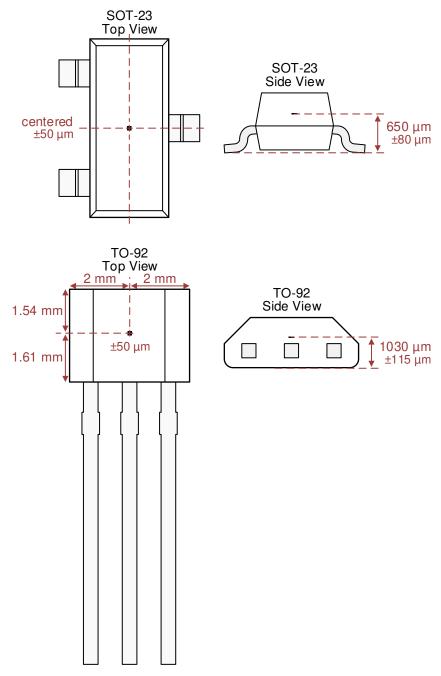


Figure 31. Hall Element Location

#### 7.4 Device Functional Modes

The DRV5056 has one mode of operation that applies when the *Recommended Operating Conditions* are met.



## 8 Application and Implementation

#### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## 8.1 Application Information

#### 8.1.1 Selecting the Sensitivity Option

Select the highest DRV5056 sensitivity option that can measure the required range of magnetic flux density, so that the output voltage swing is maximized.

Larger magnets and greater sensing distances can generally enable better positional accuracy than very small magnets at close distances, because magnetic flux density increases exponentially with the proximity to a magnet.

#### 8.1.2 Temperature Compensation for Magnets

The DRV5056 temperature compensation is designed to directly compensate the average drift of neodymium (NdFeB) magnets and partially compensate ferrite magnets. The residual flux density ( $B_r$ ) of a magnet typically reduces by 0.12%/°C for NdFeB, and 0.20%/°C for ferrite. When the operating temperature range of a system is reduced, temperature drift errors are also reduced.

#### 8.1.3 Adding a Low-Pass Filter

As illustrated in the *Functional Block Diagram*, an RC low-pass filter can be added to the device output for the purpose of minimizing voltage noise when the full 20-kHz bandwidth is not needed. This filter can improve the signal-to-noise ratio (SNR) and overall accuracy. Do not connect a capacitor directly to the device output without a resistor in between because doing so can make the output unstable.

#### 8.1.4 Designing for Wire Break Detection

Some systems must detect if interconnect wires become open or shorted. The DRV5056 can support this function.

First, select a sensitivity option that causes the output voltage to stay within the  $V_L$  range during normal operation. Second, add a pullup resistor between OUT and  $V_{CC}$ . TI recommends a value between 20 k $\Omega$  to 100 k $\Omega$ , and the current through OUT must not exceed the  $I_O$  specification, including current going into an external ADC. Then, if the output voltage is ever measured to be within 150 mV of  $V_{CC}$  or GND, a fault condition exists. Figure 32 shows the circuit, and Table 1 describes fault scenarios.

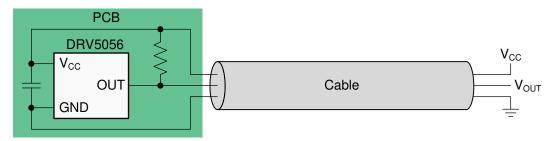


Figure 32. Wire Fault Detection Circuit



Table 1. Fault Scenarios and the Resulting Vout

FAULT SCENARIO	V <sub>OUT</sub>	
V <sub>CC</sub> disconnects	Close to GND	
GND disconnects	Close to V <sub>CC</sub>	
V <sub>CC</sub> shorts to OUT	Close to V <sub>CC</sub>	
GND shorts to OUT	Close to GND	

## 8.2 Typical Application

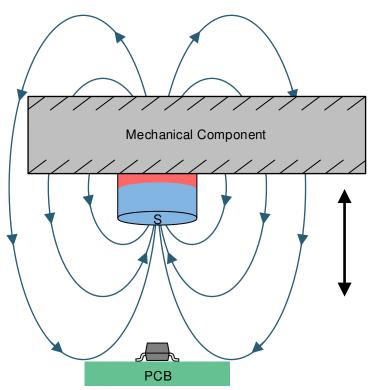


Figure 33. Unipolar Sensing Application

## 8.2.1 Design Requirements

Use the parameters listed in Table 2 for this design example.

**Table 2. Design Parameters** 

DESIGN PARAMETER	EXAMPLE VALUE
V <sub>CC</sub>	3.3 V
Magnet	10-mm diameter × 6-mm long cylinder, ferrite
Distance from magnet to sensor	From 20 mm to 3 mm
Maximum B at the sensor at 25°C	72 mT at 3 mm
Device option	DRV5056A3

#### 8.2.2 Detailed Design Procedure

This design example consists of a mechanical component that moves back and forth, an embedded magnet with the south pole facing the printed-circuit board, and a DRV5056. The DRV5056 outputs an analog voltage that describes the precise position of the component. The component must not contain ferromagnetic materials such as iron, nickel, and cobalt because these materials change the magnetic flux density at the sensor.



When designing a linear magnetic sensing system, always consider these three variables: the magnet, sensing distance, and range of the sensor. Select the DRV5056 with the highest sensitivity that has a B<sub>L</sub> (linear magnetic sensing range) that is larger than the maximum magnetic flux density in the application.

Magnets are made from various ferromagnetic materials that have tradeoffs in cost, drift with temperature, absolute maximum temperature ratings, remanence or residual induction (B<sub>r</sub>), and coercivity (H<sub>c</sub>). The B<sub>r</sub> and the dimensions of a magnet determine the magnetic flux density (B) produced in 3-dimensional space. For simple magnet shapes, such as rectangular blocks and cylinders, there are simple equations that solve B at a given distance centered with the magnet. Figure 34 shows diagrams for Equation 4 and Equation 5.

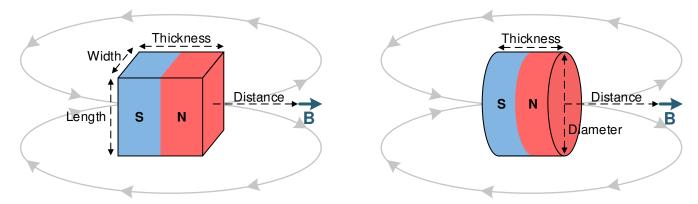


Figure 34. Rectangular Block and Cylinder Magnets

Use Equation 4 for the rectangular block shown in Figure 34:

$$\overrightarrow{\mathbf{B}} = \frac{B_r}{\pi} \left( \arctan \left( \frac{WL}{2D\sqrt{4D^2 + W^2 + L^2}} \right) - \arctan \left( \frac{WL}{2(D+T)\sqrt{4(D+T)^2 + W^2 + L^2}} \right) \right)$$
(4)

Use Equation 5 for the cylinder shown in Figure 34:

$$\vec{\mathbf{B}} = \frac{B_r}{2} \left( \frac{D + T}{\sqrt{(0.5C)^2 + (D + T)^2}} - \frac{D}{\sqrt{(0.5C)^2 + D^2}} \right)$$

where

- W is width
- · L is length
- T is thickness (the direction of magnetization)
- D is distance
- C is diameter

  (5)

Submit Documentation Feedback

Copyright © 2018–2020, Texas Instruments Incorporated



#### 8.2.3 Application Curve

Figure 35 shows the magnetic flux density versus distance for a 10-mm x 6-mm cylinder ferrite magnet.




Figure 35. Magnetic Profile of a 10-mm × 6-mm Cylindrical Ferrite Magnet

#### 8.3 What to Do and What Not to Do

Because the Hall element is sensitive to magnetic fields that are perpendicular to the top of the package, a correct magnet approach must be used for the sensor to detect the field. Figure 36 illustrates correct and incorrect approaches.

# What to Do and What Not to Do (continued)

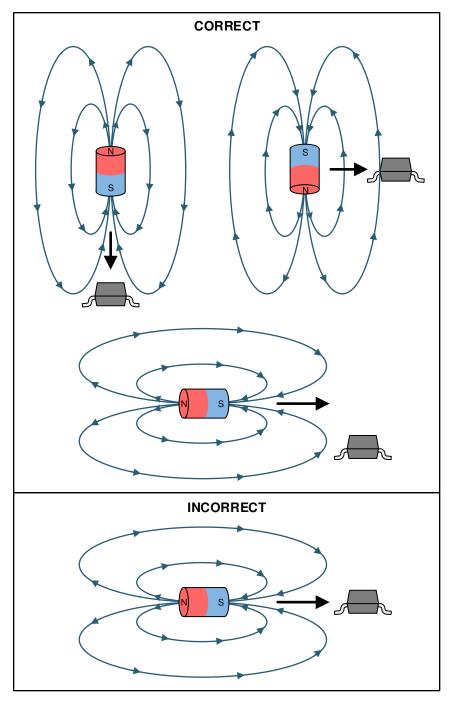


Figure 36. Correct and Incorrect Magnet Approaches



## 9 Power Supply Recommendations

A decoupling capacitor close to the device must be used to provide local energy with minimal inductance. TI recommends using a ceramic capacitor with a value of at least 0.01 µF.

#### 10 Layout

#### 10.1 Layout Guidelines

Magnetic fields pass through most nonferromagnetic materials with no significant disturbance. Embedding Hall effect sensors within plastic or aluminum enclosures and sensing magnets on the outside is common practice. Magnetic fields also easily pass through most printed-circuit boards, which makes placing the magnet on the opposite side possible.

#### 10.2 Layout Examples

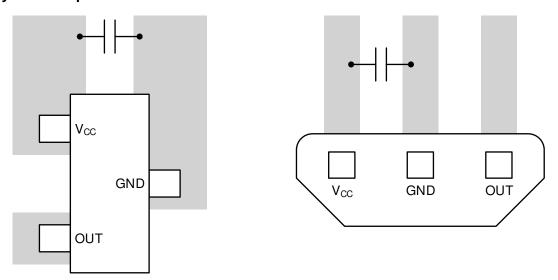


Figure 37. Layout Examples



## 11 Device and Documentation Support

#### 11.1 Documentation Support

#### 11.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, Incremental rotary encoder design considerations application note
- Texas Instruments, Using linear hall effect sensors to measure angle application note
- Texas Instruments, Angle measurements with linear hall effect sensors

#### 11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### 11.3 Community Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 11.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

#### 11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 11.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com

9-Nov-2025

## **PACKAGING INFORMATION**

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
DRV5056A1QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A1
DRV5056A1QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A1
DRV5056A1QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A1
DRV5056A1QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56A1
DRV5056A1QLPG	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A1
DRV5056A1QLPG.B	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A1
DRV5056A1QLPGM	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A1
DRV5056A1QLPGM.A	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A1
DRV5056A1QLPGM.B	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A1
DRV5056A2QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A2
DRV5056A2QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A2
DRV5056A2QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A2
DRV5056A2QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56A2
DRV5056A2QLPG	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A2
DRV5056A2QLPG.B	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A2
DRV5056A2QLPGM	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A2
DRV5056A2QLPGM.A	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A2
DRV5056A2QLPGM.B	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A2
DRV5056A3QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A3
DRV5056A3QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A3
DRV5056A3QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A3
DRV5056A3QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56A3
DRV5056A3QLPG	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A3
DRV5056A3QLPG.B	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A3
DRV5056A3QLPGM	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A3
DRV5056A3QLPGM.A	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A3
DRV5056A3QLPGM.B	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A3
DRV5056A4QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A4
DRV5056A4QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A4





www.ti.com

9-Nov-2025

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
DRV5056A4QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A4
DRV5056A4QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56A4
DRV5056A4QLPG	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A4
DRV5056A4QLPG.B	Active	Production	TO-92 (LPG)   3	1000   BULK	Yes	SN	N/A for Pkg Type	-40 to 125	56A4
DRV5056A4QLPGM	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A4
DRV5056A4QLPGM.A	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A4
DRV5056A4QLPGM.B	Active	Production	TO-92 (LPG)   3	3000   AMMO	Yes	SN	N/A for Pkg Type	-40 to 125	56A4
DRV5056A6QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A6
DRV5056A6QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A6
DRV5056A6QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56A6
DRV5056A6QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56A6
DRV5056Z1QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z1
DRV5056Z1QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z1
DRV5056Z1QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z1
DRV5056Z1QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56Z1
DRV5056Z2QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z2
DRV5056Z2QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z2
DRV5056Z2QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z2
DRV5056Z2QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56Z2
DRV5056Z3QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z3
DRV5056Z3QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z3
DRV5056Z3QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z3
DRV5056Z3QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56Z3
DRV5056Z4QDBZR	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z4
DRV5056Z4QDBZR.A	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z4
DRV5056Z4QDBZR.B	Active	Production	SOT-23 (DBZ)   3	3000   LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	56Z4
DRV5056Z4QDBZT	Obsolete	Production	SOT-23 (DBZ)   3	-	-	Call TI	Call TI	-40 to 125	56Z4

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

## PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

(2) Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF DRV5056:

Automotive : DRV5056-Q1

NOTE: Qualified Version Definitions:

Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects



www.ti.com 13-Nov-2025

#### TAPE AND REEL INFORMATION





Γ	A0	Dimension designed to accommodate the component width
	В0	Dimension designed to accommodate the component length
	K0	Dimension designed to accommodate the component thickness
	W	Overall width of the carrier tape
	P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DRV5056A1QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A2QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A2QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A3QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A3QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A4QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A4QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A6QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.15	2.77	1.22	4.0	8.0	Q3
DRV5056A6QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056A6QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	2.9	3.35	1.35	4.0	8.0	Q3
DRV5056Z1QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056Z1QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056Z2QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056Z3QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056Z4QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3
DRV5056Z4QDBZR	SOT-23	DBZ	3	3000	180.0	8.4	3.2	2.85	1.3	4.0	8.0	Q3



www.ti.com 13-Nov-2025



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DRV5056A1QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A2QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A2QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A3QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A3QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A4QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A4QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A6QDBZR	SOT-23	DBZ	3	3000	213.0	191.0	35.0
DRV5056A6QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056A6QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056Z1QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056Z1QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056Z2QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056Z3QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056Z4QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0
DRV5056Z4QDBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0



SMALL OUTLINE TRANSISTOR



#### NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
   This drawing is subject to change without notice.
   Reference JEDEC registration TO-236, except minimum foot length.

- 4. Support pin may differ or may not be present.
- 5. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.





TRANSISTOR OUTLINE



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.



TRANSISTOR OUTLINE



TRANSISTOR OUTLINE



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025