



# DS80PCI102 2.5-Gbps / 5.0-Gbps / 8.0-Gbps 1-Lane PCI-Express™ Repeater With Equalization and De-Emphasis

## 1 Features

- Comprehensive Family, Proven System Interoperability
  - DS80PCI102:** x1 PCIe Gen-1, Gen-2, and Gen-3
  - DS80PCI402:** x4 PCIe Gen-1, Gen-2, and Gen-3
  - DS80PCI800:** x8/x16 PCIe Gen-1, Gen-2, and Gen-3
- Automatic Rate-Detect and Adaptation to Gen-1, Gen-2, and Gen-3 Speeds
- Seamless Support for Gen-3 Transmit FIR Handshake
- Receiver EQ (up to 36 dB), Transmit De-Emphasis (up to -12 dB)
- Adjustable Transmit VOD: 0.7 to 1.3 Vp-p (Pin Mode)
- 0.2 UI of Residual Deterministic Jitter at 8 Gbps After 40 Inches of FR4 or 10 m 30-awg PCIe Cable
- Low Power Dissipation With Ability to Turn Off Unused Channels: 65 mW/Channel
- Automatic Receiver Detect (Hot-Plug)
- Multiple Configuration Modes: Pins/SMBus/Direct-EEPROM Load
- Flow-Thru Pinout in 4-mm × 4-mm 24-Pin Leadless WQFN Package
- Single Supply Voltage: 2.5 V or 3.3 V (Selectable)
- ±5-kV HBM ESD Rating
- 40°C to 85°C Operating Temperature Range

## 2 Applications

PCI Express Gen-1, Gen-2, and Gen-3

## 3 Description

The DS80PCI102 is a low-power, 1-lane repeater with 4-stage input equalization, and an output de-emphasis driver to enhance the reach of PCI-Express serial links in board-to-board or cable interconnects. The device is ideal for x1 PCI-Express configuration, and it automatically detects and adapts to Gen-1, Gen-2, and Gen-3 data rates for easy system upgrade.

DS80PCI102 offers programmable transmit de-emphasis (up to 12 dB), transmit VOD (up to 1300 mVp-p), and receive equalization (up to 36 dB) to enable longer distance transmission in lossy copper cables (10 meters or more), or backplanes (40 inches or more) with multiple connectors. The receiver can open an input eye that is completely closed due to inter-symbol interference (ISI) introduced by the interconnect medium.


The programmable settings can be applied easily through pins or software (SMBus/I<sup>2</sup>C), or can be loaded through an external EEPROM. When operating in the EEPROM mode, the configuration information is automatically loaded on power up, which eliminates the need for an external microprocessor or software driver.

### Device Information<sup>(1)</sup>


| PART NUMBER | PACKAGE   | BODY SIZE (NOM)   |
|-------------|-----------|-------------------|
| DS80PCI102  | WQFN (24) | 4.00 mm x 4.00 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Typical Application Block Diagram

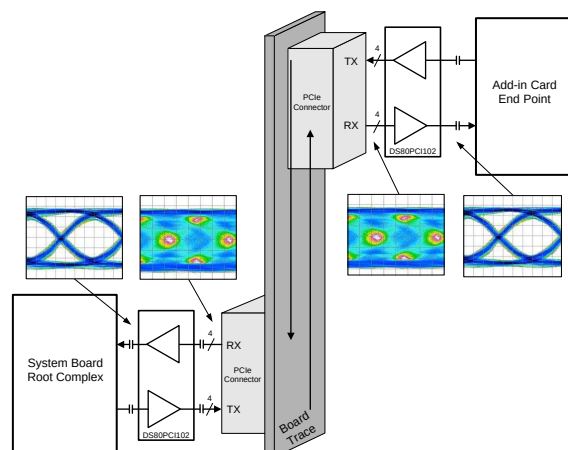

Simplified Schematic Diagram

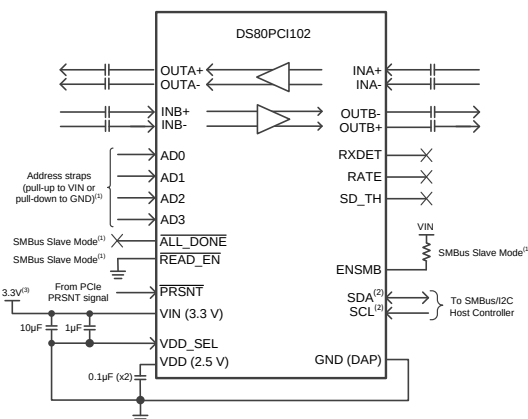

- (1) Schematic shows connection for SMBus Slave Mode (ENSMB=1kΩ to VDD). For SMBus Master Mode or Pin Mode configuration, the connections are different.  
 (2) SMBus signals need to be pulled up elsewhere in the system.  
 (3) Schematic requires different connections for 2.5 V mode.



## Table of Contents


|                                                                        |           |                                                                  |           |
|------------------------------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                                                | <b>1</b>  | 7.6 Register Maps .....                                          | 20        |
| <b>2 Applications</b> .....                                            | <b>1</b>  | <b>8 Application and Implementation</b> .....                    | <b>35</b> |
| <b>3 Description</b> .....                                             | <b>1</b>  | 8.1 Application Information .....                                | 35        |
| <b>4 Revision History</b> .....                                        | <b>2</b>  | 8.2 Typical Application .....                                    | 35        |
| <b>5 Pin Configuration and Functions</b> .....                         | <b>3</b>  | <b>9 Power Supply Recommendations</b> .....                      | <b>37</b> |
| <b>6 Specifications</b> .....                                          | <b>5</b>  | 9.1 3.3-V or 2.5-V Supply Mode Operation .....                   | 37        |
| 6.1 Absolute Maximum Ratings .....                                     | 5         | 9.2 Power Supply Bypass .....                                    | 38        |
| 6.2 ESD Ratings .....                                                  | 5         | <b>10 Layout</b> .....                                           | <b>39</b> |
| 6.3 Recommended Operating Conditions .....                             | 5         | 10.1 Layout Guidelines .....                                     | 39        |
| 6.4 Electrical Characteristics .....                                   | 6         | 10.2 Layout Example .....                                        | 39        |
| 6.5 Electrical Characteristics — Serial Management Bus Interface ..... | 9         | <b>11 Device and Documentation Support</b> .....                 | <b>40</b> |
| 6.6 Timing Diagrams .....                                              | 10        | 11.1 Device Support .....                                        | 40        |
| 6.7 Typical Characteristics .....                                      | 11        | 11.2 Documentation Support .....                                 | 40        |
| <b>7 Detailed Description</b> .....                                    | <b>12</b> | 11.3 Community Resources .....                                   | 40        |
| 7.1 Overview .....                                                     | 12        | 11.4 Trademarks .....                                            | 40        |
| 7.2 Functional Block Diagram .....                                     | 12        | 11.5 Electrostatic Discharge Caution .....                       | 40        |
| 7.3 Feature Description .....                                          | 13        | 11.6 Glossary .....                                              | 40        |
| 7.4 Device Functional Modes .....                                      | 15        | <b>12 Mechanical, Packaging, and Orderable Information</b> ..... | <b>40</b> |
| 7.5 Programming .....                                                  | 16        |                                                                  |           |

## 4 Revision History

| Changes from Revision F (October 2014) to Revision G                                                    | Page |
|---------------------------------------------------------------------------------------------------------|------|
| • Changed pin mapping for VIN and VDD to correct typo .....                                             | 5    |
| • Added full SMBus-to-EEPROM table mapping .....                                                        | 20   |
| • Changed description of EEPROM bits to match corresponding SMBus register map description .....        | 20   |
| • Changed location of CHB VOD in <a href="#">Table 7</a> to match correct location in EEPROM map .....  | 23   |
| • Changed address start and end numbers for Devices 0-3 to reflect correct bytes per device .....       | 25   |
| • Changed EEPROM bit description to match the description in the corresponding SMBus register map ..... | 25   |
| • Changed location of CHA VOD in <a href="#">Table 9</a> to match correct location in EEPROM map .....  | 27   |
| • Added information in Register Map about register bits saved to EEPROM .....                           | 29   |

| Changes from Revision E (February 2013) to Revision F                                                                                                                                                                                                                                                                                                | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • Added <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section ..... | 1    |

## 5 Pin Configuration and Functions

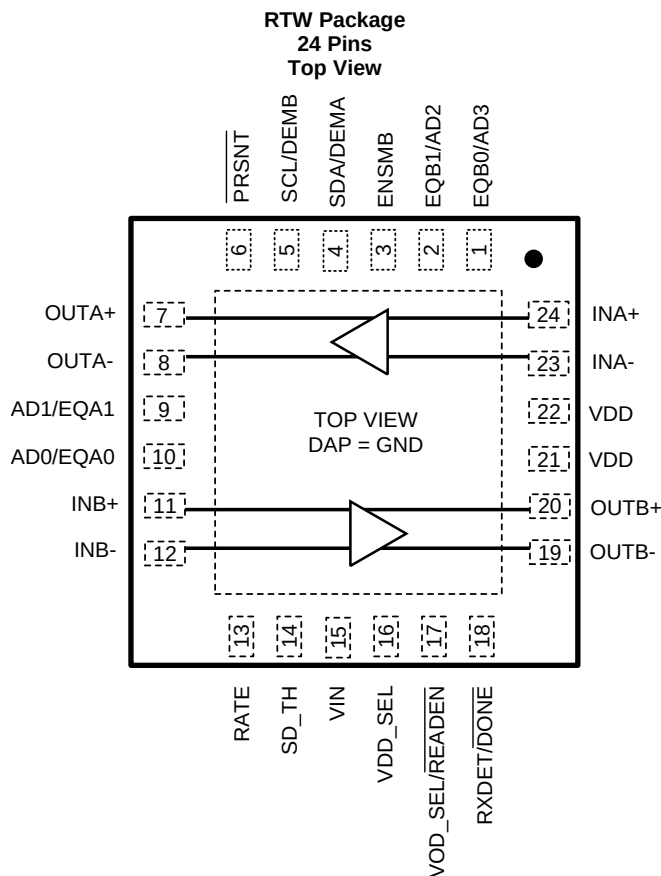

**Pin Functions** <sup>(1)(2)(3)(4)</sup>

| PIN                            |                  | I/O, TYPE             | DESCRIPTION                                                                                                                                                                                                                                            |
|--------------------------------|------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                           | NO.              |                       |                                                                                                                                                                                                                                                        |
| DIFFERENTIAL HIGH SPEED I/O'S  |                  |                       |                                                                                                                                                                                                                                                        |
| INA+, INA-,<br>INB+, INB-      | 24, 23<br>11, 12 | I, CML                | Inverting and noninverting differential inputs to the equalizer. A gated on-chip 50-Ω termination resistor connects INn+ to VDD and INn- to VDD depending on the state of RXDET. See <a href="#">Table 4</a><br>AC coupling required on high-speed I/O |
| OUTA+, OUTA-,<br>OUTB+, OUTB-  | 7, 8<br>20, 19   | O, CML                | Inverting and noninverting 50-Ω driver outputs with de-emphasis. Compatible with AC-coupled CML inputs.                                                                                                                                                |
| CONTROL PINS — SHARED (LVCMOS) |                  |                       |                                                                                                                                                                                                                                                        |
| ENSMB                          | 3                | I, 4-LEVEL,<br>LVCMOS | System management bus (SMBus) enable pin<br>Tie 1 kΩ to VDD (2.5-V mode) or VIN (3.3-V mode) = Register access SMBus slave mode<br>FLOAT = Read external EEPROM (master SMBUS mode)<br>Tie 1 kΩ to GND = Pin mode                                      |

- (1) LVCMOS inputs without the "FLOAT" conditions must be driven to a logic low or high at all times or operation is not verified.
- (2) Input edge rate for LVCMOS/FLOAT inputs must be faster than 50 ns from 10% to 90%.
- (3) For 3.3-V mode operation, VIN pin = 3.3 V and the VDD for the 4-level input is 3.3 V.
- (4) For 2.5-V mode operation, VDD pin = 2.5 V and the VDD for the 4-level input is 2.5 V.

**Pin Functions<sup>(1)(2)(3)(4)</sup> (continued)**

| PIN                                              |               | I/O, TYPE                         | DESCRIPTION                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------|---------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                             | NO.           |                                   |                                                                                                                                                                                                                                                                                                                                         |
| ENSMB = 1 (SMBus SLAVE MODE)                     |               |                                   |                                                                                                                                                                                                                                                                                                                                         |
| SCL                                              | 5             | I, 2-LEVEL, LVCMOS, O, open drain | In SMBus Slave Mode, this pin is the SMBus clock I/O. Clock input or open drain output. External 2-kΩ to 5-kΩ pullup resistor to VDD or VIN recommended as per SMBus interface standards. <sup>(5)</sup>                                                                                                                                |
| SDA                                              | 4             | I, 2-LEVEL, LVCMOS, O, open drain | In both SMBus Modes, this pin is the SMBus data I/O. Data input or open drain output. External 2-kΩ to 5-kΩ pullup resistor to VDD or VIN recommended as per SMBus interface standards. <sup>(5)</sup>                                                                                                                                  |
| AD0-AD3                                          | 10, 9, 2, 1   | I, 4-LEVEL, LVCMOS                | SMBus Slave Address Inputs. In both SMBus Modes, these pins are the user set SMBus slave address inputs. External 1-kΩ pullup or pulldown recommended.                                                                                                                                                                                  |
| $\overline{\text{READEN}}$                       | 17            | I, 2-LEVEL, LVCMOS                | When in SMBus Slave Mode the $\overline{\text{READEN}}$ pin must be tied LOW for the AD[3:0] to be active. If this pin is tied HIGH or FLOAT, the device slave address is 0xB0.                                                                                                                                                         |
| ENSMB = FLOAT (SMBus MASTER MODE)                |               |                                   |                                                                                                                                                                                                                                                                                                                                         |
| SCL                                              | 5             | I, 2-LEVEL, LVCMOS, O, open drain | Clock output when loading EEPROM configuration, reverting to SMBus clock input when EEPROM load is complete ( $\overline{\text{DONE}} = 0$ ). External 2-kΩ to 5-kΩ pullup resistor to VDD or VIN recommended as per SMBus interface standards. <sup>(5)</sup>                                                                          |
| SDA                                              | 4             | I, 2-LEVEL, LVCMOS, O, open drain | In both SMBus Modes, this pin is the SMBus data I/O. Data input or open drain output. External 2-kΩ to 5-kΩ pullup resistor to VDD or VIN recommended as per SMBus interface standards. <sup>(5)</sup>                                                                                                                                  |
| AD0-AD3                                          | 10, 9, 2, 1   | I, 4-LEVEL, LVCMOS                | SMBus Slave Address Inputs. In both SMBus Modes, these pins are the user set SMBus slave address inputs. External 1-kΩ pullup or pulldown recommended.                                                                                                                                                                                  |
| $\overline{\text{READEN}}$                       | 17            | I, 2-LEVEL, LVCMOS                | A logic low on this pin starts the load from the external EEPROM. <sup>(6)</sup> Once EEPROM load is complete ( $\overline{\text{DONE}} = 0$ ), this pin functionality remains as $\overline{\text{READEN}}$ . It does not revert to an SD_TH input.                                                                                    |
| $\overline{\text{DONE}}$                         | 18            | O, 2-LEVEL, LVCMOS                | Valid register load status output<br>HIGH = External EEPROM load failed or incomplete<br>LOW = External EEPROM load passed                                                                                                                                                                                                              |
| ENSMB = 0 (PIN MODE)                             |               |                                   |                                                                                                                                                                                                                                                                                                                                         |
| EQA0, EQA1<br>EQB0, EQB1                         | 10, 9<br>1, 2 | I, 4-LEVEL, LVCMOS                | EQA[1:0] and EQB[1:0] control the level of equalization on the input pins. The pins are active only when ENSMB is deasserted (LOW). When ENSMB goes high the SMBus registers provide independent control of each lane, and the EQA[1:0] and EQB[1:0] pins are converted to SMBUS AD[3:0] inputs. See Table 2.                           |
| DEMA, DEMB                                       | 4, 5          | I, 4-LEVEL, LVCMOS                | DEMA DEMB controls the level of de-emphasis. The DEM A/B pins are only active when ENSMB is deasserted (LOW). DEM A controls the A channel and DEMB controls the B channel. When ENSMB goes high the SMBus registers provide independent control of each channel and the DEM pins are converted to SMBUS SDA and SCL pins. See Table 3. |
| CONTROL PINS — BOTH PIN AND SMBUS MODES (LVCMOS) |               |                                   |                                                                                                                                                                                                                                                                                                                                         |
| $\overline{\text{PRSNT}}$                        | 6             | I, 2-LEVEL, LVCMOS                | Cable Present Detect input. High when a cable is not present per PCIe Cabling Spec. 1.0. Puts part into low power mode. When LOW (normal operation) part is enabled. See Table 4.                                                                                                                                                       |
| VOD_SEL                                          | 17            | I, 4-LEVEL, LVCMOS                | VOD Select pin. See Table 3.                                                                                                                                                                                                                                                                                                            |
| VDD_SEL                                          | 16            | I, LVCMOS                         | Controls the internal regulator.<br>FLOAT = 2.5-V mode<br>Tie GND = 3.3-V mode<br>See Figure 16.                                                                                                                                                                                                                                        |
| RXDET                                            | 18            | I, 4-LEVEL, LVCMOS                | The RXDET pin controls the receiver detect function. Depending on the input level, a 50-Ω or > 50-kΩ termination to the power rail is enabled. See Table 4.                                                                                                                                                                             |

(5) SCL and SDA pins can be tied either to 3.3 V or 2.5 V, regardless of whether the device is operating in 2.5-V mode or 3.3-V mode.

(6) When  $\overline{\text{READEN}}$  is asserted low, the device attempts to load EEPROM. If EEPROM cannot be loaded successfully, for example due to an invalid or blank hex file, the DS80PCI102 waits indefinitely in an unknown state where SMBus access is not possible.  $\overline{\text{DONE}}$  pin remains high in this situation.

### Pin Functions<sup>(1)(2)(3)(4)</sup> (continued)

| PIN          |        | I/O, TYPE          | DESCRIPTION                                                                                                                                                                                                                                                     |
|--------------|--------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME         | NO.    |                    |                                                                                                                                                                                                                                                                 |
| RATE         | 13     | I, 4-LEVEL, LVCMOS | RATE control pin selects GEN 1,2 and GEN 3 operating modes.<br>Tie 1 k $\Omega$ to GND = GEN 1,2<br>FLOAT = AUTO Rate Select of Gen1/2 and Gen3 with de-emphasis<br>Tie 20 k $\Omega$ to GND = GEN 3 without de-emphasis<br>Tied 1 k $\Omega$ to VDD = RESERVED |
| SD_TH        | 14     | I, 4-LEVEL, LVCMOS | Controls the internal Signal Detect Threshold.<br>See <a href="#">Table 5</a> .                                                                                                                                                                                 |
| <b>POWER</b> |        |                    |                                                                                                                                                                                                                                                                 |
| VIN          | 15     | Power              | In 3.3-V mode, feed 3.3 V to VIN<br>In 2.5-V mode, leave floating                                                                                                                                                                                               |
| VDD          | 21, 22 | Power              | Power supply pins<br>2.5-V mode, connect to 2.5-V supply<br>3.3-V mode, connect 0.1- $\mu$ F capacitor to each VDD pin (output of LDO)                                                                                                                          |
| GND          | DAP    | Power              | Ground pad (DAP - die attach pad).                                                                                                                                                                                                                              |

## 6 Specifications

### 6.1 Absolute Maximum Ratings <sup>(1)(2)</sup>

|                                                 | MIN  | MAX       | UNIT |
|-------------------------------------------------|------|-----------|------|
| Supply voltage (VDD - 2.5 V)                    | –0.5 | 2.75      | V    |
| Supply voltage (VIN - 3.3 V)                    | –0.5 | 4.0       | V    |
| LVCMOS Input/Output Voltage                     | –0.5 | 4.0       | V    |
| CML Input Voltage                               | –0.5 | VDD + 0.5 | V    |
| CML Input Current                               | –30  | 30        | mA   |
| Junction Temperature                            |      | 125       | °C   |
| Lead temperature soldering (4 s) <sup>(3)</sup> |      | 260       | °C   |
| Storage temperature, T <sub>stg</sub>           | –40  | 125       | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Absolute Maximum Numbers are specified for a junction temperature range of –40° C to 125° C. Models are validated to Maximum Operating Voltages only.
- (3) For soldering specifications: See application note [SNOA549](#).

### 6.2 ESD Ratings

|                                            |                                                                                          | VALUE | UNIT |
|--------------------------------------------|------------------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ±5000 | V    |
|                                            | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | ±1250 |      |
|                                            | MM, STD - JESD22-A115-A                                                                  | ±100  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

|                             | MIN   | NOM | MAX   | UNIT |
|-----------------------------|-------|-----|-------|------|
| Supply Voltage (2.5-V mode) | 2.375 | 2.5 | 2.625 | V    |
| Supply Voltage (3.3-V mode) | 3.0   | 3.3 | 3.6   | V    |
| Ambient Temperature         | –40   | 25  | 85    | °C   |
| SMBus (SDA, SCL)            |       |     | 3.6   | V    |

## 6.4 Electrical Characteristics

| PARAMETER                          |                                                                      | TEST CONDITIONS                                                                   | MIN | TYP       | MAX | UNIT |       |
|------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----|-----------|-----|------|-------|
| POWER                              |                                                                      |                                                                                   |     |           |     |      |       |
| IDD                                | Supply Current                                                       | VIN = 3.3-V supply,<br>EQ = Enabled, RXDET = 1,<br>VOD = 1.0 Vp-p,<br>PRSNT = LOW |     | 50        | 63  | mA   |       |
|                                    |                                                                      | VIN = 3.3-V supply,<br>PRSNT = HIGH                                               |     | 9         | 12  |      | mA    |
|                                    |                                                                      | VDD = 2.5 V,<br>PRSNT = HIGH                                                      |     | 6         | 9   |      | mA    |
| LVCMOS / LVTTTL DC SPECIFICATIONS  |                                                                      |                                                                                   |     |           |     |      |       |
| VIH25                              | High-level input voltage<br>(READ_EN pin)                            | 2.5-V Mode                                                                        |     | 2.0       | VDD | V    |       |
| VIH33                              | High-level input voltage<br>(READ_EN pin)                            | 3.3-V Mode                                                                        |     | 2.0       | VIN | V    |       |
| VIH                                | High Level Input Voltage<br>(PRSNT pin)                              | 2.5-V Mode                                                                        |     | 0.9 × VDD | VDD | V    |       |
|                                    |                                                                      | 3.3-V Mode                                                                        |     | 0.9 × VIN | VIN |      |       |
| VIL                                | Low Level Input Voltage                                              |                                                                                   |     | 0         | 0.7 | V    |       |
| VOH                                | High Level Output Voltage ( $\overline{\text{DONE}}$ pin)            | IOH = −4 mA                                                                       |     | 2.0       |     | V    |       |
| VOL                                | Low Level Output Voltage ( $\overline{\text{DONE}}$ pin)             | IOL = 4 mA                                                                        |     |           | 0.4 | V    |       |
| IIH                                | Input High Current ( $\overline{\text{PRSNT}}$ pin)                  | VIN Supply = 3.6 V,<br>Input = 3.6 V                                              |     | −15       | 15  | μA   |       |
|                                    | Input High Current with internal<br>resistors<br>(4-level input pin) |                                                                                   |     | +20       | 80  | μA   |       |
| IIL                                | Input Low Current ( $\overline{\text{PRSNT}}$ pin)                   | VIN = 3.6 V,<br>Input = 0 V                                                       |     | −15       | 15  | μA   |       |
|                                    | Input Low Current with internal<br>resistors<br>(4-level input pin)  |                                                                                   |     | −160      | −40 | μA   |       |
| CML RECEIVER INPUTS (IN_N+, IN_N-) |                                                                      |                                                                                   |     |           |     |      |       |
| RLRX-DIFF                          | RX Differential return loss                                          | 0.05 to 1.25 GHz                                                                  |     |           | −16 | dB   |       |
|                                    |                                                                      | 1.25 to 2.5 GHz                                                                   |     |           | −16 | dB   |       |
|                                    |                                                                      | 2.5 to 4.0 GHz                                                                    |     |           | −14 | dB   |       |
| RLRX-CM                            | RX Common mode return loss                                           | 0.05 to 2.5 GHz                                                                   |     |           | −12 | dB   |       |
|                                    |                                                                      | 2.5 to 4.0 GHz                                                                    |     |           | −8  | dB   |       |
| ZRX-DC                             | RX DC single-ended impedance                                         | VDD = 2.5 V                                                                       |     | 40        | 50  | 60   | Ω     |
| ZRX-DIFF-DC                        | RX DC differential mode impedance                                    | VDD = 2.5 V                                                                       |     | 80        | 100 | 120  | Ω     |
| VRX-DIFF-DC                        | VID - Differential RX peak to peak<br>input voltage                  |                                                                                   |     |           |     | 1.2  | V     |
| ZRX-HIGH-IMP-<br>DC-POS            | DC Input common mode impedance<br>for V > 0                          | VID = 0 to 200 mV,<br>ENSMB = 0, RXDET = 0,<br>VDD = 2.5 V                        |     |           | 50  |      | kΩ    |
| VRX-SIGNAL-DET-<br>DIFF-PP         | Signal detect assert level for active<br>data signal                 | SD_TH = Float,<br>0101 pattern at 8 Gbps<br>Measured at pins                      |     |           | 180 |      | mVp-p |
| VRX-IDLE-DET-<br>DIFF-PP           | Signal detect deassert level for<br>electrical idle                  | SD_TH = Float,<br>0101 pattern at 8 Gbps<br>Measured at pins                      |     |           | 110 |      | mVp-p |

## Electrical Characteristics (continued)

| PARAMETER                               |                                                                        | TEST CONDITIONS                                                                                                                                                                   | MIN | TYP  | MAX | UNIT     |
|-----------------------------------------|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|----------|
| <b>HIGH SPEED OUTPUTS</b>               |                                                                        |                                                                                                                                                                                   |     |      |     |          |
| V <sub>TX-DIFF-PP</sub>                 | Output voltage differential swing                                      | Differential measurement with OUT <sub>n+</sub> and OUT <sub>n-</sub> , terminated by 50 $\Omega$ to GND, AC-Coupled, VID = 1.0 Vp-p, DEMA/B = 0, VOD_SEL = Float, <sup>(1)</sup> | 0.8 | 1.0  | 1.1 | Vp-p     |
| V <sub>TX-DE-RATIO_3.5</sub>            | TX de-emphasis ratio                                                   | VOD = 1.0 Vp-p, DEMA/B = Float, VOD_SEL = Float, (GEN 1, 2 only)                                                                                                                  |     | –3.5 |     | dB       |
| V <sub>TX-DE-RATIO_6</sub>              | TX de-emphasis ratio                                                   | VOD = 1.0 Vp-p, DEMA/B = 20 k $\Omega$ to GND, VOD_SEL = Float, (GEN 1, 2 only)                                                                                                   |     | –6   |     | dB       |
| T <sub>TX-RJ</sub>                      | Random Ritter                                                          | VID = 800 mV, 0101 pattern, 8.0 Gbps, VOD = 1.0 V, EQ = 0x00, DE = 0 dB                                                                                                           |     | 0.3  |     | ps RMS   |
| T <sub>TX-DJ</sub>                      | Deterministic Jitter                                                   | VID = 800 mV, PRBS15, 8.0 Gbps, VOD = 1.0 V, EQ = 0x00, DE = 0 dB                                                                                                                 |     | 0.05 |     | UIpp     |
| T <sub>TX-RISE-FALL</sub>               | TX rise/fall time                                                      | 20% to 80% of differential output voltage, <sup>(2)</sup>                                                                                                                         | 34  | 45   |     | ps       |
| T <sub>RF-MISMATCH</sub>                | TX rise/fall mismatch                                                  | 20% to 80% of differential output voltage, <sup>(2)</sup>                                                                                                                         |     | 0.01 |     | UI       |
| RL <sub>TX-DIFF</sub>                   | TX Differential return loss                                            | 0.05 to 1.25 GHz                                                                                                                                                                  |     | –16  |     | dB       |
|                                         |                                                                        | 1.25 to 2.5 GHz                                                                                                                                                                   |     | –12  |     | dB       |
|                                         |                                                                        | 2.5 to 4 GHz                                                                                                                                                                      |     | –11  |     | dB       |
| RL <sub>TX-CM</sub>                     | TX Common mode return loss                                             | 0.05 to 2.5 GHz                                                                                                                                                                   |     | –12  |     | dB       |
|                                         |                                                                        | 2.5 to 4 GHz                                                                                                                                                                      |     | –8   |     | dB       |
| Z <sub>TX-DIFF-DC</sub>                 | DC differential TX impedance                                           |                                                                                                                                                                                   |     | 100  |     | $\Omega$ |
| V <sub>TX-CM-AC-PP</sub>                | TX AC common mode voltage                                              | VOD = 1.0 Vp-p, DEMA/B = 0, VOD_SEL = Float, <sup>(2)</sup>                                                                                                                       |     |      | 100 | mVp-p    |
| I <sub>TX-SHORT</sub>                   | TX short circuit current limit                                         | Total current the transmitter can supply when shorted to VDD or GND                                                                                                               |     | 20   |     | mA       |
| V <sub>TX-CM-DC-ACTIVE-IDLE-DELTA</sub> | Absolute delta of DC common mode voltage during L0 and electrical idle | <sup>(2)</sup>                                                                                                                                                                    |     |      | 100 | mV       |
| V <sub>TX-CM-DC-LINE-DELTA</sub>        | Absolute delta of DC common mode voltage between TX+ and TX-           | <sup>(2)</sup>                                                                                                                                                                    |     |      | 25  | mV       |
| T <sub>TX-IDLE-DATA</sub>               | Max time to transition to differential DATA signal after IDLE          | VID = 1.0 Vp-p, 8 Gbps                                                                                                                                                            |     | 3.5  |     | ns       |
| T <sub>TX-DATA-IDLE</sub>               | Max time to transition to IDLE after differential DATA signal          | VID = 1.0 Vp-p, 8 Gbps                                                                                                                                                            |     | 6.5  |     | ns       |
| T <sub>PLHD/PHLD</sub>                  | High-to-Low and Low-to-High Differential Propagation Delay             | DE = 0, EQ = 0x00, <sup>(3)</sup>                                                                                                                                                 |     | 200  |     | ps       |
| T <sub>LSK</sub>                        | Lane-to-lane skew                                                      | T = 25°C, VDD = 2.5 V                                                                                                                                                             |     | 25   |     | ps       |
| T <sub>PPSK</sub>                       | Part-to-part propagation delay skew                                    | T = 25°C, VDD = 2.5 V                                                                                                                                                             |     | 40   |     | ps       |

(1) In GEN3 mode, the output VOD level is not fixed. It will be adjusted automatically based on the VID input amplitude level. The output VOD level set by DEMA/B[1:0] in GEN3 mode is dependent on the VID level and the frequency content. The DS80PCI102 repeater in GEN3 mode is designed to be transparent, so the TX-FIR (de-emphasis) is passed to the RX to support the PCIe GEN3 handshake negotiation link training.

(2) Parameter is characterized but not tested in production.

(3) Propagation Delay measurements will change slightly based on the level of EQ selected. EQ = 0x00 will result in the shortest propagation delays.

**Electrical Characteristics (continued)**

| PARAMETER                                  |                                                        | TEST CONDITIONS                                                                                 | MIN | TYP  | MAX | UNIT |
|--------------------------------------------|--------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----|------|-----|------|
| <b>EQUALIZATION</b>                        |                                                        |                                                                                                 |     |      |     |      |
| DJE1                                       | Residual deterministic jitter at 8 Gbps                | 35" 4mils FR4,<br>VID = 0.8 Vp-p, PRBS15,<br><b>EQ = 0x1F</b> , DEM = 0 dB                      |     | 0.14 |     | UIpp |
| DJE2                                       | Residual deterministic jitter at 5 Gbps                | 35" 4mils FR4,<br>VID = 0.8 Vp-p, PRBS15,<br><b>EQ = 0x1F</b> , DEM = 0 dB                      |     | 0.1  |     | UIpp |
| DJE3                                       | Residual deterministic jitter at 2.5 Gbps              | 35" 4mils FR4,<br>VID = 0.8 Vp-p, PRBS15,<br><b>EQ = 0x1F</b> , DEM = 0 dB                      |     | 0.05 |     | UIpp |
| DJE4                                       | Residual deterministic jitter at 8 Gbps                | 10 meters 30-awg cable,<br>VID = 0.8 Vp-p, PRBS15,<br><b>EQ = 0x2F</b> , DEM = 0 dB             |     | 0.16 |     | UIpp |
| DJE5                                       | Residual deterministic jitter at 5 Gbps                | 10 meters 30-awg cable,<br>VID = 0.8 Vp-p, PRBS15,<br><b>EQ = 0x2F</b> , DEM = 0 dB             |     | 0.1  |     | UIpp |
| DJE6                                       | Residual deterministic jitter at 2.5 Gbps              | 10 meters 30-awg cable,<br>VID = 0.8 Vp-p, PRBS15,<br><b>EQ = 0x2F</b> , DEM = 0 dB             |     | 0.05 |     | UIpp |
| <b>DE-EMPHASIS (GEN 1&amp;2 MODE ONLY)</b> |                                                        |                                                                                                 |     |      |     |      |
| DJD1                                       | Residual deterministic jitter at 2.5 Gbps and 5.0 Gbps | 10" 4mils FR4,<br>VID = 0.8 Vp-p, PRBS15,<br>EQ = 0x00, VOD = 1.0 Vp-p,<br><b>DEM = -3.5 dB</b> |     | 0.1  |     | UIpp |
| DJD2                                       | Residual deterministic jitter at 2.5 Gbps and 5.0 Gbps | 20" 4mils FR4,<br>VID = 0.8 Vp-p, PRBS15,<br>EQ = 0x00, VOD = 1.0 Vp-p,<br><b>DEM = -9 dB</b>   |     | 0.1  |     | UIpp |



## 6.5 Electrical Characteristics — Serial Management Bus Interface

Over recommended operating supply and temperature ranges unless other specified.

| PARAMETER                                  |                                                                                              | TEST CONDITIONS                                       | MIN   | TYP  | MAX | UNIT |
|--------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------|-------|------|-----|------|
| SERIAL BUS INTERFACE DC SPECIFICATIONS     |                                                                                              |                                                       |       |      |     |      |
| V <sub>IL</sub>                            | Data, Clock Input Low Voltage                                                                |                                                       |       |      | 0.8 | V    |
| V <sub>IH</sub>                            | Data, Clock Input High Voltage                                                               |                                                       | 2.1   |      | 3.6 | V    |
| I <sub>PULLUP</sub>                        | Current Through Pullup Resistor or Current Source                                            | High Power Specification                              | 4     |      |     | mA   |
| V <sub>DD</sub>                            | Nominal Bus Voltage                                                                          |                                                       | 2.375 |      | 3.6 | V    |
| I <sub>LEAK-Bus</sub>                      | Input Leakage Per Bus Segment                                                                | (1)                                                   | -200  |      | 200 | μA   |
| I <sub>LEAK-Pin</sub>                      | Input Leakage Per Device Pin                                                                 |                                                       |       | -15  |     | μA   |
| C <sub>I</sub>                             | Capacitance for SDA and SCL                                                                  | (1) (2)                                               |       |      | 10  | pF   |
| R <sub>TERM</sub>                          | External Termination Resistance pull to V <sub>DD</sub> = 2.5 V ± 5% OR 3.3 V ± 10%          | Pullup V <sub>DD</sub> = 3.3 V <sup>(1) (2) (3)</sup> |       | 2000 |     | Ω    |
|                                            |                                                                                              | Pullup V <sub>DD</sub> = 2.5 V <sup>(1) (2) (3)</sup> |       | 1000 |     | Ω    |
| SERIAL BUS INTERFACE TIMING SPECIFICATIONS |                                                                                              |                                                       |       |      |     |      |
| FSMB                                       | Bus Operating Frequency                                                                      | ENSMB = VDD (Slave Mode)                              |       |      | 400 | kHz  |
|                                            |                                                                                              | ENSMB = FLOAT (Master Mode)                           | 280   | 400  | 520 | kHz  |
| T <sub>BUF</sub>                           | Bus Free Time Between Stop and Start Condition                                               |                                                       | 1.3   |      |     | μs   |
| T <sub>HD:STA</sub>                        | Hold time after (Repeated) Start Condition. After this period, the first clock is generated. | At I <sub>PULLUP</sub> , Max                          | 0.6   |      |     | μs   |
| T <sub>SU:STA</sub>                        | Repeated Start Condition Setup Time                                                          |                                                       | 0.6   |      |     | μs   |
| T <sub>SU:STO</sub>                        | Stop Condition Setup Time                                                                    |                                                       | 0.6   |      |     | μs   |
| T <sub>HD:DAT</sub>                        | Data Hold Time                                                                               |                                                       | 0     |      |     | ns   |
| T <sub>SU:DAT</sub>                        | Data Setup Time                                                                              |                                                       | 100   |      |     | ns   |
| T <sub>LOW</sub>                           | Clock Low Period                                                                             |                                                       | 1.3   |      |     | μs   |
| T <sub>HIGH</sub>                          | Clock High Period                                                                            | (4)                                                   | 0.6   |      | 50  | μs   |
| t <sub>F</sub>                             | Clock/Data Fall Time                                                                         | (4)                                                   |       |      | 300 | ns   |
| t <sub>R</sub>                             | Clock/Data Rise Time                                                                         | (4)                                                   |       |      | 300 | ns   |
| t <sub>POR</sub>                           | Time in which a device must be operational after power-on reset                              | (4) (5)                                               |       |      | 500 | ms   |

(1) Recommended value.

(2) Recommended maximum capacitance load per bus segment is 400 pF.

(3) Maximum termination voltage should be identical to the device supply voltage.

(4) Compliant to SMBus 2.0 physical layer specification. See System Management Bus (SMBus) Specification Version 2.0, section 3.1.1 SMBus common AC specifications for details.

(5) Specified by Design. Parameter not tested in production.

## 6.6 Timing Diagrams

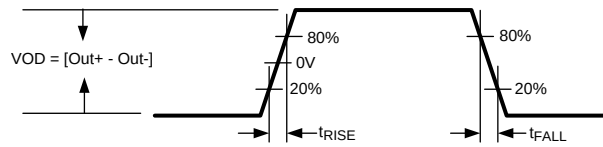


Figure 1. CML Output and Rise and Fall Times

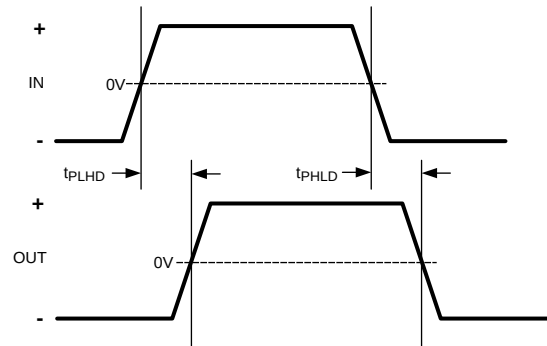


Figure 2. Propagation Delay Timing Diagram

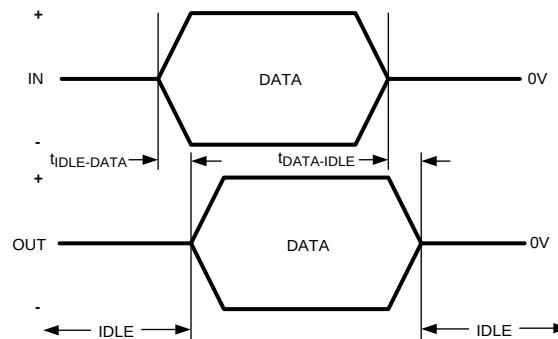


Figure 3. Transmit IDLE-DATA and DATA-IDLE Response Time



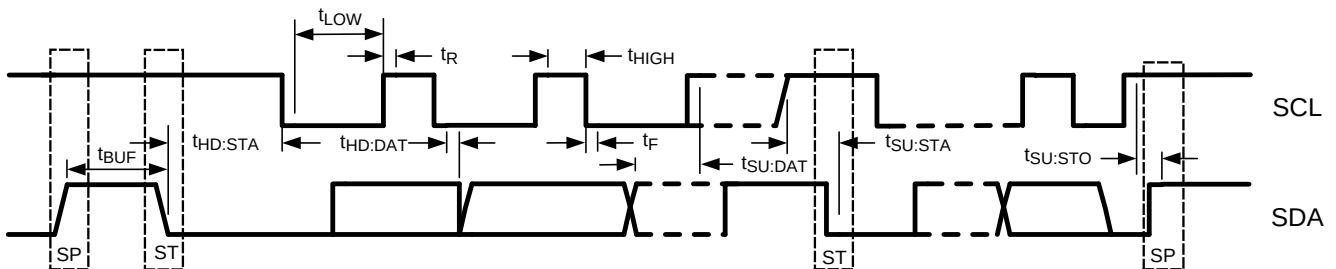


Figure 4. SMBus Timing Parameters

## 6.7 Typical Characteristics

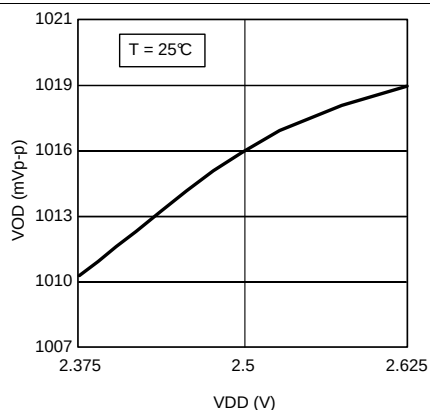

**Figure 5. Output Differential Voltage (VOD = 1.0 Vp-p) vs Supply Voltage (VDD)**

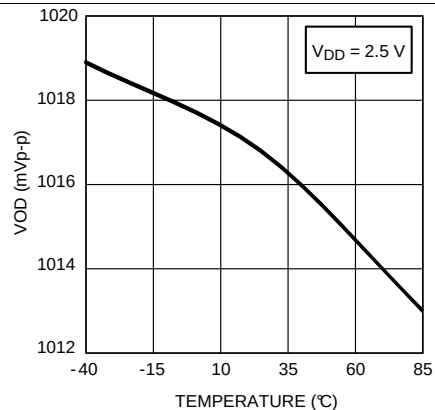


**Figure 6. Output Differential Voltage (VOD = 1.0 Vp-p) vs Temperature**

## 7 Detailed Description

### 7.1 Overview

The DS80PCI102 provides input CTLE and output De-emphasis equalization for lossy printed circuit board trace and cables. The DS80PCI102 operates in three modes: Pin Control Mode configuration (ENSMB = 0), SMBus Slave Mode (ENSMB = 1) for register configurations from host controller or SMBus Master Mode (ENSMB = Float) for loading the register configurations from an external EEPROM.

### 7.2 Functional Block Diagram

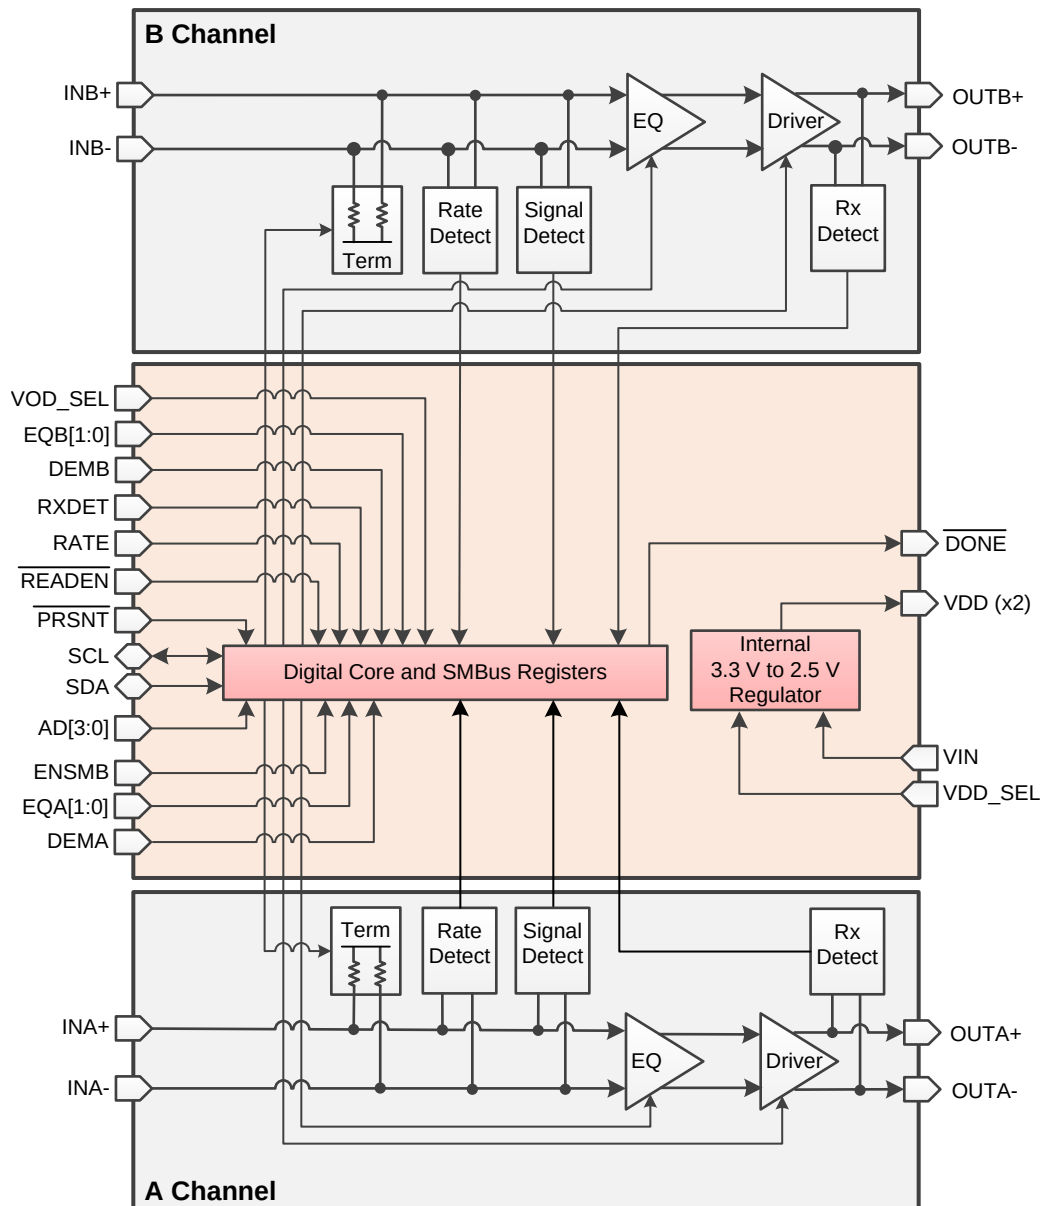

Note: This diagram is representative of device signal flow only; Channels A and B are bi-directional channels.

## 7.3 Feature Description

### 7.3.1 4-Level Input Configuration Guidelines

The 4-level input pins use a resistor divider to help set the four valid levels. There is an internal 30-k $\Omega$  pullup and a 60-k $\Omega$  pulldown connected to the package pin. These resistors, together with the external resistor connection combine to achieve the desired voltage level. Using the 1-k $\Omega$  pullup, 1-k $\Omega$  pulldown, no connect, or 20-k $\Omega$  pulldown provide the optimal voltage levels for each of the four input states.

**Table 1. 4-Level Input Voltage**

| LEVEL | SETTING                         | 3.3-V MODE           | 2.5-V MODE           |
|-------|---------------------------------|----------------------|----------------------|
| 0     | 1 k $\Omega$ to GND             | 0.1 V                | 0.08 V               |
| R     | 20 k $\Omega$ to GND            | $0.33 \times V_{IN}$ | $0.33 \times V_{DD}$ |
| F     | FLOAT                           | $0.67 \times V_{IN}$ | $0.67 \times V_{DD}$ |
| 1     | 1 k $\Omega$ to $V_{DD}/V_{IN}$ | $V_{IN} - 0.05 V$    | $V_{DD} - 0.04 V$    |

Typical 4-level input thresholds:

- Level 1 to 2 =  $0.2 V_{IN}$  or  $V_{DD}$
- Level 2 to 3 =  $0.5 V_{IN}$  or  $V_{DD}$
- Level 3 to 4 =  $0.8 V_{IN}$  or  $V_{DD}$

To minimize the start-up current associated with the integrated 2.5-V regulator, the 1-k $\Omega$  pullup and pulldown resistors are recommended. If several 4-level inputs require the same setting, it is possible to combine two or more 1-k $\Omega$  resistors into a single lower value resistor. As an example; combining two inputs with a single 500- $\Omega$  resistor is a good way to save board space. For the 20 k $\Omega$  to GND, this should also scale to 10 k $\Omega$ .

**Table 2. Equalizer Settings<sup>(1)</sup>**

| LEVEL | EQA1<br>EQB1 | EQA0<br>EQB0 | EQ – 8 BITS [7:0] | dB at<br>1.25 GHz | dB at<br>2.5 GHz | dB at<br>4 GHz | SUGGESTED USE                 |
|-------|--------------|--------------|-------------------|-------------------|------------------|----------------|-------------------------------|
| 1     | 0            | 0            | 0000 0000 = 0x00  | 2.1               | 3.7              | 4.9            | FR4 < 5 inch trace            |
| 2     | 0            | R            | 0000 0001 = 0x01  | 3.4               | 5.8              | 7.9            | FR4 5 inch 5-mil trace        |
| 3     | 0            | Float        | 0000 0010 = 0x02  | 4.8               | 7.7              | 9.9            | FR4 5 inch 4-mil trace        |
| 4     | 0            | 1            | 0000 0011 = 0x03  | 5.9               | 8.9              | 11.0           | FR4 10 inch 5-mil trace       |
| 5     | R            | 0            | 0000 0111 = 0x07  | 7.2               | 11.2             | 14.3           | FR4 10 inch 4-mil trace       |
| 6     | R            | R            | 0001 0101 = 0x15  | 6.1               | 11.4             | 14.6           | FR4 15 inch 4-mil trace       |
| 7     | R            | Float        | 0000 1011 = 0x0B  | 8.8               | 13.5             | 17.0           | FR4 20 inch 4-mil trace       |
| 8     | R            | 1            | 0000 1111 = 0x0F  | 10.2              | 15.0             | 18.5           | FR4 25 to 30 inch 4-mil trace |
| 9     | Float        | 0            | 0101 0101 = 0x55  | 7.5               | 12.8             | 18.0           | FR4 30 inch 4-mil trace       |
| 10    | Float        | R            | 0001 1111 = 0x1F  | 11.4              | 17.4             | 22.0           | FR4 35 inch 4-mil trace       |
| 11    | Float        | Float        | 0010 1111 = 0x2F  | 13.0              | 19.7             | 24.4           | 10 m, 30-awg cable            |
| 12    | Float        | 1            | 0011 1111 = 0x3F  | 14.2              | 21.1             | 25.8           | 10 m – 12 m cable             |
| 13    | 1            | 0            | 1010 1010 = 0xAA  | 13.8              | 21.7             | 27.4           |                               |
| 14    | 1            | R            | 0111 1111 = 0x7F  | 15.6              | 23.5             | 29.0           |                               |
| 15    | 1            | Float        | 1011 1111 = 0xBF  | 17.2              | 25.8             | 31.4           |                               |
| 16    | 1            | 1            | 1111 1111 = 0xFF  | 18.4              | 27.3             | 32.7           |                               |

(1) The suggested equalizer CTLE settings are based on 0 dB of TX preshoot/de-emphasis. In PCIe Gen 3 applications which use TX preshoot/de-emphasis, the CTLE should be set to a lower boost setting to optimize the RX eye opening.

**Table 3. Output Voltage and De-Emphasis Settings**

| LEVEL | VOD_SEL | DEMA<br>DEMB | VOD (Vp-p) | DEM (dB) <sup>(1)</sup> | SUGGESTED USE            |
|-------|---------|--------------|------------|-------------------------|--------------------------|
| 1     | 0       | 0            | 0.7        | 0                       | FR4 < 5 inch 4–mil trace |
| 2     | 0       | R            | 0.7        | - 6                     | FR4 12 inch 4–mil trace  |
| 3     | 0       | Float        | 0.7        | - 3.5                   | FR4 10 inch 4–mil trace  |
| 4     | 0       | 1            | 0.7        | - 9                     | FR4 15 inch 4–mil trace  |
| 5     | R       | 0            | 1.2        | 0                       | FR4 < 5 inch 4–mil trace |
| 6     | R       | R            | 1.2        | - 6                     | FR4 12 inch 4–mil trace  |
| 7     | R       | Float        | 1.2        | - 3.5                   | FR4 10 inch 4–mil trace  |
| 8     | R       | 1            | 1.2        | - 9                     | FR4 15 inch 4–mil trace  |
| 9     | Float   | 0            | 1.0        | 0                       | FR4 < 5 inch 4–mil trace |
| 10    | Float   | R            | 1.0        | - 6                     | FR4 15 inch 4–mil trace  |
| 11    | Float   | Float        | 1.0        | - 3.5                   | FR4 10 inch 4–mil trace  |
| 12    | Float   | 1            | 1.0        | - 9                     | FR4 20 inch 4–mil trace  |
| 13    | 1       | 0            | 1.1        | 0                       | FR4 < 5 inch 4–mil trace |
| 14    | 1       | R            | 1.1        | - 1.5                   | FR4 5 inch 4–mil trace   |
| 15    | 1       | Float        | 1.3        | - 1.5                   | FR4 5 inch 4–mil trace   |
| 16    | 1       | 1            | 1.3        | - 3.5                   | FR4 10 inch 4–mil trace  |

- (1) The VOD output amplitude and DEM de-emphasis levels are set with the DEMA/B[1:0] pins. The de-emphasis levels are available in GEN1, GEN2, and GEN 3 modes when RATE = Float.

**Table 4. RX-Detect Settings**

| $\overline{\text{PRSNT}}^{(1)}$<br>(PIN 52) | RXDET<br>(PIN 22)           | SMBus REG<br>BIT[3:2] | INPUT<br>TERMINATION                         | COMMENTS                                                                                                                                                                                                                                            |
|---------------------------------------------|-----------------------------|-----------------------|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0                                           | 0                           | 00                    | Hi-Z                                         | Manual RX-Detect, input is high-impedance mode                                                                                                                                                                                                      |
| 0                                           | Tie 20 k $\Omega$<br>to GND | 01                    | Pre Detect: Hi-Z<br>Post Detect: 50 $\Omega$ | Auto RX-Detect, outputs test every 12 ms for 600 ms then stops; termination is hi-Z until detection; once detected input termination is 50 $\Omega$<br>Reset function by pulsing $\overline{\text{PRSNT}}$ high for 5 $\mu\text{s}$ then low again  |
| 0                                           | Float<br>(Default)          | 10                    | Pre Detect: Hi-Z<br>Post Detect: 50 $\Omega$ | Auto RX-Detect, outputs test every 12 ms until detection occurs; termination is hi-Z until detection; once detected input termination is 50 $\Omega$<br>Reset function by pulsing $\overline{\text{PRSNT}}$ high for 5 $\mu\text{s}$ then low again |
| 0                                           | 1                           | 11                    | 50 $\Omega$                                  | Manual RX-Detect, input is 50 $\Omega$                                                                                                                                                                                                              |
| 1                                           | X                           |                       | Hi-Z                                         | Power-down mode, input is high impedance, output drivers are disabled<br>Used to reset RX-Detect State Machine when held high for 5 $\mu\text{s}$                                                                                                   |

- (1) In SMBus Slave Mode, the Rx Detect State Machine can be manually reset in software by overriding the device  $\overline{\text{PRSNT}}$  function. This is accomplished by setting the Override RXDET bit (Reg 0x02[7]) and then toggling the RXDET Value bit (Reg 0x02[6]). See [Table 10](#) for more information about resetting the Rx Detect State Machine.

**Table 5. Signal Detect Threshold Level<sup>(1)</sup>**

| SD_TH       | SMBus REG BIT [3:2] AND [1:0] | ASSERT LEVEL (TYP) | DEASSERT LEVEL (TYP) |
|-------------|-------------------------------|--------------------|----------------------|
| 0           | 10                            | 210 mVp-p          | 150 mVp-p            |
| R           | 01                            | 160 mVp-p          | 100 mVp-p            |
| F (default) | 00                            | 180 mVp-p          | 110 mVp-p            |
| 1           | 11                            | 190 mVp-p          | 130 mVp-p            |

- (1) VDD = 2.5 V, 25°C, and 0101 pattern at 8 Gbps.

## 7.4 Device Functional Modes

The DS80PCI102 is a low power media compensation 1 lane repeater optimized for PCI Express Gen 1/2 and 3. The DS80PCI102 compensates for lossy FR-4 printed circuit board backplanes and balanced cables. The DS80PCI102 operates in 3 modes: Pin Control Mode (ENSMB = 0), SMBus Slave Mode (ENSMB = 1) and SMBus Master Mode (ENSMB = float) to load register information from external EEPROM; refer to [Table 8](#) for additional information.

### 7.4.1 Pin Control Mode

When in pin mode (ENSMB = 0), equalization and de-emphasis can be selected through pin for each side independently. When de-emphasis is asserted VOD is automatically adjusted per the De- Emphasis table below. The RXDET pins provides automatic and manual control for input termination (50  $\Omega$  or > 50 k $\Omega$ ). RATE setting is also pin controllable with pin selections (Gen 1/2, auto detect and Gen 3). The receiver electrical idle detect threshold is also adjustable through the SD\_TH pin.

### 7.4.2 SMBUS Mode

When in SMBus mode (ENSMB = 1), the VOD (output amplitude), equalization, de-emphasis, and termination disable features are all programmable on a individual lane basis, instead of grouped by A or B as in the pin mode case. Upon assertion of ENSMB, the EQx and DEMx functions revert to register control immediately. The EQx and DEMx pins are converted to AD0-AD3 SMBus address inputs. The other external control pins (RATE, RXDET and SD\_TH) remain active unless their respective registers are written to and the appropriate override bit is set, in which case they are ignored until ENSMB is driven low (pin mode). On power-up and when ENSMB is driven low all registers are reset to their default state. If PRSNT is asserted while ENSMB is high, the registers retain their current state.

Equalization settings accessible through the pin controls were chosen to meet the needs of most PCIe applications. If additional fine tuning or adjustment is needed, additional equalization settings can be accessed through the SMBus registers. Each input has a total of 256 possible equalization settings. The [4-Level Input Configuration Guidelines](#) show the 16 setting when the device is in pin mode. When using SMBus mode, the equalization, VOD and de-emphasis levels are set by registers.

## 7.5 Programming

### 7.5.1 System Management Bus (SMBus) and Configuration Registers

The System Management Bus interface is compatible to SMBus 2.0 physical layer specification. ENSMB = 1 k $\Omega$  to VDD to enable SMBus slave mode and allow access to the configuration registers.

The DS80PCI102 has the AD[3:0] inputs in SMBus mode. These pins are the user set SMBUS slave address inputs. The AD[3:0] pins have internal pulldown. When left floating or pulled low the AD[3:0] = 0000'b, the device default address byte is 0xB0. Based on the SMBus 2.0 specification, the DS80PCI102 has a 7-bit slave address. The LSB is set to 0'b (for a WRITE). The device supports up to 16 address byte, which can be set with the AD[3:0] inputs. Below are the 16 addresses.

**Table 6. Device Slave Address Bytes**

| AD[3:0] SETTINGS | ADDRESS BYTES (HEX) | 7-BIT SLAVE ADDRESS (HEX) |
|------------------|---------------------|---------------------------|
| 0000             | B0                  | 58                        |
| 0001             | B2                  | 59                        |
| 0010             | B4                  | 5A                        |
| 0011             | B6                  | 5B                        |
| 0100             | B8                  | 5C                        |
| 0101             | BA                  | 5D                        |
| 0110             | BC                  | 5E                        |
| 0111             | BE                  | 5F                        |
| 1000             | C0                  | 60                        |
| 1001             | C2                  | 61                        |
| 1010             | C4                  | 62                        |
| 1011             | C6                  | 63                        |
| 1100             | C8                  | 64                        |
| 1101             | CA                  | 65                        |
| 1110             | CC                  | 66                        |
| 1111             | CE                  | 67                        |

The SDA/SCL pins are 3.3-V tolerant, but are not 5-V tolerant. An external pullup resistor is required on the SDA and SCL line. The resistor value can be from 2 k $\Omega$  to 5 k $\Omega$  depending on the voltage, loading, and speed.

### 7.5.2 Transfer of Data Through the SMBus

During normal operation the data on SDA must be stable during the time when SCL is High.

There are three unique states for the SMBus:

**START:** A high-to-low transition on SDA while SCL is High indicates a message START condition.

**STOP:** A low-to-high transition on SDA while SCL is High indicates a message STOP condition.

**IDLE:** If SCL and SDA are both High for a time exceeding  $t_{BUF}$  from the last detected STOP condition or if they are High for a total exceeding the maximum specification for  $t_{HIGH}$  then the bus will transfer to the IDLE state.

### 7.5.3 SMBus Transactions

The device supports WRITE and READ transactions. See [Table 10](#) for register address, type (Read/Write, Read Only), default value and function information.



### 7.5.4 Writing a Register

To write a register, the following protocol is used (see SMBus 2.0 specification).

1. The Host drives a START condition, the 7-bit SMBus address, and a 0 indicating a WRITE.
2. The Device (Slave) drives the ACK bit (0).
3. The Host drives the 8-bit Register Address.
4. The Device drives an ACK bit (0).
5. The Host drive the 8-bit data byte.
6. The Device drives an ACK bit (0).
7. The Host drives a STOP condition.

The WRITE transaction is completed, the bus goes IDLE and communication with other SMBus devices may now occur.


### 7.5.5 Reading a Register

To read a register, the following protocol is used (see SMBus 2.0 specification).

1. The Host drives a START condition, the 7-bit SMBus address, and a 0 indicating a WRITE.
2. The Device (Slave) drives the ACK bit (0).
3. The Host drives the 8-bit Register Address.
4. The Device drives an ACK bit (0).
5. The Host drives a START condition.
6. The Host drives the 7-bit SMBus Address, and a 1 indicating a READ.
7. The Device drives an ACK bit 0.
8. The Device drives the 8-bit data value (register contents).
9. The Host drives a NACK bit 1 indicating end of the READ transfer.
10. The Host drives a STOP condition.

The READ transaction is completed, the bus goes IDLE and communication with other SMBus devices may now occur.

See [Table 10](#) for more information.

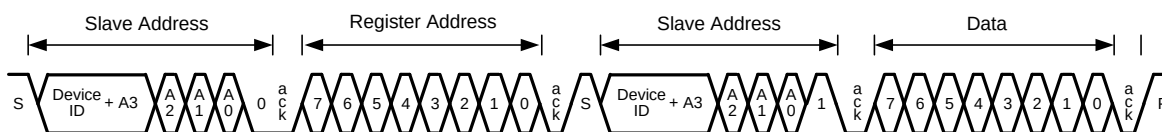

**Figure 7. Typical SMBus Write Operation**

### 7.5.6 EEPROM Programming


The DS80PCI102 supports reading directly from an external EEPROM device by implementing SMBus Master mode. When using the SMBus master mode, the DS80PCI102 will read directly from specific location in the external EEPROM. When designing a system for using the external EEPROM, the following guidelines should be followed:

- Set the DS80PCI102 into SMBus Master Mode.
  - ENSMB (PIN 3) = Float
- The external EEPROM device must support 1-MHz operation.
- The external EEPROM device address byte must be 0xA0.
- Set the AD[3:0] inputs for SMBus address byte. When the AD[3:0] = 0000'b, the device address byte is 0xB0.
- The device address can be set with the use of the AD[3:0] input up to 16 different addresses. Use the example below to set each of the SMBus addresses.
  - AD[3:0] = 0001'b, the device address byte is 0xB2
  - AD[3:0] = 0010'b, the device address byte is 0xB4
  - AD[3:0] = 0011'b, the device address byte is 0xB6

- AD[3:0] = 0100'b, the device address byte is 0xB8
- The master implementation in the DS80PCI102 supports multiple devices reading from one EEPROM. When tying multiple devices to the SDA and SCL pins, use these guidelines:
  - Use adjacent SMBus addresses for the 4 devices
  - Use a pullup resistor on SDA; value = 4.7 kΩ
  - Use a pullup resistor on SCL; value = 4.7 kΩ
  - Daisy-chain  $\overline{\text{READEN}}$  (Pin 17) and  $\overline{\text{DONE}}$  (Pin18) from one device to the next device in the sequence.
    1. Tie  $\overline{\text{READEN}}$  of the first device in the chain (U1) to GND
    2. Tie  $\overline{\text{DONE}}$  of U1 to  $\overline{\text{READEN}}$  of U2
    3. Tie  $\overline{\text{DONE}}$  of U2 to  $\overline{\text{READEN}}$  of U3
    4. Tie  $\overline{\text{DONE}}$  of U3 to  $\overline{\text{READEN}}$  of U4
    5. Optional: Tie  $\overline{\text{DONE}}$  of U4 to a LED to show each of the devices have been loaded successfully

### 7.5.6.1 Master EEPROM Programming

The following example represents a 2 kbits (256 × 8-bit) EEPROM in hex format for the DS80PCI102 device. The first 3 bytes of the EEPROM always contain a header common and necessary to control initialization of all devices connected to the same SMBus line. There is a CRC enable flag to enable or disable CRC checking. There is a MAP bit to flag the presence of an address map that specifies the configuration data start in the EEPROM. If the MAP bit is not present, the configuration data start address immediately follows the 3-byte base header. A bit to indicate an EEPROM size > 256 bytes is necessary to properly address the EEPROM. There are 37 bytes of data size for each DS80PCI102 device. For more details about EEPROM programming and Master mode, refer to [SNLA228](#).

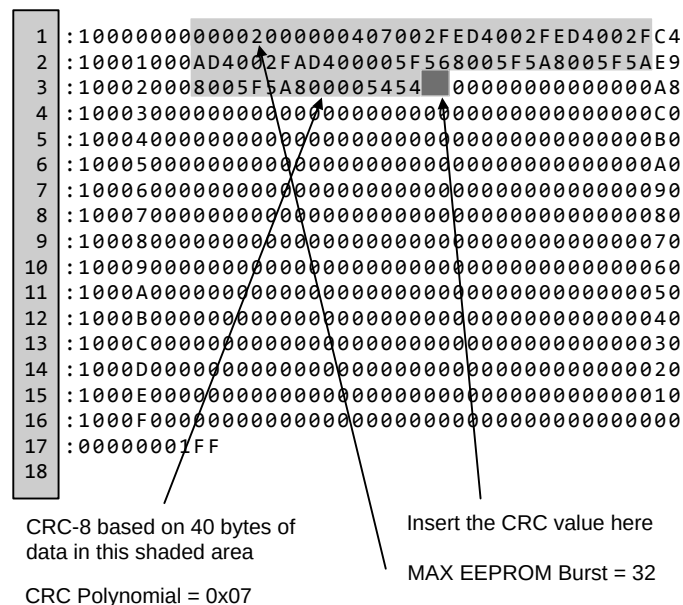

**Figure 8. Typical EEPROM Data Set**

#### NOTE

The maximum EEPROM size supported is 8kbits (1024 × 8 bits).

The CRC-8 calculation is performed on the first 3 bytes of header information plus the 37 bytes of data for the DS80PCI102, or 40 bytes in total. The result of this calculation is placed immediately after the DS80PCI102 data in the EEPROM, which ends with "5454". The CRC-8 in the DS80PCI102 uses a polynomial =  $x^8 + x^2 + x + 1$ .

There are two pins that provide unique functions in SMBus Master mode:

- $\overline{\text{DONE}}$
- $\overline{\text{READEN}}$

When the DS80PCI102 is powered up in SMBus master mode, it reads its configuration from the external EEPROM when the READEN pin goes low. When the DS80PCI102 is finished reading its configuration from the external EEPROM, it drives the DONE pin low. In applications where there is more than one DS80PCI102 on the same SMBus, bus contention can result if more than one DS80PCI102 tries to take control of the SMBus at the same time. The READEN and DONE pins prevent this bus contention. The system should be designed so that the READEN pin from one DS80PCI102 in the system is driven low on power-up. This DS80PCI102 will take command of the SMBus on power-up and will read its initial configuration from the external EEPROM. When it is finished reading its configuration, it will drive the DONE pin low. This pin should be connected to the READEN pin of another DS80PCI102. When this second DS80PCI102 senses its READEN pin driven low, it will take command of the SMBus and read its initial configuration from the external EEPROM, after which it will set its DONE pin low. By connecting the DONE pin of each DS80PCI102 to the READEN pin of the next DS80PCI102, each DS80PCI102 can read its initial configuration from the EEPROM without causing bus contention.

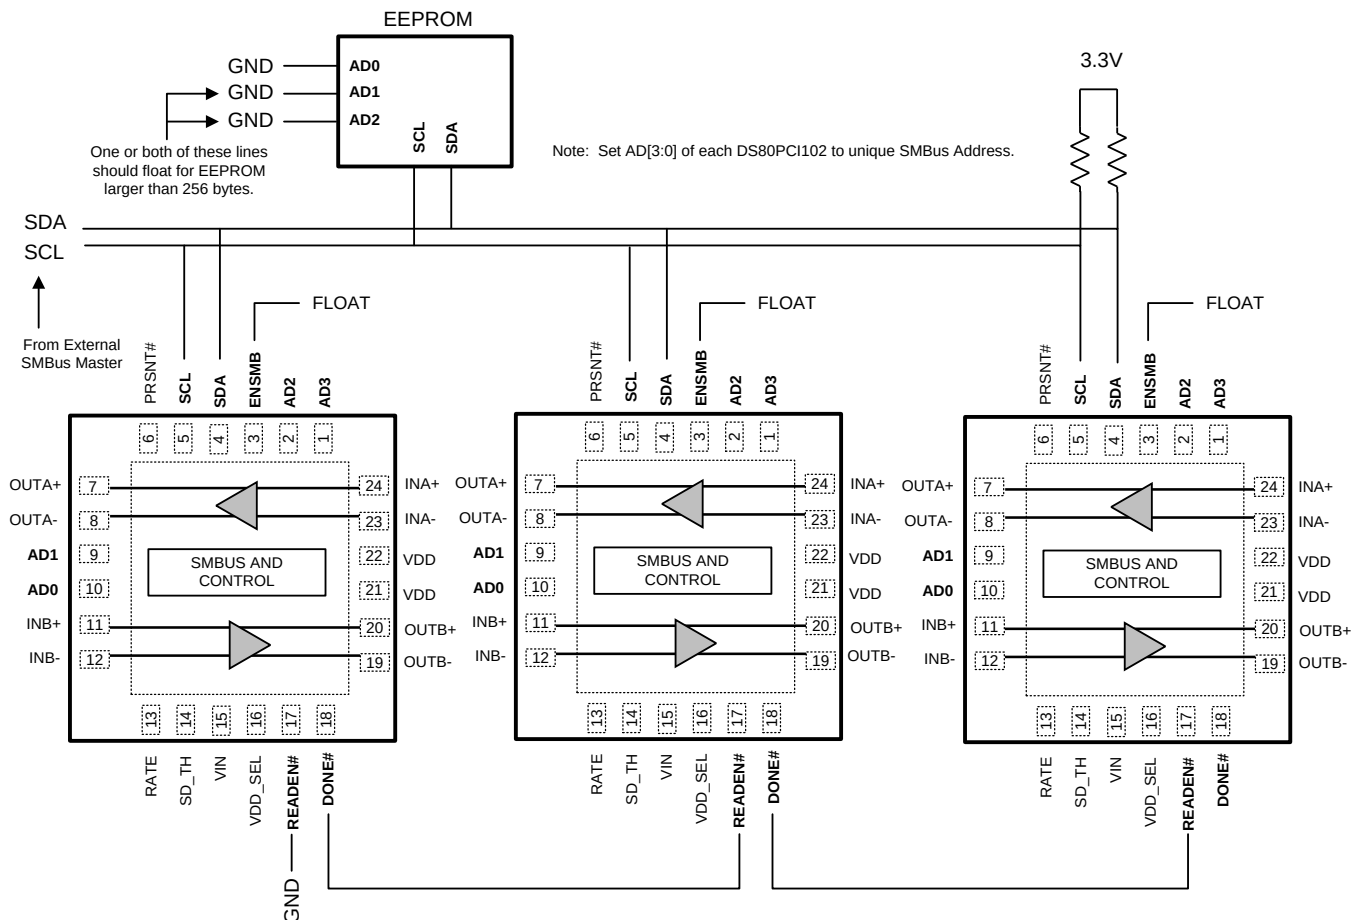


Figure 9. Typical Multi-Device EEPROM Connection Diagram

### 7.5.6.2 EEPROM Address Mapping

A detailed EEPROM Address Mapping for a single device is shown in Table 7. For instances where multiple devices are written to EEPROM, the device starting address definitions align starting with Byte 0x03. A register map overview for a multi-device EEPROM address map is shown in Table 8.

## 7.6 Register Maps

**Table 7. Single Device with Default Value**

| EEPROM Address Byte |      | BIT 7                    | BIT 6                    | BIT 5                    | BIT 4                    | BIT 3                    | BIT 2                    | BIT 1                    | BIT 0                    |
|---------------------|------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Description         | 0x00 | CRC_EN                   | Address Map Present      | EEPROM > 256 Bytes       | Reserved                 | DEVICE COUNT[3]          | DEVICE COUNT[2]          | DEVICE COUNT[1]          | DEVICE COUNT[0]          |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        |
| Description         | 0x01 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        |
| Description         | 0x02 | Max EEPROM Burst size[7] | Max EEPROM Burst size[6] | Max EEPROM Burst size[5] | Max EEPROM Burst size[4] | Max EEPROM Burst size[3] | Max EEPROM Burst size[2] | Max EEPROM Burst size[1] | Max EEPROM Burst size[0] |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        |
| Description         | 0x03 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | PWDN CH B                | PWDN CH A                |
| SMBus Register      |      | 0x01[7]                  | 0x01[6]                  | 0x01[5]                  | 0x01[4]                  | 0x01[3]                  | 0x01[2]                  | 0x01[1]                  | 0x01[0]                  |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        |
| Description         | 0x04 | Reserved                 | Reserved                 | PWDN_Inputs              | PWDN_Osc                 | Override PRST            | Reserved                 | Reserved                 | Reserved                 |
| SMBus Register      |      | 0x02[5]                  | 0x02[4]                  | 0x02[3]                  | 0x02[2]                  | 0x02[0]                  | 0x04[7]                  | 0x04[6]                  | 0x04[5]                  |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        |
| Description         | 0x05 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Ovrd IDLE_TH             | Reserved                 |
| SMBus Register      |      | 0x04[4]                  | 0x04[3]                  | 0x04[2]                  | 0x04[1]                  | 0x04[0]                  | 0x06[4]                  | 0x08[6]                  | 0x08[5]                  |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 1                        | 0                        | 0                        |
| Description         | 0x06 | Reserved                 | Ovrd RXDET               | Ovrd RATE                | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 |
| SMBus Register      |      | 0x08[4]                  | 0x08[3]                  | 0x08[2]                  | 0x08[1]                  | 0x08[0]                  | 0x0B[6]                  | 0x0B[5]                  | 0x0B[4]                  |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 1                        | 1                        | 1                        |
| Description         | 0x07 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | Reserved                 | RXDET_A_1                | RXDET_A_0                |
| SMBus Register      |      | 0x0B[3]                  | 0x0B[2]                  | 0x0B[1]                  | 0x0B[0]                  | 0x0E[5]                  | 0x0E[4]                  | 0x0E[3]                  | 0x0E[2]                  |
| Default Value       |      | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        | 0                        |

Table 7. Single Device with Default Value (continued)

| EEPROM Address Byte |      | BIT 7           | BIT 6           | BIT 5           | BIT 4           | BIT 3           | BIT 2           | BIT 1           | BIT 0           |
|---------------------|------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Description         | 0x08 | CHA_EQ[7]       | CHA_EQ[6]       | CHA_EQ[5]       | CHA_EQ[4]       | CHA_EQ[3]       | CHA_EQ[2]       | CH0_EQ[1]       | CH0_EQ[0]       |
| SMBus Register      |      | 0x0F[7]         | 0x0F[6]         | 0x0F[5]         | 0x0F[4]         | 0x0F[3]         | 0x0F[2]         | 0x0F[1]         | 0x0F[0]         |
| Default Value       |      | 0               | 0               | 1               | 0               | 1               | 1               | 1               | 1               |
| Description         | 0x09 | CHA_Sel SCP     | CHA_Sel RATE    | Reserved        | Reserved        | Reserved        | Reserved        | Reserved        | Reserved        |
| SMBus Register      |      | 0x10[7]         | 0x10[6]         | 0x10[5]         | 0x10[4]         | 0x10[3]         | 0x10[2]         | 0x10[1]         | 0x10[0]         |
| Default Value       |      | 1               | 1               | 1               | 0               | 1               | 1               | 0               | 1               |
| Description         | 0x0A | CHA_DEM[2]      | CHA_DEM[1]      | CHA_DEM[0]      | Reserved        | CHA_Idle_ThA[1] | CHA_Idle_ThA[0] | CHA_Idle_ThD[1] | CHA_Idle_ThD[0] |
| SMBus Register      |      | 0x11[2]         | 0x11[1]         | 0x11[0]         | 0x12[7]         | 0x12[3]         | 0x12[2]         | 0x12[1]         | 0x12[0]         |
| Default Value       |      | 0               | 1               | 0               | 0               | 0               | 0               | 0               | 0               |
| Description         | 0x0B | Reserved        | Reserved        | RXDET_B_1       | RXDET_B_0       | CHB_EQ[7]       | CHB_EQ[6]       | CHB_EQ[5]       | CHB_EQ[4]       |
| SMBus Register      |      | 0x15[5]         | 0x15[4]         | 0x15[3]         | 0x15[2]         | 0x16[7]         | 0x16[6]         | 0x16[5]         | 0x16[4]         |
| Default Value       |      | 0               | 0               | 0               | 0               | 0               | 0               | 1               | 0               |
| Description         | 0x0C | CHB_EQ[3]       | CHB_EQ[2]       | CHB_EQ[1]       | CHB_EQ[0]       | CHB_Sel SCP     | CHB_Sel RATE    | Reserved        | Reserved        |
| SMBus Register      |      | 0x16[3]         | 0x16[2]         | 0x16[1]         | 0x16[0]         | 0x17[7]         | 0x17[6]         | 0x17[5]         | 0x17[4]         |
| Default Value       |      | 1               | 1               | 1               | 1               | 1               | 1               | 1               | 0               |
| Description         | 0x0D | Reserved        | Reserved        | Reserved        | Reserved        | CHB_DEM[2]      | CHB_DEM[1]      | CHB_DEM[0]      | Reserved        |
| SMBus Register      |      | 0x17[3]         | 0x17[2]         | 0x17[1]         | 0x17[0]         | 0x18[2]         | 0x18[1]         | 0x18[0]         | 0x19[7]         |
| Default Value       |      | 1               | 1               | 0               | 1               | 0               | 1               | 0               | 0               |
| Description         | 0x0E | CHB_Idle_ThA[1] | CHB_Idle_ThA[0] | CHB_Idle_ThD[1] | CHB_Idle_ThD[0] | Reserved        | Reserved        | Reserved        | Reserved        |
| SMBus Register      |      | 0x19[3]         | 0x19[2]         | 0x19[1]         | 0x19[0]         | 0x1C[5]         | 0x1C[4]         | 0x1C[3]         | 0x1C[2]         |
| Default Value       |      | 0               | 0               | 0               | 0               | 0               | 0               | 0               | 0               |
| Description         | 0x0F | Reserved        | Reserved        | Reserved        | Reserved        | Reserved        | Reserved        | Reserved        | Reserved        |
| SMBus Register      |      | 0x1D[7]         | 0x1D[6]         | 0x1D[5]         | 0x1D[4]         | 0x1D[3]         | 0x1D[2]         | 0x1D[1]         | 0x1D[0]         |
| Default Value       |      | 0               | 0               | 1               | 0               | 1               | 1               | 1               | 1               |

**DS80PCI102**

SNLS344G –JULY 2011–REVISED AUGUST 2015

[www.ti.com](http://www.ti.com)
**Table 7. Single Device with Default Value (continued)**

| EEPROM Address Byte |      | BIT 7      | BIT 6      | BIT 5    | BIT 4    | BIT 3    | BIT 2    | BIT 1    | BIT 0      |
|---------------------|------|------------|------------|----------|----------|----------|----------|----------|------------|
| Description         | 0x10 | Reserved   | Reserved   | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved   |
| SMBus Register      |      | 0x1E[7]    | 0x1E[6]    | 0x1E[5]  | 0x1E[4]  | 0x1E[3]  | 0x1E[2]  | 0x1E[1]  | 0x1E[0]    |
| Default Value       |      | 1          | 0          | 1        | 0        | 1        | 1        | 0        | 1          |
| Description         | 0x11 | Reserved   | Reserved   | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved   |
| SMBus Register      |      | 0x1F[2]    | 0x1F[1]    | 0x1F[0]  | 0x20[7]  | 0x20[3]  | 0x20[2]  | 0x20[1]  | 0x20[0]    |
| Default Value       |      | 0          | 1          | 0        | 0        | 0        | 0        | 0        | 0          |
| Description         | 0x12 | Reserved   | Reserved   | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved   |
| SMBus Register      |      | 0x23[5]    | 0x23[4]    | 0x23[3]  | 0x23[2]  | 0x24[7]  | 0x24[6]  | 0x24[5]  | 0x24[4]    |
| Default Value       |      | 0          | 0          | 0        | 0        | 0        | 0        | 1        | 0          |
| Description         | 0x13 | Reserved   | Reserved   | Reserved | Reserved | Reserved | Reserved | Reserved | CHA_VOD[2] |
| SMBus Register      |      | 0x24[3]    | 0x24[2]    | 0x24[1]  | 0x24[0]  | 0x25[7]  | 0x25[6]  | 0x25[5]  | 0x25[4]    |
| Default Value       |      | 1          | 1          | 1        | 1        | 1        | 0        | 1        | 0          |
| Description         | 0x14 | CHA_VOD[1] | CHA_VOD[0] | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved   |
| SMBus Register      |      | 0x25[3]    | 0x25[2]    | 0x25[1]  | 0x25[0]  | 0x26[2]  | 0x26[1]  | 0x26[0]  | 0x27[7]    |
| Default Value       |      | 1          | 1          | 0        | 1        | 0        | 1        | 0        | 0          |
| Description         | 0x15 | Reserved   | Reserved   | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved   |
| SMBus Register      |      | 0x27[3]    | 0x27[2]    | 0x27[1]  | 0x27[0]  | 0x28[6]  | 0x28[5]  | 0x28[4]  | 0x28[3]    |
| Default Value       |      | 0          | 0          | 0        | 0        | 0        | 0        | 0        | 0          |
| Description         | 0x16 | Reserved   | Reserved   | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved   |
| SMBus Register      |      | 0x28[2]    | 0x28[1]    | 0x28[0]  | 0x2B[5]  | 0x2B[4]  | 0x2B[3]  | 0x2B[2]  | 0x2C[7]    |
| Default Value       |      | 0          | 0          | 0        | 0        | 0        | 0        | 0        | 0          |
| Description         | 0x17 | Reserved   | Reserved   | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved   |
| SMBus Register      |      | 0x2C[6]    | 0x2C[5]    | 0x2C[4]  | 0x2C[3]  | 0x2C[2]  | 0x2C[1]  | 0x2C[0]  | 0x2D[7]    |
| Default Value       |      | 0          | 1          | 0        | 1        | 1        | 1        | 1        | 1          |

Table 7. Single Device with Default Value (continued)

| EEPROM Address Byte |      | BIT 7    | BIT 6    | BIT 5      | BIT 4      | BIT 3      | BIT 2    | BIT 1    | BIT 0    |
|---------------------|------|----------|----------|------------|------------|------------|----------|----------|----------|
| Description         | 0x18 | Reserved | Reserved | CHB_VOD[2] | CHB_VOD[1] | CHB_VOD[0] | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x2D[6]  | 0x2D[5]  | 0x2D[4]    | 0x2D[3]    | 0x2D[2]    | 0x2D[1]  | 0x2D[0]  | 0x2E[2]  |
| Default Value       |      | 0        | 1        | 0          | 1          | 1          | 0        | 1        | 0        |
| Description         | 0x19 | Reserved | Reserved | Reserved   | Reserved   | Reserved   | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x2E[1]  | 0x2E[0]  | 0x2F[7]    | 0x2F[3]    | 0x2F[2]    | 0x2F[1]  | 0x2F[0]  | 0x32[5]  |
| Default Value       |      | 1        | 0        | 0          | 0          | 0          | 0        | 0        | 0        |
| Description         | 0x1A | Reserved | Reserved | Reserved   | Reserved   | Reserved   | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x32[4]  | 0x32[3]  | 0x32[2]    | 0x33[7]    | 0x33[6]    | 0x33[5]  | 0x33[4]  | 0x33[3]  |
| Default Value       |      | 0        | 0        | 0          | 0          | 0          | 1        | 0        | 1        |
| Description         | 0x1B | Reserved | Reserved | Reserved   | Reserved   | Reserved   | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x33[2]  | 0x33[1]  | 0x33[0]    | 0x34[7]    | 0x34[6]    | 0x34[5]  | 0x34[4]  | 0x34[3]  |
| Default Value       |      | 1        | 1        | 1          | 1          | 0          | 1        | 0        | 1        |
| Description         | 0x1C | Reserved | Reserved | Reserved   | Reserved   | Reserved   | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x34[2]  | 0x34[1]  | 0x34[0]    | 0x35[2]    | 0x35[1]    | 0x35[0]  | 0x36[7]  | 0x36[3]  |
| Default Value       |      | 1        | 0        | 1          | 0          | 1          | 0        | 0        | 0        |
| Description         | 0x1D | Reserved | Reserved | Reserved   | Reserved   | Reserved   | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x36[2]  | 0x36[1]  | 0x36[0]    | 0x39[5]    | 0x39[4]    | 0x39[3]  | 0x39[2]  | 0x3A[7]  |
| Default Value       |      | 0        | 0        | 0          | 0          | 0          | 0        | 0        | 0        |
| Description         | 0x1E | Reserved | Reserved | Reserved   | Reserved   | Reserved   | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x3A[6]  | 0x3A[5]  | 0x3A[4]    | 0x3A[3]    | 0x3A[2]    | 0x3A[1]  | 0x3A[0]  | 0x3B[7]  |
| Default Value       |      | 0        | 1        | 0          | 1          | 1          | 1        | 1        | 1        |
| Description         | 0x1F | Reserved | Reserved | Reserved   | Reserved   | Reserved   | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x3B[6]  | 0x3B[5]  | 0x3B[4]    | 0x3B[3]    | 0x3B[2]    | 0x3B[1]  | 0x3B[0]  | 0x3C[2]  |
| Default Value       |      | 0        | 1        | 0          | 1          | 1          | 0        | 1        | 0        |

**Table 7. Single Device with Default Value (continued)**

| EEPROM Address Byte |      | BIT 7    | BIT 6    | BIT 5    | BIT 4    | BIT 3    | BIT 2    | BIT 1    | BIT 0    |
|---------------------|------|----------|----------|----------|----------|----------|----------|----------|----------|
| Description         | 0x20 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x3C[1]  | 0x3C[0]  | 0x3D[7]  | 0x3D[3]  | 0x3D[2]  | 0x3D[1]  | 0x3D[0]  | 0x40[5]  |
| Default Value       |      | 1        | 0        | 0        | 0        | 0        | 0        | 0        | 0        |
| Description         | 0x21 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x40[4]  | 0x40[3]  | 0x40[2]  | 0x41[7]  | 0x41[6]  | 0x41[5]  | 0x41[4]  | 0x41[3]  |
| Default Value       |      | 0        | 0        | 0        | 0        | 0        | 1        | 0        | 1        |
| Description         | 0x22 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x41[2]  | 0x41[1]  | 0x41[0]  | 0x42[7]  | 0x42[6]  | 0x42[5]  | 0x42[4]  | 0x42[3]  |
| Default Value       |      | 1        | 1        | 1        | 1        | 0        | 1        | 0        | 1        |
| Description         | 0x23 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x42[2]  | 0x42[1]  | 0x42[0]  | 0x43[2]  | 0x43[1]  | 0x43[0]  | 0x44[7]  | 0x44[3]  |
| Default Value       |      | 1        | 0        | 1        | 0        | 1        | 0        | 0        | 0        |
| Description         | 0x24 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x44[2]  | 0x44[1]  | 0x44[0]  | 0x47[3]  | 0x47[2]  | 0x47[1]  | 0x47[0]  | 0x48[7]  |
| Default Value       |      | 0        | 0        | 0        | 0        | 0        | 0        | 0        | 0        |
| Description         | 0x25 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x48[6]  | 0x4C[7]  | 0x4C[6]  | 0x4C[5]  | 0x4C[4]  | 0x4C[3]  | 0x4C[0]  | 0x59[0]  |
| Default Value       |      | 0        | 0        | 0        | 0        | 0        | 0        | 0        | 0        |
| Description         | 0x26 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x5A[7]  | 0x5A[6]  | 0x5A[5]  | 0x5A[4]  | 0x5A[3]  | 0x5A[2]  | 0x5A[1]  | 0x5A[0]  |
| Default Value       |      | 0        | 1        | 0        | 1        | 0        | 1        | 0        | 0        |
| Description         | 0x27 | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved | Reserved |
| SMBus Register      |      | 0x5B[7]  | 0x5B[6]  | 0x5B[5]  | 0x5B[4]  | 0x5B[3]  | 0x5B[2]  | 0x5B[1]  | 0x5B[0]  |
| Default Value       |      | 0        | 1        | 0        | 1        | 0        | 1        | 0        | 0        |



**Table 8. Multi-Device EEPROM Register Map Overview<sup>(1)(2)(3)(4)</sup>**

|                  | Addr | Bit 7       | Bit 6       | Bit 5              | Bit 4       | Bit 3       | Bit 2       | Bit 1       | Bit 0       |
|------------------|------|-------------|-------------|--------------------|-------------|-------------|-------------|-------------|-------------|
| Header           | 0    | CRC EN      | Address Map | EEPROM > 256 Bytes | Reserved    | COUNT[3]    | COUNT[2]    | COUNT[1]    | COUNT[0]    |
|                  | 1    | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | Reserved    | Reserved    |
|                  | 2    | EE Burst[7] | EE Burst[6] | EE Burst[5]        | EE Burst[4] | EE Burst[3] | EE Burst[2] | EE Burst[1] | EE Burst[0] |
| Device 0 Info    | 3    | CRC[7]      | CRC[6]      | CRC[5]             | CRC[4]      | CRC[3]      | CRC[2]      | CRC[1]      | CRC[0]      |
|                  | 4    | EE AD0 [7]  | EE AD0 [6]  | EE AD0 [5]         | EE AD0 [4]  | EE AD0 [3]  | EE AD0 [2]  | EE AD0 [1]  | EE AD0 [0]  |
| Device 1 Info    | 5    | CRC[7]      | CRC[6]      | CRC[5]             | CRC[4]      | CRC[3]      | CRC[2]      | CRC[1]      | CRC[0]      |
|                  | 6    | EE AD1 [7]  | EE AD1 [6]  | EE AD1 [5]         | EE AD1 [4]  | EE AD1 [3]  | EE AD1 [2]  | EE AD1 [1]  | EE AD1 [0]  |
| Device 2 Info    | 7    | CRC[7]      | CRC[6]      | CRC[5]             | CRC[4]      | CRC[3]      | CRC[2]      | CRC[1]      | CRC[0]      |
|                  | 8    | EE AD2 [7]  | EE AD2 [6]  | EE AD2 [5]         | EE AD2 [4]  | EE AD2 [3]  | EE AD2 [2]  | EE AD2 [1]  | EE AD2 [0]  |
| Device 3 Info    | 9    | CRC[7]      | CRC[6]      | CRC[5]             | CRC[4]      | CRC[3]      | CRC[2]      | CRC[1]      | CRC[0]      |
|                  | 10   | EE AD3 [7]  | EE AD3 [6]  | EE AD3 [5]         | EE AD3 [4]  | EE AD3 [3]  | EE AD3 [2]  | EE AD3 [1]  | EE AD3 [0]  |
| Device 0 Addr 3  | 11   | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | PWDN CH B   | PWDN CH A   |
| Device 0 Addr 4  | 12   | Reserved    | Reserved    | PDWN Inp           | PDWN OSC    | Ovrd PRST   | Reserved    | Reserved    | Reserved    |
| Device 0 Addr 38 | 46   | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | Reserved    | Reserved    |
| Device 0 Addr 39 | 47   | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | Reserved    | Reserved    |
| Device 1 Addr 3  | 48   | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | PWDN CH B   | PWDN CH A   |
| Device 1 Addr 4  | 49   | Reserved    | Reserved    | PDWN Inp           | PDWN OSC    | Ovrd PRST   | Reserved    | Reserved    | Reserved    |
| Device 1 Addr 38 | 83   | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | Reserved    | Reserved    |
| Device 1 Addr 39 | 84   | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | Reserved    | Reserved    |
| Device 2 Addr 3  | 85   | Reserved    | Reserved    | Reserved           | Reserved    | Reserved    | Reserved    | PWDN CH B   | PWDN CH A   |
| Device 2 Addr 4  | 86   | Reserved    | Reserved    | PDWN Inp           | PDWN OSC    | Ovrd PRST   | Reserved    | Reserved    | Reserved    |

(1) CRC EN = 1; Address Map = 1

(2) EEPROM > 256 Bytes = 0

(3) COUNT[3:0] = 0011'b

(4) Multiple DS80PC102 devices may point at the same address space if they have identical programming values.

**Table 8. Multi-Device EEPROM Register Map Overview<sup>(1)(2)(3)(4)</sup> (continued)**

|                     | Addr | Bit 7    | Bit 6    | Bit 5    | Bit 4    | Bit 3     | Bit 2    | Bit 1     | Bit 0     |
|---------------------|------|----------|----------|----------|----------|-----------|----------|-----------|-----------|
| Device 2<br>Addr 38 | 120  | Reserved | Reserved | Reserved | Reserved | Reserved  | Reserved | Reserved  | Reserved  |
| Device 2<br>Addr 39 | 121  | Reserved | Reserved | Reserved | Reserved | Reserved  | Reserved | Reserved  | Reserved  |
| Device 3<br>Addr 3  | 122  | Reserved | Reserved | Reserved | Reserved | Reserved  | Reserved | PWDN CH B | PWDN CH A |
| Device 3<br>Addr 4  | 123  | Reserved | Reserved | PDWN Inp | PDWN OSC | Ovrd PRST | Reserved | Reserved  | Reserved  |
| Device 3<br>Addr 38 | 157  | Reserved | Reserved | Reserved | Reserved | Reserved  | Reserved | Reserved  | Reserved  |
| Device 3<br>Addr 39 | 158  | Reserved | Reserved | Reserved | Reserved | Reserved  | Reserved | Reserved  | Reserved  |

**Table 9. Multi DS80PCI102 EEPROM Data**

| EEPROM Address | Address (Hex) | EEPROM Data | Comments                                                               |
|----------------|---------------|-------------|------------------------------------------------------------------------|
| 0              | 00            | 0x43        | CRC_EN = 0, Address Map = 1, Device Count = 3 (Devices 0, 1, 2, and 3) |
| 1              | 01            | 0x00        |                                                                        |
| 2              | 02            | 0x08        | EEPROM Burst Size                                                      |
| 3              | 03            | 0x00        | CRC not used                                                           |
| 4              | 04            | 0x0B        | Device 0 Address Location                                              |
| 5              | 05            | 0x00        | CRC not used                                                           |
| 6              | 06            | 0x30        | Device 1 Address Location                                              |
| 7              | 07            | 0x00        | CRC not used                                                           |
| 8              | 08            | 0x30        | Device 2 Address Location                                              |
| 9              | 09            | 0x00        | CRC not used                                                           |
| 10             | 0A            | 0x0B        | Device 3 Address Location                                              |
| 11             | 0B            | 0x00        | Begin Device 0 and Device 3 - Address Offset 3                         |
| 12             | 0C            | 0x00        |                                                                        |
| 13             | 0D            | 0x04        |                                                                        |
| 14             | 0E            | 0x07        |                                                                        |
| 15             | 0F            | 0x00        |                                                                        |
| 16             | 10            | 0x2F        | Default EQ CHA                                                         |
| 17             | 11            | 0xED        |                                                                        |
| 18             | 12            | 0x40        |                                                                        |
| 19             | 13            | 0x02        | Default EQ CHB                                                         |
| 20             | 14            | 0xFE        | Default EQ CHB                                                         |
| 21             | 15            | 0xD4        |                                                                        |
| 22             | 16            | 0x00        |                                                                        |
| 23             | 17            | 0x2F        |                                                                        |
| 24             | 18            | 0xAD        |                                                                        |
| 25             | 19            | 0x40        |                                                                        |
| 26             | 1A            | 0x02        |                                                                        |
| 27             | 1B            | 0xFA        | PCI102 CHA VOD = 1000 mVpp                                             |
| 28             | 1C            | 0xD4        | PCI102 CHA VOD = 1000 mVpp                                             |
| 29             | 1D            | 0x01        |                                                                        |
| 30             | 1E            | 0x80        |                                                                        |
| 31             | 1F            | 0x5F        |                                                                        |
| 32             | 20            | 0x56        | PCI102 CHB VOD = 1000 mVpp                                             |
| 33             | 21            | 0x80        |                                                                        |
| 34             | 22            | 0x05        |                                                                        |
| 35             | 23            | 0xF5        |                                                                        |
| 36             | 24            | 0xA8        |                                                                        |
| 37             | 25            | 0x00        |                                                                        |
| 38             | 26            | 0x5F        |                                                                        |
| 39             | 27            | 0x5A        |                                                                        |
| 40             | 28            | 0x80        |                                                                        |
| 41             | 29            | 0x05        |                                                                        |
| 42             | 2A            | 0xF5        |                                                                        |
| 43             | 2B            | 0xA8        |                                                                        |
| 44             | 2C            | 0x00        |                                                                        |
| 45             | 2D            | 0x00        |                                                                        |
| 46             | 2E            | 0x54        |                                                                        |

**Table 9. Multi DS80PCI102 EEPROM Data (continued)**

| EEPROM Address | Address (Hex) | EEPROM Data | Comments                                       |
|----------------|---------------|-------------|------------------------------------------------|
| 47             | 2F            | 0x54        | End Device 0 and Device 3 - Address Offset 39  |
| 48             | 30            | 0x00        | Begin Device 1 and Device 2 - Address Offset 3 |
| 49             | 31            | 0x00        |                                                |
| 50             | 32            | 0x04        |                                                |
| 51             | 33            | 0x07        |                                                |
| 52             | 34            | 0x00        |                                                |
| 53             | 35            | 0x2F        | Default EQ CHA                                 |
| 54             | 36            | 0xED        |                                                |
| 55             | 37            | 0x40        |                                                |
| 56             | 38            | 0x02        | Default EQ CHB                                 |
| 57             | 39            | 0xFE        | Default EQ CHB                                 |
| 58             | 3A            | 0xD4        |                                                |
| 59             | 3B            | 0x00        |                                                |
| 60             | 3C            | 0x2F        |                                                |
| 61             | 3D            | 0xAD        |                                                |
| 62             | 3E            | 0x40        |                                                |
| 63             | 3F            | 0x02        |                                                |
| 64             | 40            | 0xFA        | PCI102 CHA VOD = 1000 mVpp                     |
| 65             | 41            | 0xD4        | PCI102 CHA VOD = 1000 mVpp                     |
| 66             | 42            | 0x01        |                                                |
| 67             | 43            | 0x80        |                                                |
| 68             | 44            | 0x5F        |                                                |
| 69             | 45            | 0x56        | PCI102 CHB VOD = 1000 mVpp                     |
| 70             | 46            | 0x80        |                                                |
| 71             | 47            | 0x05        |                                                |
| 72             | 48            | 0xF5        |                                                |
| 73             | 49            | 0xA8        |                                                |
| 74             | 4A            | 0x00        |                                                |
| 75             | 4B            | 0x5F        |                                                |
| 76             | 4C            | 0x5A        |                                                |
| 77             | 4D            | 0x80        |                                                |
| 78             | 4E            | 0x05        |                                                |
| 79             | 4F            | 0xF5        |                                                |
| 80             | 50            | 0xA8        |                                                |
| 81             | 51            | 0x00        |                                                |
| 82             | 52            | 0x00        |                                                |
| 83             | 53            | 0x54        |                                                |
| 84             | 54            | 0x54        | End Device 1 and Device 2 - Address Offset 39  |

**Table 10. SMBus Register Map**

| Address | Register Name              | Bit | Field                   | Type | Default | EEPROM Bit | Description                                                                                                                                        |
|---------|----------------------------|-----|-------------------------|------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x00    | Device Address Observation | 7   | Reserved                | R/W  | 0x00    |            | Reserved                                                                                                                                           |
|         |                            | 6:3 | I2C Address [3:0]       | R    |         |            | SMBus strap observation                                                                                                                            |
|         |                            | 2   | EEPROM reading done     | R    |         |            | 1: Device completed the read from external EEPROM                                                                                                  |
|         |                            | 1   | Reserved                | RWSC |         |            | Reserved                                                                                                                                           |
|         |                            | 0   | Reserved                | RWSC |         |            | Reserved                                                                                                                                           |
| 0x01    | Control 1                  | 7:2 | Reserved                | R/W  | 0x00    | Yes        | Reserved                                                                                                                                           |
|         |                            | 1:0 | PWDN A/B                |      |         |            | [1]: Powerdown Channel B (1); Normal Operation (0)<br>[0]: Powerdown Channel A (1); Normal Operation (0)                                           |
| 0x02    | Control 2                  | 7   | Override RXDET          | R/W  | 0x00    |            | 1 = Override Automatic Rx Detect State Machine Reset                                                                                               |
|         |                            | 6   | RXDET Value             |      |         |            | 1 = Set Rx Detect State Machine Reset<br>0 = Clear Rx Detect State Machine Reset                                                                   |
|         |                            | 5:4 | Reserved                |      |         | Yes        | Reserved                                                                                                                                           |
|         |                            | 3   | PWDN Inputs             |      |         | Yes        | Reserved                                                                                                                                           |
|         |                            | 2   | PWDN Oscillator         |      |         | Yes        | Reserved                                                                                                                                           |
|         |                            | 1   | Reserved                |      |         |            | Reserved                                                                                                                                           |
|         |                            | 0   | Override PRSNT          |      |         | Yes        | 1: Enables Reg 0x01[1:0]<br>0: Normal Operation                                                                                                    |
| 0x03    | Reserved                   | 7:0 | Reserved                | R/W  | 0x00    |            | Reserved                                                                                                                                           |
| 0x04    | Reserved                   | 7:0 | Reserved                | R/W  | 0x00    | Yes        | Reserved                                                                                                                                           |
| 0x05    | Reserved                   | 7:0 | Reserved                | R/W  | 0x00    |            | Reserved                                                                                                                                           |
| 0x06    | Slave Register Control     | 7:5 | Reserved                | R/W  | 0x10    |            | Reserved                                                                                                                                           |
|         |                            | 4   | Reserved                |      |         | Yes        | Reserved                                                                                                                                           |
|         |                            | 3   | Register Enable         |      |         |            | 1 = Enables SMBus Slave Mode Register Control<br><b>Note: To change VOD, DEM, and EQ of the channels in slave mode, this bit must be set to 1.</b> |
|         |                            | 2:0 | Reserved                |      |         |            | Reserved                                                                                                                                           |
| 0x07    | Digital Reset and Control  | 7   | Reserved                | R/W  | 0x01    |            | Reserved                                                                                                                                           |
|         |                            | 6   | Reset Regs              |      |         |            | Self clearing reset for registers. Writing a [1] will return register settings to default values.                                                  |
|         |                            | 5   | Reset SMBus Master      |      |         |            | Self clearing reset to SMBus master state machine                                                                                                  |
|         |                            | 4:0 | Reserved                |      |         |            | Reserved                                                                                                                                           |
| 0x08    | Pin Override               | 7   | Reserved                | R/W  | 0x00    |            | Reserved                                                                                                                                           |
|         |                            | 6   | Override Idle Threshold |      |         | Yes        | [1]: Override by Channel - see Reg 0x12 and 0x19<br>[0]: SD_TH pin control                                                                         |
|         |                            | 5:4 | Reserved                |      |         | Yes        | Set bits to 0                                                                                                                                      |
|         |                            | 3   | Override RXDET          |      |         | Yes        | [1]: Force RXDET by Channel - see Reg 0x0E and 0x15<br>[0]: Normal Operation                                                                       |
|         |                            | 2   | Override RATE           |      |         | Yes        | [1]: Override by Channel - see Reg 0x10 and 0x17<br>[0]: Normal Operation                                                                          |
|         |                            | 1:0 | Reserved                |      |         | Yes        | Reserved                                                                                                                                           |
| 0x09    | Reserved                   | 7:0 | Reserved                | R/W  | 0x00    |            | Reserved                                                                                                                                           |
| 0x0A    | Reserved                   | 7:0 | Reserved                | R    | 0x00    |            | Reserved                                                                                                                                           |

**Table 10. SMBus Register Map (continued)**

| Address | Register Name       | Bit | Field            | Type | Default | EEPROM Bit | Description                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|---------------------|-----|------------------|------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x0B    | Reserved            | 7   | Reserved         | R/W  | 0x70    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 6:0 | Reserved         | R/W  |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x0C    | Reserved            | 7:0 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x0D    | Reserved            | 7:0 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x0E    | CH A RXDET Control  | 7:6 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 5:4 | Reserved         |      |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 3:2 | RXDET            |      |         | Yes        | 00: Input is hi-Z impedance<br>01: Auto RX-Detect, outputs test every 12 ms for 600 ms (50 times) then stops; termination is hi-Z until detection; once detected input termination is 50 Ω<br>10: Auto RX-Detect, outputs test every 12 ms until detection occurs; termination is hi-Z until detection; once detected input termination is 50 Ω<br>11: Input is 50 Ω Note: override RXDET pin. |
|         |                     | 1:0 | Reserved         |      |         |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     |     |                  |      |         |            |                                                                                                                                                                                                                                                                                                                                                                                                |
| 0x0F    | CH A EQ Control     | 7:0 | BOOST [7:0]      | R/W  | 0x2F    | Yes        | EQ Control - total of 256 levels<br>See <a href="#">Table 2</a>                                                                                                                                                                                                                                                                                                                                |
| 0x10    | CH A RATE Control   | 7   | Sel_scp          | R/W  | 0xED    | Yes        | 1 = Short Circuit Protection ON<br>0 = Short Circuit Protection OFF                                                                                                                                                                                                                                                                                                                            |
|         |                     | 6   | Sel_RATE         |      |         | Yes        | 1 = Select GEN1/2 Mode<br>0 = Select GEN3 Mode                                                                                                                                                                                                                                                                                                                                                 |
|         |                     | 5:3 | Reserved         |      |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 2:0 | Reserved         |      |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x11    | CH A DEM Control    | 7   | Reserved         | R    | 0x82    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 6:5 | Rate Information |      |         |            | Signal Rate Detected<br>00 = GEN1 (2.5G)<br>01 = GEN2 (5.0G)<br>11 = GEN3 (8.0G)                                                                                                                                                                                                                                                                                                               |
|         |                     | 4:3 | Reserved         |      |         |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 2:0 | DEM [2:0]        | R/W  |         | Yes        | DEM Control<br>000: 0 dB<br>001: -1.5 dB<br>010: -3.5 dB (default)<br>011: -5 dB<br>100: -6 dB<br>101: -8 dB<br>110: -9 dB<br>111: -12 dB                                                                                                                                                                                                                                                      |
| 0x12    | CH A Idle Threshold | 7   | Reserved         | R/W  | 0x00    | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 6:4 | Reserved         |      |         |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|         |                     | 3:2 | idle_thA[1:0]    |      |         | Yes        | Assert Thresholds<br>Use only if register 0x08 [6] = 1<br>00 = 180 mV (Default)<br>01 = 160 mV<br>10 = 210 mV<br>11= 190 mV                                                                                                                                                                                                                                                                    |
|         |                     | 1:0 | idle_thD[1:0]    |      |         | Yes        | Deassert Thresholds<br>Use only if register 0x08 [6] = 1<br>00 = 110 mV (Default)<br>01 = 100 mV<br>10 = 150 mV<br>11= 130 mV                                                                                                                                                                                                                                                                  |
| 0x13    | Reserved            | 7:0 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x14    | Reserved            | 7:0 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |

**Table 10. SMBus Register Map (continued)**

| Address   | Register Name       | Bit | Field            | Type | Default | EEPROM Bit | Description                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------|---------------------|-----|------------------|------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x15      | CH B RXDET Control  | 7:6 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 5:4 | Reserved         |      |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 3:2 | RXDET            |      |         | Yes        | 00: Input is hi-Z impedance<br>01: Auto RX-Detect, outputs test every 12 ms for 600 ms (50 times) then stops; termination is hi-Z until detection; once detected input termination is 50 Ω<br>10: Auto RX-Detect, outputs test every 12 ms until detection occurs; termination is hi-Z until detection; once detected input termination is 50 Ω<br>11: Input is 50 Ω Note: override RXDET pin. |
|           |                     | 1:0 | Reserved         |      |         |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x16      | CH B EQ Control     | 7:0 | BOOST [7:0]      | R/W  | 0x2F    | Yes        | EQ Control - total of 256 levels<br>See <a href="#">Table 2</a>                                                                                                                                                                                                                                                                                                                                |
| 0x17      | CH B RATE Control   | 7   | Sel_scp          | R/W  | 0xED    | Yes        | 1 = Short Circuit Protection ON<br>0 = Short Circuit Protection OFF                                                                                                                                                                                                                                                                                                                            |
|           |                     | 6   | Sel_RATE         |      |         | Yes        | 1 = Select GEN1/2 Mode<br>0 = Select GEN3 Mode                                                                                                                                                                                                                                                                                                                                                 |
|           |                     | 5:3 | Reserved         |      |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 2:0 | Reserved         |      |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x18      | CH B DEM Control    | 7   | Reserved         | R    | 0x02    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 6:5 | Rate Information |      |         |            | Signal Rate Detected<br>00 = GEN1 (2.5G)<br>01 = GEN2 (5.0G)<br>11 = GEN3 (8.0G)                                                                                                                                                                                                                                                                                                               |
|           |                     | 4:3 | Reserved         | R/W  |         |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 2:0 | DEM [2:0]        |      |         | Yes        | DEM Control<br>000: 0 dB<br>001: –1.5 dB<br>010: –3.5 dB (default)<br>011: –5 dB<br>100: –6 dB<br>101: –8 dB<br>110: –9 dB<br>111: –12 dB                                                                                                                                                                                                                                                      |
| 0x19      | CH B Idle Threshold | 7   | Reserved         | R/W  | 0x00    | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 6:4 | Reserved         |      |         |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 3:2 | idle_thA[1:0]    |      |         | Yes        | Assert Thresholds<br>Use only if register 0x08 [6] = 1<br>00 = 180 mV (Default)<br>01 = 160 mV<br>10 = 210 mV<br>11= 190 mV                                                                                                                                                                                                                                                                    |
|           |                     | 1:0 | idle_thD[1:0]    |      |         | Yes        | Deassert Thresholds<br>Use only if register 0x08 [6] = 1<br>00 = 110 mV (Default)<br>01 = 100 mV<br>10 = 150 mV<br>11= 130 mV                                                                                                                                                                                                                                                                  |
| 0x1A-0x1B | Reserved            | 7:0 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x1C      | Reserved            | 7:6 | Reserved         | R/W  | 0x00    |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 5:2 | Reserved         |      |         | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
|           |                     | 1:0 | Reserved         |      |         |            | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x1D      | Reserved            | 7:0 | Reserved         | R/W  | 0x2F    | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x1E      | Reserved            | 7:0 | Reserved         | R/W  | 0xAD    | Yes        | Reserved                                                                                                                                                                                                                                                                                                                                                                                       |

**Table 10. SMBus Register Map (continued)**

| Address   | Register Name | Bit | Field           | Type | Default | EEPROM Bit | Description                                                                                                                               |
|-----------|---------------|-----|-----------------|------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| 0x1F      | Reserved      | 7:3 | Reserved        | R/W  | 0x02    |            | Reserved                                                                                                                                  |
|           |               | 2:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x20      | Reserved      | 7   | Reserved        | R/W  | 0x00    | Yes        | Reserved                                                                                                                                  |
|           |               | 6:4 | Reserved        |      |         |            | Reserved                                                                                                                                  |
|           |               | 3:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x21-0x22 | Reserved      | 7:0 | Reserved        | R/W  | 0x00    |            | Reserved                                                                                                                                  |
| 0x23      | Reserved      | 7:6 | Reserved        | R/W  | 0x00    |            | Reserved                                                                                                                                  |
|           |               | 5:2 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
|           |               | 1:0 | Reserved        |      |         |            | Reserved                                                                                                                                  |
| 0x24      | Reserved      | 7:0 | Reserved        | R/W  | 0x2F    | Yes        | Reserved                                                                                                                                  |
| 0x25      | CH A VOD      | 7:5 | Reserved        | R/W  | 0xAD    | Yes        | Reserved                                                                                                                                  |
|           |               | 4:2 | VOD CHA Control |      |         | Yes        | VOD Control CHA<br>000: 0.7 V<br>001: 0.8 V<br>010: 0.9 V<br>011: 1.0 V (default)<br>100: 1.1 V<br>101: 1.2 V<br>110: 1.3 V<br>111: 1.4 V |
|           |               | 1:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x26      | Reserved      | 7:3 | Reserved        | R/W  | 0x02    |            | Reserved                                                                                                                                  |
|           |               | 2:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x27      | Reserved      | 7   | Reserved        | R/W  | 0x00    | Yes        | Reserved                                                                                                                                  |
|           |               | 6:4 | Reserved        |      |         |            | Reserved                                                                                                                                  |
|           |               | 3:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x28      | Idle Control  | 7   | Reserved        | R/W  | 0x00    |            | Reserved                                                                                                                                  |
|           |               | 6:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x29-0x2A | Reserved      | 7:0 | Reserved        | R/W  | 0x00    |            | Reserved                                                                                                                                  |
| 0x2B      | Reserved      | 7:6 | Reserved        | R/W  | 0x00    |            | Reserved                                                                                                                                  |
|           |               | 5:2 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
|           |               | 1:0 | Reserved        |      |         |            | Reserved                                                                                                                                  |
| 0x2C      | Reserved      | 7:0 | Reserved        | R/W  | 0x2F    | Yes        | Reserved                                                                                                                                  |
| 0x2D      | CH B VOD      | 7:5 | Reserved        | R/W  | 0xAD    | Yes        | Reserved                                                                                                                                  |
|           |               | 4:2 | VOD CHB Control |      |         | Yes        | VOD Control CHB<br>000: 0.7 V<br>001: 0.8 V<br>010: 0.9 V<br>011: 1.0 V (default)<br>100: 1.1 V<br>101: 1.2 V<br>110: 1.3 V<br>111: 1.4 V |
|           |               | 1:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x2E      | Reserved      | 7:3 | Reserved        | R/W  | 0x02    |            | Reserved                                                                                                                                  |
|           |               | 2:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x2F      | Reserved      | 7   | Reserved        | R/W  | 0x00    | Yes        | Reserved                                                                                                                                  |
|           |               | 6:4 | Reserved        |      |         |            | Reserved                                                                                                                                  |
|           |               | 3:0 | Reserved        |      |         | Yes        | Reserved                                                                                                                                  |
| 0x30-0x31 | Reserved      | 7:0 | Reserved        | R/W  | 0x00    |            | Reserved                                                                                                                                  |



**Table 10. SMBus Register Map (continued)**

| Address   | Register Name      | Bit | Field          | Type | Default | EEPROM Bit | Description |
|-----------|--------------------|-----|----------------|------|---------|------------|-------------|
| 0x32      | Reserved           | 7:6 | Reserved       | R/W  | 0x00    |            | Reserved    |
|           |                    | 5:2 | Reserved       |      |         | Yes        | Reserved    |
|           |                    | 1:0 | Reserved       |      |         |            | Reserved    |
| 0x33      | Reserved           | 7:0 | Reserved       | R/W  | 0x2F    | Yes        | Reserved    |
| 0x34      | Reserved           | 7:0 | Reserved       | R/W  | 0xAD    | Yes        | Reserved    |
| 0x35      | Reserved           | 7:3 | Reserved       | R/W  | 0x02    |            | Reserved    |
|           |                    | 2:0 | Reserved       |      |         | Yes        | Reserved    |
| 0x36      | Reserved           | 7   | Reserved       | R/W  | 0x00    | Yes        | Reserved    |
|           |                    | 6:4 | Reserved       |      |         |            | Reserved    |
|           |                    | 3:0 | Reserved       |      |         | Yes        | Reserved    |
| 0x37-0x38 | Reserved           | 7:0 | Reserved       | R/W  | 0x00    |            | Reserved    |
| 0x39      | Reserved           | 7:6 | Reserved       | R/W  | 0x00    |            | Reserved    |
|           |                    | 5:2 | Reserved       |      |         | Yes        | Reserved    |
|           |                    | 1:0 | Reserved       |      |         |            | Reserved    |
| 0x3A      | Reserved           | 7:0 | Reserved       | R/W  | 0x2F    | Yes        | Reserved    |
| 0x3B      | Reserved           | 7:0 | Reserved       | R/W  | 0xAD    | Yes        | Reserved    |
| 0x3C      | Reserved           | 7:3 | Reserved       | R/W  | 0x02    |            | Reserved    |
|           |                    | 2:0 | Reserved       |      |         | Yes        | Reserved    |
| 0x3D      | Reserved           | 7   | Reserved       | R/W  | 0x00    | Yes        | Reserved    |
|           |                    | 6:4 | Reserved       |      |         |            | Reserved    |
|           |                    | 3:0 | Reserved       |      |         | Yes        | Reserved    |
| 0x3E-0x3F | Reserved           | 7:0 | Reserved       | R/W  | 0x00    |            | Reserved    |
| 0x40      | Reserved           | 7:6 | Reserved       | R/W  | 0x00    |            | Reserved    |
|           |                    | 5:2 | Reserved       |      |         | Yes        | Reserved    |
|           |                    | 1:0 | Reserved       |      |         |            | Reserved    |
| 0x41      | Reserved           | 7:0 | Reserved       | R/W  | 0x2F    | Yes        | Reserved    |
| 0x42      | Reserved           | 7:0 | Reserved       | R/W  | 0xAD    | Yes        | Reserved    |
| 0x43      | Reserved           | 7:3 | Reserved       | R/W  | 0x02    |            | Reserved    |
|           |                    | 2:0 | Reserved       |      |         | Yes        | Reserved    |
| 0x44      | Reserved           | 7   | Reserved       | R/W  | 0x00    | Yes        | Reserved    |
|           |                    | 6:4 | Reserved       |      |         |            | Reserved    |
|           |                    | 3:0 | Reserved       |      |         | Yes        | Reserved    |
| 0x45      | Reserved           | 7:0 | Reserved       | R/W  | 0x00    |            | Reserved    |
| 0x46      | Reserved           | 7:0 | Reserved       | R/W  | 0x38    |            | Reserved    |
| 0x47      | Reserved           | 7:4 | Reserved       | R/W  | 0x00    |            | Reserved    |
|           |                    | 3:0 | Reserved       |      |         | Yes        | Reserved    |
| 0x48      | Reserved           | 7:6 | Reserved       | R/W  | 0x05    | Yes        | Reserved    |
|           |                    | 5:0 | Reserved       |      |         |            | Reserved    |
| 0x49-0x4B | Reserved           | 7:0 | Reserved       | R/W  | 0x00    |            | Reserved    |
| 0x4C      | Reserved           | 7:3 | Reserved       | R/W  | 0x00    | Yes        | Reserved    |
|           |                    | 2:1 | Reserved       |      |         |            | Reserved    |
|           |                    | 0   | Reserved       |      |         | Yes        | Reserved    |
| 0x4D-0x50 | Reserved           | 7:0 | Reserved       | R/W  | 0x00    |            | Reserved    |
| 0x51      | Device Information | 7:5 | Version[2:0]   | R    | 0x77    |            | 011'b       |
|           |                    | 4:0 | Device ID[4:0] |      |         |            | 1 0111'b    |
| 0x52      | Reserved           | 7:0 | Reserved       | R/W  | 0x00    |            | Reserved    |
| 0x53      | Reserved           | 7:0 | Reserved       | R/W  | 0x00    |            | Reserved    |

**Table 10. SMBus Register Map (continued)**

| Address | Register Name | Bit | Field    | Type | Default | EEPROM Bit | Description |
|---------|---------------|-----|----------|------|---------|------------|-------------|
| 0x54    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |
| 0x55    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |
| 0x56    | Reserved      | 7:0 | Reserved | R/W  | 0x10    |            | Reserved    |
| 0x57    | Reserved      | 7:0 | Reserved | R/W  | 0x64    |            | Reserved    |
| 0x58    | Reserved      | 7:0 | Reserved | R/W  | 0x21    |            | Reserved    |
| 0x59    | Reserved      | 7:1 | Reserved | R/W  | 0x00    |            | Reserved    |
|         |               | 0   | Reserved |      |         | Yes        | Reserved    |
| 0x5A    | Reserved      | 7:0 | Reserved | R/W  | 0x54    | Yes        | Reserved    |
| 0x5B    | Reserved      | 7:0 | Reserved | R/W  | 0x54    | Yes        | Reserved    |
| 0x5C    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |
| 0x5D    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |
| 0x5E    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |
| 0x5F    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |
| 0x60    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |
| 0x61    | Reserved      | 7:0 | Reserved | R/W  | 0x00    |            | Reserved    |

## 8 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

In PCIe Gen-3 applications, the specification requires Rx-Tx link training to establish and optimize signal conditioning settings at 8 Gbps. In link training, the Rx partner requests a series of FIR - preshoot and de-emphasis coefficients (10 Presets) from the Tx partner. The Rx partner includes 7-levels (6 dB to 12 dB) of CTLE followed by a single tap DFE. The link training would pre-condition the signal with an equalized link between the root-complex and endpoint. Note that there is no link training in PCIe Gen-1 (2.5 Gbps) or PCIe Gen-2 (5.0 Gbps) applications. The DS80PCI102 is placed in between the Tx and Rx. It would help extend the PCB trace reach distance by boosting the attenuated signals with it's equalization, so that the signal can be more easily recovered by the downstream Rx. In Gen 3 mode, DS80PCI102 transmit outputs are designed to pass the Tx Preset signaling onto the Rx for the PCIe Gen 3 link to train and optimize the equalization settings. The suggested setting for the DS80PCI102 are EQ = 0x00, VOD = 1.2 Vp-p and DEM = 0 dB. Additional adjustments to increase the EQ or DEM setting should be performed to optimize the eye opening in the Rx partner. See the tables below for Pin Mode and SMBus Mode configurations.

**Table 11. Suggested Device Settings in Pin Mode**


| Channel  | Pin Mode Settings   |
|----------|---------------------|
| EQx[1:0] | 0, 0 (Level 1)      |
| DEMx     | Float, R (Level 10) |

**Table 12. Suggested Device Settings in SMBus Slave Mode**

| Register | Write Value | Comments                                  |
|----------|-------------|-------------------------------------------|
| 0x06     | 0x18        | Enables SMBus Slave Mode Register Control |
| 0x0F     | 0x00        | Set CHA EQ to 0x00.                       |
| 0x25     | 0xAD        | Set CHA VOD to 101'b (1.2 Vp-p).          |
| 0x11     | 0x00        | Set CHA DEM to 000'b (0 dB).              |
| 0x16     | 0x00        | Set CHB EQ to 0x00.                       |
| 0x2D     | 0xAD        | Set CHB VOD to 101'b (1.2 Vp-p).          |
| 0x18     | 0x00        | Set CHB DEM to 000'b (0 dB).              |

### 8.2 Typical Application

The DS80PCI102 extends PCB trace and cable reach in PCIe Gen1, 2 and 3 applications by applying equalization to compensate for the insertion loss of the trace or cable. In Gen 3 mode, the device aids specifically in the equalization link training to improve the margin and overall eye inside the Rx. The DS80PCI102 can be used on the motherboard, mid plane (riser card), end-point target cards, and active cable assemblies. The capability of the DS80PCI102 performance is shown in the following two test setup connections.

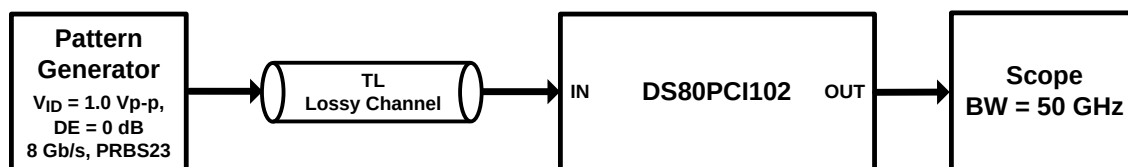

**Figure 10. Test Setup Connections Diagram**

## Typical Application (continued)



**Figure 11. Test Setup Connections Diagram**

### 8.2.1 Design Requirements



As with any high speed design, there are many factors which influence the overall performance. The following list indicates critical areas for consideration during design.

- Use 100-Ω impedance traces. Length matching on the P and N traces should be done on the single-end segments of the differential pair.
- Use uniform trace width and trace spacing for differential pairs.
- Place AC-coupling capacitors near to the receiver end of each channel segment to minimize reflections.
- For Gen3, AC-coupling capacitors of 220 nF are recommended, maximum body size is 0402, and add cutout void on GND plane below the landing pad of the capacitor in order to reduce parasitic capacitance to GND.
- Back-drill connector vias and signal vias to minimize stub length.
- Use Reference plane vias to ensure a low inductance path for the return current.


### 8.2.2 Detailed Design Procedure

The DS80PCI102 should be placed at an offset location and close to the Rx with respect to the overall channel attenuation. The suggested settings are recommended as a starting point for most applications. Once these settings are configured, additional adjustments of the DS80PCI102 EQ or DE may be required to optimize the repeater performance. The CTLE and DFE coefficient in the Rx can also be adjusted to further improve the eye opening.

### 8.2.3 Application Curves

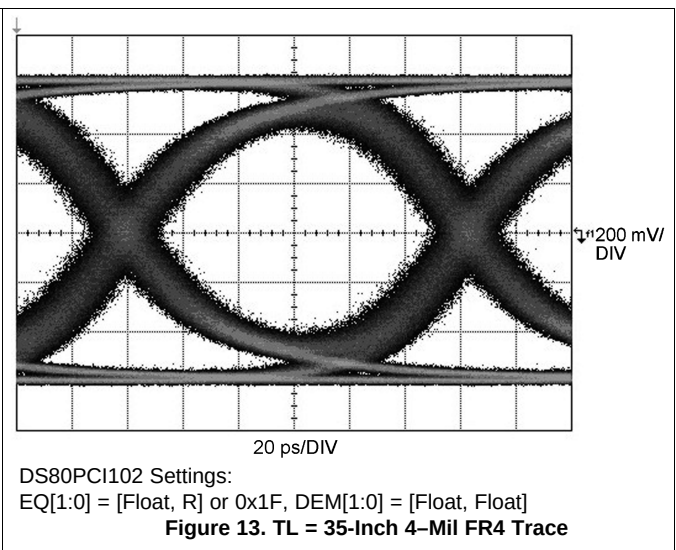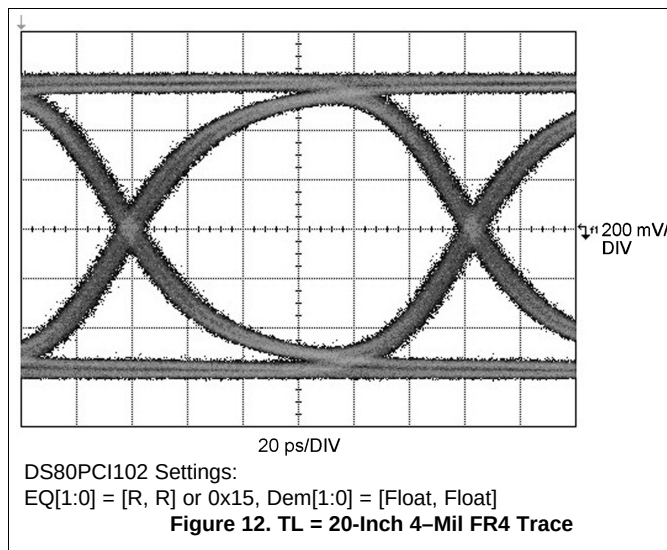

## Typical Application (continued)

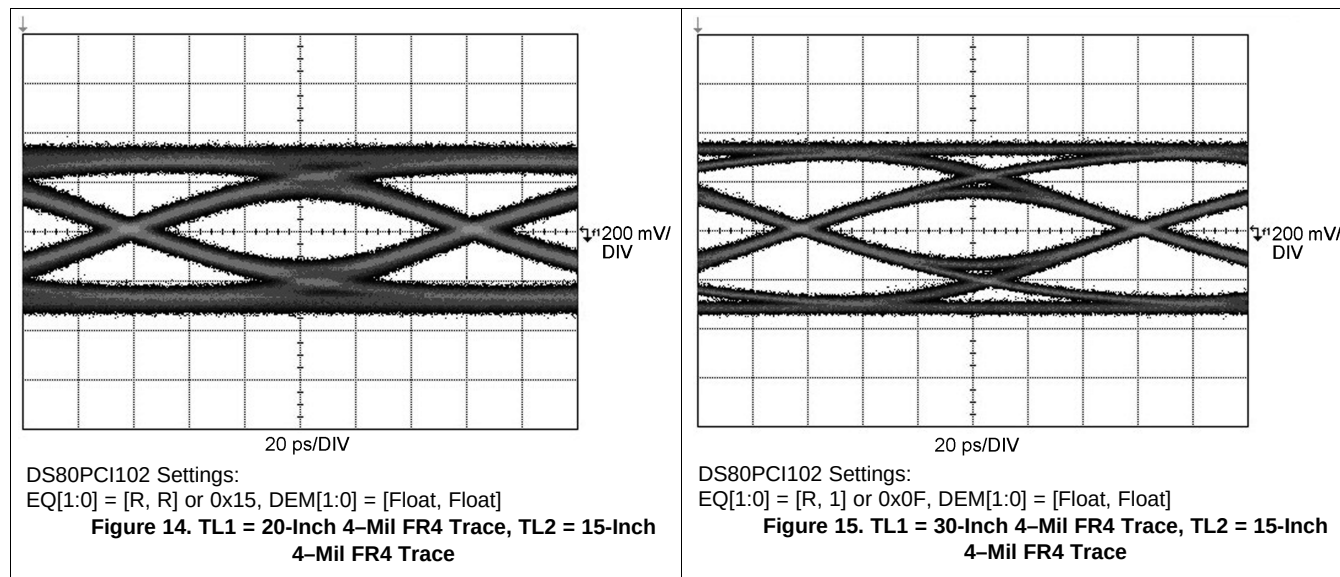

## 9 Power Supply Recommendations

### 9.1 3.3-V or 2.5-V Supply Mode Operation

The DS80PCI102 has an optional internal voltage regulator to provide the 2.5-V supply to the device. In 3.3-V mode, the VIN pin = 3.3 V is used to supply power to the device and the VDD pins should be left open. The internal regulator will provide the 2.5 V to the VDD pins of the device and a 0.1- $\mu$ F capacitor is needed at each of the five VDD pins for power supply de-coupling (total capacitance should be  $\leq 0.5 \mu$ F), and the VDD pins should be left open. The VDD\_SEL pin must be tied to GND to enable the internal regulator. In 2.5-V mode, the VIN pin should be left open and 2.5-V supply must be applied to the VDD pins. The VDD\_SEL pin must be left open (no connect) to disable the internal regulator.

The DS80PCI102 can be configured for 2.5-V operation or 3.3-V operation. The lists below outline required connections for each supply selection.

#### 3.3-V Mode of Operation

1. Tie VDD\_SEL = 0 with 1-k $\Omega$  resistor to GND.
2. Feed 3.3-V supply into VIN pin. Local 1.0- $\mu$ F decoupling at VIN is recommended.
3. See information on VDD bypass below.
4. SDA and SCL pins should connect pullup resistor to VIN
5. Any 4-Level input which requires a connection to "Logic 1" should use a 1-k $\Omega$  resistor to VIN


#### 2.5-V Mode of Operation

6. VDD\_SEL = Float
7. VIN = Float
8. Feed 2.5-V supply into VDD pins.
9. See information on VDD bypass below.
10. SDA and SCL pins connect pullup resistor to VDD for 2.5-V uC SMBus IO
11. SDA and SCL pins connect pullup resistor to VDD for 3.3-V uC SMBus IO
12. Any 4-Level input which requires a connection to "Logic 1" should use a 1-k $\Omega$  resistor to VIN

#### NOTE

Note: The DAP (bottom solder pad) is the GND connection.

### 3.3-V or 2.5-V Supply Mode Operation (continued)

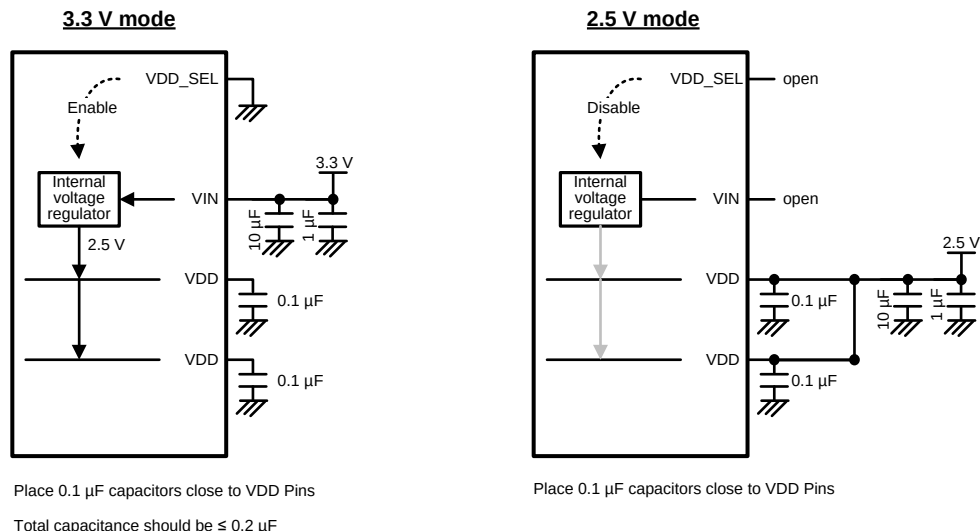

**Figure 16. 3.3 V or 2.5 V Supply Connection Diagram**

## 9.2 Power Supply Bypass

Two approaches are recommended to ensure that the DS80PCI102 is provided with an adequate power supply bypass. First, the supply (VDD) and ground (GND) pins should be connected to power planes routed on adjacent layers of the printed circuit board. Second, careful attention to supply bypassing through the proper use of bypass capacitors is required. A 0.1 μF bypass capacitor should be connected to each VDD pin such that the capacitor is placed as close as possible to the device. Small body size capacitors (such as 0402) reduce the parasitic inductance of the capacitor and also help in placement close to the VDD pin. If possible, the layer thickness of the dielectric should be minimized so that the VDD and GND planes create a low inductance supply with distributed capacitance.

## 10 Layout

### 10.1 Layout Guidelines

The differential inputs and outputs are designed with 100-Ω differential terminations. Therefore, they should be connected to interconnects with controlled differential impedance of approximately 85-110 Ω. It is preferable to route differential lines primarily on one layer of the board, particularly for the input traces. The use of vias should be avoided if possible. If vias must be used, they should be used sparingly and must be placed symmetrically for each side of a given differential pair. Whenever differential vias are used, the layout must also provide for a low inductance path for the return currents as well. Route the differential signals away from other signals and noise sources on the printed circuit board. To minimize the effects of crosstalk, a 5:1 ratio or greater should be maintained between inter-pair spacing and trace width. See AN-1187 *Leadless Leadframe Package (LLP) Application Report (SNOA401)* for additional information on QFN (WQFN) packages.

The DS80PCI102 pinout promotes easy high speed routing and layout. To optimize DS80PCI102 performance refer to the following guidelines:

1. Place local VIN and VDD capacitors as close as possible to the device supply pins. Often the best location is directly under the DS80PCI102 pins to reduce the inductance path to the capacitor. In addition, bypass capacitors may share a via with the DAP GND to minimize ground loop inductance.
2. Differential pairs going into or out of the DS80PCI102 should have adequate pair-to-pair spacing to minimize crosstalk.
3. Use return current via connections to link reference planes locally. This ensures a low inductance return current path when the differential signal changes layers.
4. Optimize the via structure to minimize trace impedance mismatch.
5. Place GND vias around the DAP perimeter to ensure optimal electrical and thermal performance.
6. Use small body size AC coupling capacitors when possible — 0402 or smaller size is preferred. The AC coupling capacitors should be placed closer to the Rx on the channel.

Figure 17 depicts different transmission line topologies which can be used in various combinations to achieve the optimal system performance. Impedance discontinuities at the differential via can be minimized or eliminated by increasing the swell around each hole and providing for a low inductance return current path. When the via structure is associated with thick backplane PCB, further optimization such as back drilling is often used to reduce the detrimental high-frequency effects of stubs on the signal path.

### 10.2 Layout Example

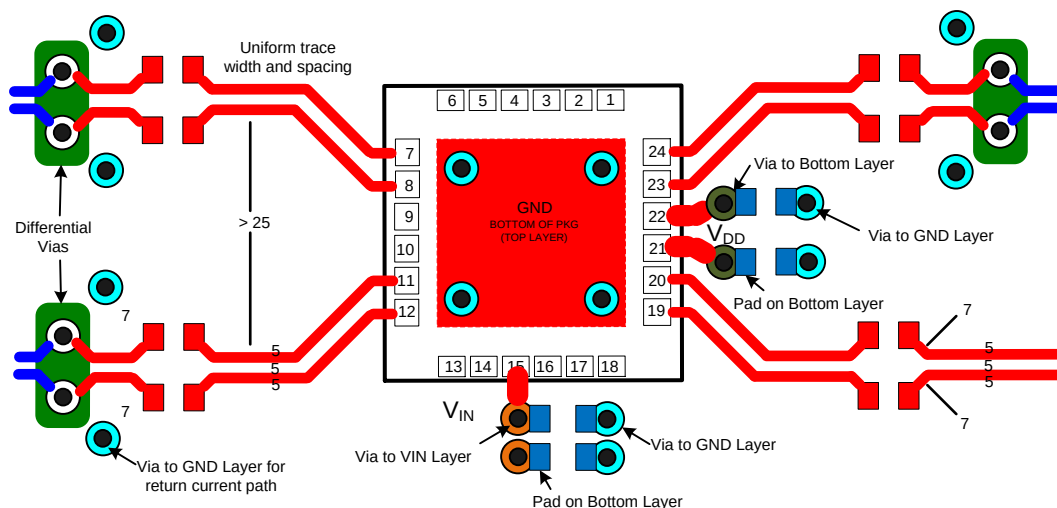


Figure 17. Typical Routing Options



## 11 Device and Documentation Support

### 11.1 Device Support

#### 11.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 11.2 Documentation Support

#### 11.2.1 Related Documentation

For related documentation see the following:

- *Absolute Maximum Ratings for Soldering*, [SNOA549](#)

### 11.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](#), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 11.4 Trademarks

E2E is a trademark of Texas Instruments.

PCI-Express is a trademark of PCI-SIG.

All other trademarks are the property of their respective owners.

### 11.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 11.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



## PACKAGING INFORMATION

| Orderable part number              | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">DS80PCI102SQ/NOPB</a>  | Active        | Production           | WQFN (RTW)   24 | 1000   SMALL T&R      | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | PCI102              |
| DS80PCI102SQ/NOPB.A                | Active        | Production           | WQFN (RTW)   24 | 1000   SMALL T&R      | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | PCI102              |
| DS80PCI102SQ/NOPB.B                | Active        | Production           | WQFN (RTW)   24 | 1000   SMALL T&R      | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | PCI102              |
| <a href="#">DS80PCI102SQE/NOPB</a> | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | PCI102              |
| DS80PCI102SQE/NOPB.A               | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | PCI102              |
| DS80PCI102SQE/NOPB.B               | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | PCI102              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.




## TAPE AND REEL INFORMATION

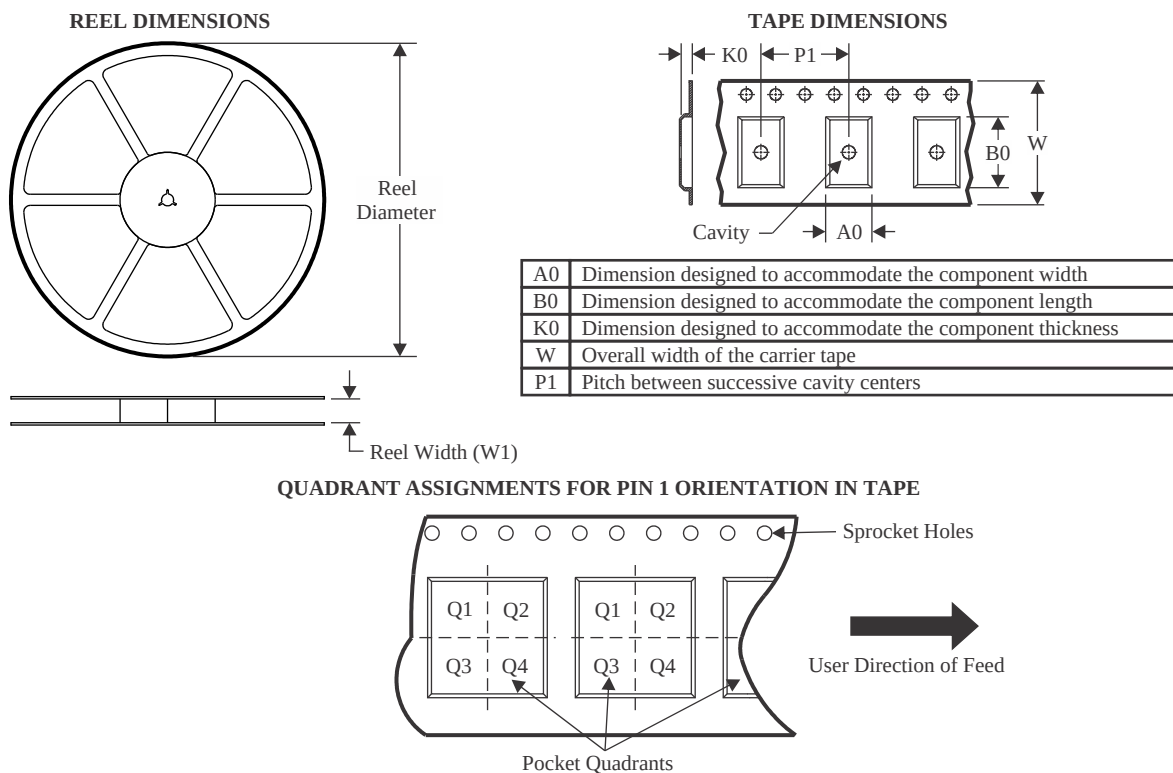

\*All dimensions are nominal



| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DS80PCI102SQ/NOPB  | WQFN         | RTW             | 24   | 1000 | 177.8              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| DS80PCI102SQE/NOPB | WQFN         | RTW             | 24   | 250  | 177.8              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

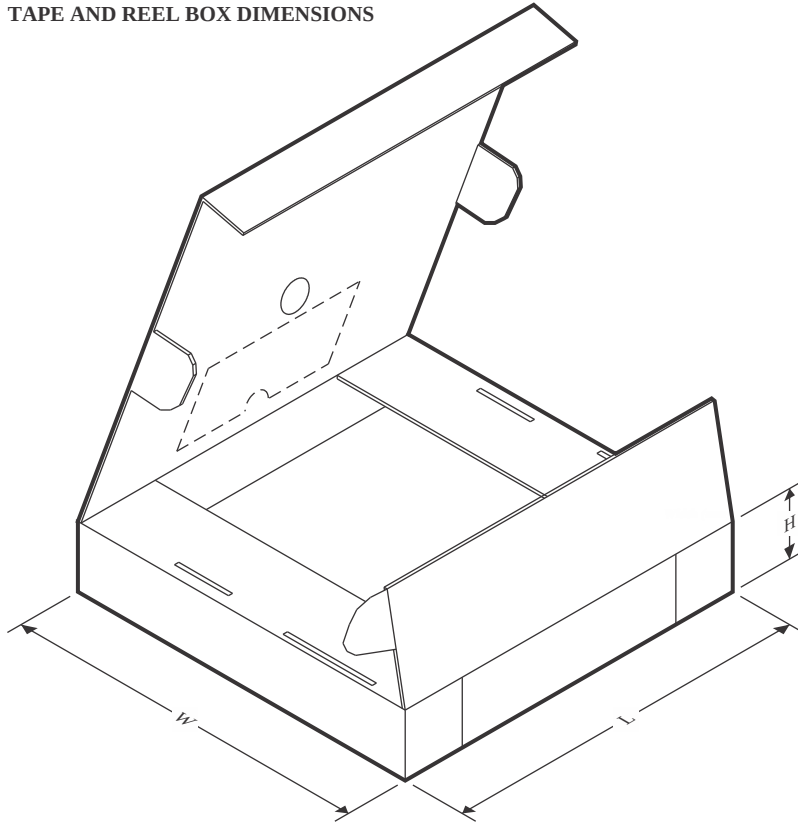

\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DS80PCI102SQ/NOPB  | WQFN         | RTW             | 24   | 1000 | 208.0       | 191.0      | 35.0        |
| DS80PCI102SQE/NOPB | WQFN         | RTW             | 24   | 250  | 208.0       | 191.0      | 35.0        |

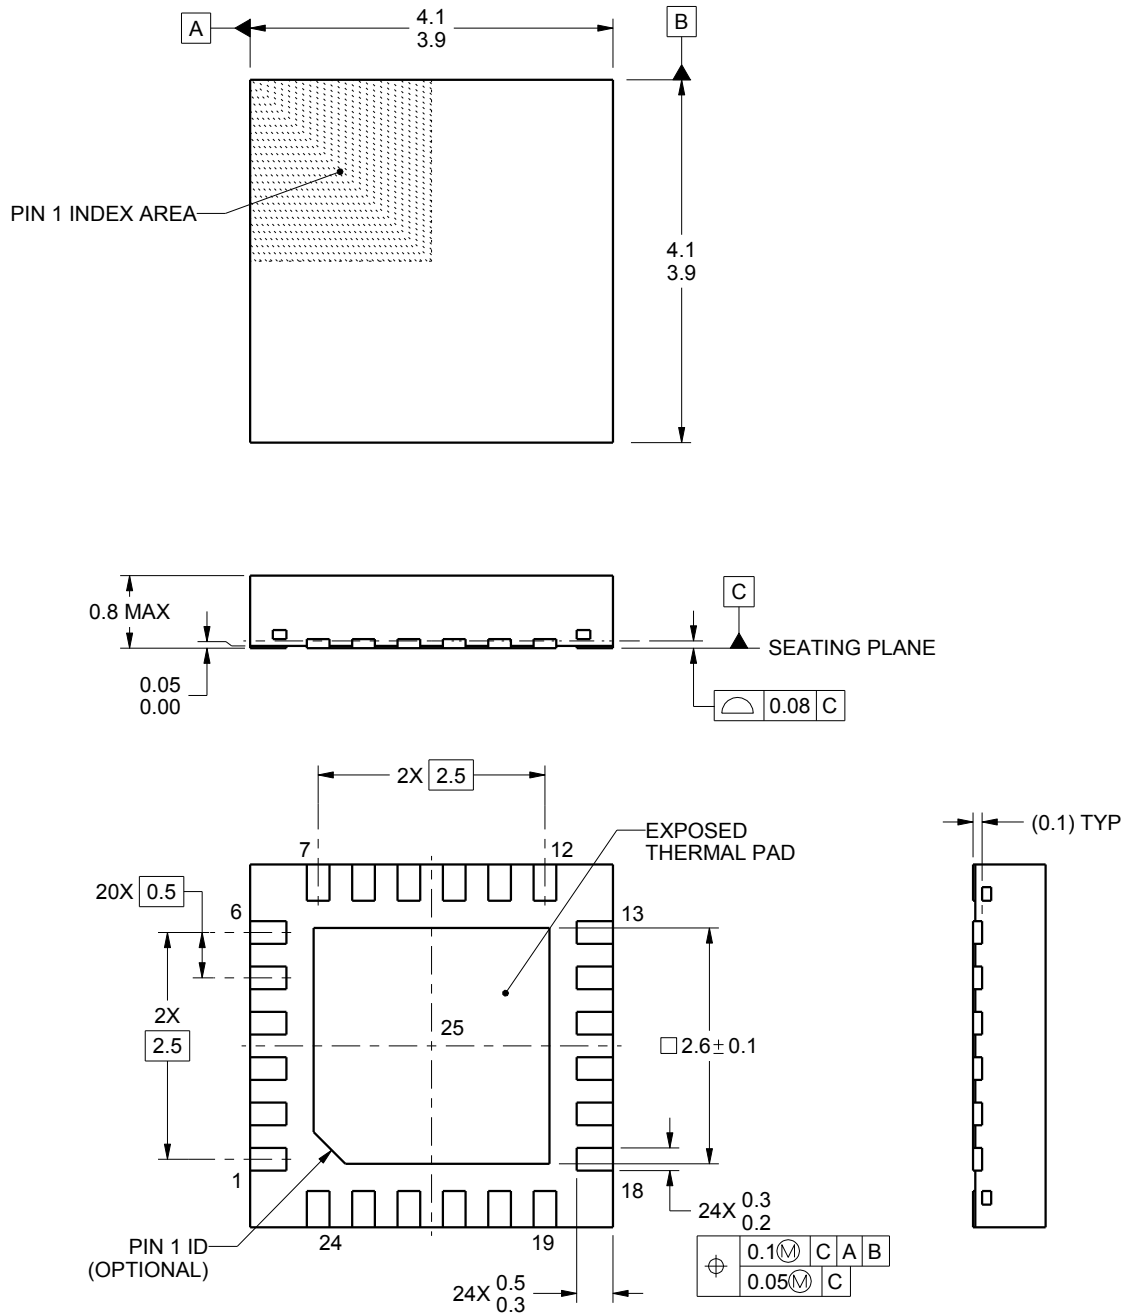

4222815/A 03/2016

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT



RTW0024A

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

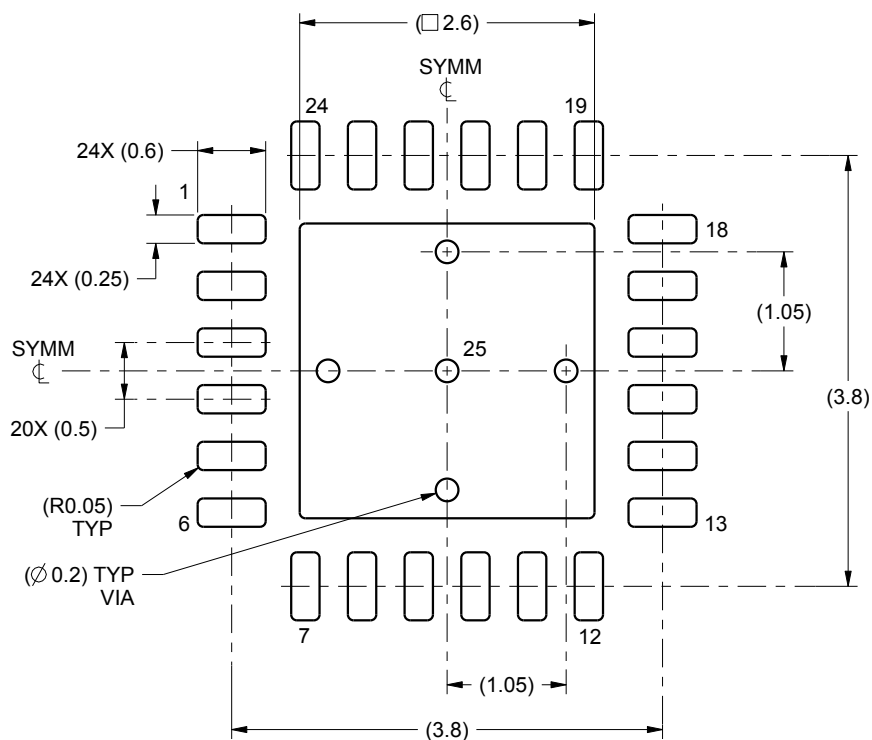

LAND PATTERN EXAMPLE  
SCALE:15X

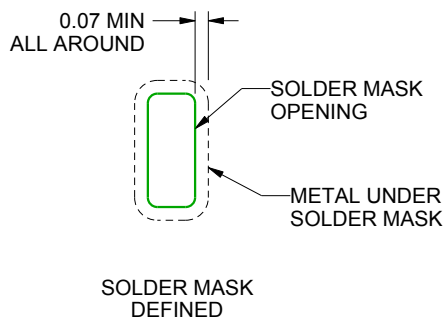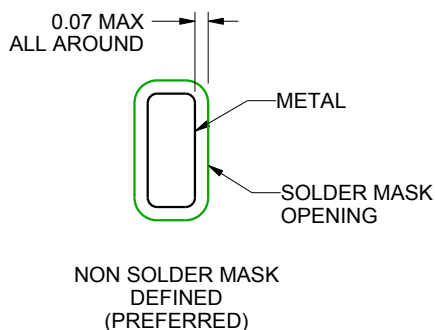

SOLDER MASK DETAILS

4222815/A 03/2016

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).

# EXAMPLE STENCIL DESIGN

RTW0024A

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

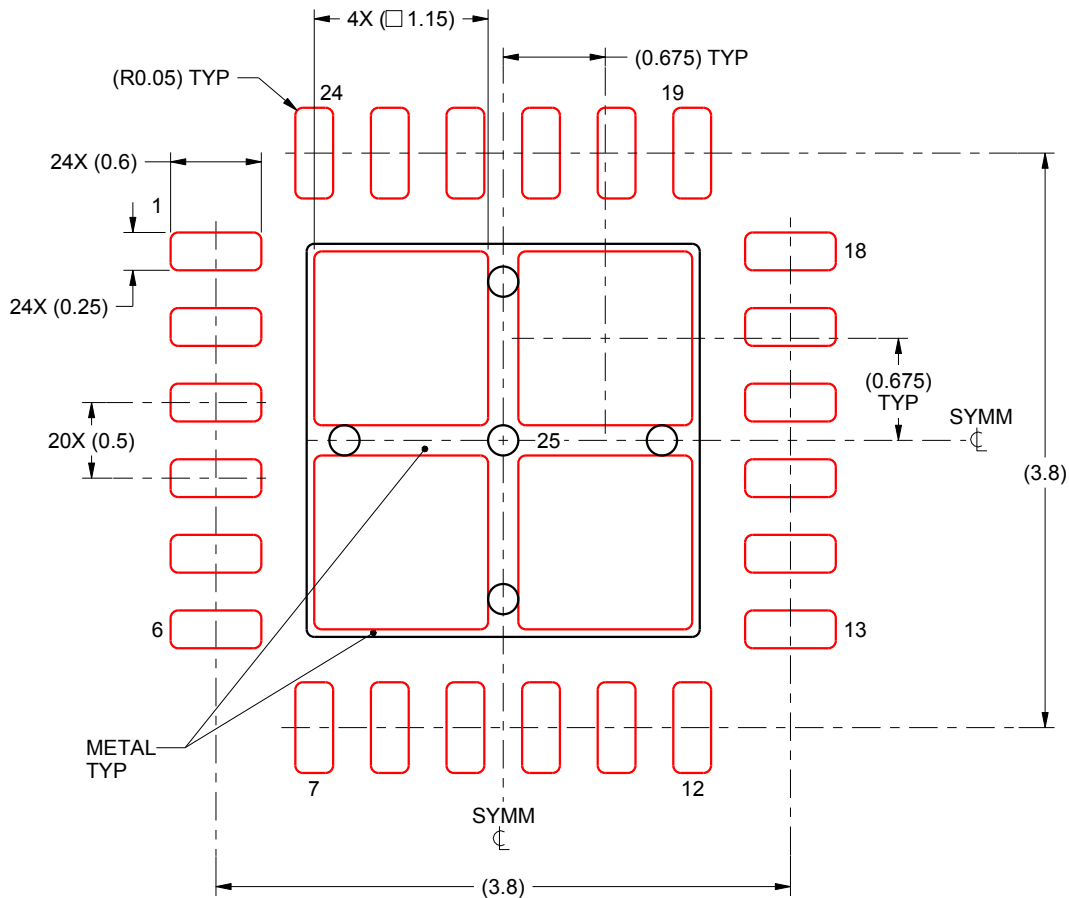

**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 25:  
78% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:20X

4222815/A 03/2016

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated