





INA500 SBOSAI9B – DECEMBER 2023 – REVISED MARCH 2024


INA500 Cost and Size Optimized, Low Power, 1.7V to 5.5V Difference Amplifier with >1MΩ Input Impedance

1 Features

- · Optimized for small-size, low-power, and low-cost
- >1MΩ Ultra-high input impedance
- Three gain options (G = 1, 0.50, and 0.25)
- · Good precision for 8-bit to 12-bit systems
 - CMRR: 87dB (typical)
 - Gain error: ±0.01% (typical)
 - Offset voltage: ±0.70mV (typical)
- Space saving 0.8mm² X2SON package
- Bandwidth: 125kHz (typical)
- Drives 200pF with <20% overshoot (typical)
- Low guiescent current: 13.5µA (typical)
- Supply range: 1.7V (±0.85V) to 5.5V (±2.75V)
- Specified temperature range: –40°C to 125°C

2 Applications

- · Battery cell formation and test equipment
- String inverter
- · EV charging station power module
- · Battery energy storage system
- Power tools
- Industrial AC-DC
- · Wearable fitness and activity monitor



NOTE: The input resistors (R_{IN}) values are 1.08M Ω for INA500A, 1.44M Ω for INA500B, and 1.68M Ω for INA500C.

INA500 Simplified Internal Schematic

3 Description

The INA500 is a difference amplifier with integrated op-amp and matched resistors that offers three gain options. The INA500A version offers gain option of 1, while the INA500B and INA500C versions offer gain options of 0.50 and 0.25 respectively.

These are voltage sensing INAs in difference amplifier configuration with high input impedance of >1M Ω and low quiescent current of 13.5µA. The device achieves 75dB of minimum CMRR and an accurate ±0.05% of maximum gain error, along with 3.5mV of maximum offset (referred to output) in G = 1 configuration. The device can handle up to 27.5V (±13.75V) of input common-mode voltage in G = 0.25 with 5.5V (±2.75V) of supply voltage. The combination of specifications noted above are designed for a variety of level translation and battery monitoring applications.

The precision matched integrated resistors of the INA500 saves BOM costs and board space by removing the need for precise and low tolerance external resistors. The INA500 can interface directly to low-speed, 8-bit to 12-bit, analog-to-digital converters (ADC) and is an excellent choice for replacing discrete implementation of difference amplifiers built with commodity amplifiers and discrete resistors. The INA500 is offered in standard 6-pin packages such as SOT-23 and SC70 as well as the space saving, X2SON package.

Package Information

- uokugo mormuuon								
PART NUMBER ⁽¹⁾	VERSION	PACKAGE ⁽²⁾	PACKAGE SIZE ⁽⁴⁾					
		DCK (SC70, 6)	2.1mm × 1.25mm					
	Α	DBV (SOT-23, 6)	2.9mm × 2.8mm					
		DTQ (X2SON, 6) (3)	1mm × 0.8mm					
	В	DCK (SC70, 6)	2.1mm × 1.25mm					
INA500		DBV (SOT-23, 6)	2.9mm × 2.8mm					
		DTQ (X2SON, 6) (3)	1mm × 0.8mm					
	С	DCK (SC70, 6)	2.1mm × 1.25mm					
		DBV (SOT-23, 6)	2.9mm × 2.8mm					
		DTQ (X2SON, 6) (3)	1mm × 0.8mm					

- (1) See Device Comparison
- (2) For more information, see Section 11
- (3) This package is preview only.
- (4) The package size (length × width) is a nominal value and includes pins, where applicable



Table of Contents

1 Features1	7.4 Device Functional Modes	30
2 Applications1	8 Application and Implementation	31
3 Description1	8.1 Application Information	
4 Device Comparison Table2	8.2 Typical Applications	
5 Pin Configuration and Functions2	8.3 Power Supply Recommendations	
6 Specifications4	8.4 Layout	35
6.1 Absolute Maximum Ratings4	9 Device and Documentation Support	
6.2 ESD Ratings 4	9.1 Device Support	
6.3 Recommended Operating Conditions4	9.2 Documentation Support	
6.4 Thermal Information4	9.3 Receiving Notification of Documentation Updates	36
6.5 Electrical Characteristics - INA500A5	9.4 Support Resources	36
6.6 Electrical Characteristics - INA500B7	9.5 Trademarks	36
6.7 Electrical Characteristics - INA500C9	9.6 Electrostatic Discharge Caution	36
6.8 Typical Characteristics11	9.7 Glossary	36
7 Detailed Description25	10 Revision History	36
7.1 Overview	11 Mechanical, Packaging, and Orderable	
7.2 Functional Block Diagram25	Information	37
7.3 Feature Description26		

4 Device Comparison Table

		NO. OF	PACKAGE LEADS			
DEVICE	VERSION	CHANNELS	SOT-23 DBV	SC70 DCK	X2SON DTQ ⁽¹⁾	
INA500	A	1	6	6	6	
	В	1	6	6	6	
	С	1	6	6	6	

(1) Package is preview only.

5 Pin Configuration and Functions




Figure 5-1. INA500 DCK Package, 6-Pin SC70 (Top View)

Table 5-1. Pin Functions

PIN		TYPE ⁽¹⁾	DESCRIPTION
NAME	SC70	TYPE(1)	DESCRIPTION
IN-	3	I	Negative (inverting) input
IN+	1	I	Positive (non-inverting) input
OUT	4	0	Output
REF	5	I	Reference input
V-	2	_	Negative supply
V+	6	_	Positive supply

(1) I = input, O = output

Product Folder Links: INA500




Figure 5-2. INA500 DBV Package, 6-Pin SOT-23 (Top View)

Table 5-2. Pin Functions

PIN		TYPE(1)	DESCRIPTION		
NAME	SOT-23	TYPE(1)	DESCRIPTION		
IN-	4	I	Negative (inverting) input		
IN+	3	I	Positive (noninverting) input		
OUT	1	0	Output		
REF	5	I	Reference input		
V-	2	_	Negative supply		
V+	6	_	Positive supply		




Figure 5-3. INA500 DTQ Package, 6-Pin X2SON (Top View)

Table 5-3. Pin Functions

P	IN	TYPE ⁽¹⁾	DESCRIPTION
NAME	X2SON	IYPE	DESCRIPTION
IN-	3	I	Negative (inverting) input
IN+	4	I	Positive (noninverting) input
OUT	1	0	Output
REF	5	I	Reference input
V-	2	_	Negative supply
V+	6	_	Positive supply

(1) I = input, O = output



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Supply voltage, $V_S = (V+) - (V-)$	Single Supply		6	V
Supply voltage, vs = (v+) = (v-)	Dual Supply		±3	V
Signal input pins	Current	-10	10	mA
Output short-circuit ⁽²⁾		Continuo	ous	
Operating Temperature, T _A		-55	150	
Junction Temperature, T _J			150	°C
Storage Temperature, T _{stg}		-65	150	

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾		\/
V _(ESD)		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±1500	, v

⁽¹⁾ JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Supply voltage V _S = (V+) – (V–)	Single-supply	1.7	5.5	V
	Dual-supply	±0.85	±2.75	V
C _{BYP}	Bypass capacitor on the power supply pins ⁽¹⁾	0.1		μF
Specified temperature	Specified temperature	-40	125	°C

⁽¹⁾ For C_{BYP}, use low-ESR ceramic capacitors between each supply pin and ground. Only one C_{BYP} is sufficient for single supply operation. Ensure that C_{BYP} is placed as close to the device as possible and the supply trace routes through C_{BYP} before reaching the supply pin.

6.4 Thermal Information

			INA500		
	THERMAL METRIC ⁽¹⁾	DCK (SC70)	DBV (SOT-23)	DTQ (X2SON)	UNIT
		6 PINS	6 PINS	6 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	200.2	195.9	TBD	°C/W
R ₀ JC(top)	Junction-to-case (top) thermal resistance	127.6	115.5	TBD	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	59.6	77.1	TBD	°C/W
Ψлт	Junction-to-top characterization parameter	42.6	52.2	TBD	°C/W
ΨЈВ	Junction-to-board characterization parameter	59.4	76.8	TBD	°C/W
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	n/a	n/a	TBD	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application note.

Product Folder Links: INA500

⁽²⁾ Short-circuit to V_S / 2.

²⁾ JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.



6.5 Electrical Characteristics - INA500A

For $V_S = (V+) - (V-) = 1.7V$ to 5.5V (±0.85V to ±2.75V) at $T_A = 25^{\circ}$ C, $V_{REF} = V_S / 2$, G = 1, $R_L = 100k\Omega$ connected to $V_S / 2$, $V_{CM} = (V_{IN+} + V_{IN-}) / 2 = V_S / 2$, $V_{IN} = (V_{IN+} - V_{IN-}) = 0$ V and $V_{OLIT} = V_S / 2$ (unless otherwise noted)

	PARAMETER	2, $V_{IN} = (V_{IN+} - V_{IN-}) = 0V$ ar TEST CONDIT		MIN	TYP	MAX	UNIT	
OFFSET	•				·			
	Offset voltage, RTO ⁽³⁾	V _S = 5.5V	T _A = 25°C		±0.70	±3.5	mV	
/ _{oso}	Offset voltage over T, RTO ⁽³⁾	V _S = 5.5V	T _A = -40°C to 125°C			±3.6	mV	
	Offset temp drift, RTO ⁽³⁾	V _S = 5.5V	T _A = -40°C to 125°C		±1.8	8.5	μV/°C	
PSRR	Power-supply rejection ratio	V _S = 1.7V to 5.5V	T _A = 25°C		40	175	μV/V	
NPUT II	MPEDANCE							
R _{IN-DM}	Differential Resistance				2160		kΩ	
R _{IN-CM}	Common-mode Resistance				1080		kΩ	
NPUT V	OLTAGE							
V _{CM}	Input common-mode Range	V _{REF} = V _S / 2		2*(V–) – V _{REF}		2*(V+) – V _{REF}	V	
CMRR DC	Common-mode rejection ratio, RTO ⁽³⁾	V_{CM} = [2*(V-) - V_{REF}] to [2*(V+) - V_{REF} - 1.4V], High CMRR region	V _S = 5.5V, V _{REF} = V _S / 2	75	87		dB	
CMRR DC	Common-mode rejection ratio, RTO ⁽³⁾	V_{CM} = [2*(V-) - V_{REF}] to [2*(V+) - V_{REF}], Rail-to-Rail CMRR region	V _S = 5.5V, V _{REF} = V _S / 2	62	77		dB	
NOISE V	/OLTAGE							
۵	Output voltage noise		f = 1kHz		310		nV/√Hz	
NI	density		f = 10kHz		308		11 7 11 12	
E _{NI}	Output voltage noise	f _B = 0.1Hz to 10Hz			8		μV_{PP}	
GAIN								
GE	Gain error ⁽²⁾	$V_{REF} = V_S / 2$	$V_O = (V-) + 0.1V$ to $(V+) - 0.1V$		±0.01	±0.05	%	
	Gain drift vs temperature ⁽²⁾		$T_A = -40^{\circ}\text{C to } 125^{\circ}\text{C}$			±1	ppm/°C	
OUTPUT	Γ							
∕он	Positive rail headroom	$R_L = 10k\Omega$ to $V_S / 2$			10.5	15	mV	
V _{OL}	Negative rail headroom	$R_L = 10k\Omega$ to $V_S / 2$			8.5	15	mV	
C _L Drive	Load capacitance drive	V _O = 100mV step, Overshoot < 20%	6		200		pF	
Z _O	Closed-loop output impedance	f = 10kHz			200		Ω	
sc	Short-circuit current	V _S = 5.5V			±33		mA	
REQUE	ENCY RESPONSE							
ВW	Bandwidth, -3dB	$V_{IN} = 10 \text{mV}_{pk-pk}$			125		kHz	
ΓHD + N	Total harmonic distortion + noise	V_S = 5.5V, V_{CM} = 2.75V, V_O = 1V _{RM} f = 1kHz, 80kHz measurement BW			0.02		%	
EMIRR	Electro-magnetic interference rejection ratio	f = 1GHz, V _{IN_EMIRR} = 100mV			100		dB	
SR	Slew rate	$V_S = 5V$, $V_O = 2V$ step			0.20		V/µs	
	Settling time	To 0.1%, $V_S = 5.5V$, $V_{STEP} = 2V$, C_L			18			
s	Cetting time	To 0.01%, V _S = 5.5V, V _{STEP} = 2V, C _L = 10pF			33		II.S	
S	Settling time	To 0.1%, V _S = 5.5V, V _{OUT_STEP} = 4V, C _L = 10pF			26		μs	
	Setting time	To 0.01%, $V_S = 5.5V$, $V_{OUT_STEP} = 4$	IV, C _L = 10pF		43			
	Overload recovery	V _{STEP} = V _S / G			23.2		μs	
REFERE	NCE INPUT							
REF - V _{IN}	Input voltage range	V _S = 5.5V		(V-)		(V+)	V	
REF - G	Reference gain to output				1		V/V	



6.5 Electrical Characteristics - INA500A (continued)

For $V_S = (V+) - (V-) = 1.7V$ to 5.5V (±0.85V to ±2.75V) at $T_A = 25^{\circ}$ C, $V_{REF} = V_S / 2$, G = 1, $R_L = 100k\Omega$ connected to $V_S / 2$, $V_{CM} = (V_{IN+} + V_{IN-}) / 2 = V_S / 2$, $V_{IN} = (V_{IN+} - V_{IN-}) = 0$ V and $V_{OUT} = V_S / 2$ (unless otherwise noted)

	PARAMETER	TES'	T CONDITIONS	MIN	TYP	MAX	UNIT
REF - GE	Reference gain error ⁽²⁾	V _S = 5.5V			±0.005	±0.02	%
POWER	SUPPLY						
Vs	Power-supply voltage	Dual-supply		±0.85		±2.75	V
		V _S = 1.7V			14.5		μA
I _Q Quiescent current	V _S = 5.5V			13.5	18.5		
		V _S = 5.5V	T _A = -40°C to 125°C			19.5	μΑ

- (1) Offset drifts are uncorrelated.
- (2) Minimum and maximum values are specified by characterization.
- (3) RTO stands for Referred to Output

Submit Document Feedback



6.6 Electrical Characteristics - INA500B

For $V_S = (V+) - (V-) = 1.7V$ to 5.5V (±0.85V to ±2.75V) at $T_A = 25^{\circ}C$, $V_{MID} = [(V+) + (V-)] / 2$, G = 0.5, $V_{REF} = V_{MID}$, $R_L = 100k\Omega$ connected to V_{MID} , $V_{CM} = [(V_{IN+}) + (V_{IN-})] / 2 = V_{MID}$, $V_{IN} = (V_{IN+}) - (V_{IN-}) = 0V$ and $V_{OUT} = V_{MID}$ (unless otherwise noted)

noted)	PARAMETER	TEST CONDITION	ONS	MIN	TYP	MAX	UNIT
OFFSET		1201 00/(2)11				mr ux	0
	Offset voltage, RTO	V _S = 5.5V	T _A = 25°C		±0.50	±2.6	mV
V _{oso}	Offset voltage over T,	V _S = 5.5V	T _A = -40°C to 125°C			±2.7	mV
	Offset temp drift, RTO ⁽¹⁾	V _S = 5.5V	T _A = -40°C to 125°C		±1.4	6.6	μV/°C
PSRR	Power-supply rejection ratio	V _S = 1.7V to 5.5V	T _A = 25°C		40	150	μV/V
INPUT IN	MPEDANCE						
R _{IN-DM}	Differential Resistance				2880		kΩ
R _{IN-CM}	Common-mode Resistance				1080		kΩ
INPUT V	OLTAGE						
V _{CM}	Input common-mode Range	V _{REF} = V _{MID}		3*(V-) - 2*(V _{REF})		3*(V+) – 2*(V _{REF})	V
CMRR DC	Common-mode rejection ratio, RTO	V _{CM} = [3*(V-) - 2*(V _{REF})] to [3*(V+) - 2*(V _{REF}) - 2.1]	V _S = 5.5V, V _{REF} = V _{MID}	77	89		dB
CMRR DC	Common-mode rejection ratio, RTO	$V_{CM} = [3*(V-) - 2*(V_{REF})]$ to $[3*(V+) - 2*(V_{REF})]$	V _S = 5.5V, V _{REF} = V _{MID}	62	79		dB
NOISE V	OLTAGE						
	Output voltage noise		f = 1kHz		200		\/\/\ \\\
e _{NI}	density		f = 10kHz		190		nV/√ Hz
E _{NI}	Output voltage noise	f _B = 0.1Hz to 10Hz			7.5		μV _{PP}
GAIN							
GE	Gain error ⁽²⁾	V _{REF} = V _{MID}	V _O = (V–) + 0.1V to (V+) – 0.1V		±0.003	±0.075	%
	Gain drift vs temperature ⁽²⁾	G = 0.5	T _A = -40°C to 125°C			±1	ppm/°C
OUTPUT	-						
V _{OH}	Positive rail headroom	$R_L = 10k\Omega$ to V_{MID}			10	25	mV
V_{OL}	Negative rail headroom	$R_L = 10k\Omega$ to V_{MID}			8	20	mV
C _L Drive	Load capacitance drive	V _O = 100mV step, Overshoot < 20%			120		pF
Zo	Closed-loop output impedance	f = 10kHz			165		Ω
I _{SC}	Short-circuit current	V _S = 5.5V			±35		mA
FREQUE	NCY RESPONSE						
BW	Bandwidth, –3dB		$V_{IN} = 10 \text{mV}_{pk-pk}$		135		kHz
THD + N	Total harmonic distortion + noise	V_S = 5.5V, V_{CM} = 2.75V, V_O = 1V _{RMS} , f = 1kHz, 80kHz measurement BW	, R _L = 100kΩ		0.017		%
EMIRR	Electro-magnetic interference rejection ratio	f = 1GHz, V _{IN_EMIRR} = 100mV			95		dB
SR	Slew rate	V _S = 5V, V _O = 2V step			0.18		V/µs
	Settling time	To 0.1% , $V_S = 5.5V$, $V_{STEP} = 2V$, $C_L =$	To 0.1%, V _S = 5.5V, V _{STEP} = 2V, C _L = 10pF		21		
t _S	To 0.01%, $V_S = 5.5V$, $V_{STEP} = 2V$, $C_L = 10pF$		= 10pF		34		μs
'5	Settling time To 0.1%, $V_S = 5.5V$, V_{OUT_ST}		C _L = 10pF		30		μο
	Octaing and	To 0.01%, $V_S = 5.5V$, $V_{OUT_STEP} = 4V$, $C_L = 10pF$			45		
	Overload recovery	$V_{STEP} = V_S / G$			24		μs
	NCE INPUT		-				
REF - V _{IN}	Input voltage range	V _S = 5.5V		(V-)		(V+)	V
REF - G	Reference gain to output				1		V/V



For $V_S = (V+) - (V-) = 1.7V$ to 5.5V (±0.85V to ±2.75V) at $T_A = 25^{\circ}C$, $V_{MID} = [(V+) + (V-)] / 2$, G = 0.5, $V_{REF} = V_{MID}$, $R_L = 100k\Omega$ connected to V_{MID} , $V_{CM} = [(V_{IN+}) + (V_{IN-})] / 2 = V_{MID}$, $V_{IN} = (V_{IN+}) - (V_{IN-}) = 0V$ and $V_{OUT} = V_{MID}$ (unless otherwise noted)

	PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
REF - GE	Reference gain error ⁽²⁾	V _S = 5.5V			±0.002	±0.025	%
POWER	SUPPLY	ı				•	
Vs	Power-supply voltage	Dual-supply		±0.85		±2.75	V
IQ	Quiescent current	V _S = 1.7V			15		μA
	Quiescent current	V _S = 5.5V			14	19	
ΙQ		V _S = 5.5V	T _A = -40°C to 125°C			20	μΑ

⁽¹⁾ Offset drifts are uncorrelated.

⁽²⁾ Minimum and maximum values are specified by characterization.

6.7 Electrical Characteristics - INA500C

For $V_S = (V+) - (V-) = 1.7V$ to 5.5V (±0.85V to ±2.75V) at $T_A = 25^{\circ}C$, $V_{MID} = [(V+) + (V-)] / 2$, G = 0.25, $V_{REF} = V_{MID}$, $R_L = 100k\Omega$ connected to V_{MID} , $V_{CM} = [(V_{IN+}) + (V_{IN-})] / 2 = V_{MID}$, $V_{IN} = (V_{IN+}) - (V_{IN-}) = 0V$ and $V_{OUT} = V_{MID}$ (unless otherwise noted)

noted)	PARAMETER	TEST CONDITION	ONS	MIN	TYP	MAX	UNIT
OFFSET		TEST CONDITIO	ONS	MIIIA	111	IVIAA	ONIT
OFFSEI	Offset voltage, RTO	V _S = 5.5V	T _A = 25°C		±0.40	±2.2	mV
V _{oso}	Offset voltage over T,	V _S = 5.5V	$T_A = -40^{\circ}\text{C to } 125^{\circ}\text{C}$		10.40	±2.3	mV
000	Offset temp drift, RTO ⁽¹⁾	V _S = 5.5V	T _A = -40°C to 125°C		±1.1	5.5	μV/°C
DCDD	Power-supply rejection						•
PSRR	ratio	V _S = 1.7V to 5.5V	T _A = 25°C		40	130	μV/V
	MPEDANCE		Г				
R _{IN-DM}	Differential Resistance				3360		kΩ
R _{IN-CM}	Common-mode Resistance				1050		kΩ
NPUT V	OLTAGE						
V _{CM}	Input common-mode Range	V _{REF} = V _{MID}		5*(V-) - 4*(V _{REF})		5*(V+) – 4*(V _{REF})	٧
CMRR DC	Common-mode rejection ratio, RTO	$V_{CM} = [5*(V-) - 4*(V_{REF})] \text{ to } [5*(V+) - 4*(V_{REF}) - 3.5]$	V _S = 5.5V, V _{REF} = V _{MID}	77.7	85		dB
CMRR DC	Common-mode rejection ratio, RTO	$V_{CM} = [5*(V-) - 4*(V_{REF})]$ to $[5*(V+) - 4*(V_{REF})]$	V _S = 5.5V, V _{REF} = V _{MID}	70			dB
NOISE V	OLTAGE		I I				
	Output voltage noise		f = 1kHz		150		
e _{NI}	density		f = 10kHz		140		nV/√Hz
E _{NI}	Output voltage noise	f _B = 0.1Hz to 10Hz			7.5		μV _{PP}
GAIN			l				
GE	Gain error ⁽²⁾	V _{REF} = V _{MID}	V _O = (V-) + 0.1 V to (V+) - 0.1V		±0.003	±0.1	%
	Gain drift vs temperature ⁽²⁾	G = 0.5	T _A = -40°C to 125°C			±1	ppm/°C
OUTPUT	-						
V _{OH}	Positive rail headroom	$R_L = 10k\Omega$ to V_{MID}			15	25	mV
V _{OL}	Negative rail headroom	$R_L = 10k\Omega$ to V_{MID}			15	20	mV
C _L Drive	Load capacitance drive	V _O = 100mV step, Overshoot < 20%			100		pF
Z _O	Closed-loop output impedance	f = 10kHz			180		Ω
I _{sc}	Short-circuit current	V _S = 5.5V			±30		mA
FREQUE	NCY RESPONSE		1			<u>'</u>	
BW	Bandwidth, -3dB		$V_{IN} = 10 \text{mV}_{pk-pk}$		160		kHz
THD + N	Total harmonic distortion + noise	V_S = 5.5V, V_{CM} = 2.75V, V_O = 1 V_{RMS} , f = 1kHz, 80kHz measurement BW	R _L = 100kΩ		0.017		%
EMIRR	Electro-magnetic interference rejection ratio	f = 1GHz, V _{IN_EMIRR} = 100mV			105		dB
SR	Slew rate	V _S = 5V, V _O = 2V step			0.19		V/µs
	0-44:	To 0.1%, V _S = 5.5V, V _{STEP} = 2V, C _L = 10pF			20		
	Settling time To 0.01%, $V_S = 5.5V$, $V_{STEP} =$		= 10pF		32		
ts	To 0.1%, V _S = 5.5V, V _{OUT STEP} = 4V, C _L =		C _L = 10pF		26		μs
	Settling time	To 0.01%, V _S = 5.5V, V _{OUT_STEP} = 4V, C _L = 10pF			40		
	Overload recovery	V _{STEP} = V _S / G			23.2		μs
REFERE	NCE INPUT	•					
REF - V _{IN}	Input voltage range	V _S = 5.5V, V _{REF} = V _{MID}		(V-)		(V+)	V
REF - G	Reference gain to output				1		V/V



For $V_S = (V+) - (V-) = 1.7V$ to 5.5V (±0.85V to ±2.75V) at $T_A = 25^{\circ}C$, $V_{MID} = [(V+) + (V-)] / 2$, G = 0.25, $V_{REF} = V_{MID}$, $R_L = 100k\Omega$ connected to V_{MID} , $V_{CM} = [(V_{IN+}) + (V_{IN-})] / 2 = V_{MID}$, $V_{IN} = (V_{IN+}) - (V_{IN-}) = 0V$ and $V_{OUT} = V_{MID}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
REF - GE	Reference gain error ⁽²⁾	V _S = 5.5V			±0.002	±0.02	%
POWER	SUPPLY				-		
Vs	Power-supply voltage	Dual-supply		±0.85		±2.75	V
IQ	Quiescent current	V _S = 1.7V			15		μA
IQ	Quiescent current	V _S = 5.5V			14	19	
		V _S = 5.5V	T _A = -40°C to 125°C			20	μA

⁽¹⁾ Offset drifts are uncorrelated.

Submit Document Feedback

⁽²⁾ Minimum and maximum values are specified by characterization.

6.8 Typical Characteristics

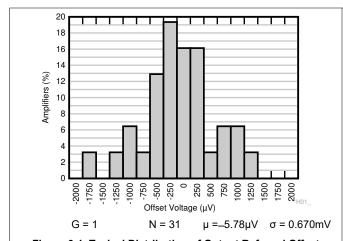


Figure 6-1. Typical Distribution of Output Referred Offset Voltage

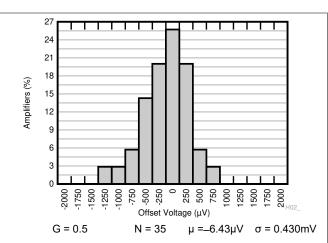


Figure 6-2. Typical Distribution of Output Referred Offset Voltage

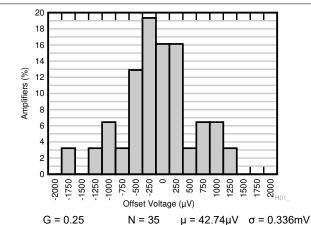


Figure 6-3. Typical Distribution of Output Referred Offset Voltage

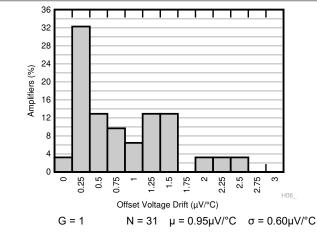
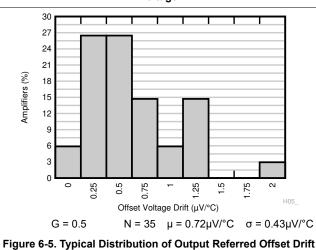


Figure 6-4. Typical Distribution of Output Referred Offset Drift




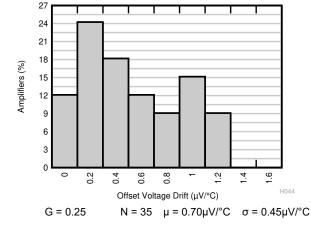



Figure 6-6. Typical Distribution of Output Referred Offset Drift



at $T_A = 25^{\circ}C$, $V_S = (V+) - (V-) = 5.5V$, $V_{IN} = (V_{IN+} - V_{IN-}) = 0V$, $R_L = 10k\Omega$, $C_L = 10pF$, $V_{REF} = V_S / 2$, $V_{CM} = (V_{IN+} + V_{IN-}) / 2 = V_S / 2$, $V_{OUT} = V_S / 2$ and G = 1 (unless otherwise noted)

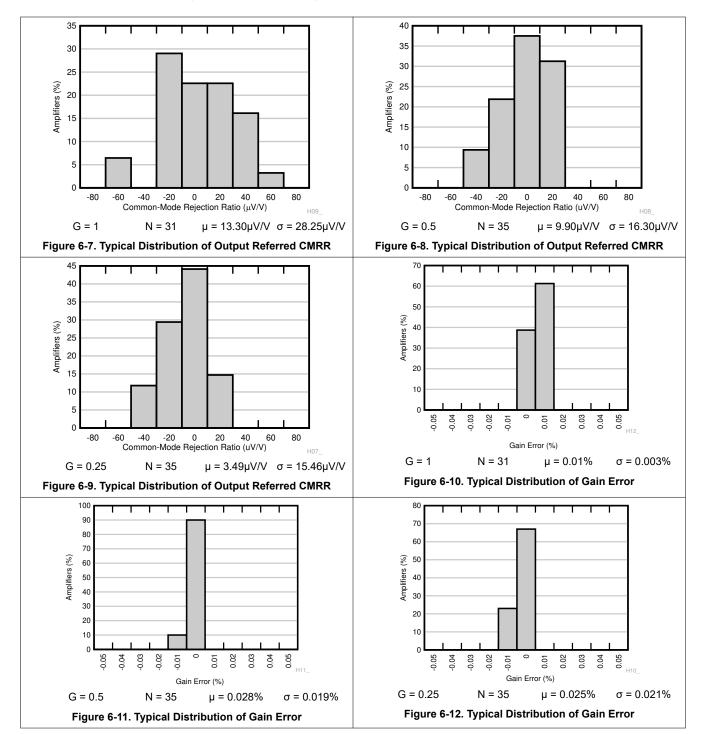

Submit Document Feedback

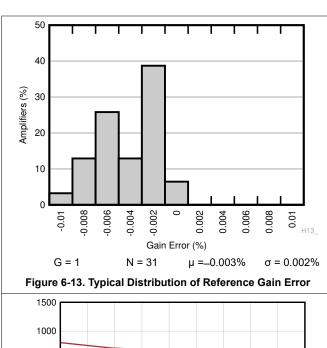

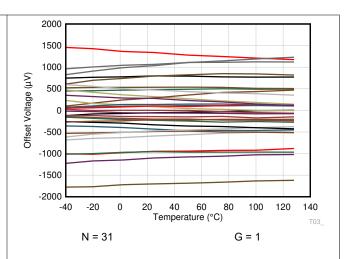
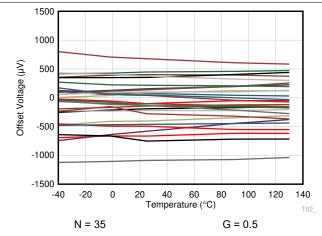


Figure 6-14. Output Referred Offset Voltage vs Temperature



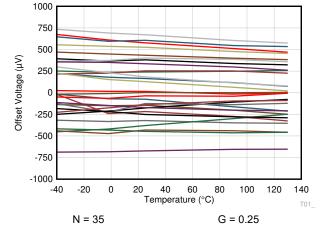
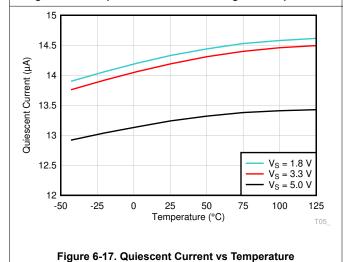


Figure 6-15. Output Referred Offset Voltage vs Temperature

Figure 6-16. Output Referred Offset Voltage vs Temperature



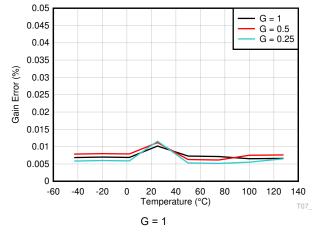


Figure 6-18. Gain Error vs Temperature



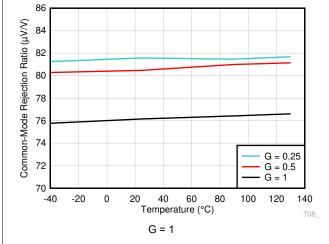


Figure 6-19. Output Referred CMRR vs Temperature

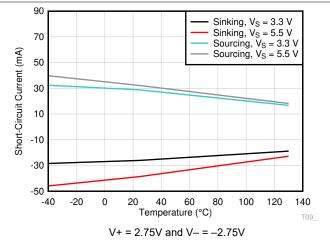


Figure 6-20. Short-Circuit Current vs Temperature

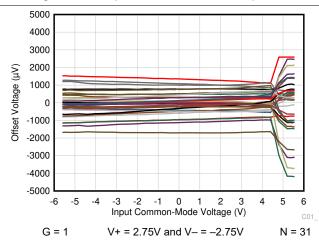


Figure 6-21. Output Referred Offset Voltage vs Input Common-Mode Voltage

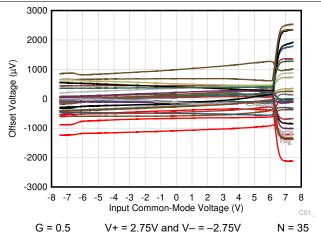


Figure 6-22. Output Referred Offset Voltage vs Input Common-Mode Voltage

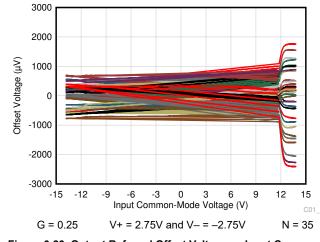


Figure 6-23. Output Referred Offset Voltage vs Input Common-Mode Voltage



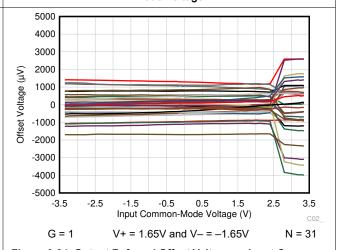


Figure 6-24. Output Referred Offset Voltage vs Input Common-Mode Voltage



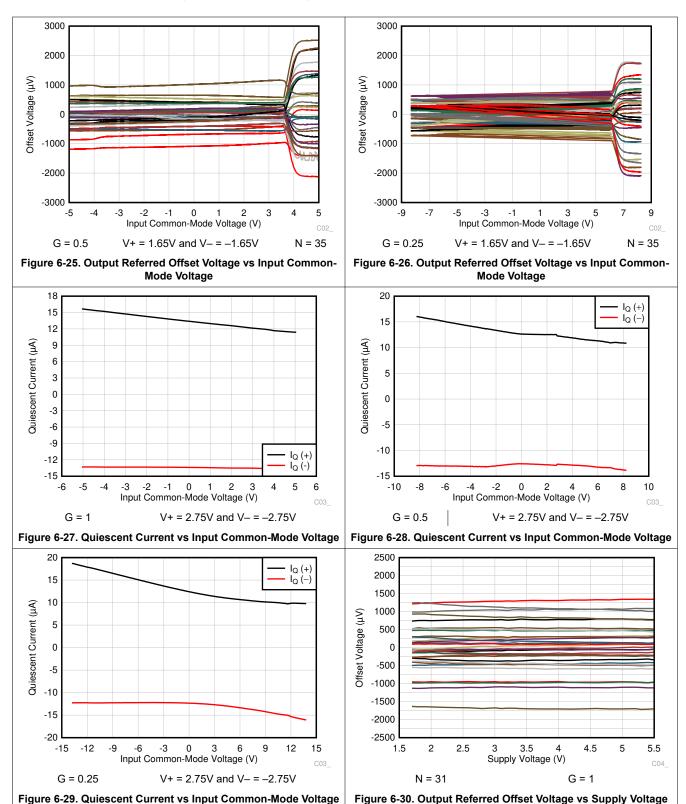

at $T_A = 25^{\circ}C$, $V_S = (V+) - (V-) = 5.5V$, $V_{IN} = (V_{IN+} - V_{IN-}) = 0V$, $R_L = 10k\Omega$, $C_L = 10pF$, $V_{REF} = V_S / 2$, $V_{CM} = (V_{IN+} + V_{IN-}) / 2 = V_S / 2$, $V_{OUT} = V_S / 2$ and G = 1 (unless otherwise noted)

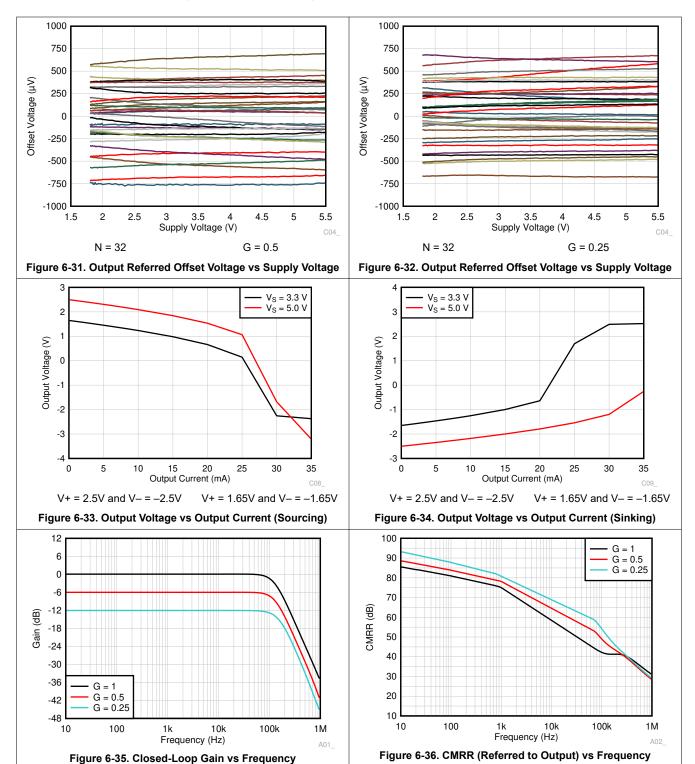

Submit Document Feedback

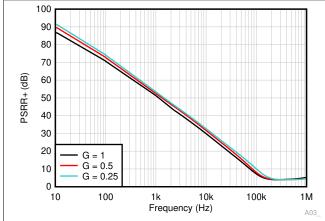


Figure 6-37. PSRR+ (Referred to Output) vs Frequency

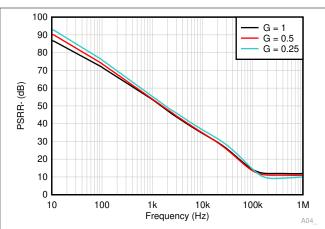


Figure 6-38. PSRR- (Referred to Output) Vs Frequency

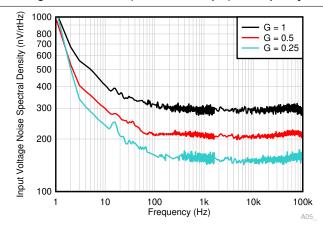


Figure 6-39. Output Referred Voltage Noise Spectral Density

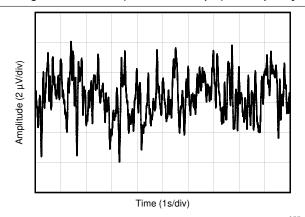


Figure 6-40. Output Referred 0.1 Hz to 10 Hz Voltage Noise in Time Domain

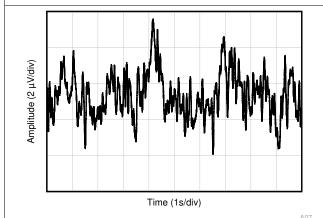


Figure 6-41. Output Referred 0.1 Hz to 10 Hz Voltage Noise in Time Domain


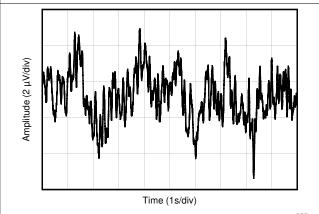



Figure 6-42. Output Referred 0.1 Hz to 10 Hz Voltage Noise in Time Domain




at $T_A = 25^{\circ}C$, $V_S = (V+) - (V-) = 5.5V$, $V_{IN} = (V_{IN+} - V_{IN-}) = 0V$, $R_L = 10k\Omega$, $C_L = 10pF$, $V_{REF} = V_S / 2$, $V_{CM} = (V_{IN+} + V_{IN-}) / 2 = V_S / 2$, $V_{OUT} = V_S / 2$ and G = 1 (unless otherwise noted)

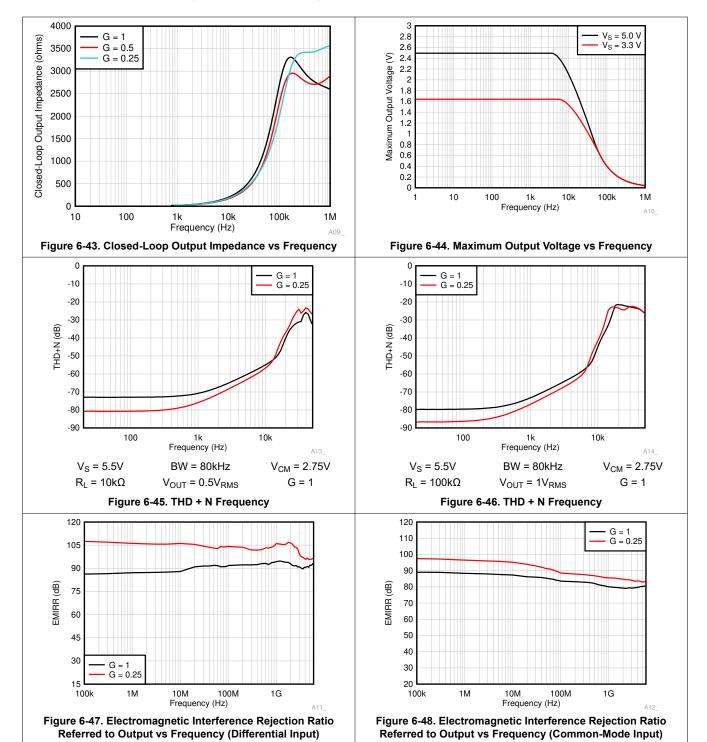


Submit Document Feedback

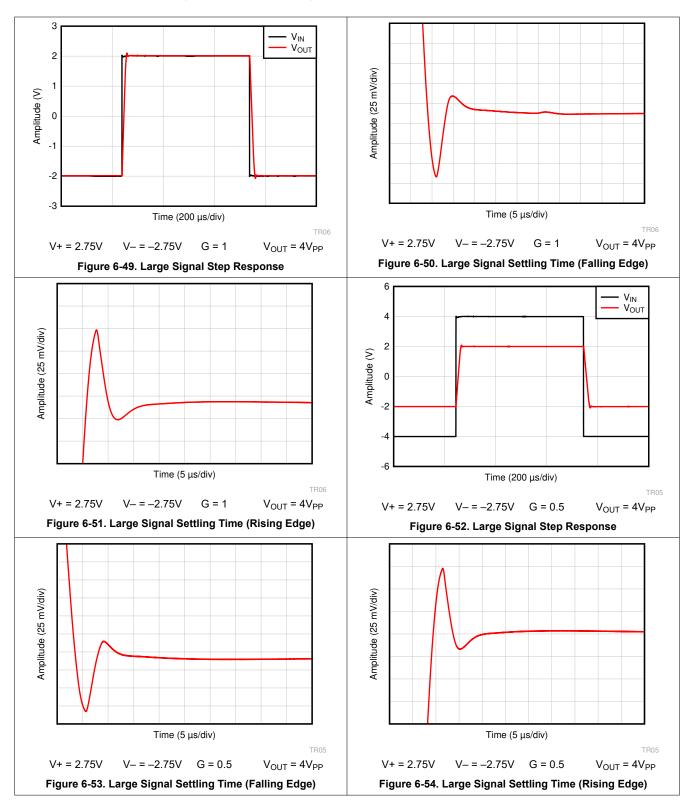



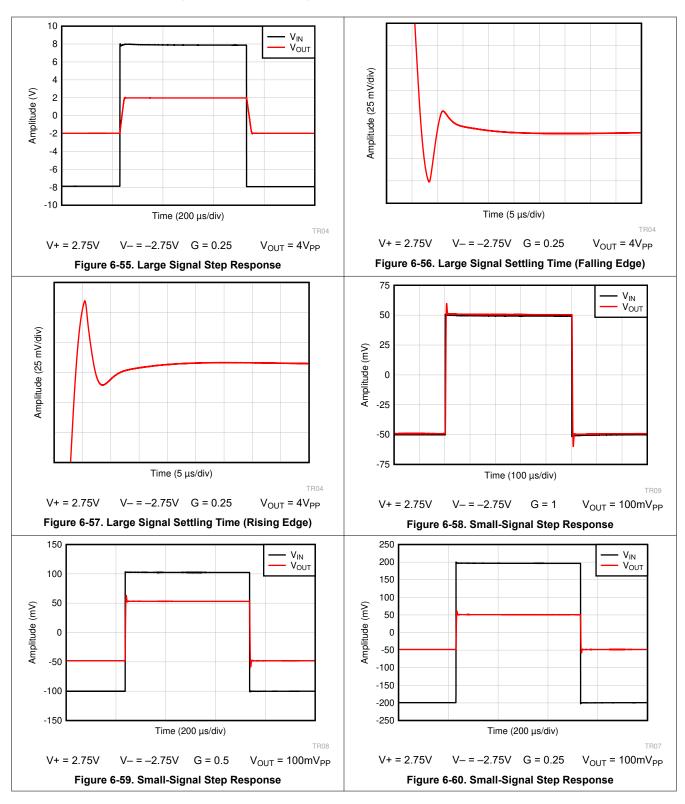

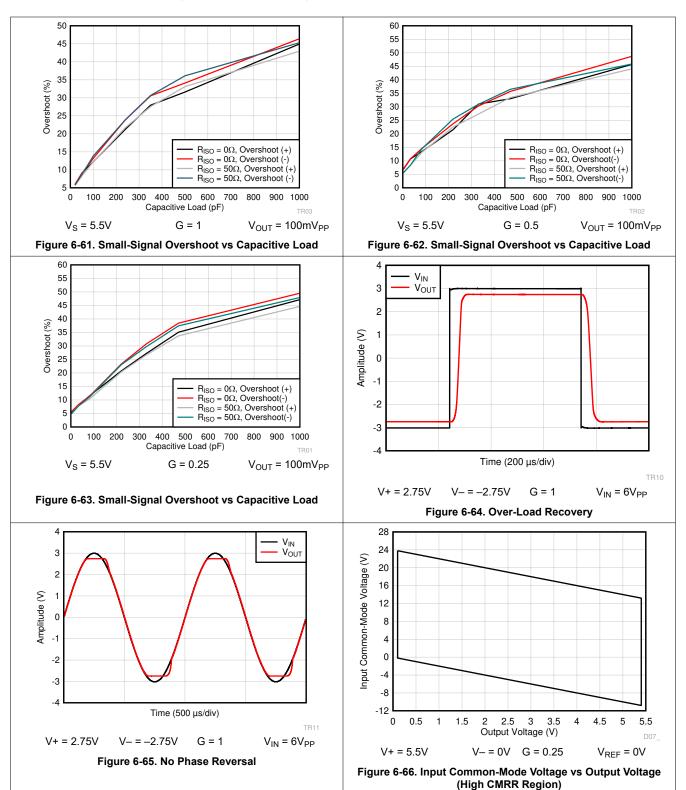



at $T_A = 25^{\circ}C$, $V_S = (V+) - (V-) = 5.5V$, $V_{IN} = (V_{IN+} - V_{IN-}) = 0V$, $R_L = 10k\Omega$, $C_L = 10pF$, $V_{REF} = V_S / 2$, $V_{CM} = (V_{IN+} + V_{IN-}) / 2 = V_S / 2$, $V_{OUT} = V_S / 2$ and G = 1 (unless otherwise noted)

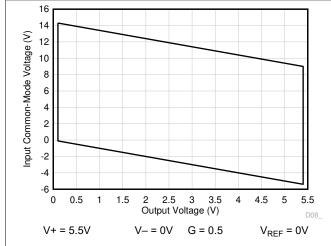


Figure 6-67. Input Common-Mode Voltage vs Output Voltage (High CMRR Region)

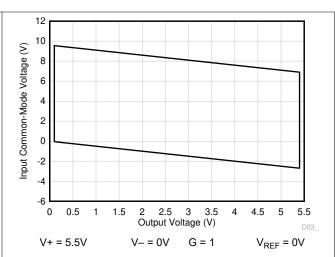


Figure 6-68. Input Common-Mode Voltage vs Output Voltage (High CMRR Region)

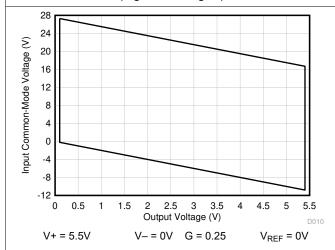


Figure 6-69. Input Common-Mode Voltage vs Output Voltage (Rail-to-Rail CMRR Region)

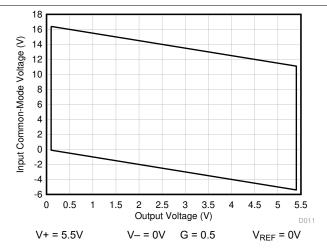


Figure 6-70. Input Common-Mode Voltage vs Output Voltage (Rail-to-Rail CMRR Region)

Submit Document Feedback

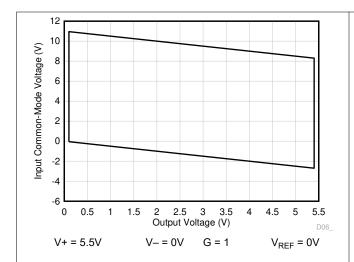


Figure 6-71. Input Common-Mode Voltage vs Output Voltage (Rail-to-Rail CMRR Region)

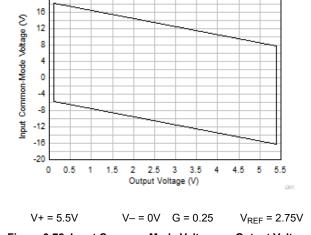


Figure 6-72. Input Common-Mode Voltage vs Output Voltage (High CMRR Region)

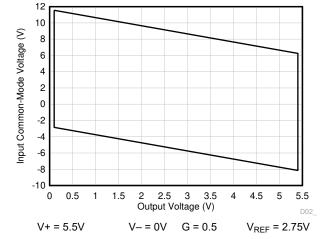


Figure 6-73. Input Common-Mode Voltage vs Output Voltage (High CMRR Region)

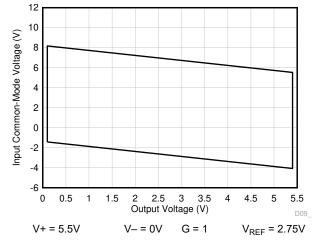


Figure 6-74. Input Common-Mode Voltage vs Output Voltage (High CMRR Region)



 $V_{REF} = 2.75V$

6.8 Typical Characteristics (continued)


at $T_A = 25^{\circ}C$, $V_S = (V+) - (V-) = 5.5V$, $V_{IN} = (V_{IN+} - V_{IN-}) = 0V$, $R_L = 10k\Omega$, $C_L = 10pF$, $V_{REF} = V_S / 2$, $V_{CM} = (V_{IN+} + V_{IN-}) / 2 = 10k\Omega$ $V_S / 2$, $V_{OUT} = V_S / 2$ and G = 1 (unless otherwise noted)

12

10

8

V + = 5.5V

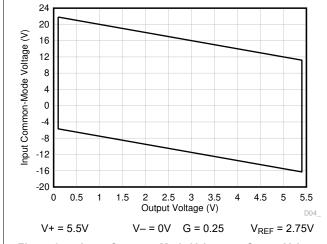


nput Common-Mode Voltage (V) 6 2 0 -2 -4 -6 -8 -10 3 3.5 0.5 1 1.5 2.5 4.5 5 0 Output Voltage (V)

Figure 6-75. Input Common-Mode Voltage vs Output Voltage (Rail-to-Rail CMRR Region)

Figure 6-76. Input Common-Mode Voltage vs Output Voltage (Rail-to-Rail CMRR Region)

V- = 0V G = 0.5

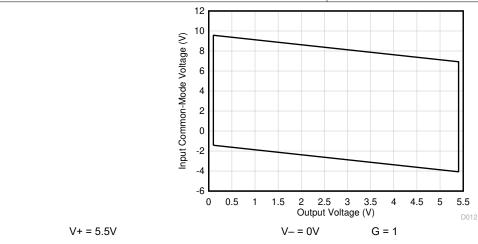

 $V_{REF} = 2.75V$

Figure 6-77. Input Common-Mode Voltage vs Output Voltage (Rail-to-Rail CMRR Region)

Submit Document Feedback

7 Detailed Description

7.1 Overview


The INA500 is a cost-effective, integrated difference amplifier designed to provide better performance, and smaller solution size for applications employing discrete implementation of difference amplifiers using commodity amplifiers and discrete resistors. The device incorporates one low power operational amplifier and four precision matched integrated resistors. INA500 can be used in 8-bit system without any calibration. Further calibration of offset and gain error at a system level can improve system resolution and accuracy, enabling use in 10-bit and 12-bit systems.

The INA500 is offered in three gain options across three variants. The INA500A version offers gain option of 1, while the INA500B and INA500C versions offer gain options of 0.50 and 0.25 respectively. Optimized for voltage sensing applications, the INA500 offers 75dB of minimum common-mode rejection ratio (CMRR) and $\pm 0.05\%$ of maximum gain error. A high input impedance of >1M Ω along with just 13.5 μ A of quiescent current is one of the key features of the INA500, which is very useful in single cell battery monitoring applications. All of the errors including offset, offset drift, CMRR and so forth are referred to the output so as to enable easy calculation of signal-to-noise ratio (SNR) and effective number of bits (ENOB) close to the analog-to-digital converter (ADC).

The INA500 gain options are designed for level translation applications that interface with a wide variety of differential (±12V, ±10V, ±5V, and so forth) and single-ended (0V to 12V, 0V to 10V, 0V to 5V, and so forth) high voltage signals into low voltage (0V to 5V, 0V to 3V, 0V to 2.5V, and so forth) ADCs. This would be useful in a variety of end equipments such as Battery testers, Solar string inverters, Power tools, Analog input modules, Battery energy storage systems and so forth where multiple high voltage signals and supply domains are required to be monitored. When routing signals differentially for common-mode noise immunity, the INA500 in G = 1 would be useful in converting the differential signal back to single-ended signal for easy interface to single-ended ADCs while rejecting the common-mode noise. The device also has enough bandwidth of 125kHz to directly drive low-speed (≤10ksps) ADCs.

The INA500 is an excellent choice for use in space-constrained applications such as wearable fitness and activity monitors, cell phones, and so forth as it is offered in ultra-small, 0.8mm² X2SON package. For easy use in industrial applications, it is also available in industry standard packages including SOT-23 and SC70.

7.2 Functional Block Diagram

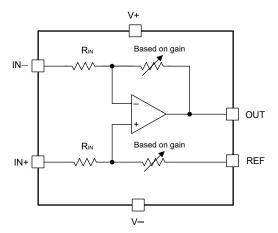

Note: Input resistors (R_{IN}) values are 1.08M Ω for INA500A, 1.44M Ω for INA500B, and 1.68M Ω for INA500C

Figure 7-1. INA500A Simplified Internal Schematic

7.3 Feature Description

7.3.1 Gain Options and Resistors

The gain value of the INA500 is given by the ratio of feedback resistor and input resistor. The gain options are offered across different device variants as provided in Table 7-1. While the typical value of input and feedback resistors are shown in the following table, it is important to note that these values can vary together by about ±15% while maintaining tighter gain error (tolerance) numbers as specified in the *Electrical Characteristics* table.

Table 7-1. Gain Selection Table

DEVICE	INPUT RESISTOR	FEEDBACK RESISTOR	GAIN
INA500A	1.08ΜΩ	1.08ΜΩ	1
INA500B	1.44ΜΩ	0.72ΜΩ	0.50
INA500C	1.68ΜΩ	0.42ΜΩ	0.25

7.3.1.1 Gain Error and Drift


Gain error in the INA500 is limited by the mismatch of the integrated precision resistors and is specified based on characterization results. Maximum gain error of $\pm 0.05\%$ can be expected for all gains of 1, 0.50, and 0.25. Gain drift in the INA500 is limited by the slight mismatch of the temperature coefficient of the integrated resistors. Since these integrated resistors are precision matched with low temperature coefficient resistors to begin with, the overall gain drift is much better in comparison to discrete implementation of the difference amplifiers built using external resistors. Maximum gain error of $\pm 0.02\%$ can be expected for inputs from the reference pin that sets output common-mode voltage.

7.3.2 Input Common-Mode Voltage Range

The INA500 difference-amplifier rejects the input common mode. The rejection capability is based on the matching of the internal resistors. The input voltage range of the INA500 is primarily dictated by the signal swing at the op-amp inputs. The INA500 input common-mode voltage range can extend well beyond the supply rails and is a major function of the gain configuration. To maximize performance, it is critical to keep the op-amp inside the INA500 within the linear range for a given combination of gain, reference voltage, and input common-mode voltage for a particular input differential voltage and output swing.

Input common-mode voltage (V_{CM}) vs output voltage graphs (V_{OUT}) in this section outlines the linear performance region of the INA500 for a particular combination of gain and reference voltage values. A good common-mode rejection can be expected when operating with in the limits of the V_{CM} versus V_{OUT} graph. The common-mode range for the INA500 in equation form is outlined in the *Electrical Characteristics* for each gain. The most common operating conditions are outlined graphically in the *Typical Characteristics* section. Figure 7-2 shows the region of operation where a minimum of 75dB CMRR can be achieved. This is referred as the high CMRR region. Figure 7-3 has much wider region of operation with a lower CMRR of 62dB minimum. This is because the input signal crosses over the transition region of the input pairs to achieve rail-to-rail operation.

Copyright © 2024 Texas Instruments Incorporated Product Folder Links: *INA500*

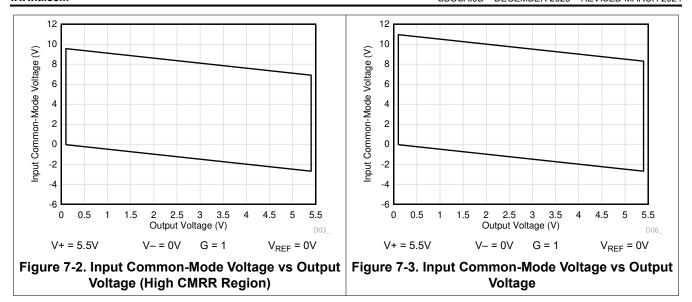

7.3.3 EMI Rejection

The INA500 uses integrated electromagnetic interference (EMI) filtering to reduce the effects of EMI from sources such as wireless communications and densely-populated boards with a mix of analog signal chain and digital components. EMI immunity can be improved with circuit design techniques; the INA500 benefits from these design improvements. Texas Instruments has the ability to accurately measure and quantify the immunity of an operational amplifier over a broad frequency spectrum extending from 10MHz to 6GHz. Figure 7-4 shows the results of this testing on the INA500 for differential EMI interference and Figure 7-5 shows the results of this testing on the INA500 for common-mode EMI interference. Table 7-2 provides the EMIRR IN+ values for the INA500 at particular frequencies commonly encountered in real-world applications. The EMI Rejection Ratio of Operational Amplifiers application report contains detailed information on the topic of EMIRR performance relating to op amps and is available for download from www.ti.com.

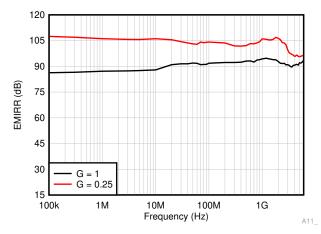


Figure 7-4. Electromagnetic Interference Rejection Ratio Referred to Output vs Frequency (Differential Input)



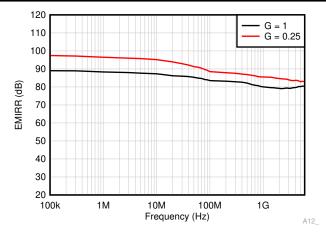


Figure 7-5. Electromagnetic Interference Rejection Ratio Referred to Output vs Frequency (Common-Mode Input)

Table 7-2. INA500 EMIRR for Frequencies of Interest

FREQUENCY	APPLICATION OR ALLOCATION	EMIRR DIFFERNTIAL	EMIRR COMMON-MODE
400MHz	Mobile radio, mobile satellite, space operation, weather, radar, ultra-high frequency (UHF) applications		83dB
900MHz	Global system for mobile communications (GSM) applications, radio communication, navigation, GPS (to 1.6GHz), GSM, aeronautical mobile, UHF applications	98dB	82dB
1.8GHz	GSM applications, mobile personal communications, broadband, satellite, L-band (1GHz to 2GHz)	101dB	80dB
2.4GHz	802.11b, 802.11g, 802.11n, Bluetooth®, mobile personal communications, industrial, scientific and medical (ISM) radio band, amateur radio and satellite, S-band (2GHz to 4GHz)	95dB	78dB
3.6GHz	Radiolocation, aero communication and navigation, satellite, mobile, S-band	88dB	79dB
5GHz	802.11a, 802.11n, aero communication and navigation, mobile communication, space and satellite operation, C-band (4GHz to 8GHz)	94dB	80dB

7.3.4 Typical Specifications and Distributions

Designers often have questions about a typical specification of an amplifier to design a more robust circuit. Due to natural variation in process technology and manufacturing procedures, every specification of an amplifier exhibits some amount of deviation from the ideal value, like an amplifier's offset voltage. These deviations often follow *Gaussian* (*bell curve*), or *normal* distributions, and circuit designers can leverage this information to guard band their system, even when there is not a minimum or maximum specification in the *Electrical Characteristics* table.

Product Folder Links: INA500

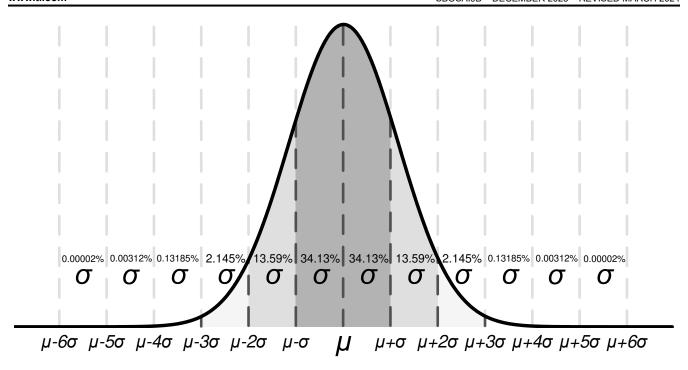


Figure 7-6. Ideal Gaussian Distribution

Figure 7-6 shows an example distribution, where μ , or mu, is the mean of the distribution, and where σ , or sigma, is the standard deviation of a system. For a specification that exhibits this kind of distribution, approximately two-thirds (68.26%) of all units can be expected to have a value within one standard deviation, or one sigma, of the mean (from $\mu - \sigma$ to $\mu + \sigma$).

Depending on the specification, values listed in the *typical* column of the *Electrical Characteristics* table are represented in different ways. As a general rule, if a specification naturally has a nonzero mean (for example, like gain bandwidth), then the typical value is equal to the mean (μ). However, if a specification naturally has a mean near zero (like offset voltage), then the typical value is equal to the mean plus one standard deviation (μ + σ) to most accurately represent the typical value.

This chart can be used to calculate approximate probability of a specification in a unit; for example, the INA500A typical offset voltage is $700\mu\text{V}$, so 68.2% of all INA500A devices are expected to have an offset from $-700\mu\text{V}$ to $+700\mu\text{V}$. At 4 σ ($\pm2800\mu\text{V}$), 99.9937% of the distribution has an offset voltage less than $\pm2800\mu\text{V}$, which means 0.0063% of the population is outside of these limits, which corresponds to about 1 in 15,873 units.

Specifications with a value in the minimum or maximum column are verified by TI, and units outside these limits are removed from production material. For example, the INA500A family has a maximum offset voltage of ± 3.5 mV at 25°C, and even though this corresponds to 5σ (equals approximately 1 in 3.5 million units), which is extremely unlikely, TI verifies that any unit with larger offset than ± 3.5 mV are removed from production material.

For specifications with no value in the minimum or maximum column, consider selecting a sigma value of sufficient guard band for the application, and design worst-case conditions using this value. A 6 σ value corresponds to about 1 in 500 million units, which is an extremely unlikely chance, and can be an option as a wide guard band to design a system around. Histograms for some of the important specifications like offset, offset drift, CMRR, gain error are shown in the *Typical Characteristics* section.

In the case of gain error, the INA500 family does not specify a maximum value based on final test but based on characterization as mentioned in the *Electrical Characteristics* table. The corresponding distribution mentioned in Figure 6-10 has a mean of 0.01% and sigma of 0.003%. Hence, the mean plus 6σ value for gain error can be calculated to be approximately 0.03%. When designing for system conditions with 6σ guardband, this method and value can be used to estimate the worst possible gain error.



However, process variation and adjustments over time can shift typical means and standard deviations, and unless there is a value in the minimum or maximum specification column that is specified based on final test, TI cannot verify the performance of a device. Hence, the maximum gain error spec in the *Electrical Characteristics* table is relaxed beyond 6σ guardband to be $\pm 0.05\%$.

7.3.5 Electrical Overstress

Designers often ask questions about the capability of an operational amplifier to withstand electrical overstress. These questions tend to focus on the device inputs, but can involve the supply voltage pins or even the output pin. Each of these different pin functions have electrical stress limits determined by the voltage breakdown characteristics of the particular semiconductor fabrication process and specific circuits connected to the pin. Additionally, internal electrostatic discharge (ESD) protection is built into these circuits to protect them from accidental ESD events both before and during product assembly.

Having a good understanding of this basic ESD circuitry and the relevance to an electrical overstress event is helpful. Figure 7-7 shows the ESD circuits contained in the INA500 devices. On the input pins, the ESD protection circuitry involves local high impedance diode structures and do not route the ESD current to power supply ESD cell. On the output pin, there are reverse biased diodes to both the power supply rails. These diode structures route the ESD current back to the internal power supply lines, where there is an absorption power supply ESD cell internal to the difference amplifier. On the reference pin, the ESD protection is local and does not route current to the power supply ESD cell.

All of the ESD protection circuitry is intended to remain inactive during normal circuit operation.

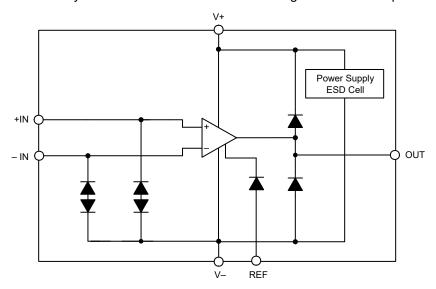


Figure 7-7. Equivalent Internal ESD Circuitry

7.4 Device Functional Modes

The INA500 has only one functional mode. The device powers on, starts drawing quiescent current and is functional as long as the power supply voltages are in the recommended operating voltage range of 1.7V $(\pm 0.85V)$ to 5.5V $(\pm 2.75V)$. Operational temperature range of INA500 is from -40° C to 125° C.

Copyright © 2024 Texas Instruments Incorporated Product Folder Links: *INA500*

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

8.1.1 Reference Pin

The output voltage of the INA500 is developed with respect to the voltage on the reference pin (REF). Often in dual-supply operation, REF pin connects to the system ground. However, in single-supply operation, offsetting the output signal to a precise mid-supply level is useful and required (for example, 2.5V in a 5.0V supply environment). To accomplish this level shift, a voltage source must be connected to the REF pin to level-shift the output so that the INA can drive a single-supply ADC. This is accomplished using an external reference buffer configured in unity gain, voltage follower configuration as shown in Figure 8-1.

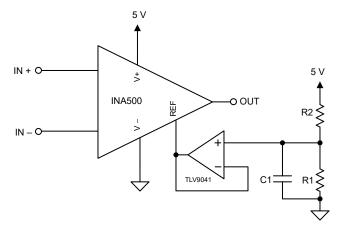


Figure 8-1. INA500 with External Reference Buffer



8.2 Typical Applications

8.2.1 Battery Monitoring using Difference Amplifier

The INA500 is an integrated difference amplifier that processes large differential voltages while simultaneously rejecting larger common-mode voltages. The device offers a low power consumption of 13.5µA (typical) and has a smaller form factor.

With the specifications above, the device is a good fit for portable applications that are powered with single cell or coin-cell batteries. Often, these systems do not need sophisticated battery management technology but a solution that is rather simple and small-size. In a few other systems, battery monitoring ICs are preferred to perform sophisticated functions including cell balancing, protection, voltage and current sensing and so forth but these systems still need a secondary level of protection or redundancy with a simpler and reliable solution for system integrity. It is in these scenarios, the amplifier based battery monitoring application shown below could be quite useful.

Figure 8-2 shows an example circuit that monitors a 12V battery voltage and interfaces it to an ADC that is powered using a 3V power supply. The main advantage for using difference amplifiers in this application is the elimination of ground bounce, which is a common-mode signal, when measuring the battery voltage. These ground bounce signals, when not rejected, are capable of causing errors in the range of few milli-volts to tens or hundreds of milli-volts.

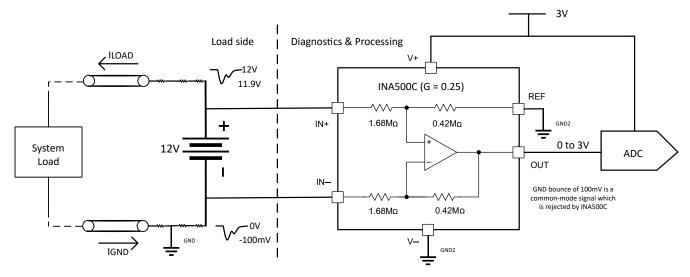


Figure 8-2. Battery Monitoring Circuitry

Product Folder Links: INA500

8.2.1.1 Design Requirements

For this application, the design requirements are as provided in Table 8-1.

Table 8-1. Design Requirements

DESCRIPTION	VALUE
Battery voltage	V _{BAT} = 12V
Supply voltage	$V_S = 3V$
Full-scale range of ADC	$V_{ADC(fs)} = V_{OUT} = 3V$
Quiescent current	30μΑ
Accuracy	8 bits
Common-mode rejection ratio	60dB or a factor of 1000

8.2.1.2 Detailed Design Procedure

This section provides basic calculations for the INA500C difference amplifier with respect to the given design requirements.

Firstly, the 12V battery voltage needs to be attenuated and interfaced to ADC reference voltage of 3V. This requires a $G = \frac{1}{4}$ or 0.25V/V and hence INA500C is chosen for the application.

Gain =
$$\frac{V_{BAT}}{V_{ADC}} = \frac{12}{3} = \frac{1}{4} = 0.25$$
 (1)

The maximum common-mode range of INA500 in a gain of 0.25 is given by,

$$V_{CM MAX} = 5*(V +) - 4*V_{REF} = 5*3 - 4*0 = 15V$$
 (2)

This is well within the requirements for sensing 12V battery voltage and the common-mode rejection ratio (CMRR) referred to output is a minimum of 62dB as per *Electrical Characteristics* table. This corresponds to a attenuation factor of $\frac{1}{1250}$. This helps attenuate the 100mV common-mode error shown in the Figure 8-2 to just 80μ V.

$$CM_{Err\ RTO} = \frac{100mV}{1250} = 80\mu V$$
, when referred to INA500C's output. (3)

Next, INA500C has input impedance of $1.68M\Omega$ as per the *Electrical Characteristics* table. Assuming a full battery voltage of 12V, the input current through the resistor is calculated as,

$$I_{R_{\text{IN}}} = \frac{V_{\text{BAT}}}{R_{\text{IN}}} = \frac{12}{1.68M} = 7.2 \mu A \tag{4}$$

This input current through the resistor adds to the amplifier quiescent current of 13.5μ A resulting in a total current consumption of 20.7μ A, which meets the design requirement of 30μ A.

$$I_{\text{total}} = I_{R_{\text{IN}}} + I_{Q} \tag{5}$$

The next step is to calculate the other error sources in the application. Maximum gain error and offset error as per *Electrical Characteristics* table are 0.05% and 2.5mV for the Gain = 0.25V/V.

Total Error =
$$\sqrt{(0.0005*12)^2 + 0.0025^2} = 6.5 \text{mV}$$
 (6)

For an 8 bit, 3V ADC, V_{LSB} is calculated as,

$$V_{LSB} = \frac{3}{28} = 11.7 \text{mV} \tag{7}$$

The total error of 6.5mV that was calculated is approximately 0.5LSB of ADC full scale voltage of 3V and hence meets the 8-bit accuracy requirement.

Note, that the errors across temperature are not calculated here but can be easily included in the error analysis based on the drift specifications provided in the *Electrical Characteristics* table as per the application's temperature requirements. These drift errors and noise often do not heavily affect the performance at 8 bit accuracy levels. Finally, calibration of offset and gain error can improve the accuracy beyond 10 to 12 bits as these factors can be the major sources of error in the application.

8.2.1.3 Application Curves

The following typical characteristic curve is for the circuit in Figure 8-2.

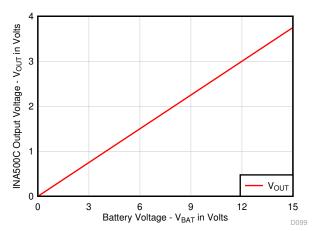


Figure 8-3. Battery Input Voltage vs INA500C Output Voltage

8.3 Power Supply Recommendations

The nominal performance of the INA500 is specified with a supply voltage of ± 2.75 V and midsupply reference voltage. The device also operates using power supplies from ± 0.85 V (1.7V) to ± 2.75 V (5.5V) and non-midsupply reference voltages with good performance. Many specifications apply from -40°C to 125°C. *Electrical Characteristics* presents parameters that can exhibit significant variance due to operating voltage or temperature.

TI highly recommends to add low-ESR ceramic bypass capacitors (C_{BYP}) between each supply pin and ground. Only one C_{BYP} is sufficient for single supply operation. Place the C_{BYP} as close to the device as possible to reduce coupling errors from noisy or high-impedance power supplies. Please ensure the power supply trace routes through C_{BYP} before reaching the amplifier power supply terminals. For more information, see *Layout Guidelines*.

Parameters can vary with operating voltage and reference voltage. *Typical Characteristics* section can be used to estimate the performance outside of the *Electrical Characteristics* section.

Copyright © 2024 Texas Instruments Incorporated Product Folder Links: *INA500*


8.4 Layout

8.4.1 Layout Guidelines

Attention to good layout practices is always recommended. For best operational performance of the device, use the following PCB layout practices:

- Ensure that both input paths are well-matched for source impedance and capacitance to avoid converting common-mode signals into differential signals.
- Use bypass capacitors to reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
 - Connect low-ESR, 0.1µF ceramic bypass capacitors between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V+ to ground is applicable for singlesupply applications.
- Route the input traces as far away from the supply or output traces as possible to reduce parasitic coupling. If
 these traces cannot be kept separate, crossing the sensitive trace perpendicular is much better than crossing
 in parallel with the noisy trace.
- Place the external components as close to the device as possible.
- · Keep the traces as short as possible.

8.4.2 Layout Example



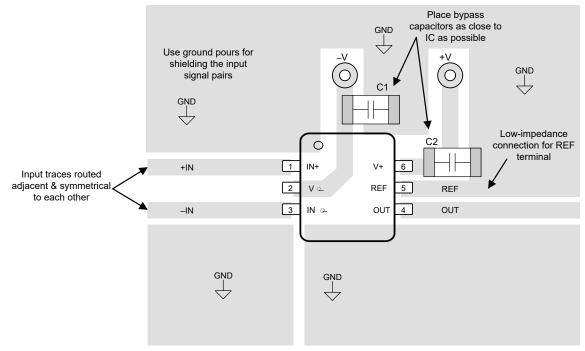


Figure 8-4. Example Schematic and Associated PCB Layout



9 Device and Documentation Support

9.1 Device Support

9.1.1 Development Support

- SPICE-based analog simulation program TINA-TI software folder
- Analog Engineers Calculator

9.1.1.1 PSpice® for TI

PSpice® for TI is a design and simulation environment that helps evaluate performance of analog circuits. Create subsystem designs and prototype solutions before committing to layout and fabrication, reducing development cost and time to market.

9.2 Documentation Support

9.2.1 Related Documentation

For related documentation see the following:

Texas Instruments, EMI Rejection Ratio of Operational Amplifiers application note

9.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on Notifications to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.4 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

9.5 Trademarks

TI E2E[™] is a trademark of Texas Instruments.

Bluetooth® is a registered trademark of Bluetooth SIG. Inc.

PSpice® is a registered trademark of Cadence Design Systems, Inc.

All trademarks are the property of their respective owners.

9.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.7 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (January 2024) to Revision B (March 2024)

Product Folder Links: INA500

Added Typical Characteristics graphs for the 0.5 and 0.25 gain options	11
Changes from Revision * (December 2023) to Revision A (January 2024)	Page
Added footnote for Reference gain error in Electrical Characteristics table,	5

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com

8-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
INA500AIDBVR	Active	Production	SOT-23 (DBV) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	3B4H
INA500AIDBVR.A	Active	Production	SOT-23 (DBV) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	3B4H
INA500AIDCKR	Active	Production	SC70 (DCK) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	1RJ
INA500AIDCKR.A	Active	Production	SC70 (DCK) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	1RJ
INA500BIDBVR	Active	Production	SOT-23 (DBV) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	3B6H
INA500BIDBVR.A	Active	Production	SOT-23 (DBV) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	3B6H
INA500BIDCKR	Active	Production	SC70 (DCK) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	1RK
INA500BIDCKR.A	Active	Production	SC70 (DCK) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	1RK
INA500CIDBVR	Active	Production	SOT-23 (DBV) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	3B5H
INA500CIDBVR.A	Active	Production	SOT-23 (DBV) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	3B5H
INA500CIDCKR	Active	Production	SC70 (DCK) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	1RL
INA500CIDCKR.A	Active	Production	SC70 (DCK) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	1RL

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No. RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM


www.ti.com 8-Nov-2025

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

www.ti.com 23-Mar-2024

TAPE AND REEL INFORMATION

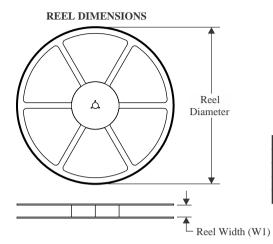



A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
INA500AIDBVR	SOT-23	DBV	6	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
INA500AIDCKR	SC70	DCK	6	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
INA500BIDBVR	SOT-23	DBV	6	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
INA500BIDCKR	SC70	DCK	6	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
INA500CIDBVR	SOT-23	DBV	6	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
INA500CIDCKR	SC70	DCK	6	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3



www.ti.com 23-Mar-2024



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
INA500AIDBVR	SOT-23	DBV	6	3000	210.0	185.0	35.0
INA500AIDCKR	SC70	DCK	6	3000	190.0	190.0	30.0
INA500BIDBVR	SOT-23	DBV	6	3000	210.0	185.0	35.0
INA500BIDCKR	SC70	DCK	6	3000	190.0	190.0	30.0
INA500CIDBVR	SOT-23	DBV	6	3000	210.0	185.0	35.0
INA500CIDCKR	SC70	DCK	6	3000	190.0	190.0	30.0





NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.25 per side.

- 4. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
- 5. Refernce JEDEC MO-178.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.

 4. Falls within JEDEC MO-203 variation AB.





NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.






NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.





PLASTIC SMALL OUTLINE - NO LEAD

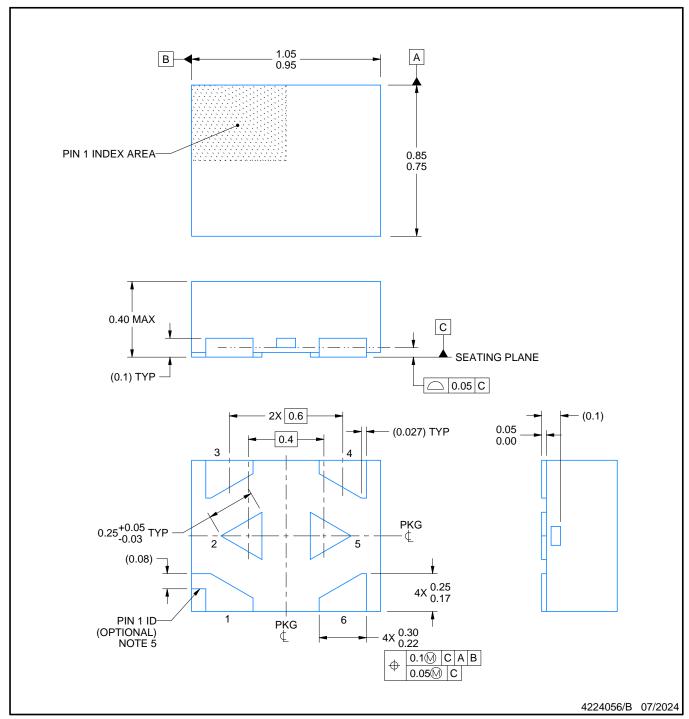


NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pads must be soldered to the printed circuit board for optimal thermal and mechanical performance.

 4. The size and shape of this feature may vary.
- 5. Features may not exist. Recommend use of pin 1 marking on top of package for orientation purposes.



PLASTIC SMALL OUTLINE - NO LEAD

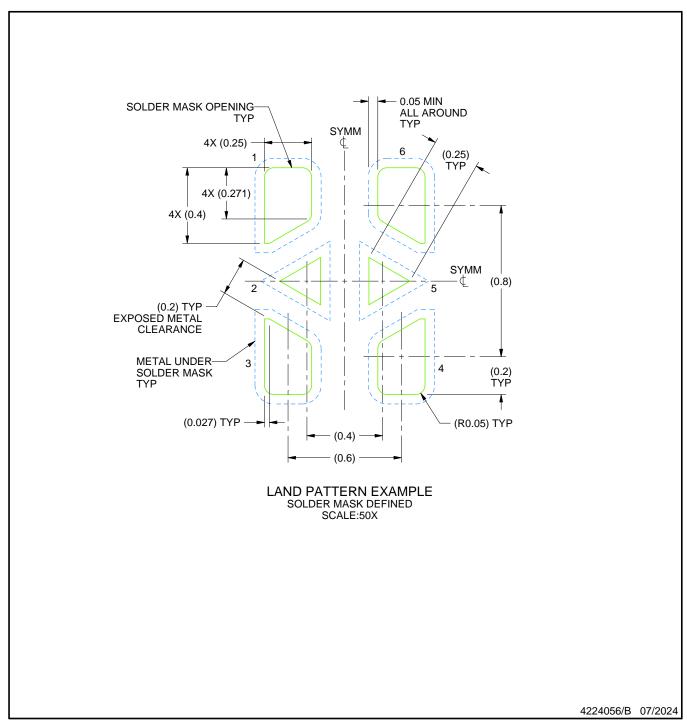


NOTES: (continued)



^{6.} This package is designed to be soldered to a thermal pads on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

^{7.} Vias are optional depending on application, refer to device data sheet. If some or all are implemented, recommended via locations are shown.

PLASTIC SMALL OUTLINE - NO LEAD

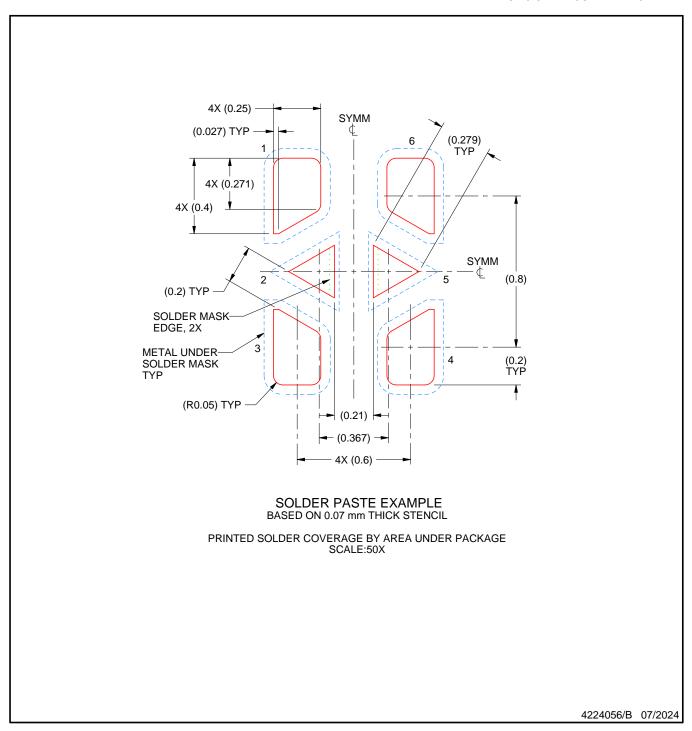

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025