











SBOS160A - NOVEMBER 1993 - REVISED JANUARY 2015

ISO122

ISO122 Precision Lowest-Cost Isolation Amplifier

Features

- 100% Tested for High-Voltage Breakdown
- Rated 1500 Vrms
- High IMR: 140 dB at 60 Hz
- Bipolar Operation: $V_0 = \pm 10 \text{ V}$
- 16-Pin Plastic DIP and 28-Lead SOIC
- Ease of Use: Fixed Unity Gain Configuration
- 0.020% Maximum Nonlinearity
- ±4.5-V to ±18-V Supply Range

Applications

- Industrial Process Control:
 - Transducer Isolator, Isolator for Thermocouples, RTDs, Pressure Bridges, and Flow Meters, 4-mA to 20-mA Loop Isolation
- **Ground Loop Elimination**
- Motor and SCR Control
- **Power Monitoring**
- PC-Based Data Acquisition
- Test Equipment

3 Description

The ISO122 is a precision isolation amplifier incorporating a novel duty cycle modulationdemodulation technique. The signal is transmitted digitally across a 2-pF differential capacitive barrier. With digital modulation the barrier characteristics do not affect signal integrity, thus resulting in excellent reliability and good high-frequency transient immunity across the barrier. Both barrier capacitors are imbedded in the plastic body of the package.

The ISO122 is easy to use. No external components are required for operation. The key specifications are maximum nonlinearity, 50-kHz signal bandwidth, and 200-V/°C VOS drift. A power supply range of 4.5 V to 18 V and quiescent currents of 5 mA on V_{S1} and ± 5.5 mA on V_{S2} make the ISO122 ideal for a wide range of applications.

The ISO122 is available in 16-pin plastic DIP and 28-lead plastic surface-mount packages.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
100400	PDIP (16)	17.90 mm × 7.50 mm
ISO122	SOIC (28)	20.01 mm × 6.61 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Simplified Schematic






Table of Contents

1	Features 1		8.3 Feature Description	8
2	Applications 1		8.4 Device Functional Modes	9
3	Description 1	9	Application and Implementation	9
4	Simplified Schematic		9.1 Application Information	9
5	Revision History2		9.2 Typical Application	10
6	Pin Configuration and Functions	10	Power Supply Recommendations	17
7	Specifications4		10.1 Signal and Supply Connections	17
′	7.1 Absolute Maximum Ratings	11	Layout	18
	7.2 ESD Ratings		11.1 Layout Guidelines	
	7.3 Recommended Operating Conditions		11.2 Layout Example	18
	7.4 Thermal Information	12	Device and Documentation Support	19
	7.5 Electrical Characteristics 5		12.1 Trademarks	19
	7.6 Typical Characteristics		12.2 Electrostatic Discharge Caution	19
8	Detailed Description8		12.3 Glossary	19
•	8.1 Overview 8	13	Mechanical, Packaging, and Orderable	
	8.2 Functional Block Diagram		Information	19


5 Revision History


Changes from Original (November1993) to Revision A

Page



6 Pin Configuration and Functions





Pin Functions

	PIN		1/0	DESCRIPTION			
NAME	PDIP	SOIC	1/0	DESCRIPTION			
GND	8	14	-	Low-side ground reference			
GND	16	28	-	High-side ground reference			
V _{IN}	15	27	1	High-side analog input			
V _{OUT}	7	13	0	Low-side analog output			
+V _{S1}	1	1	-	High-side positive analog supply			
-V _{S1}	2	2	-	High-side negative analog supply			
+V _{S2}	9	15	-	Low-side positive analog supply			
-V _{S2}	10	16	-	Low-side negative analog supply			

Copyright © 1993–2015, Texas Instruments Incorporated



7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

	MIN	MAX	UNIT
Supply voltage		±18	V
V_{IN}		100	V
Continuous isolation voltage		1500	Vrms
Junction temperature		150	°C
Output short to common		Continuous	
Storage temperature, T _{stg}	-40	125	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

			VALUE	UNIT
		Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±1000	
V _(ESD)	Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±500	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	NOM	MAX	UNIT
TA	-25		85	°C
+VS1 -VS1		15		
-VS1		-15		
+VS2		15		
-V\$2		-15		
VIN		±10		

7.4 Thermal Information

		ISC	ISO122				
	THERMAL METRIC ⁽¹⁾	NVF (PDIP)	DVA (SOIC)	UNIT			
		16 PINS	28 PINS				
$R_{\theta JA}$	Junction-to-ambient thermal resistance	51.0	79.8				
R ₀ JC(top)	Junction-to-case (top) thermal resistance	32.4	32.9				
$R_{\theta JB}$	Junction-to-board thermal resistance	29.5	42.2	°C/W			
Ψлт	Junction-to-top characterization parameter	10.4	6.6				
ΨЈВ	Junction-to-board characterization parameter	29.0	40.9				

(1) For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.

Product Folder Links: ISO122



7.5 Electrical Characteristics

At $T_A = +25^{\circ}C$, $V_{S1} = V_{S2} = \pm 15$ V, and $R_L = 2$ k Ω , unless otherwise noted.

DADAMETED	TEST	IS	O122P/U		ISO122JP/JU				
PARAMETER	CONDITIONS	MIN TYP MAX		MIN TYP MAX			UNIT		
SOLATION									
Voltage rated continuous ac 60Hz		1500			1500			Vac	
100% Test ⁽¹⁾	1s, 5pc PD	2400			2400			Vac	
Isolation Mode Rejection	60Hz		140			140		dB	
Barrier Impedance			10 ¹⁴ 2			10 ¹⁴ 2		Ω pF	
Leakage Current at 60Hz	V _{ISO} = 240Vrms		0.18	0.5		0.18	0.5	μArms	
GAIN									
Nominal Gain	101/		1			1		V/V	
Gain Error	$V_0 = \pm 10V$		±0.05	±0.50		±0.05	±0.50	%FSR	
Gain vs Temperature			±10			±10		ppm/°C	
Nonlinearity ⁽²⁾			±0.016	±0.020		±0.025	±0.050	%FSR	
NPUT OFFSET VOLTAGE									
Initial Offset			±20	±50		±20	±50	mV	
vs Temperature			±200			±200		μV/°C	
vs Supply			±2			±2		mV/V	
Noise			4					μV/√ Hz	
NPUT								-	
Voltage Range		±10	±12.5		±10	±12.5		V	
Resistance			200			200		kΩ	
OUTPUT									
Voltage Range		±10	±12.5		±10	±12.5		V	
Current Drive		±5	±15		±5	±15		mA	
Capacitive Load Drive			0.1			0.1		μF	
Ripple Voltage ⁽³⁾			20			20		mVp-p	
FREQUENCY RESPONSE									
Small-Signal Bandwidth			50			50		kHz	
Slew Rate			2			2		V/µs	
Settling Time 0.10%			50			50		μs	
Settling Time 0.01%	$V_0 = \pm 10V$		350			350		μs	
Overload Recovery Time			150			150		μs	
POWER SUPPLIES							<u> </u>		
Rated Voltage			±15			±15		V	
Voltage Range		±4.5		±18	±4.5		±18	V	
161			±5	±7		±5	±7		
Quiescent Current			±5.5	±7		±5.5	±7	mA	
EMPERATURE RANGE	<u>l</u>								
Specification		-25		85	-25		85	°C	
Operating		-25		85	-25		85	°C	
Storage	+	-40		125	-40		125	°C	
Lia			100	.20	10	100	123	°C/W	
Thermal Resistance			65			65		°C/W	


Copyright © 1993–2015, Texas Instruments Incorporated

⁽¹⁾ Tested at 1.6 X rated, fail on 5pC partial discharge.
(2) Nonlinearity is the peak deviation of the output voltage from the best-fit straight line. It is expressed as the ratio of deviation to FSR.
(3) Ripple frequency is at carrier frequency (500kHz).



7.6 Typical Characteristics


At $T_A = +25$ °C, and $V_S = \pm 15$ V, unless otherwise noted.

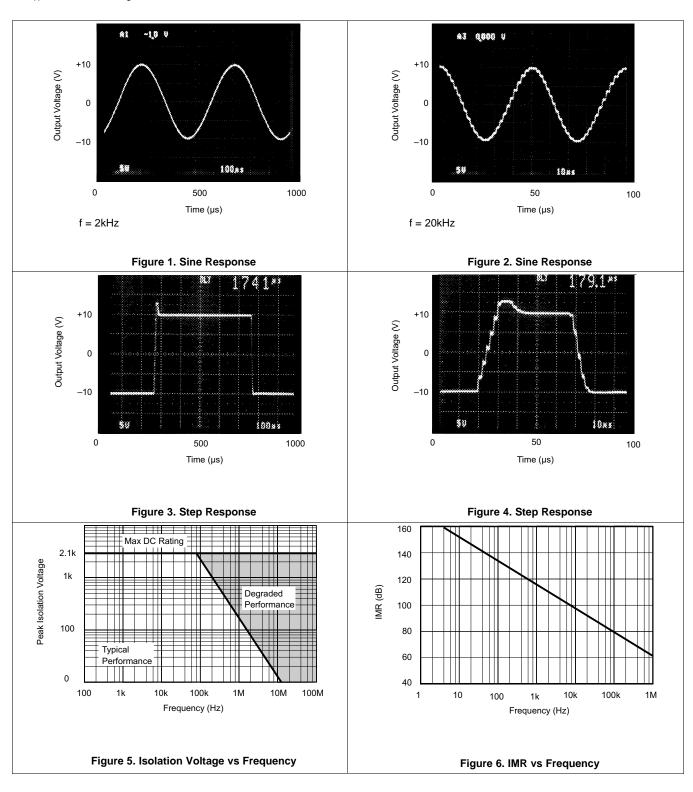



Typical Characteristics (continued)

At $T_A = +25$ °C, and $V_S = \pm 15$ V, unless otherwise noted.







Figure 7. PSRR vs Frequency

Figure 8. Isolation Leakage Current vs Frequency



Input Frequency

NOTE: Shaded area shows aliasing frequencies that cannot be removed by a low-pass filter at the output.

Figure 9. Signal Response to Inputs Greater than 250 kHz

Copyright © 1993–2015, Texas Instruments Incorporated



8 Detailed Description

8.1 Overview

The ISO122 isolation amplifier uses an input and an output section galvanically isolated by matched 1-pF isolating capacitors built into the plastic package. The input is duty-cycle modulated and transmitted digitally across the barrier. The output section receives the modulated signal, converts it back to an analog voltage and removes the ripple component inherent in the demodulation. Input and output sections are fabricated, then laser trimmed for exceptional circuitry matching common to the input and output sections. The sections are then mounted on opposite ends of the package with the isolating capacitors mounted between the two sections. The ISO122 contains 250 transistors.


8.1.1 Modulator

An input amplifier (A1, Functional Block Diagram) integrates the difference between the input current ($V_{IN}/200 \text{ k}\Omega$) and a switched ±100-mA current source. This current source is implemented by a switchable 200-mA source and a fixed 100-µA current sink. To understand the basic operation of the modulator, assume that $V_{IN}=0$ V. The integrator will ramp in one direction until the comparator threshold is exceeded. The comparator and sense amp will force the current source to switch; the resultant signal is a triangular waveform with a 50% duty cycle. The internal oscillator forces the current source to switch at 500 kHz. The resultant capacitor drive is a complementary duty-cycle modulation square wave.

8.1.2 Demodulator

The sense amplifier detects the signal transitions across the capacitive barrier and drives a switched current source into integrator A2. The output stage balances the duty-cycle modulated current against the feedback current through the 200 kW feedback resistor, resulting in an average value at the V_{OUT} pin equal to V_{IN} . The sample and hold amplifiers in the output feedback loop serve to remove undesired ripple voltages inherent in the demodulation process.

8.2 Functional Block Diagram

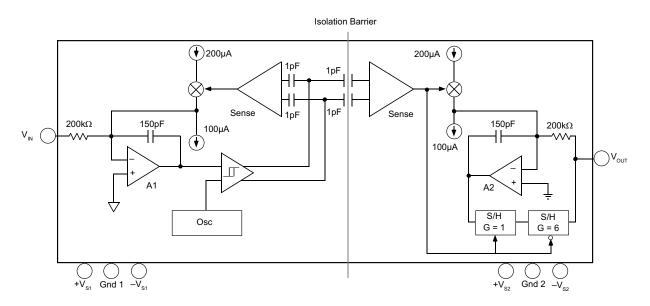

8.3 Feature Description

8.3.1 Isolation Amplifier

The ISO122 is a precision analog isolation amplifier. The input signal is transmitted digitally across a high-voltage differential capacitive barrier. With digital modulation the barrier characteristics do affect signal integrity, resulting in excellent reliability and high-frequency transient immunity.

Product Folder Links: ISO122



8.4 Device Functional Modes

The ISO122 does not have any additional functional modes.

Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 Carrier Frequency Considerations

The ISO122 amplifier transmits the signal across the isolation barrier by a 500kHz duty cycle modulation technique. For input signals having frequencies below 250 kHz, this system works like any linear amplifier. But for frequencies above 250 kHz, the behavior is similar to that of a sampling amplifier. The signal response to inputs greater than 250 kHz performance curve shows this behavior graphically; at input frequencies above 250 kHz the device generates an output signal component of reduced magnitude at a frequency below 250 kHz. This is the aliasing effect of sampling at frequencies less than two times the signal frequency (the Nyquist frequency). At the carrier frequency and its harmonics, both the frequency and amplitude of the aliasing go to zero.

9.1.2 Isolation Mode Voltage Induced Errors

IMV can induce errors at the output as indicated by the plots of IMV vs Frequency. It should be noted that if the IMV frequency exceeds 250 kHz, the output also will display spurious outputs (aliasing), in a manner similar to that for V_{IN} > 250 kHz and the amplifier response will be identical to that shown in the Signal Response to Inputs Greater Than 250-kHz performance curve. This occurs because IMV-induced errors behave like input-referred error signals. To predict the total error, divide the isolation voltage by the IMR shown in the IMR vs Frequency curve and compute the amplifier response to this input-referred error signal from the data given in the Signal Response to Inputs Greater than 250-kHz performance curve. For example, if a 800-kHz 1000-Vrms IMR is present, then a total of [(-60 dB) + (-30 dB)] x (1000 V) = 32-mV error signal at 200 kHz plus a 1 V, 800-kHz error signal will be present at the output.

9.1.3 High IMV dV/dt Errors

As the IMV frequency increases and the dV/dt exceeds 1000 Vµs, the sense amp may start to false trigger, and the output will display spurious errors. The common-mode current being sent across the barrier by the high slew rate is the cause of the false triggering of the sense amplifier. Lowering the power-supply voltages below ±15 V may decrease the dV/dt to 500 V/µs for typical performance.

9.1.4 High Voltage Testing

Texas Instruments has adopted a partial discharge test criterion that conforms to the German VDE0884 Optocoupler Standards. This method requires the measurement of minute current pulses (< 5 pC) while applying 2400-Vrms, 60-Hz high-voltage stress across every ISO122 isolation barrier. No partial discharge may be initiated to pass this test. This criterion confirms transient overvoltage (1.6 x 1500 Vrms) protection without damage to the ISO122. Lifetest results verify the absence of failure under continuous rated voltage and maximum temperature.

This new test method represents the "state of the art" for nondestructive high-voltage reliability testing. It is based on the effects of nonuniform fields that exist in heterogeneous dielectric material during barrier degradation. In the case of void nonuniformities, electric field stress begins to ionize the void region before bridging the entire high-voltage barrier. The transient conduction of charge during and after the ionization can be detected externally as a burst of 0.01-0.1 ms current pulses that repeat on each AC voltage cycle. The minimum AC barrier voltage that initiates partial discharge is defined as the "inception voltage." Decreasing the barrier voltage to a lower level is required before partial discharge ceases and is defined as the "extinction voltage." The



Application Information (continued)

package insulation processes have been characterized and developed to yield an inception voltage in excess of 2400 Vrms so that transient overvoltages below this level will not damage the ISO122. The extinction voltage is above 1500 Vrms so that even overvoltage induced partial discharge will cease once the barrier voltage is reduced to the 1500 Vrms (rated) level. Older high-voltage test methods relied on applying a large enough overvoltage (above rating) to break down marginal parts, but not so high as to damage good ones. Our new partial discharge testing gives us more confidence in barrier reliability than breakdown/no breakdown criteria.

9.2 Typical Application

9.2.1 Output Filter

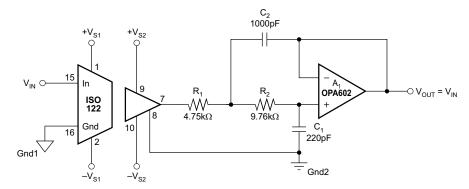


Figure 10. ISO122 With Output Filter for Improved Ripple

9.2.1.1 Design Requirements


The ISO122 isolation amplifiers (ISO amps) have a small (10 to 20 mVp-p typical) residual demodulator ripple at the output. A simple filter can be added to eliminate the output ripple without decreasing the 50-kHz signal bandwidth of the ISO amp.

9.2.1.2 Detailed Design Procedure

The ISO122 is designed to have a 50-kHz single-pole (Butterworth) signal response. By cascading the ISO amp with a simple 50-kHz, Q=1, two-pole, low-pass filter, the overall signal response becomes three-pole Butterworth. The result is a maximally flat 50-kHz magnitude response and the output ripple reduced below the noise level. Figure 10 shows the complete circuit. The two-pole filter is a unity-gain Sallen-Key type consisting of A1, R1, R2, C1, and C2. The values shown give Q=1 and f-3-dB bandwidth = 50 kHz. Because the op amp is connected as a unity-gain follower, gain and gain accuracy of the ISO amp are unaffected. Using a precision op amp such as the OPA602 also preserves the DC accuracy of the ISO amp.



9.2.1.3 Application Curves



- 1) Standard ISO122 has 50kHz single-pole (Butterworth) response.
- 2) ISO122 with cascaded 50kHz, Q = 1, two-pole, low-pass filter has three-pole Butterworth response.

Figure 11. Gain vs. Frequency




Figure 12. Standard ISO122 (Approximately 20-mVp-p Output Ripple)




Figure 13. Filtered ISO122 (No Visible Output Ripple)




Figure 14. Step Response of Standard ISO122




Figure 15. Step Response of ISO122 With Added Twopole Output Filter




Figure 16. Large-signal, 10 kHz Sine-wave Response of ISO122 With and Without Output Filter



9.2.2 Battery Monitor

Figure 17 provides a means to monitor the cell voltage on a 600-V battery stack by using the battery as a power source for the isolated voltage.

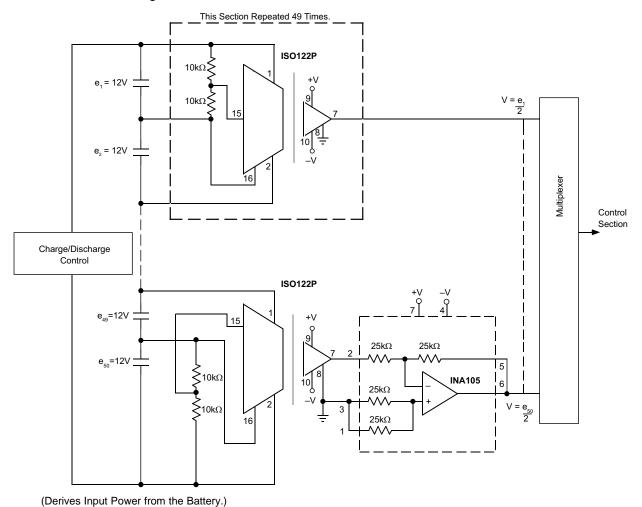


Figure 17. Battery Monitor for a 600-V Battery Power System



9.2.3 Programmable Gain Amplifier

In applications where variable gain configurations are required, a programmable gain amplifier like the PGA102 can be used with the ISO122. Figure 18 uses an ISO150 to provide gain pin selection options to the PGA102.




Figure 18. Programmable-Gain Isolation Channel With Gains of 1, 10, and 100

Copyright © 1993–2015, Texas Instruments Incorporated



9.2.4 Thermocouple Amplifier

For isolated temperature measurements, Figure 19 provides an application solution using the INA101 feeding the input stage of the ISO122. The table provides suggested resistor values based on the type of thermistor used in the application.

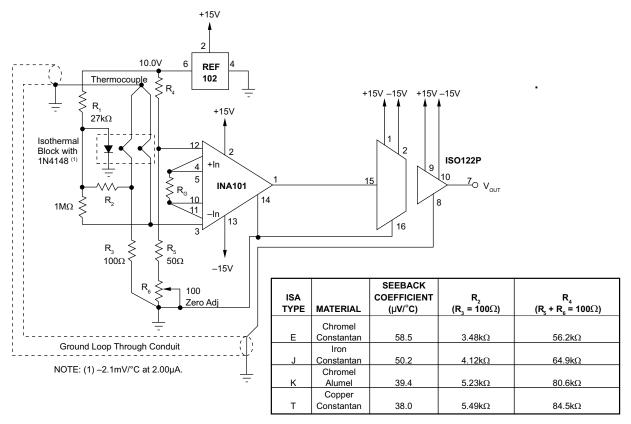


Figure 19. Thermocouple Amplifier With Ground Loop Elimination, Cold Junction Compensation, and Up-scale Burn-out.



9.2.5 Isolated 4- to 20-mA Instrument Loop

For isolated temperature measurements in a 4- to 20-mA loop, Figure 20 provides a solution using the XTR101 and RCV420. A high-performance PT100 resistance temperature detector (RTD) provides the user with an isolated 0- to 5-V representation of the isolated temperature measurement.


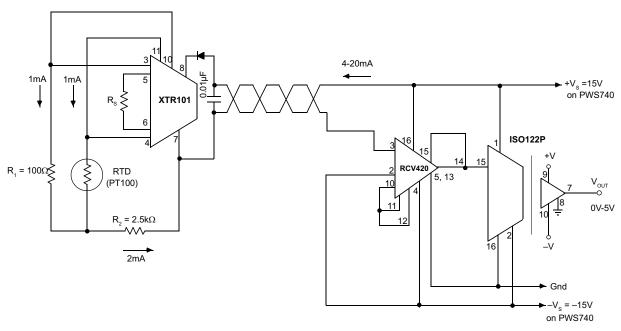


Figure 20. Isolated 4- to 200-mA Instrument Loop. (RTD shown.)

9.2.6 Single-Supply Operation of the ISO122P Isolation Amplifier

The circuit shown in Figure 21 uses a 5.1-V Zener diode to generate the negative supply for an ISO122 from a single supply on the high-voltage side of the isolation amplifier. The input measuring range will be dependent on the applied voltage as noted in the accompanying table.

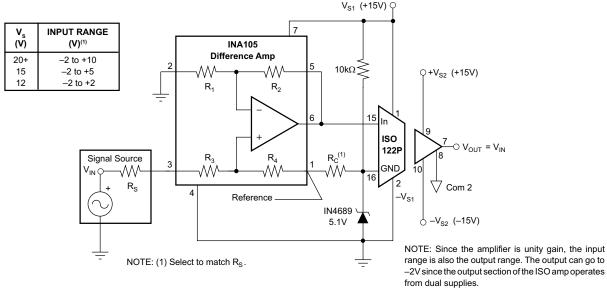

For additional information see SBOA004.

Figure 21. Single-Supply Operation of the ISO122P Isolation Amplifier



9.2.7 Input-Side Powered ISO Amp

The user side of the ISO122 can be powered from the high-voltage side using an isolated DC-DC converter as shown in Figure 22.

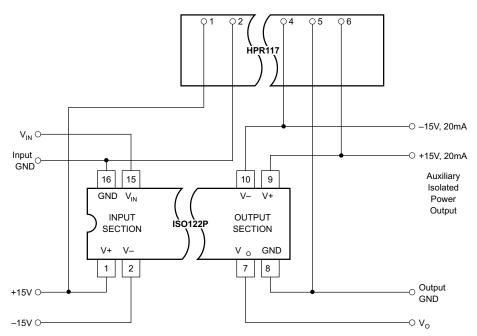


Figure 22. Input-Side Powered ISO Amp

9.2.8 Powered ISO Amp With Three-Port Isolation

Figure 23 shows an application solution that provides isolated power to both the user and high-voltage sides of the ISO122 amplifier.

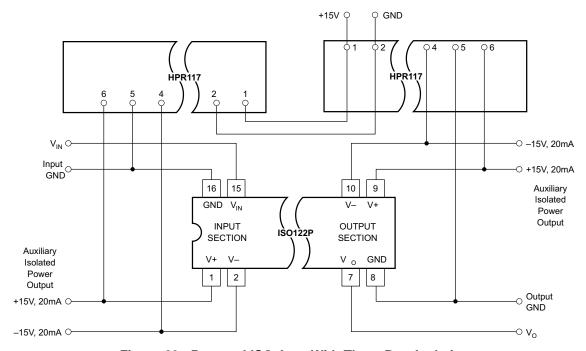


Figure 23. Powered ISO Amp With Three-Port Isolation



10 Power Supply Recommendations

10.1 Signal and Supply Connections

Each power-supply pin should be bypassed with 1- μ F tantalum capacitors located as close to the amplifier as possible. The internal frequency of the modulator/demodulator is set at 500 kHz by an internal oscillator. Therefore, if it is desired to minimize any feedthrough noise (beat frequencies) from a DC-DC converter, use a π filter on the supplies (see Figure 24). The ISO122 output has a 500-kHz ripple of 20 mV, which can be removed with a simple 2-pole low-pass filter with a 100-kHz cutoff using a low-cost op amp (see Figure 10).

The input to the modulator is a current (set by the 200-k Ω integrator input resistor) that makes it possible to have an input voltage greater than the input supplies, as long as the output supply is at least ± 15 V. It is therefore possible, when using an unregulated DC-DC converter, to minimize PSR related output errors with ± 5 -V voltage regulators on the isolated side and still get the full ± 10 V input and output swing.




Figure 24. Basic Signal and Power Connections



11 Layout

11.1 Layout Guidelines

To maintain the isolation barrier of the device, the distance between the high-side ground (pin 16 or 28) and the low-side ground (pin 8 or 14) should be kept at maximum; that is, the entire area underneath the device should be kept free of any conducting materials.

11.2 Layout Example

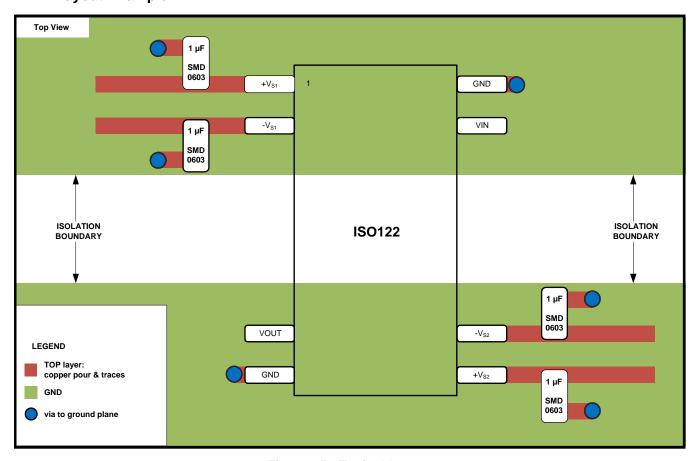


Figure 25. Typical Layout



12 Device and Documentation Support

12.1 Trademarks

All trademarks are the property of their respective owners.

12.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.3 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: ISO122

www.ti.com

10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
ISO122JP	Active	Production	PDIP (NVF) 8	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-25 to 85	ISO122JP
ISO122JP.A	Active	Production	PDIP (NVF) 8	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-25 to 85	ISO122JP
ISO122JP.B	Active	Production	PDIP (NVF) 8	25 TUBE	-	Call TI	Call TI	-25 to 85	
ISO122JPE4	Active	Production	PDIP (NVF) 8	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-25 to 85	ISO122JP
ISO122JU	Active	Production	SOIC (DVA) 8	20 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122JU
ISO122JU.A	Active	Production	SOIC (DVA) 8	20 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122JU
ISO122JU.B	Active	Production	SOIC (DVA) 8	20 TUBE	-	Call TI	Call TI	-25 to 85	
ISO122JU/1K	Active	Production	SOIC (DVA) 8	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122JU
ISO122JU/1K.A	Active	Production	SOIC (DVA) 8	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122JU
ISO122JU/1K.B	Active	Production	SOIC (DVA) 8	1000 LARGE T&R	-	Call TI	Call TI	-25 to 85	
ISO122JUE4	Active	Production	SOIC (DVA) 8	20 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122JU
ISO122P	Active	Production	PDIP (NVF) 8	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-25 to 85	ISO122P
ISO122P.A	Active	Production	PDIP (NVF) 8	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-25 to 85	ISO122P
ISO122P.B	Active	Production	PDIP (NVF) 8	25 TUBE	-	Call TI	Call TI	-25 to 85	
ISO122PE4	Active	Production	PDIP (NVF) 8	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-25 to 85	ISO122P
ISO122U	Active	Production	SOIC (DVA) 8	20 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122U
ISO122U.A	Active	Production	SOIC (DVA) 8	20 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122U
ISO122U.B	Active	Production	SOIC (DVA) 8	20 TUBE	-	Call TI	Call TI	-25 to 85	
ISO122U/1K	Active	Production	SOIC (DVA) 8	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122U
ISO122U/1K.A	Active	Production	SOIC (DVA) 8	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122U
ISO122U/1K.B	Active	Production	SOIC (DVA) 8	1000 LARGE T&R	-	Call TI	Call TI	-25 to 85	
ISO122UE4	Active	Production	SOIC (DVA) 8	20 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-25 to 85	ISO 122U

PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

- (1) Status: For more details on status, see our product life cycle.
- (2) Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 22-Sep-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ISO122JU/1K	SOIC	DVA	8	1000	330.0	24.4	10.9	18.3	3.2	12.0	24.0	Q1
ISO122U/1K	SOIC	DVA	8	1000	330.0	24.4	10.9	18.3	3.2	12.0	24.0	Q1

www.ti.com 22-Sep-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ISO122JU/1K	SOIC	DVA	8	1000	356.0	356.0	45.0
ISO122U/1K	SOIC	DVA	8	1000	356.0	356.0	45.0

PACKAGE MATERIALS INFORMATION

www.ti.com 22-Sep-2025

TUBE




*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
ISO122JP	NVF	PDIP	8	25	506	13.97	11230	4.32
ISO122JP.A	NVF	PDIP	8	25	506	13.97	11230	4.32
ISO122JPE4	NVF	PDIP	8	25	506	13.97	11230	4.32
ISO122JU	DVA	SOIC	8	20	507	12.83	5080	6.6
ISO122JU.A	DVA	SOIC	8	20	507	12.83	5080	6.6
ISO122JUE4	DVA	SOIC	8	20	507	12.83	5080	6.6
ISO122P	NVF	PDIP	8	25	506	13.97	11230	4.32
ISO122P.A	NVF	PDIP	8	25	506	13.97	11230	4.32
ISO122PE4	NVF	PDIP	8	25	506	13.97	11230	4.32
ISO122U	DVA	SOIC	8	20	507	12.83	5080	6.6
ISO122U.A	DVA	SOIC	8	20	507	12.83	5080	6.6
ISO122UE4	DVA	SOIC	8	20	507	12.83	5080	6.6

DVA (R-PDSO-G8/28)

PLASTIC SMALL-OUTLINE

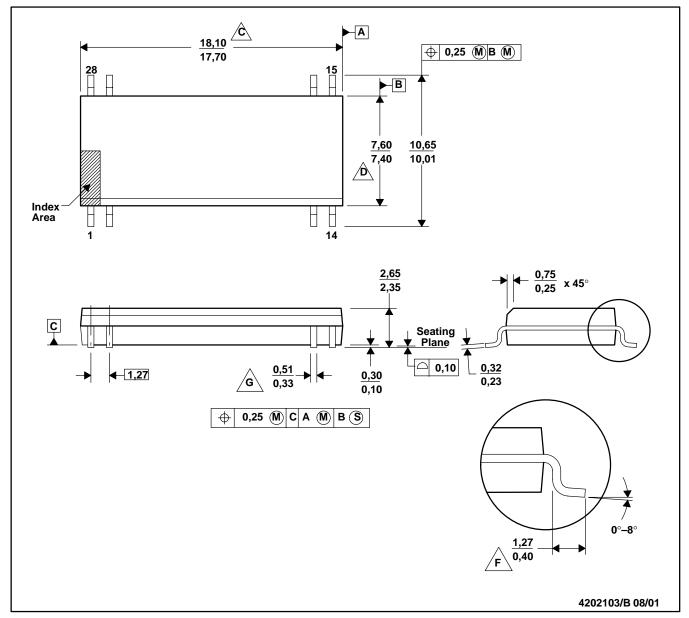

NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

Body length dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, and gate burrs shall not exceed 0,15 mm per side.

Body width dimension does not include inter-lead flash or portrusions. Inter-lead flash and protrusions shall not exceed 0,25 mm per side.

E. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the cross-hatched area.

Lead dimension is the length of terminal for soldering to a substrate.


Lead width, as measured 0,36 mm or greater above the seating plane, shall not exceed a maximum value of 0,61 mm.

- H. Lead-to-lead coplanarity shall be less than 0,10 mm from seating plane.
- Falls within JEDEC MS-013-AE with the exception of the number of leads.



NVF (R-PDIP-T8/16)

PLASTIC DUAL-IN-LINE

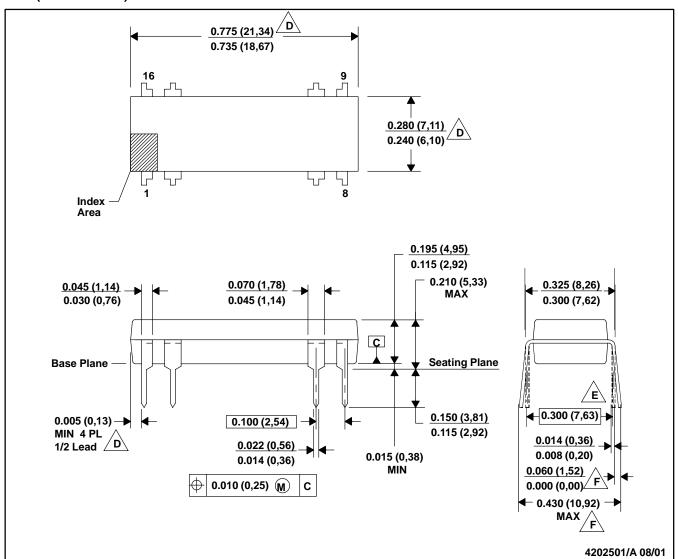

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001-BB with the exception of lead count.
- Dimensions do not include mold flash or protrusions.
 - Mold flash or protrusions shall not exceed 0.010 (0,25).
 - \(\) Dimensions measured with the leads constrained to be perpendicular to Datum C.
- Dimensions are measured at the lead tips with the leads unconstrained.
- G. A visual index feature must be located within the cross-hatched area.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025