

# LMV7291 Single 1.8V Low Power Comparator with Rail-to-Rail Input

Check for Samples: LMV7291

### **FEATURES**

- $(V_S = 1.8V, T_A = 25^{\circ}C, Typical)$ Values unless Specified)
- Single Supply
- Ultra Low Supply Current 9µA per Channel
- **Low Input Bias Current 10nA**
- Low Input Offset Current 200pA
- Low ensured V<sub>os</sub> 4mV
- Propagation Delay 880ns (20mV Overdrive)
- Input Common Mode Voltage Range 0.1V beyond Rails

### **APPLICATIONS**

- **Mobile Communications**
- Laptops and PDA's
- **Battery Powered Electronics**
- **General Purpose Low Voltage Applications**

# DESCRIPTION

The LMV7291 is a rail-to-rail input low power comparator, characterized at supply voltage 1.8V, 2.7V and 5.0V. It consumes only 9uA supply current per channel while achieving a 800ns propagation delay.

The LMV7291 is available in SC70 package. With this tiny package, the PC board area can be significantly reduced. It is ideal for low voltage, low power and space critical designs.

The LMV7291 features a push-pull output stage which allows operation with minimum power consumption when driving a load.

The LMV7291 is built with Texas Instruments' advance submicron silicon-gate BiCMOS process. It has bipolar inputs for improved noise performance and CMOS outputs for rail-to-rail output swing.

# **Typical Circuit**




Figure 1. Threshold Detector



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet. All trademarks are the property of their respective owners.



# Absolute Maximum Ratings (1)(2)

ESD Tolerance	
	2KV <sup>(3)</sup>
	200V <sup>(4)</sup>
V <sub>IN</sub> Differential	±Supply Voltage
Supply Voltage (V <sup>+</sup> - V <sup>-</sup> )	5.5V
Voltage at Input/Output pins	V <sup>+</sup> +0.1V, V <sup>−</sup> −0.1V
Soldering Information	•
Infrared or Convection (20 sec.)	235°C
Wave Soldering (10 sec.)	260°C
Storage Temperature Range	−65°C to +150°C
Junction Temperature <sup>(5)</sup>	+150°C

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) Human body model, 1.5kΩ in series with 100pF.
- (4) Machine Model,  $0\Omega$  in series with 200pF.
- 5) Typical values represent the most likely parametric norm.

# Operating Ratings (1)

_ 1	
Operating Temperature Range (2)	−40°C to +85°C
Package Thermal Resistance (2)	
SC70	265°C/W

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) The maximum power dissipation is a function of  $T_{J(MAX)}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{J(MAX)} T_A)/\theta_{JA}$ . All numbers apply for packages soldered directly into a PC board.



#### 1.8V Electrical Characteristics

Unless otherwise specified, all limits ensured for  $T_J = 25$ °C,  $V^+ = 1.8V$ ,  $V^- = 0V$ . **Boldface** limits apply at the temperature extremes. (1)

Symbol	Parameter	Condition	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
V <sub>OS</sub>	Input Offset Voltage			0.3	4 <b>6</b>	mV
TC V <sub>OS</sub>	Input Offset Temperature Drift	$V_{CM} = 0.9V^{(4)}$		10		uV/C
I <sub>B</sub>	Input Bias Current			10		nA
Ios	Input Offset Current			200		pА
I <sub>S</sub>	Supply Current	LMV7291		9	12 <b>14</b>	μΑ
I <sub>SC</sub>	Output Short Circuit Current	Sourcing, V <sub>O</sub> = 0.9V	3.5	6		A
		Sinking, $V_0 = 0.9V$	4	6		mA
V <sub>OH</sub>	Output Voltage High	$I_O = 0.5 \text{mA}$	1.7	1.74		\/
		I <sub>O</sub> = 1.5mA	1.58	1.63		V
V <sub>OL</sub>	Output Voltage Low	I <sub>O</sub> = −0.5mA		52	70	\/
		I <sub>O</sub> = −1.5mA		166	220	mV
V <sub>CM</sub>	Input Common Mode Voltage Range	CMRR > 45 dB			1.9	V
			-0.1			V
CMRR	Common Mode Rejection Ratio	0 < V <sub>CM</sub> < 1.8V	47	78		dB
PSRR	Power Supply Rejection Ratio	$V^+ = 1.8V \text{ to } 5V$	55	80		dB
I <sub>LEAKAGE</sub>	Output Leakage Current	V <sub>O</sub> = 1.8V		2		pА

<sup>(1)</sup> Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

- (2) All limits are specified by testing or statistical analysis.
- (3) Typical values represent the most likely parametric norm.
- (4) Offset Voltage average drift determined by dividing the change in V<sub>OS</sub> at temperature extremes into the total temperature change.

# 1.8V AC Electrical Characteristics

Unless otherwise specified, all limits ensured for  $T_J = 25^{\circ}C$ ,  $V^+ = 1.8V$ ,  $V^- = 0V$ ,  $V_{CM} = 0.5V$ ,  $V_O = V^+/2$  and  $R_L > 1M\Omega$  to  $V^-$ . **Boldface** limits apply at the temperature extremes. (1)

Symbol	Parameter	Condition	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
t <sub>PHL</sub>	Propagation Delay (High to Low)	Input Overdrive = $20mV$ Load = $50pF//5k\Omega$		088		ns
		Input Overdrive = $50mV$ Load = $50pF//5k\Omega$		570		ns
t <sub>PLH</sub>	Propagation Delay (Low to High)	Input Overdrive = $20mV$ Load = $50pF//5k\Omega$		1100		ns
		Input Overdrive = $50mV$ Load = $50pF//5k\Omega$		800		ns

<sup>(1)</sup> Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

- All limits are specified by testing or statistical analysis.
- (3) Typical values represent the most likely parametric norm.



#### 2.7V Electrical Characteristics

Unless otherwise specified, all limits ensured for  $T_J = 25$ °C,  $V^+ = 2.7V$ ,  $V^- = 0V$ . **Boldface** limits apply at the temperature extremes. (1)

Symbol	Parameter	Conditions	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units	
Vos	Input Offset Voltage			0.3	4 6	mV	
TC V <sub>OS</sub>	Input Offset Temperature Drift	V <sub>CM</sub> = 1.35V <sup>(4)</sup>		10		μV/C	
$I_{B}$	Input Bias Current			10		nA	
Ios	Input offset Current			200		pA	
I <sub>S</sub>	Supply Current	LMV7291		9	13 <b>15</b>	μA	
I <sub>SC</sub>	Output Short Circuit Current	Sourcing, V <sub>O</sub> = 1.35V	12	15		A	
		Sinking, V <sub>O</sub> = 1.35V	12	15		mA	
V <sub>OH</sub>	Output Voltage High	I <sub>O</sub> = 0.5mA	2.63	2.66		V	
		I <sub>O</sub> = 2.0mA	2.48	2.55		V	
V <sub>OL</sub>	Output Voltage Low	I <sub>O</sub> = −0.5mA		50	70	\/	
		I <sub>O</sub> = −2mA		155	220	mV	
$V_{CM}$	Input Common Voltage Range	CMRR > 45dB			2.8	V	
			-0.1			V	
CMRR	Common Mode Rejection Ratio	0 < V <sub>CM</sub> < 2.7V	47	78		dB	
PSRR	Power Supply Rejection Ratio	V <sup>+</sup> = 1.8V to 5V	55	80		dB	
I <sub>LEAKAGE</sub>	Output Leakage Current	V <sub>O</sub> = 2.7V		2		pA	

<sup>(1)</sup> Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

- (2) All limits are specified by testing or statistical analysis.
- (3) Typical values represent the most likely parametric norm.
- (4) Offset Voltage average drift determined by dividing the change in V<sub>OS</sub> at temperature extremes into the total temperature change.

### 2.7V AC Electrical Characteristics

Unless otherwise specified, all limits ensured for  $T_J = 25^{\circ}C$ ,  $V^+ = 2.7V$ ,  $V^- = 0V$ ,  $V_{CM} = 0.5V$ ,  $V_O = V^+/2$  and  $R_L > 1M\Omega$  to  $V^-$ . **Boldface** limits apply at the temperature extremes. (1)

Symbol	Parameter	Condition	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
t <sub>PHL</sub>	Propagation Delay (High to Low)	Input Overdrive = $20 \text{mV}$ Load = $50 \text{pF}//5 \text{k}\Omega$		1200		ns
		Input Overdrive = $50mV$ Load = $50pF//5k\Omega$		810		ns
t <sub>PLH</sub>	Propagation Delay (Low to High)	Input Overdrive = $20 \text{mV}$ Load = $50 \text{pF}//5 \text{k}\Omega$		1300		ns
		Input Overdrive = $50 \text{mV}$ Load = $50 \text{pF}//5 \text{k}\Omega$		860		ns

<sup>(1)</sup> Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

- 2) All limits are specified by testing or statistical analysis.
- (3) Typical values represent the most likely parametric norm.



#### **5V Electrical Characteristics**

Unless otherwise specified, all limits ensured for  $T_J = 25^{\circ}C$ ,  $V^+ = 5V$ ,  $V^- = 0V$ . **Boldface** limits apply at the temperature extremes. (1)

Symbol	Parameter	Conditions	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units	
Vos	Input Offset Voltage			0.3	4 <b>6</b>	mV	
TC V <sub>OS</sub>	Input Offset Temperature Drift	$V_{CM} = 2.5V^{(4)}$		10		μV/C	
I <sub>B</sub>	Input Bias Current			10		nA	
Ios	Input Offset Current			200		рА	
Is	Supply Current	LMV7291		10	14 <b>16</b>	μA	
I <sub>SC</sub>	Output Short Circuit Current	Sourcing, V <sub>O</sub> = 2.5V	28	34		^	
		Sinking, $V_0 = 2.5V$	28	34		mA	
V <sub>OH</sub>	Output Voltage High	I <sub>O</sub> = 0.5mA	4.93	4.96			
		I <sub>O</sub> = 4.0mA	4.70	4.77		V	
V <sub>OL</sub>	Output Voltage Low	I <sub>O</sub> = −0.5mA		27	70	\/	
		$I_{O} = -4.0 \text{mA}$		225	300	mV	
V <sub>CM</sub>	Input Common Voltage Range	CMRR > 45dB			5.1		
			-0.1			V	
CMRR	Common Mode Rejection Ratio	0 < V <sub>CM</sub> < 5.0V	47	78		dB	
PSRR	Power Supply Rejection Ratio	V <sup>+</sup> = 1.8V to 5V	55	80		dB	
I <sub>LEAKAGE</sub>	Output Leakage Current	V <sub>O</sub> = 5V		2		pA	

<sup>(1)</sup> Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

- (2) All limits are specified by testing or statistical analysis.
- (3) Typical values represent the most likely parametric norm.
- (4) Offset Voltage average drift determined by dividing the change in V<sub>OS</sub> at temperature extremes into the total temperature change.

### 5.0V AC Electrical Characteristics

Unless otherwise specified, all limits ensured for  $T_J = 25^{\circ}C$ ,  $V^+ = 5.0V$ ,  $V^- = 0V$ ,  $V_{CM} = 0.5V$ ,  $V_O = V^+/2$  and  $R_L > 1M\Omega$  to  $V^-$ . **Boldface** limits apply at the temperature extremes. (1)

Symbol	Parameter	Condition	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
t <sub>PHL</sub>	Propagation Delay (High to Low)	Input Overdrive = $20$ mV Load = $50$ pF// $5$ k $\Omega$		2100		ns
		Input Overdrive = $50mV$ Load = $50pF//5k\Omega$		1380		ns
t <sub>PLH</sub>	Propagation Delay (Low to High)	Input Overdrive = $20 \text{mV}$ Load = $50 \text{pF}//5 \text{k}\Omega$		1800		ns
		Input Overdrive = $50 \text{mV}$ Load = $50 \text{pF}//5 \text{k}\Omega$		1100		ns

<sup>(1)</sup> Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

- (2) All limits are specified by testing or statistical analysis.
- (3) Typical values represent the most likely parametric norm.



# **Connection Diagram**




Figure 2. 5-Pin SC70 – Top View See Package Number DCK



# **Typical Performance Characteristics**

 $(T_A = 25$ °C, Unless otherwise specified).




Figure 3.




Figure 5.




Figure 7.





Figure 4.






Figure 8.



# **Typical Performance Characteristics (continued)**

 $(T_A = 25$ °C, Unless otherwise specified).




Figure 9.





Figure 11.






Figure 10.




Figure 12.




Figure 14.

Submit Documentation Feedback



# **Typical Performance Characteristics (continued)**

 $(T_A = 25$ °C, Unless otherwise specified).






Figure 15.



I<sub>SOURCE</sub> (mA)

Figure 17.

0 0.5






Figure 16.




Figure 18.




Figure 20.



# **Typical Performance Characteristics (continued)**

(T<sub>A</sub> = 25°C, Unless otherwise specified).




Figure 21.




Figure 22.





Figure 23.



t<sub>PLH</sub> vs. Overdrive 5 4.5 4 3.5 3 tpLH (µS) 2.5 2 1.5  $V_S = 1.8V$ 0.5 0 10 100 1000 OVERDRIVE (mV)

Figure 25.



#### APPLICATION NOTES

#### **BASIC COMPARATOR**

A comparator is often used to convert an analog signal to a digital signal. As shown in Figure 26, the comparator compares an input voltage  $(V_{IN})$  to a reference voltage  $(V_{REF})$ . If  $V_{IN}$  is less than  $V_{REF}$ , the output  $(V_O)$  is low. However, if  $V_{IN}$  is greater than  $V_{REF}$ , the output voltage  $(V_O)$  is high.

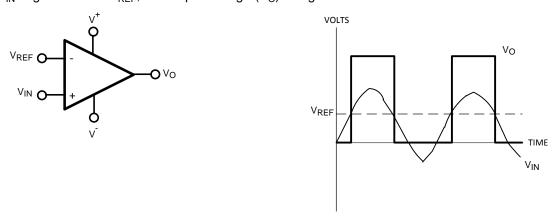


Figure 26. LMV7291 Basic Comparator

#### **RAIL-TO-RAIL INPUT STAGE**

The LMV7291 has an input common mode voltage range ( $V_{CM}$ ) of -0.1V below the  $V^-$  to 0.1V above  $V^+$ . This is achieved by using paralleled PNP and NPN differential input pairs. When the  $V_{CM}$  is near  $V^+$ , the NPN pair is on and the PNP pair is off. When the  $V_{CM}$  is near  $V^-$ , the NPN pair is off and the PNP pair is on. The crossover point between the NPN and PNP input stages is around 950mV from  $V^+$ . Since each input stage has its own offset voltage ( $V_{OS}$ ), the  $V_{OS}$  of the comparator becomes a function of the  $V_{CM}$ . See Figure 3, Figure 4, and Figure 5 in Typical Performance Characteristics. In application design, it is recommended to keep the  $V_{CM}$  away from the crossover point to avoid problems. The wide input voltage range makes LMV7291 ideal in power supply monitoring circuits, where the comparators are used to sense signals close to gnd and power supplies.

## **OUTPUT STAGE**

The LMV7291 has a push-pull output stage. This output stage keeps the total system power consumption to the absolute minimum. The only current consumed is the low supply current and the current going directly into the load. When output switches, both PMOS and NMOS at the output stage are on at the same time for a very short time. This allows current to flow directly between V<sup>+</sup> and V<sup>-</sup> through output transistors. The result is a short spike of current (shoot-through current) drawn from the supply and glitches in the supply voltages. The glitches can spread to other parts of the board as noise. To prevent the glitches in supply lines, power supply bypass capacitors must be installed. See CIRCUIT TECHNIQUES FOR AVOIDING OSCILLATIONS IN COMPARATOR APPLICATIONS for details.

#### **HYSTERESIS**

It is a standard procedure to use hysteresis (positive feedback) around a comparator, to prevent oscillation, and to avoid excessive noise on the output because the comparator is a good amplifier of its own noise.

### **Inverting Comparator with Hysteresis**

The inverting comparator with hysteresis requires a three resistor network that are referenced to the supply voltage  $V_{CC}$  of the comparator (Figure 27). When  $V_{IN}$  at the inverting input is less than  $V_A$ , the voltage at the non-inverting node of the comparator ( $V_{IN} < V_A$ ), the output voltage is high (for simplicity assume  $V_O$  switches as high as  $V_{CC}$ ). The three network resistors can be represented as  $R_1||R_3$  in series with  $R_2$ . The lower input trip voltage  $V_{A1}$  is defined as



$$V_{A1} = \frac{V_{CC} R_2}{(R_1 || R_3) + R_2} \tag{1}$$

When  $V_{IN}$  is greater than  $V_A$  ( $V_{IN} > V_A$ ), the output voltage is low and very close to ground. In this case the three network resistors can be presented as  $R_2//R_3$  in series with  $R_1$ . The upper trip voltage  $V_{A2}$  is defined as

$$V_{A2} = \frac{V_{CC} (R_2||R_3)}{R_1 + (R_2||R_3)}$$
(2)

The total hysteresis provided by the network is defined as

$$\Delta V_A = V_{A1} - V_{A2} \tag{3}$$

A good typical value of  $\Delta V_A$  would be in the range of 5 to 50 mV. This is easily obtained by choosing  $R_3$  as 1000 to 100 times ( $R_1||R_2$ ) for 5V operation, or as 300 to 30 times ( $R_1||R_2$ ) for 1.8V operation.

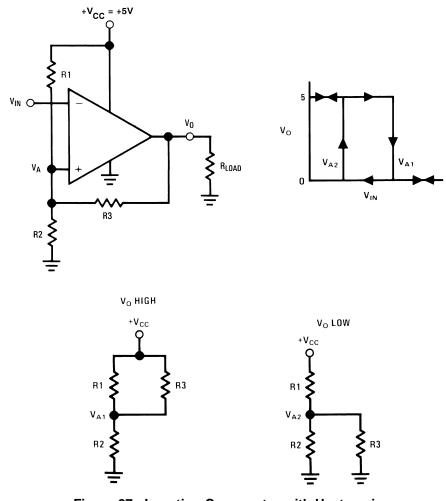


Figure 27. Inverting Comparator with Hysteresis

### **Non-Inverting Comparator with Hysteresis**

A non-inverting comparator with hysteresis requires a two resistor network, and a voltage reference ( $V_{REF}$ ) at the inverting input (Figure 28). When  $V_{IN}$  is low, the output is also low. For the output to switch from low to high,  $V_{IN}$  must rise up to  $V_{IN1}$ , where  $V_{IN1}$  is calculated by

$$V_{in1} = \frac{V_{ref}(R_1 + R_2)}{R_2}$$
 (4)

Submit Documentation Feedback



When  $V_{IN}$  is high, the output is also high. To make the comparator switch back to its low state,  $V_{IN}$  must equal  $V_{REF}$  before  $V_A$  will again equal  $V_{REF}$ .  $V_{IN}$  can be calculated by:

$$V_{in2} = \frac{V_{ref}(R_1 + R_2) - V_{CC}R_1}{R_2}$$
 (5)

The hysteresis of this circuit is the difference between  $V_{IN1}$  and  $V_{IN2}$ .

$$\Delta V_{IN} = V_{CC} R_1 / R_2 \tag{6}$$

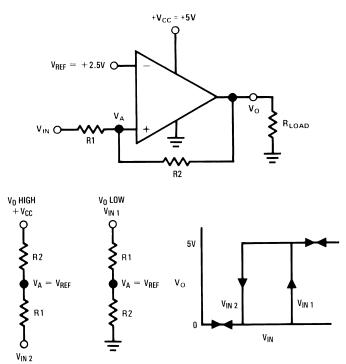


Figure 28. Non-Inverting Comparator with Hysteresis

#### CIRCUIT TECHNIQUES FOR AVOIDING OSCILLATIONS IN COMPARATOR APPLICATIONS

Feedback to almost any pin of a comparator can result in oscillation. In addition, when the input signal is a slow voltage ramp or sine wave, the comparator may also burst into oscillation near the crossing point. To avoid oscillation or instability, PCB layout should be engineered thoughtfully. Several precautions are recommended:

- 1. Power supply bypassing is critical, and will improve stability and transient response. Resistance and inductance from power supply wires and board traces increase power supply line impedance. When supply current changes, the power supply line will move due to its impedance. Large enough supply line shift will cause the comparator to mis-operate. To avoid problems, a small bypass capacitor, such as 0.1uF ceramic, should be placed immediately adjacent to the supply pins. An additional 6.8µF or greater tantalum capacitor should be placed at the point where the power supply for the comparator is introduced onto the board. These capacitors act as an energy reservoir and keep the supply impedance low. In dual supply application, a 0.1µF capacitor is recommended to be placed across V<sup>+</sup> and V<sup>-</sup> pins.
- 2. Keep all leads short to reduce stray capacitance and lead inductance. It will also minimize any unwanted coupling from any high-level signals (such as the output). The comparators can easily oscillate if the output lead is inadvertently allowed to capacitively couple to the inputs via stray capacitance. This shows up only during the output voltage transition intervals as the comparator changes states. Try to avoid a long loop which could act as an inductor (coil).
- 3. It is a good practice to use an unbroken ground plane on a printed circuit board to provide all components with a low inductive ground connection. Make sure ground paths are low-impedance where heavier currents are flowing to avoid ground level shift. Preferably there should be a ground plane under the component.
- 4. The output trace should be routed away from inputs. The ground plane should extend between the output and inputs to act as a guard.



- 5. When the signal source is applied through a resistive network to one input of the comparator, it is usually advantageous to connect the other input with a resistor with the same value, for both DC and AC consideration. Input traces should be laid out symmetrically if possible.
- 6. All pins of any unused comparators should be tied to the negative supply.

## **Typical Applications**

#### **POSITIVE PEAK DETECTOR**

A positive peak detect circuit is basically a comparator operated in a unity gain follower configuration, with a capacitor as a load to maintain the highest voltage. A diode is added at the output to prevent the capacitor from discharging through the output, and a  $1M\Omega$  resistor added in parallel to the capacitor to provide a high impedance discharge path. When the input  $V_{IN}$  increases, the inverting input of the comparator follows it, thus charging the capacitor. When it decreases, the cap discharges through the  $1M\Omega$  resistor. The decay time can be modified by changing the resistor. The output should be accessed through a follower circuit to prevent loading.




Figure 29. Positive Peak Detector

#### **NEGATIVE PEAK DETECTOR**

For the negative detector, the output transistor of the comparator acts as a low impedance current sink. Since there is no pull-up resistor, the only discharge path will be the  $1M\Omega$  resistor and any load impedance used. Decay time is changed by varying the  $1M\Omega$  resistor.




Figure 30. Negative Peak Detector

#### **SQUARE WAVE GENERATOR**

A typical application for a comparator is as a square wave oscillator. The circuit below generates a square wave whose period is set by the RC time constant of the capacitor  $C_1$  and resistor  $R_4$ . The maximum frequency is limited by the large signal propagation delay of the comparator, and by the capacitive loading at the output, which limits the output slew rate.



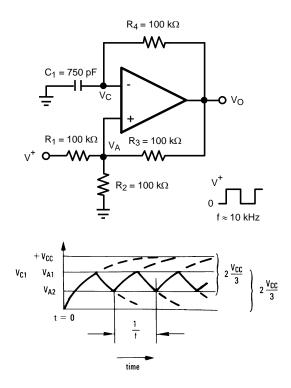


Figure 31. Squarewave Oscillator

To analyze the circuit, consider it when the output is high. That implies that the inverted input  $(V_C)$  is lower than the non-inverting input  $(V_A)$ . This causes the  $C_1$  to get charged through  $R_{4,}$  and the voltage  $V_C$  increases till it is equal to the non-inverting input. The value of  $V_A$  at this point is

$$V_{A1} = \frac{V_{CC}.R_2}{R_2 + R_1 || R_3} \tag{7}$$

If  $R_1 = R_2 = R_3$  then  $V_{A1} = 2V_{CC}/3$ 

At this point the comparator switches pulling down the output to the negative rail. The value of VA at this point is

$$V_{A2} = \frac{V_{CC}(R_2||R_3)}{R_1 + (R_2||R_3)}$$
(8)

If  $R_1 = R_2 = R_3$  then  $V_{A2} = V_{CC}/3$ 

The capacitor  $C_1$  now discharges through  $R_4$ , and the voltage  $V_C$  decreases till it is equal to  $V_{A2}$ , at which point the comparator switches again, bringing it back to the initial stage. The time period is equal to twice the time it takes to discharge  $C_1$  from  $2V_{CC}/3$  to  $V_{CC}/3$ , which is given by  $R_4C_1.$ In2. Hence the formula for the frequency is:

$$F = 1/(2.R_4.C_1.ln2)$$

# SNOSA86E - FEBRUARY 2004-REVISED MARCH 2013



# **REVISION HISTORY**

Cł	nanges from Revision D (March 2013) to Revision E	Pa	ge
•	Changed layout of National Data Sheet to TI format		15

www.ti.com 11-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
LMV7291MG	Obsolete	Production	SC70 (DCK)   5	-	-	Call TI	Call TI	-40 to 85	C36
LMV7291MG/NOPB	Active	Production	SC70 (DCK)   5	1000   SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	C36
LMV7291MG/NOPB.A	Active	Production	SC70 (DCK)   5	1000   SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	C36
LMV7291MGX/NOPB	Active	Production	SC70 (DCK)   5	3000   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	C36
LMV7291MGX/NOPB.A	Active	Production	SC70 (DCK)   5	3000   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	C36

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 5-Sep-2025

# TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMV7291MG/NOPB	SC70	DCK	5	1000	178.0	8.4	2.25	2.45	1.2	4.0	8.0	Q3
LMV7291MGX/NOPB	SC70	DCK	5	3000	178.0	8.4	2.25	2.45	1.2	4.0	8.0	Q3

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 5-Sep-2025

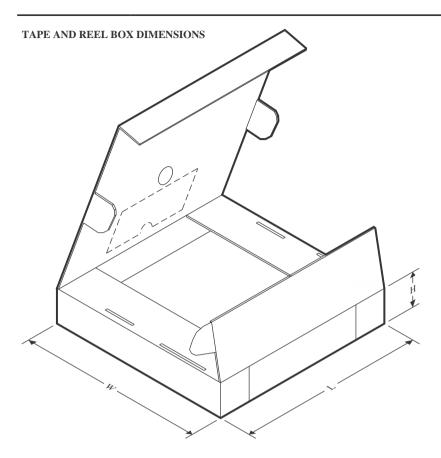

## \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMV7291MG/NOPB	SC70	DCK	5	1000	208.0	191.0	35.0
LMV7291MGX/NOPB	SC70	DCK	5	3000	208.0	191.0	35.0



SMALL OUTLINE TRANSISTOR



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
  2. This drawing is subject to change without notice.
  3. Reference JEDEC MO-203.

- 4. Support pin may differ or may not be present.5. Lead width does not comply with JEDEC.
- 6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 10. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025