

LSF0002 Ultra-Small Auto-Bidirectional Translator for Open Drain or Push Pull Applications

1 Features

- Provide bidirectional voltage translation with no direction pin needed (V_{EXTA} needs to be 0.8V less than V_{EXTB} for best signal integrity)
- Supports switch configuration implementation when $V_{EXTA} = V_{EXTB}$
- Supports up to 100MHz up translation and greater than 100MHz down translation at ≤ 30pF capacitive load and up To 40MHz up or down translation at 50pF capacitive load
- Allows bidirectional voltage-level translation between
 - $-0.95V \leftrightarrow 1.8/2.5/3.3/5V$
 - 1.2V ↔ 1.8/2.5/3.3/5V
 - 1.8V ↔ 2.5/3.3/5V
 - 2.5V ↔ 3.3/5V
 - $-3.3V \leftrightarrow 5V$
- Low standby current
- 5V tolerance I/O port to support TTL
- Low R_{ON} provides less signal distortion
- High-impedance I/O pins for EN = Low
- Flow-through pinout for easy PCB trace routing
- Latch-up performance >100mA per JESD 17
- -40°C to 125°C operating temperature range

2 Applications

- GPIO, MDIO, PMBus, SMBus, SDIO, UART, I²C, and other interfaces in telecom infrastructure
- Enterprise systems
- Communications equipment
- Personal electronics
- Industrial applications

3 Description

The LSF0002 supports bidirectional translation without the need for DIR pin, which minimizes system effort (for PMBus, I2C, SMBus, and so forth). The LSF family of devices supports up to 100MHz up translation and greater than 100MHz down translation at ≤ 30pF capacitive load and up to 40MHz up or down translation at 50pF capacitive load, which allows the LSF family to support more consumer or telecom interfaces (MDIO or SDIO).


LSF family supports 5V tolerance on I/O port, which makes it compatible with TTL levels in industrial and telecom applications. The LSF family can set up different voltage translation levels, which makes it very flexible.

Unlike the LSF0x0x family, the LSF0002 does not require VREF A and VREF B power supplies and the $200k\Omega$ bias resistor. The LSF0002 utilizes the V_{BIAS} pin that enables translation by being biased to the same voltage as the lower power supply at the I/Os that is being translated to and from.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE(2)		
LSF0002	DTQ (X2SON, 6)	1mm × 0.8mm		

- For more information, see Section 11.
- (2)The package size (length × width) is a nominal value and includes pins, where applicable.



Functional Block Diagram



Table of Contents

1 Features1	7.1 Ove
2 Applications	7.2 Fund
3 Description1	7.3 Feat
4 Pin Configuration and Functions3	7.4 Devi
5 Specifications4	8 Applicat
5.1 Absolute Maximum Ratings	8.1 Appl
5.2 ESD Ratings4	8.2 Typi
5.3 Recommended Operating Conditions4	8.3 Pow
5.4 Thermal Information5	8.4 Layo
5.5 Electrical Characteristics5	9 Device a
5.6 Switching Characteristics (Translating Down):	9.1 Rela
B _N = 3.3V6	9.2 Rece
5.7 Switching Characteristics (Translating Down):	9.3 Sup
B _N = 2.5V6	9.4 Trad
5.8 Switching Characteristics (Translating Up): B _N =	9.5 Elec
3.3V6	9.6 Glos
5.9 Switching Characteristics (Translating Up):B _N =	10 Revision
2.5V7	11 Mechai
6 Parameter Measurement Information8	
7 Detailed Description9	

7.1 Overview	9
7.2 Functional Block Diagram	9
7.3 Feature Description	
7.4 Device Functional Modes	
8 Application and Implementation	11
8.1 Application Information	11
8.2 Typical Applications	
8.3 Power Supply Recommendations	15
8.4 Layout	15
9 Device and Documentation Support	17
9.1 Related Documentation	17
9.2 Receiving Notification of Documentation Updates	s17
9.3 Support Resources	17
9.4 Trademarks	17
9.5 Electrostatic Discharge Caution	17
9.6 Glossary	
10 Revision History	18
11 Mechanical, Packaging, and Orderable	
Information	18



4 Pin Configuration and Functions

Pinout drawings are not to scale




Figure 4-1. LSF0002 DTQ Package, 6-Pin X2SON (Top View)

Table 4-1. Pin Functions

PIN TYPE(1		TYPE ⁽¹⁾	DESCRIPTION			
NAME	NO.	IIFE\/	DESCRIPTION			
A1	2	I/O				
A2	3	I/O	Auto Didirectional Data nort			
B1	5	I/O	Auto-Bidirectional Data port			
B2	4	I/O				
VBIAS	6	I	Enable input/ Supply Voltage			
GND	1	_	Ground			

⁽¹⁾ I= input, O = output



5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT
VI	Input voltage ⁽²⁾		-0.5	7	V
V _{I/O}	Input/output voltage ⁽²⁾		-0.5	7	V
	Continuous channel current			128	mA
I _{IK}	Input clamp current	V _I < 0		-50	mA
TJ	Junction temperature			150	°C
T _{stg}	Storage temperature		-65	150	°C

⁽¹⁾ Operation outside the Absolute Maximum Rating may cause permanent device damage. Absolute Maximum Rating do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Condition. If used outside the Recommended Operating Condition but within the Absolute Maximum Rating, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

(2) The input and input/output voltage ratings may be exceeded if the input and input/output clamp-current ratings are observed.

5.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 ⁽³⁾	±2000	V
V _(ESD)	Electrostatic discharge	Charged device model (CDM), per AEC Q100-001	±1000	V
V	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
V _(ESD)		Charged device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±1000	V

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.
- (3) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	PARAMETER		MIN	MAX	UNIT
V _{BIAS}	Reference Voltage		0	5.5	V
V _{I/O}	Input/Output voltage	A1, A2, B1, B2	0	5.5	V
I _{PASS}	Pass switch current			64	mA
T _A	Operating free-air temperature		-40	125	°C



5.4 Thermal Information

		LSF0002	
	THERMAL METRIC ⁽¹⁾	DTQ (X2SON)	UNIT
		6 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	294.4	°C/W
R ₀ JC(top)	Junction-to-case (top) thermal resistance	188.9	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	216.8	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	26.5	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	216.0	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	n/a	°C/W

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application

5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONE	DITIONS	MIN	TYP ⁽¹⁾	MAX	UNIT
V _{IK}	I _I = -18mA	EN = 0V				-1.2	V
I _{IH}	V _I = 5V	EN = 0V				5.0	μΑ
I _{CCBA}	$V_{ref_B} = V_{EN} = 5$	$5.5V$, $V_{ref_A} = 4.5V$,	$I_O = 0$, $V_I = V_{CC}$ or GND		1		μΑ
C _{I(ref_A/B/EN)}	V _I = 3V or 0				11		pF
$C_{\text{io(off)}}$	$V_0 = 3V \text{ or } 0,$	V _{EN} = 0V			4.0	6.0	pF
C _{io(on)}	$V_0 = 3V \text{ or } 0,$	V _{EN} = 3V			10.5	12.5	pF
			V _{ref_A} = 3.3V; V _{ref_B} = V _{EN} = 5V		8.0		
	$V_{I} = 0,$ $I_{O} = 64 \text{mA}$ $V_{I} = 0,$ $I_{O} = 32 \text{mA}$	I _O = 64mA	V _{ref_A} = 1.8V; V _{ref_B} = V _{EN} = 5V		9.0		Ω
			V _{ref_A} = 1.0V; V _{ref_B} = V _{EN} = 5V		10		
		1 - 22mA	V _{ref_A} = 1.8V; V _{ref_B} = V _{EN} = 5V		10		Ω
r _{ON} ⁽²⁾		1 ₀ – 32111A	V _{ref_A} = 2.5V; V _{ref_B} = V _{EN} = 5V		15		12
	V _I = 1.8V,	I _O = 15mA	V _{ref_A} = 3.3V; V _{ref_B} = V _{EN} = 5V		9.0		Ω
	V _I = 1.0V,	I _O = 10mA	V _{ref_A} = 1.8V; V _{ref_B} = V _{EN} = 3.3V		18		Ω
	V _I = 0V,	I _O = 10mA	$V_{ref_A} = 1.0V; V_{ref_B} = V_{EN} = 3.3V$		20		Ω
	V _I = 0V,	I _O = 10mA	V _{ref_A} = 1.0V; V _{ref_B} = V _{EN} = 1.8V		30		Ω

Copyright © 2025 Texas Instruments Incorporated

All typical values are at $T_A = 25$ °C. Measured by the voltage drop between the A and B pins at the indicated current through the switch. Minimum ON-state resistance is determined by the lowest voltage of the two (A or B) pins.



5.6 Switching Characteristics (Translating Down): $B_N = 3.3V$

over recommended operating free-air temperature range, $B_N = 3.3V$, $B_N = VIH = A_N + 1$, VIL = 0, and $VM = 0.5A_N$ (unless otherwise noted $^{(1)}$ (2)) (see Section 6)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
			C _L = 15pF		0.3		
T _{PLH}	Low-to-high propagation delay		C _L = 30pF		0.7		ns
		From (input) A or B to (output) B or A	C _L = 50pF		1.1		
	High to low propagation delay		C _L = 15pF		0.4		
T _{PHL}			C _L = 30pF		0.8		ns
			C _L = 50pF		1.2		

⁽¹⁾ Specified by simulation, not tested in production.

5.7 Switching Characteristics (Translating Down): $B_N = 2.5V$

over recommended operating free-air temperature range, B_N = 2.5V, B_N = VIH = A_N + 1, VIL = 0, and VM = 0.5 A_N (unless otherwise noted $^{(1)}$ (2)) (see Section 6)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
	Low-to-high propagation delay		C _L = 15pF		0.35		
T _{PLH}			C _L = 30pF		0.8		ns
			C _L = 50pF		1.2		
	High to low propagation delay		C _L = 15pF		0.5		
T _{PHL}			C _L = 30pF		1		ns
			C _L = 50pF		1.3		

⁽¹⁾ Specified by simulation, not tested in production.

5.8 Switching Characteristics (Translating Up): $B_N = 3.3V$

over recommended operating free-air temperature range, $B_N = 3.3V$, $B_N = VT = A_N + 1$, $Vref_A = VIH$, VIL = 0, $VM = 0.5A_N$ and RL = 300 (unless otherwise noted $^{(1)}$ (2)) (see Section 6)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
			C _L = 15pF		0.4		
T _{PLH}	Low-to-high propagation delay		C _L = 30pF		8.0		ns
		From (input) A or B to (output) B or A	C _L = 50pF		1		
			C _L = 15pF		0.4		
T _{PHL}	High to low propagation delay		C _L = 30pF		0.9		ns
			C _L = 50pF		1		

⁽¹⁾ Specified by simulation, not tested in production.

(2) Translating Down: the high-voltage side driving toward the low-voltage side.

⁽²⁾ Translating Down: the high-voltage side driving toward the low-voltage side.

⁽²⁾ Translating Down: the high-voltage side driving toward the low-voltage side.



5.9 Switching Characteristics (Translating Up): $B_N = 2.5V$

over recommended operating free-air temperature range, B_N = 2.5V, B_N = VT = A_N + 1, A_N = VIH, VIL = 0, VM = 0.5 A_N and RL = 300 (unless otherwise noted $^{(1)}$ (2)) (see Section 6)

	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT	
			C _L = 15pF		0.45		
T _{PLH}	Low-to-high propagation delay		C _L = 30pF		0.9		ns
		From (input) A or B to (output) B or	C _L = 50pF		1.1		
		A	C _L = 15pF		0.6		
T _{PHL} High to low propagation delay		C _L = 30pF		1.1		ns	
			C _L = 50pF		1.3		


⁽¹⁾ Specified by simulation, not tested in production.

Copyright © 2025 Texas Instruments Incorporated

⁽²⁾ Translating Down: the high-voltage side driving toward the low-voltage side.



6 Parameter Measurement Information

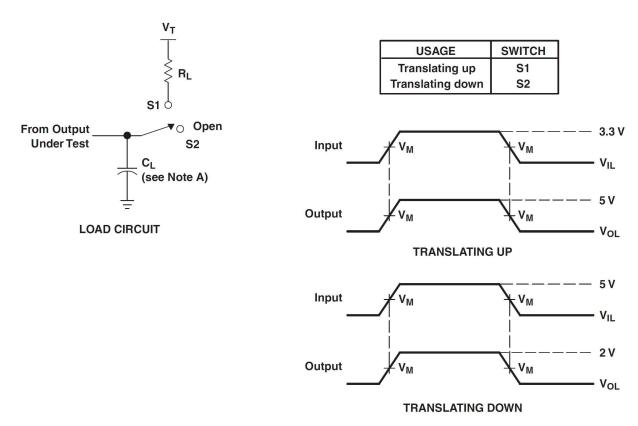

- A. C_L includes probe and jig capacitance.
- B. Generators that have the following characteristics generate all input pulses: PRR \leq 10MHs, $Z_O = 50\Omega$, $t_f \leq$ 2ns, $t_f \leq$ 2ns.
- C. The outputs are measured one at a time, with one transition per measurement.

Figure 6-1. Load Circuit for Outputs

Submit Document Feedback

Copyright © 2025 Texas Instruments Incorporated




7 Detailed Description

7.1 Overview

The LSF0002 can be used in level-translation applications for interfacing devices or systems operating with one another that operate at different interface voltages as well as for switching applications where $V_{\text{EXTA}} = V_{\text{EXTB}}$. This allows the I/Os of the LSF0002 to be placed in HIGH-Z when the device is set to enabled/ disabled. The LSF family is an excellent choice for use in applications where an open-drain driver is connected to the data I/Os. With appropriate pull-up resistors and layout, LSF can achieve 100MHz. The LSF family can also be used in applications where a push-pull driver is connected to the data I/Os. For an overview of device setup and operation, see *The Logic Minute* training series on *Understanding the LSF Family of Bidirectional, Multi-Voltage Level Translators*.

7.2 Functional Block Diagram



7.3 Feature Description

7.3.1 Auto Bidirectional Voltage Translation

The LSF family is an auto bidirectional voltage level translator that is operational from 0.95 to 5.5V. This allows for bidirectional voltage translation between 0.95V and 5.5V without the need for a direction pin in open-drain or push-pull applications. The LSF family supports level translation applications with transmission speeds greater than 100Mbps for open-drain systems using a 30pF capacitance and 250Ω pullup resistor. Both the output driver of the controller and the peripheral device output can be push-pull or open-drain (pull-up resistors may be required). In both up and down translation, the B-side is often referred to as the high side and refers to devices connected to the B ports. The A-side can be referred to as the low side.

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback



7.3.2 V_{BIAS}/ Enable

To enable the I/O pins, the V_{BIAS} input should be referenced towards the lower power supply (in the following example, $V_{EXT,A}$) during voltage translation. To be in the high impedance state during power-up, power-down, or during operation, the V_{BIAS} pin must be pulled low and at GND or disabled by an open-drain driver without a pullup resistor. Use the V_{BIAS} pin to properly bias the I/O channels. A filter capacitor on V_{BIAS} is also recommended for a stable supply at the device.

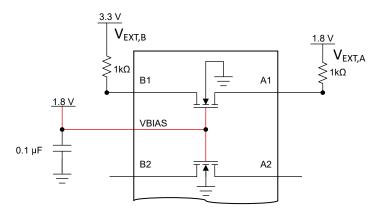


Figure 7-1. V_{BIAS} Tied to Lower Power Supply

The supply voltage of open drain I/O devices can be completely different from the supplies used for the LSF and has no impact on the operation. For additional details on how to use the enable pin, see the *Using the Enable Pin with the LSF Family video*.

Table 7-1. Enable Pin Function Table

INPUT V _{BIAS} PIN	Data Port State
Tied directly to V _{BIAS}	An = Bn
L	Hi-Z

7.4 Device Functional Modes

For each channel (n), when either the An or Bn port is LOW, the switch provides a low impedance path between the An and Bn ports; the corresponding Bn or An port will be pulled LOW. The low R_{ON} of the switch allows connections to be made with minimal propagation delay and signal distortion.

Table 7-1 provides a summary of device operation. For additional details on the functional operation of the LSF family of devices, see the *Down Translation with the LSF Family* and *Up Translation with the LSF Family* videos.

Table 7-2. Device Functionality

Signal Direction ⁽¹⁾	Input State	Switch State	Functionality
B to A (Down Translation)	B = LOW	ON (Low Impedance)	A-side voltage is pulled low through the switch to the B-side voltage
B to A (Down Translation)	B = HIGH	OFF (High Impedance)	A-side voltage is clamped at V _{EXT,A} ⁽²⁾
A to B (Up Translation)	A = LOW	ON (Low Impedance)	B-side voltage is pulled low through the switch to the A-side voltage
A to B (Op Translation)	A = HIGH	OFF (High Impedance)	B-side voltage is clamped at $V_{\text{EXT,A}}$ and then pulled up to the $V_{\text{EXT,B}}$ supply voltage

- (1) The downstream channel should not be actively driven through a low impedance driver, or else bus contention may occur.
- (2) The A-side can have a pullup to V_{EXT,A} for additional current drive capability or may also be pulled above V_{EXT,A} with a pullup resistor. Specifications in the Recommended Operating Conditions section should always be followed.

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

The LSF devices can perform voltage translation for open-drain or push-pull interfaces. Table 8-1 provides common interfaces and the corresponding device recommendation from the LSF family, which supports the corresponding bit count.

Table 8-1. Voltage Translator for Common Interfaces

Part Name	Channel Number	Interface
LSF0002	2	GPIO, MDIO, SMBus, PMBus, and I ² C

Some important reminders regarding the LSF0002 are as follows:

- LSF devices are switch-based, not buffer-based (for more information, see the TXB family for buffer-based devices).
- Specific data rates cannot be calculated by using 1/Tpd.
- V_{EXT.A}/V_{EXT.B} are referenced to the external power supplies at the I/Os.
- V_{BIAS} should be tied towards the lowest voltage being translated to at the I/Os.

8.2 Typical Applications

8.2.1 Open-Drain Interface (I²C, PMBus, SMBus, and GPIO)

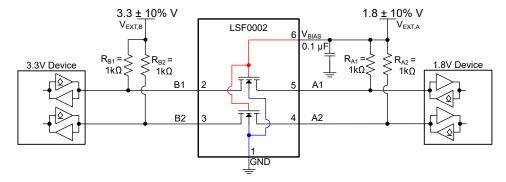


Figure 8-1. Typical Application Circuit for Open-Drain Translation (MDIO Shown as an Example)

8.2.1.1 Design Requirements

8.2.1.1.1 Enable and Disable Guidelines

In the previous figure, V_{BIAS} is referenced to the lower power supply ($V_{EXT,A}$) of 1.8V power supply and $V_{EXT,B}$ is set to 3.3V. The A1 and A2 channels have a maximum output voltage equal to V_{EXTA} and the B1 and B2 channels have a maximum output voltage equal to V_{EXT.B}.

The LSF0002 has an V_{BIAS} input that is used to disable the device by driving this node LOW to GND, placing all I/Os in the high-impedance state. Since the LSF family of devices are switch-type voltage translators, the power consumption is very low. TI recommends always enabling the LSF family for bidirectional applications (I²C, SMBus, PMBus, or MDIO).

Note

The $200k\Omega$, bias resistor is not required for the LSF0002

Table 8-2. Application Operating Condition (Level Shift Configuration, V_{FYTA} ≠ V_{FYTB})

			, EX1,X EX1,E	••
	PARAMETER	MIN	TYP MAX	UNIT
V _{EXT,A} (1)	reference voltage (A)	0.9	5.5	V
$V_{EXT,B}$	reference voltage (B)	V _{EXT,A} + 0.8	5.5	V
V _{BIAS}	input voltage on V _{BIAS} pin	V _{EXT,A}	V _{EXT,A} + 0.8	V
V_{PU}	pull-up supply voltage	0	$V_{EXT,B}$	V

(1) V_{EXT.A} is required to be the lowest voltage level across all inputs and outputs.

Table 8-3. Application Operating Condition (Switch Configuration, $V_{EXT.A} = V_{EXT.B}$)

	PARAMETER	MIN	TYP	MAX	UNIT
V _{EXT,A} =V _{EXT,B}	reference voltage (A) reference voltage (B)	0.9		5.5	V
V _{BIAS}	input voltage on V _{BIAS} pin	V _{EXT,A}		V _{EXT,A} + 0.8	V
V _{PU}	pull-up supply voltage	0		$V_{EXT,B}$	V

8.2.1.2 Detailed Design Procedure

8.2.1.2.1 Bidirectional Translation

For the bidirectional translation configuration (higher voltage to lower voltage or lower voltage to higher voltage), the V_{BIAS} input must be connected to $V_{EXT,A}$. This allows V_{BIAS} to regulate the bias of the I/O channels for proper translation. A filter capacitor on V_{BIAS} is recommended for a stable supply at the device. The controller output driver can be push-pull or open-drain (pull-up resistors may be required) and the peripheral device output can be push-pull or open-drain (pull-up resistors are required to pull the Bn outputs to V_{PU}).

Note

If either output is push-pull, data must be unidirectional or the outputs must be tri-state and be controlled by some direction-control mechanism to prevent HIGH-to-LOW bus contention in either direction. If both outputs are open-drain, no direction control is needed.

8.2.1.2.2 Pull-Up Resistor Sizing

The pull-up resistor value needs to limit the current through the pass transistor when it is in the ON state to about 15mA. Doing this causes a voltage drop of 260mV to 350mV to have a valid LOW signal on the downstream channel. If the current through the pass transistor is higher than 15mA, then the voltage drop is also higher in the ON state. To set the current through each pass transistor at 15mA, calculate the pull-up resistor value using the following equation:

$$Rpu = \frac{(Vpu - 0.35 V)}{0.015 A} \tag{1}$$

Table 8-4 provides resistor values, reference voltages, and currents at 8mA, 5mA, and 3mA. The resistor value shown in the +10% column (or a larger value) should be used so that the voltage drop across the transistor is 350mV or less. The external driver must be able to sink the total current from the resistors on both sides of the LSF family device at 0.175V, although the 15mA applies only to current flowing through the LSF family device. The device driving the low state at 0.175V must sink current from one or more of the pull-up resistors and maintain V_{OL} . A decrease in resistance will increase current, and thus result in increased V_{OL} .

	Table 6-4. Pull-Op Resistor Values						
V _{PU} ^{(1) (2)}	8mA		5n	nA	3mA		
V PU ('') (=)	NOMINAL (Ω)	+10% ⁽³⁾ (Ω)	NOMINAL (Ω)	+10% ⁽³⁾ (Ω)	NOMINAL (Ω)	+10% ⁽³⁾ (Ω)	
5V	581	639	930	1023	1550	1705	
3.3V	369	406	590	649	983	1082	
2.5V	269	296	430	473	717	788	
1.8V	181	199	290	319	483	532	
1.5V	144	158	230	253	383	422	
1.2V	106	117	170	187	283	312	

Table 8-4. Pull-Up Resistor Values

- (1) Calculated for V_{OL} = 0.35V
- (2) Assumes output driver $V_{OL} = 0.175V$ at stated current
- (3) +10% to compensate for V_{DD} range and resistor tolerance

8.2.1.3 Application Curve

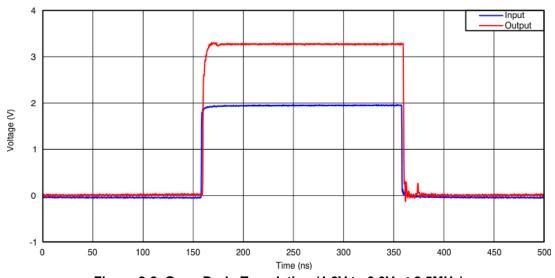


Figure 8-2. Open Drain Translation (1.8V to 3.3V at 2.5MHz)

8.2.2 Mixed-Mode Voltage Translation

The supply voltage ($V_{\text{EXT A,B}}$) for each channel can be individually set with a pull-up resistor. Figure 8-3 shows an example of this mixed-mode multi-voltage translation. For additional details on multi-voltage translation, see the *Multi-voltage Translation with the LSF Family* video.

With $V_{EXT,B}$ pulled up to 5V and $V_{EXT,A}$ connected to 1.2V, all channels will be clamped to 1.2V at which point a pullup can be used to define the high level voltage for a given channel.

- Push-Pull Down Translation (5V to 1.2V): Channel 2 is an example of this setup. When B2 is 5V (HIGH), A2 is clamped to 1.2V, and when B2 is 0V (LOW), A2 is driven LOW through the switch.
- Push-Pull Up Translation (1.2V to 3.3V): Channel 1 is an example of this setup. When A1 is 1.2V, the
 switch is high impedance and B1 channel is pulled up to 3.3V through RB1. When A1 is LOW, B1 is driven
 LOW through the switch.

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback

• Push-Pull Down Translation (3.3V to 1.2V): Channels 1 is an example of this setup. When B1 is driven to 3.3V, A1 is clamped to 1.2V, and when B1 is LOW, A1 is driven LOW through the switch.

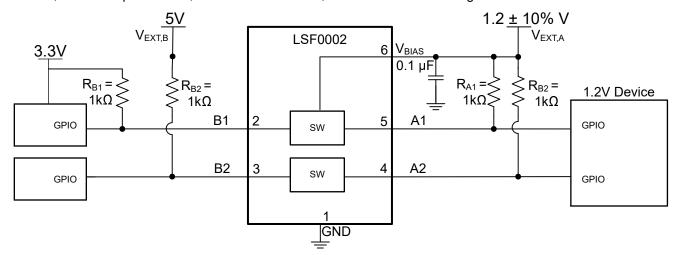


Figure 8-3. Multi-Voltage Translation Example with the LSF Translators

8.2.3 Voltage Translation for $V_{ref\ B} < V_{ref\ A} + 0.8V$

As described in the *Enable and Disable Guidelines* section, it is generally recommended that $V_{EXT,B} > V_{EXT,A} + 0.8V$; however, the device can still operate in the condition where $V_{EXT,B} < V_{EXT,A} + 0.8V$ as long as additional considerations are made for the design.

Typical Operation (V_{EXT,B} > **V**_{EXT,A} + **0.8V):** in this scenario, pullup resistors are not required on the A-side for proper down-translation. When down translating from B to A, the A-side I/O ports will clamp at $V_{EXT,A}$ to provide proper voltage translation. For further explanation of device operation, see the *Down Translation with the LSF Family* video.

Requirements for V_{EXT,B} < **V**_{EXT,A} + **0.8V Operation:** in this scenario, there is not a large enough voltage difference between V_{EXT,A} and V_{EXT,B} so that the A side I/O ports will be clamped at V_{EXT,A}, but rather at a voltage approximately equal to V_{EXT,B} – 0.8V. For example, if V_{EXT,B} = 1.8V and V_{EXT,A} = 1.2V, the A-side I/Os will clamp to a voltage around 1.0V. Therefore, to operate in such a condition, the following additional design considerations must be met:

- V_{EXT,B} must be greater than V_{EXT,A} during operation (V_{EXT,B} > V_{EXT,A})
- Pullup resistors should be populated on A-side I/O ports for the line to be fully pulled up to the desired voltage.

Figure 8-4 shows an example of this setup, where $1.2V \leftrightarrow 1.8V$ translation is achieved with the LSF0002. This type of setup also applies for other voltage nodes such as $1.8V \leftrightarrow 2.5V$, $1.05V \leftrightarrow 1.5V$, and others as long as the *Recommended Operating Conditions* table is followed.

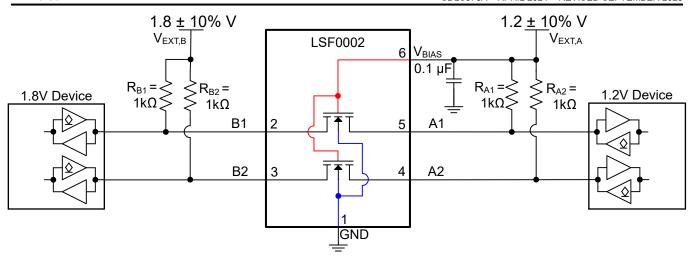


Figure 8-4. 1.2V to 1.8V Level Translation with LSF0002

8.3 Power Supply Recommendations

There are no power sequence requirements for the LSF family. Table 8-5 provides recommended operating voltages for all supply and input pins.

Table 8-5. Recommended Operating Voltages

	PARAMETER	MIN	TYP MAX	UNIT
V _{EXT,A} (1)	reference voltage (A)	0.9	5.5	V
V _{EXT,B}	reference voltage (B)	V _{EXT,A} + 0.8	5.5	V
V _{BIAS}	input voltage on EN pin	V _{EXT,A}	V _{EXT,A} + 0.8	V
V _{PU}	pull-up supply voltage	0	$V_{EXT,B}$	V

⁽¹⁾ $V_{\text{EXT,A}}$ is required to be the lowest voltage level across all inputs and outputs.

8.4 Layout

8.4.1 Layout Guidelines

Because the LSF family is a switch-type level translator, the signal integrity is highly related with a pull-up resistor and PCB capacitance condition. Therefore, do as follows:


- Short the signal trace as short as possible to reduce capacitance and minimize stub from the pull-up resistor.
- Place the LSF device as close to the high voltage side as possible.
- Select the appropriate pull-up resistor that applies to translation levels and the driving capability of the transmitter.

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback



8.4.2 Layout Example

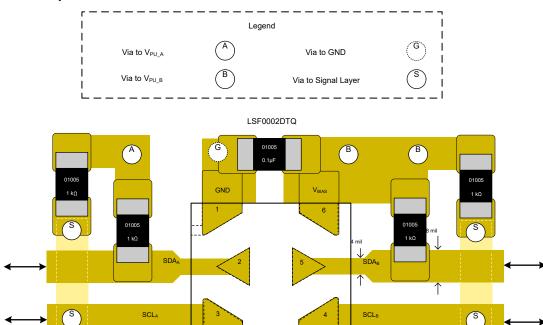

*Pullup Resistors are not required to be adjacent to the device, and can be present on the I²C line elsewhere in the system

Figure 8-5. Short Trace Layout



Figure 8-6. Device Placement

Submit Document Feedback

Copyright © 2025 Texas Instruments Incorporated

9 Device and Documentation Support

9.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, LSF Translator Family Evaluation Module user's guide
- Texas Instruments, Biasing Requirements for TXS, TXB, and LSF Auto-Bidirectional Translators application note
- · Texas Instruments, Voltage Level Translation with the LSF Family application note
- The Logic Minute Video Training Series on Understanding the LSF Family of Devices:
 - Texas Instruments, Introduction Voltage Level Translation with the LSF Family
 - Texas Instruments, Understanding the Bias Circuit for the LSF Family
 - Texas Instruments, Using the Enable Pin with the LSF Family
 - Texas Instruments, Translation Basics with the LSF Family
 - Texas Instruments, Down Translation with the LSF Family
 - Texas Instruments, *Up Translation with the LSF Family*
 - Texas Instruments, Multi-Voltage Translation with the LSF Family
 - Texas Instruments, Single Supply Translation with the LSF Family

9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.3 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

9.4 Trademarks

TI E2E[™] is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.



10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Ch	anges from Revision * (April 2024) to Revision A (September 2025)	Page
•	Updated Features to include switch configuration	
•	Updated Guaranteed by simulation to Specified by simulation in table notes for all Switching	
	Characteristics tables	6
•	Updated Figure 8-1	11
	Added Table 8-3	
•	Updated Figure 8-3	13
	Updated Figure 8-4	

DATE	REVISION	NOTES
April 2024	*	Initial Release

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 31-Oct-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
LSF0002DTQR	Active	Production	X2SON (DTQ) 6	12000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	J
LSF0002DTQR.A	Active	Production	X2SON (DTQ) 6	12000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	J

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE MATERIALS INFORMATION

www.ti.com 23-Dec-2024

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LSF0002DTQR	X2SON	DTQ	6	12000	180.0	8.4	0.92	1.12	0.47	4.0	8.1	Q2

www.ti.com 23-Dec-2024




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
LSF0002DTQR	X2SON	DTQ	6	12000	182.0	182.0	20.0	



PLASTIC SMALL OUTLINE - NO LEAD

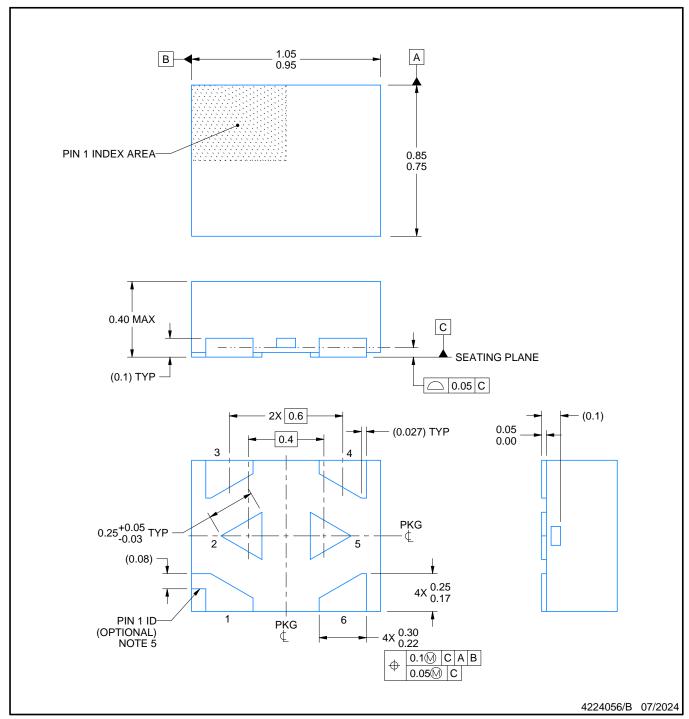


NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pads must be soldered to the printed circuit board for optimal thermal and mechanical performance.

 4. The size and shape of this feature may vary.
- 5. Features may not exist. Recommend use of pin 1 marking on top of package for orientation purposes.



PLASTIC SMALL OUTLINE - NO LEAD

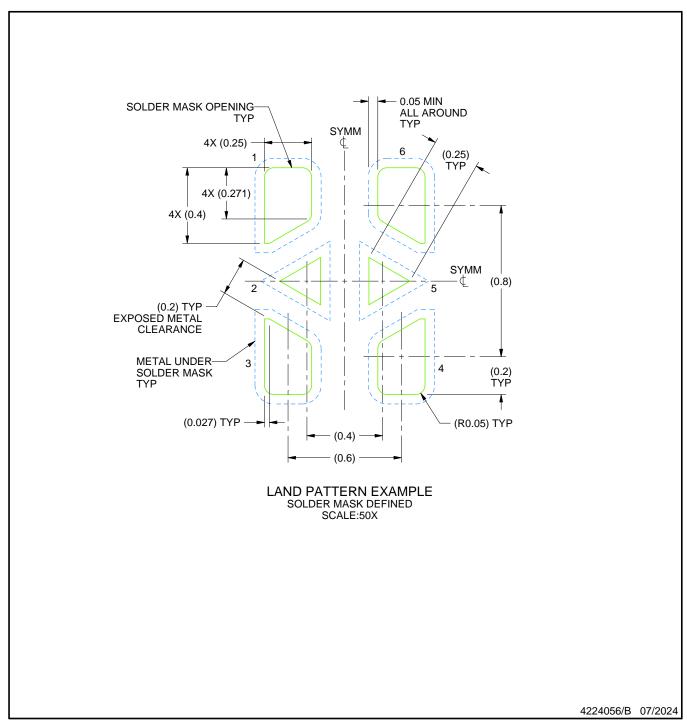


NOTES: (continued)



^{6.} This package is designed to be soldered to a thermal pads on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

^{7.} Vias are optional depending on application, refer to device data sheet. If some or all are implemented, recommended via locations are shown.

PLASTIC SMALL OUTLINE - NO LEAD

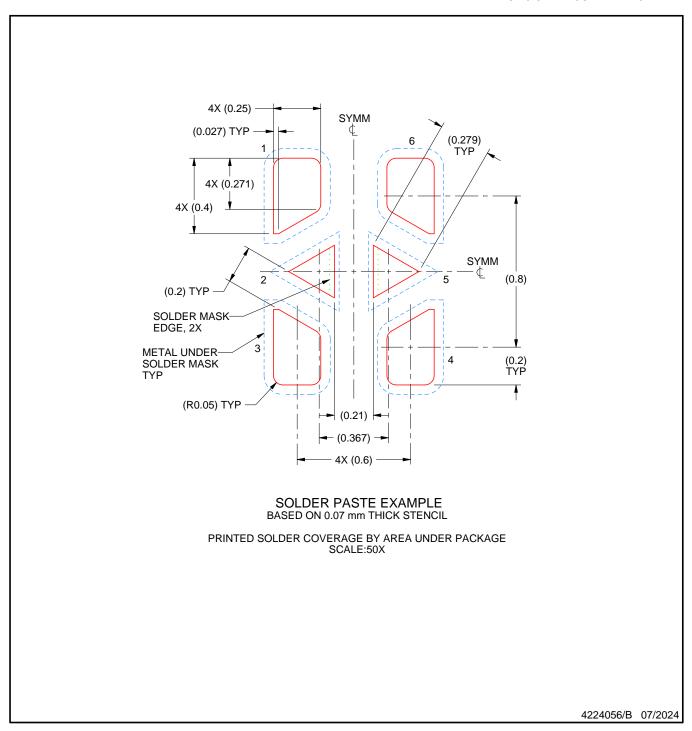

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025