

11.3 Gbps Limiting Amplifier

Check for Samples: ONET1151P

FEATURES

- Up to 11.3 Gbps Operation
- Two-Wire Digital Interface
- Adjustable LOS Threshold
- Digitally Selectable Output Voltage
- Digitally Selectable Output De-Emphasis
- Adjustable Input Threshold Voltage
- Output Polarity Select
- Programmable LOS Masking Time
- Input Offset Cancellation
- CML Data Outputs with On-Chip 50- Ω Back-Termination to VCC
- Single +3.3-V Supply
- Low Power Consumption

Output Disable

- Surface Mount Small Footprint 3 mm x 3 mm 16-Pin RoHS Compliant QFN Package
- Pin Compatible to the ONET8501PB

APPLICATIONS

- 10 Gigabit Ethernet Optical Receivers
- 2x/4x/8x and 10x Fibre Channel Optical Receivers
- SONET OC-192/SDH-64 Optical Receivers
- SFP+ and XFP Transceiver Modules
- Cable Driver and Receiver

DESCRIPTION

The ONET1151P is a high-speed, 3.3-V limiting amplifier for multiple fiber optic and copper cable applications with data rates up to 11.3 Gbps.

The device provides a two-wire serial interface which allows digital control of the output amplitude, output preemphasis, input threshold voltage (slice level) and the loss of signal assert level.

The ONET1151P provides a gain of about 33dB which ensures a fully differential output swing for input signals as low as 20 mV $_{p-p}$. The output amplitude can be adjusted between 350 mV $_{p-p}$ and 850 mV $_{p-p}$. To compensate for frequency dependent loss of microstrips or striplines connected to the output of the device, programmable deemphasis is included in the output stage. A settable loss of signal (LOS) detection with programmable output masking time and output disable are also provided.

The part, available in RoHS compliant small footprint 3 mm x 3 mm 16-pin QFN package, typically dissipates 132 mW with 550 mV_{p-p} output and is characterized for operation from -40°C to 100°C.



SLLSEH8 -SEPTEMBER 2013 www.ti.com





This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

BLOCK DIAGRAM

A simplified block diagram of the ONET1151P is shown in Figure 1.

This compact, low power 11.3 Gbps limiting amplifier consists of a high-speed data path with offset cancellation block (DC feedback) combined with an analog settable input threshold adjust, a loss of signal detection block using 2 peak detectors, a two-wire interface with a control-logic block and a bandgap voltage reference and bias current generation block.

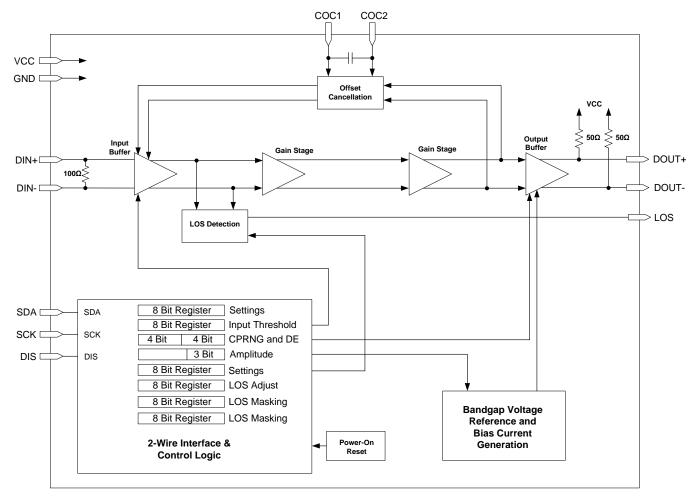


Figure 1. Simplified Block Diagram of the ONET1151P

PACKAGE

The ONET1151P is available in a small footprint 3 mm \times 3 mm 16-pin RoHS compliant QFN package with a lead pitch of 0.5 mm. The pinout is shown in Figure 2.




Figure 2. Pinout of ONET1151P in a 3mm x 3mm 16-Pin QFN Package (Top View)

Table 1. PIN DESCRIPTIONS

	PIN	TVDE	DESCRIPTION
NAME	NO.	TYPE	DESCRIPTION
GND	1, 4, EP	Supply	Circuit ground. Exposed die pad (EP) must be grounded.
DIN+	2	Analog-input	Non-inverted data input. Differentially 100 Ω terminated to DIN–.
DIN-	3	Analog-input	Inverted data input. Differentially 100 Ω terminated to DIN+.
COC1	5	Analog	Offset cancellation filter capacitor plus terminal. An external capacitor can be connected between this pin and COC2 to reduce the low frequency cutoff. To disable the offset cancellation loop, connect COC1 and COC2 together.
COC2	6	Analog	Offset cancellation filter capacitor minus terminal. An external capacitor can be connected between this pin and COC1 to reduce the low frequency cutoff. To disable the offset cancellation loop, connect COC1 and COC2 together.
DIS	7	Digital-input	Disables the output stage when set to a high level.
LOS	8	Open drain MOS	High level indicates that the input signal amplitude is below the programmed threshold level. Open drain output. Requires an external $10k\Omega$ pull-up resistor to VCC for proper operation.
VCC	9, 12	Supply	3.3-V supply voltage.
DOUT-	10	CML-out	Inverted data output. On-chip 50 Ω back-terminated to VCC.
DOUT+	11	CML-out	Non-inverted data output. On-chip 50 Ω back-terminated to VCC.
NC	13, 14	No Connect	Do not connect
SCK	15	Digital-input	Serial interface clock input. Connect a pull-up resistor (10 kΩ typical) to VCC.
SDA	16	Digital-input	Serial interface data input. Connect a pull-up resistor (10 kΩ typical) to VCC.

Copyright © 2013, Texas Instruments Incorporated

STRUMENTS

SLLSEH8 –SEPTEMBER 2013 www.ti.com

ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

	DADAMETED	VALUE	LINUT	
	PARAMETER	MIN	MAX	UNIT
V _{CC}	Supply voltage ⁽²⁾	-0.3	4	V
V _{DIN+} , V _{DIN-}	Voltage at DIN+, DIN- (2)	0.5	4	V
V _{LOS} , V _{COC1} , V _{COC2} , V _{DOUT+} , V _{DOUT-} , V _{DIS} , V _{SDA} , V _{SCK}	Voltage at LOS, COC1, COC2, DOUT+, DOUT-, DIS, SDA, SCK ⁽²⁾	-0.3	4.0	V
V _{DIN, DIFF}	Differential voltage between DIN+ and DIN-		±2.5	V
I _{DIN+} , I _{DIN} -, I _{DOUT+} , I _{DOUT-}	Continuous current at inputs and outputs		25	mA
ESD	ESD rating at all pins		2	kV (HBM)
T _A	Characterized free-air operating temperature range	-40	100	°C
T _{J, max}	Maximum junction temperature		125	°C
T _{STG}	Storage temperature range	-65	150	°C
T _C	Case temperature	-40	110	°C
T _{LEAD}	Lead temperature 1.6mm (1/16 inch) from case for 10 seconds		260	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute—maximum—rated conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	,	VALUE			
	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
V Supply valtage	Cumply valtage	$T_A = -40^{\circ}C \text{ to } +100^{\circ}C$	2.9	3.3	3.63		
V _{CC}	Supply voltage	$T_A = -30^{\circ}C \text{ to } +100^{\circ}C$	2.85	3.3	3.63	V	
T _A	Operating free-air temperature		-40		100	°C	
	DIGITAL input high voltage		2.0			V	
	DIGITAL input low voltage	_			0.8	V	

DC ELECTRICAL CHARACTERISTICS

over recommended operating conditions with $50-\Omega$ output load, $550~\text{mV}_{\text{p-p}}$ output voltage and BIAS bit (Register 7) set to 1, unless otherwise noted. Typical operating condition is at 3.3 V and $T_A = 25^{\circ}\text{C}$

	PARAMETER	TEST CONDITIONS	,	UNIT		
	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNII
V _{CC} Suppl	Supply voltage	$T_A = -40^{\circ}C \text{ to } +100^{\circ}C$	2.9	3.3	3.63	V
	Supply voltage	$T_A = -30$ °C to +100°C	2.85	3.3	3.63	
I _{VCC}	Supply current	DIS = 0, CML currents included		40	52	mA
R _{IN}	Data input resistance	Differential		100		Ω
R _{OUT}	Data output resistance	Single-ended, referenced to V _{CC}		50		Ω
	LOS HIGH voltage	I_{SOURCE} = 50 μA with 10 kΩ pull-up to V_{CC}	2.3			V
	LOS LOW voltage	I_{SINK} = 10 mA with 10 k Ω pull-up to V_{CC}			0.4	V

⁽²⁾ All voltage values are with respect to network ground terminal.



AC ELECTRICAL CHARACTERISTICS

over recommended operating conditions with 50- Ω output load, 550mVpp output voltage and BIAS bit (Register 7) set to 1, unless otherwise noted. Typical operating condition is at $V_{CC} = 3.3 \text{ V}$ and $T_A = 25^{\circ}\text{C}$.

	herwise noted. Typical operating condition		,	/ALUE		
	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f3dB-H	-3dB bandwidth default settings		7.5	9.5		GHz
f3dB-L	Low frequency -3dB bandwidth	With 330 pF COC capacitor		10	45	kHz
.,	Data family and William	PRBS31 pattern at 11.3 Gbps, BER < 10 ⁻¹²		6	9	>/
$V_{IN,MIN}$	Data input sensitivity	V _{OD-min} ≥ 0.95 * V _{OD} (output limited)		20	40	mV_{p-p}
00044	Differential insulations and	0.01 GHz < f < 5 GHz		-15		-ID
SDD11	Differential input return gain	5 GHz < f < 12.1 GHz		-8		dB
SDD22	Differential output return gain	0.01 GHz < f < 5 GHz		-15		dB
		5 GHz < f < 12.1 GHz		-8		
SCD11	Differential to common mode conversion gain	0.01 GHz < f < 12.1 GHz		-15		dB
00000		0.01 GHz < f < 5 GHz		-13		٩D
SCC22	Common mode output return gain	5 GHz < f < 12.1 GHz		-9		dB
Α	Small signal gain		26	33		dB
V _{IN-MAX}	Data input overload	BIAS (Reg7 bit 0) set to 1	2000			mV_{p-p}
		$V_{IN} = 15 \text{ mV}_{p-p}$, K28.5 pattern		3	8	
DJ	Deterministic jitter at 11.3 Gbps	$V_{IN} = 30 \text{ mV}_{p-p}$, K28.5 pattern		3	10	ps _{p-p}
		V _{IN} = 2000 mV _{p-p} , K28.5 pattern		6	15	
RJ	Random jitter	$V_{IN} = 30 \text{ mV}_{p-p}$		1		ps _{rms}
		$V_{IN} > 30 \text{ mV}_{p-p}, \text{ DIS} = 0, \text{ AMP}[02] = 000$		380		m\/
V _{OD}	Differential data output voltage	$V_{IN} > 30 \text{ mV}_{p-p}, \text{ DIS} = 0, \text{ AMP}[02] = 111$		820		mV_{p-p}
		DIS = 1			5	mV_{rms}
V_{PREEM}	Output de-emphasis step size			1		dB
t _R	Output rise time	$20\% - 80\%$, $V_{IN} > 30 \text{ mV}_{p-p}$		30	40	ps
t _F	Output fall time	20% – 80%, V _{IN} > 30 mV _{p-p}		30	40	ps
CMOV	AC common mode output voltage	PRBS31 pattern; AMP[02] = 010			7	mV_{rms}
\/	LOW LOS assert threshold range min.	K28.5 pattern at 11.3 Gbps, LOSRNG = 0		15		m\/
V_{TH}	LOW LOS assert threshold range max.	K28.5 pattern at 11.3 Gbps, LOSRNG = 0		35		mV_{p-p}
V	HIGH LOS assert threshold range min.	K28.5 pattern at 11.3 Gbps, LOSRNG = 1		35		m\/
V _{TH}	HIGH LOS assert threshold range max.	K28.5 pattern at 11.3 Gbps, LOSRNG = 1		80		mV_{p-p}
		Versus temperature at 11.3 Gbps		1.5		dB
	LOS threshold variation	Versus supply voltage VCC at 11.3 Gbps		1		dB
		Versus data rate		1.5		dB
	LOS hysteresis (electrical)	K28.5 pattern at 11.3 Gbps	2	4	6.5	dB
T _{LOS_AST}	LOS assert time		2.5	10	80	μs
T _{LOS_DEA}	LOS deassert time		2.5	10	80	μs
	Maximum LOS output masking time		2000			μs
	LOS masking time step size			32		μs
T _{DIS}	Disable response time			20		ns

SLLSEH8 -SEPTEMBER 2013 www.ti.com



DETAILED DESCRIPTION

HIGH-SPEED DATA PATH

The high-speed data signal is applied to the data path by means of input signal pins DIN+ / DIN-. The data path consists of a $100-\Omega$ differential termination resistor followed by an input buffer. A gain stage and an output buffer stage follow the input buffer, which together provide a gain of 33dB. The device can accept input amplitude levels from $6mV_{p-p}$ up to $2000mV_{p-p}$. The amplified data output signal is available at the output pins DOUT+ / DOUT- which include on-chip $2 \times 50-\Omega$ back-termination to VCC.

Offset cancellation compensates for internal offset voltages and thus ensures proper operation even for very small input data signals. The offset cancellation can be disabled so that the input threshold voltage can be adjusted to optimize the bit error rate or change the eye crossing to compensate for input signal pulse width distortion. The offset cancellation can be disabled by setting OCDIS = 1 (bit 1 of register 0). The input threshold level can be adjusted using register settings THADJ[0..7] (register 1). When register 1 is set to 0x00, the threshold adjustment circuitry is disabled to reduce the supply current. Setting register 1 to any other value will enable the circuitry and the supply current will increase by approximately 2 mA. The amount of adjustment that register 1 can provide is controlled by the CPRNG[1..0] bits (register 2). For details regarding input threshold adjust and range, see Table 12.

The low frequency cutoff is as low as 80 kHz with the built-in filter capacitor. For applications, which require even lower cutoff frequencies, an additional external filter capacitor may be connected to the COC1 and COC2 pins. A value of 330 pF results in a low frequency cutoff of 10 kHz.

The receiver can be optimized for various applications using the settings in register 7. To enable the settings, set the SEL bit (bit 7 of register 7) to 1. It is recommended that the BIAS bit (bit 0 of register 7) be set to 1, especially if the input voltage to the ONET1151P will exceed about 500 mV_{p-p} differential. Setting BIAS to 1 adds 2 mA of bias current to the input stage, making it more robust for high input voltages. For input voltages lower than 500 mV_{p-p}, as typically would be supplied from a transimpedance amplifier (TIA), BIAS can be set to 0 to reduce the supply current. In addition, the RXOPT[1..0] bits (register 7) can be used to optimize the jitter based upon the TIA that is used. When RXOPT is set to 00, there is some input equalization set at the input to the limiting amplifier. This is a good general setting to use and for most applications it is recommended to set register 7 to 0x81. If the input voltage to the limiting amplifier does not exceed about 500 mV_{p-p} differential, then the jitter may be reduced by setting register 7 to 0x85.

BANDGAP VOLTAGE AND BIAS GENERATION

The ONET1151P limiting amplifier is supplied by a single +3.3-V supply voltage connected to the VCC pins. This voltage is referred to ground (GND).

On-chip bandgap voltage circuitry generates a reference voltage, independent of supply voltage, from which all other internally required voltages and bias currents are derived.

HIGH-SPEED OUTPUT BUFFER

The output amplitude of the buffer can be varied from 350 mV_{p-p} to 850 mV_{p-p} using the register settings AMP[0..2] (register 3) via the serial interface. The default amplitude setting is AMP[0..2] = 010 which provides 550 mV_{p-p} differential output voltage. To compensate for frequency dependant losses of transmission lines connected to the output, the ONET1151P has adjustable de-emphasis of the output stage. The de-emphasis can be set from 0 to 8dB in 1dB steps using register settings DEADJ[0..3] (register 2).

In addition, the polarity of the output pins can be inverted by setting the output polarity switch bit, POL (bit 4 of register 0) to 1.

Product Folder Links: ONET1151P

LOSS OF SIGNAL DETECTION

The loss of signal detection is done by 2 separate level detectors to cover a wide dynamic range. The peak values of the input signal and the output signal of the gain stage are monitored by the peak detectors. The peak values are compared to a pre-defined loss of signal threshold voltage inside the loss of signal detection block. As a result of the comparison, the LOS signal, which indicates that the input signal amplitude is below the defined threshold level, is generated. The LOS assert level is settable through the serial interface. There are 2 LOS ranges settable with the LOSRNG bit (bit 2 register 0). By setting LOSRNG = 1, the high range of the LOS assert values are used (35 mV_{p-p} to 80 mV_{p-p}) and by setting LOSRNG = 0, the low range of the LOS assert values are used (15 mV_{p-p} to 35 mV_{p-p}).

There are 128 possible internal LOS settings (7bit) for each LOS range to adjust the LOS assert level. If the LOS register selection bit is set low, LOSSEL = 0 (bit 7 of register 11), then the default LOS assert level of approximately 25 mV_{p-p} is used. If the register selection bit is set high, LOSSEL = 1 (bit 7 of register 11), then the content of LOS[0..6] (register 11) is used to set the LOS assert level.

An LOS output masking time can be enabled on the raising and falling edges of the LOS output signal. The LOS rising edge masking time is enabled by setting LOSTMRENA = 1 (bit 7 of register 13) and the time programmed using LOSTMR[0..6] (register 13). The LOS falling edge masking time is enabled by setting LOSTMFENA = 1 (bit 7 of register 12) and the time programmed using LOSTMF[0..6] (register 12). This feature is used to mask a false input to the limiting amplifier after a loss of signal has occurred or when the input signal is re-applied. The masking time can be set from 10 μ s to 2 ms.

2-WIRE INTERFACE AND CONTROL LOGIC

The ONET1151P uses a 2-wire serial interface for digital control. The two circuit inputs, SDA and SCK, are driven, respectively, by the serial data and serial clock from a microcontroller, for example. Both inputs include $100-k\Omega$ pull-up resistors to VCC. For driving these inputs, an open drain output is recommended.

The 2-wire interface allows write access to the internal memory map to modify control registers and read access to read out control and status signals. The ONET1151P is a slave device only which means that it can not initiate a transmission itself; it always relies on the availability of the SCK signal for the duration of the transmission. The master device provides the clock signal as well as the START and STOP commands. The protocol for a data transmission is as follows:

- 1. START command
- 2. 7 bit slave address (1000100) followed by an eighth bit which is the data direction bit (R/W). A zero indicates a WRITE and a 1 indicates a READ.
- 3. 8-bit register address
- 4. 8-bit register data word
- 5. STOP command

Regarding timing, the ONET1151P is I²C compatible. The typical timing is shown in Figure 3 and complete data transfer is shown in Figure 4. Parameters for Figure 3 are defined in Table 2.

Bus Idle: Both SDA and SCK lines remain HIGH.

Start Data Transfer: A change in the state of the SDA line, from HIGH to LOW, while the SCK line is HIGH, defines a START condition (S). Each data transfer is initiated with a START condition.

Stop Data Transfer: A change in the state of the SDA line from LOW to HIGH while the SCK line is HIGH defines a STOP condition (P). Each data transfer is terminated with a STOP condition; however, if the master still wishes to communicate on the bus, it can generate a repeated START condition and address another slave without first generating a STOP condition.

Data Transfer: Only one data byte can be transferred between a START and a STOP condition. The receiver acknowledges the transfer of data.

Product Folder Links: ONET1151P



Acknowledge: Each receiving device, when addressed, is obliged to generate an acknowledge bit. The transmitter releases the SDA line and a device that acknowledges must pull down the SDA line during the acknowledge clock pulse in such a way that the SDA line is stable LOW during the HIGH period of the acknowledge clock pulse. Setup and hold times must be taken into account. When a slave-receiver doesn't acknowledge the slave address, the data line must be left HIGH by the slave. The master can then generate a STOP condition to abort the transfer. If the slave-receiver does acknowledge the slave address but some time later in the transfer cannot receive any more data bytes, the master must abort the transfer. This is indicated by the slave generating the not acknowledge on the first byte to follow. The slave leaves the data line HIGH and the master generates the STOP condition.

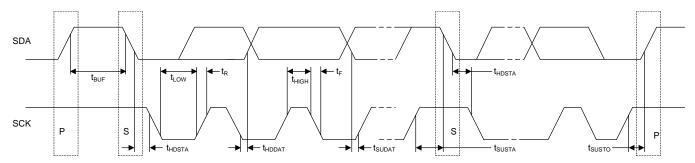


Figure 3. I²C Timing Diagram

Table 2. Timing Diagram Definitions

Parameter	Symbol	Min	Max	Unit
SCK clock frequency	f _{SCK}		400	kHz
Bus free time between STOP and START conditions	t _{BUF}	1.3		μs
Hold time after repeated START condition. After this period, the first clock pulse is generated	t _{HDSTA}	0.6		μs
Low period of the SCK clock	t _{LOW}	1.3		μs
High period of the SCK clock	t _{HIGH}	0.6		μs
Setup time for a repeated START condition	t _{SUSTA}	0.6		μs
Data HOLD time	t _{HDDAT}	0		μs
Data setup time	t _{SUDAT}	100		ns
Rise time of both SDA and SCK signals	t _R		300	ns
Fall time of both SDA and SCK signals	t _F		300	ns
Setup time for STOP condition	t _{SUSTO}	0.6		μs



Write	Sequence												
1	7	1	1	8	1		8	1	1				
S	Slave Address	Wr	A	Register Address	A		Data Byte	А	Р				
Read	Sequence												
1	7	1	1	8	1	1	7		1	1	8	1	1
S	Slave Address	Wr	А	Register Address	А	s	Slave Addre	ess	Rd	А	Data Byte	N	Р
Legend	1												
S	Start Condition												
Wr	Write Bit (bit value = 0)												
Rd	Read Bit (bit value = 1)												
А	Acknowledge												
N	Not Acknowledge												
Р	Stop Condition												

Figure 4. Data Transfer



www.ti.com

REGISTER MAPPING

The register mapping for read/write register addresses 0 (0x00) through 13 (0x0D) are shown in Table 3 through Table 10. The register mapping for the read only register address 15 (0x0F) is shown in Table 11. Table 12 describes the circuit functionality based on the register settings.

Table 3. Register 0 (0x00) Mapping - Control Settings

Register Address 0 (0x00)										
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0			
-	-	CLKDIS	POL	DIS	LOSRNG	OCDIS	-			

Table 4. Register 1 (0x01) Mapping - Input Threshold Adjust

Register Address 1 (0x01)									
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0		
THADJ7	THADJ6	THADJ5	THADJ4	THADJ3	THADJ2	THADJ1	THADJ0		

Table 5. Register 2 (0x02) Mapping – Cross Point Range and De-emphasis Adjust

Register Address 2 (0x02)										
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0			
-	-	CPRNG1	CPRNG0	DEADJ3	DEADJ2	DEADJ1	DEADJ0			

Table 6. Register 3 (0x03) Mapping – Output Amplitude Adjust

	Register Address 3 (0x03)										
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0				
-	-	-	-	-	AMP2	AMP1	AMP0				

Table 7. Register 7 (0x07) Mapping - Receiver Optimization

	Register Address 7 (0x07)										
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0				
SEL	-	-	-	RXOPT1	RXOPT0	-	BIAS				

Table 8. Register 11 (0x0B) Mapping - LOS Assert Level

			` '	•					
Register Address 11 (0x0B)									
Bit 7	Bit 1	Bit 0							
LOSSEL	LOSA6	LOSA5	LOSA4	LOSA3	LOSA2	LOSA1	LOSA0		

Table 9. Register 12 (0x0C) Mapping – Falling Edge LOS Masking Register

	Register Address 12 (0x0C)											
Bit 7 Bit 6 Bit 5 Bit 4 Bit 3 Bit 2 Bit 1												
LOSTMFENA	LOSTMF6	LOSTMF5	LOSTMF4	LOSTMF3	LOSTMF2	LOSTMF1	LOSTMF0					

Table 10. Register 13 (0x0D) Mapping – Rising Edge LOS Masking Register

	Register Address 13 (0x0D)											
Bit 7 Bit 6 Bit 5 Bit 4 Bit 3 Bit 2 Bit 1 Bit 0												
	LOSTMRENA	LOSTMR6	LOSTMR5	LOSTMR4	LOSTMR3	LOSTMR2	LOSTMR1	LOSTMR0				

Table 11. Register 15 (0x0F) Mapping – Selected LOS Level (Read Only)

	Register Address 15 (0x0F)											
Bit 7 Bit 6 Bit 5 Bit 4 Bit 3 Bit 2 Bit 1 Bit 0												
-	SELLOS6	SELLOS5	SELLOS4	SELLOS3	SELLOS2	SELLOS1	SELLOS0					



Table 12. Register Functionality

Register	Bit	Symbol	Function
-	7	-	
	6	-	
	5	CLKDIS	Disable I ² C clock: 1 = clock disabled when DIS pin is high 0 = clock enabled
	4	POL	Output polarity switch bit: 1 = inverted polarity 0 = normal polarity
0	3	DIS	Output disable bit: 1 = output disabled 0 = output enabled
	2	LOSRNG	LOS range bit: 1 = high LOS assert voltage range 0 = low LOS assert voltage range
	1	OCDIS	Offset cancellation disable bit: 1 = offset cancellation is disabled 0 = offset cancellation is enabled
	0	-	Reserved
	7	THADJ7	Input threshold adjustment setting:
	6	THADJ6	Circuit disabled for 00000000 (0) – low supply current option
	5	THADJ5	Maximum positive shift for 00000001 (1)
1	4	THADJ4	Minimum positive shift for 01111111 (127)
'	3	THADJ3	Zero shift for 10000000 (128) – added supply current
	2	THADJ2	Minimum negative shift for 10000001 (129)
	1	THADJ1	Maximum negative shift for 11111111 (255)
	0	THADJ0	
	7	-	
	6	-	
	5	CPRNG1	Cross point range setting:
0	4	CPRNG0	Minimum range for 00 Maximum range for 11
2	3	PEADJ3	De-emphasis setting:
	2	PEADJ2	0000 = 0dB
	1	PEADJ1	0001 = 1dB
	0	PEADJ0	0011= 2dB
	7	-	
	6	-	
	5	-	
	4	-	
3	3	-	
	2	AMP2	Output amplitude adjustment:
	1	AMP1	000 = 350 mV _{p-p} , 001 = 450 mV _{p-p} , 010 = 550 mV _{p-p} (default), 011 = 600 mV _{p-p}
	0	AMP0	$100 = 650 \text{ mV}_{p-p}, 101 = 700 \text{ mV}_{p-p}, 110 = 750 \text{ mV}_{p-p}, 111 = 850 \text{ mV}_{p-p}$

STRUMENTS



Table 12. Register Functionality (continued)

Register	Bit	Symbol	Function
	7	SEL	Receiver Optimization: 1 = Content of register used to optimize the receiver 0 = Default receiver settings
	6	-	
	5	-	
_	4	-	
7	3	RXOPT1	00 = Some input equalization (recommended)
	2	RXOPT0	01 = Reduced input equalization
	1	-	
	0	BIAS	Bias current for input stage control bit: 1 = Add 2 mA extra bias current to the input stage (recommended). 0 = Default
	7	LOSSEL	LOS assert level:
	6	LOSA6	LOSSEL = 1
	5	LOSA5	Content of register bits 6 to 0 is used to select the LOS assert level
4.4	4	LOSA4	Minimum LOS assert level for 0000000
11	3	LOSA3	Maximum LOS assert level for 1111111
	2	LOSA2	LOSASEL = 0
	1	LOSA1	Default LOS assert level of 25 mV _{p-p} is used
	0	LOSA0	
	7	LOSTMFENA	Falling edge LOS mask enable and duration:
	6	LOSTMF6	LOSTMFENA = 1 enables falling edge LOS masking
	5	LOSTMF5	LOSTMFENA = 0 disables falling edge LOS masking
12	4	LOSTMF4	Mask time < 10 μs for 000000
12	3	LOSTMF3	Mask time > 2 ms for 111111
	2	LOSTMF2	
	1	LOSTMF1	
	0	LOSTMF0	
	7	LOSTMRENA	Rising edge LOS mask enable and duration:
	6	LOSTMR6	LOSTMRENA = 1 enables rising edge LOS masking
	5	LOSTMR5	LOSTMRENA = 0 disables rising edge LOS masking
13	4	LOSTMR4	Mask time < 10 μs for 000000
15	3	LOSTMR3	Mask time > 2 ms for 111111
	2	LOSTMR2	
	1	LOSTMR1	
	0	LOSTMR0	
	-	-	Selected LOS assert level (read only)
	6	SELLOS6	
	5	SELLOS5	
15	4	SELLOS4	
15	3	SELLOS3	
	2	SELLOS2	
	1	SELLOS1	
	0	SELLOS0	

SLLSEH8 -SEPTEMBER 2013 www.ti.com

TEXAS INSTRUMENTS

APPLICATION INFORMATION

Figure 5 shows a typical application circuit using the ONET1151P.


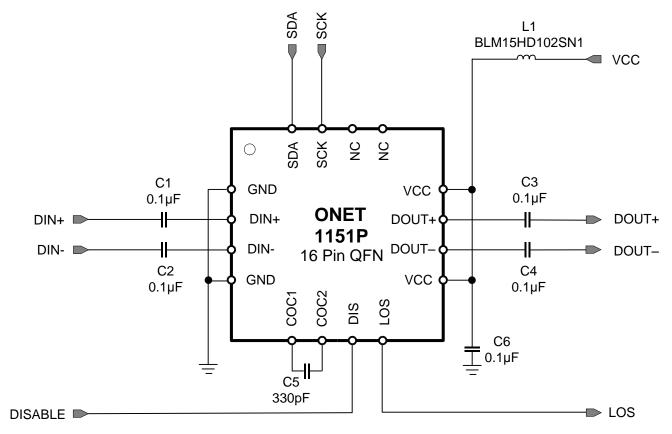


Figure 5. Typical Application Circuit



TYPICAL CHARACTERISTICS

Typical operating condition is at $V_{CC} = 3.3 \text{ V}$, $T_A = 25^{\circ}\text{C}$, and Register 7 set to 0x81 (unless otherwise noted).






Figure 6.






Figure 8.

DIFFERENTIAL OUTPUT RETURN GAIN
VS
FREQUENCY




Figure 9.



www.ti.com

TYPICAL CHARACTERISTICS (continued)

Typical operating condition is at V_{CC} = 3.3 V, T_A = 25°C, and Register 7 set to 0x81 (unless otherwise noted). **BIT-ERROR RATIO DETERMINISTIC JITTER**




Figure 10.

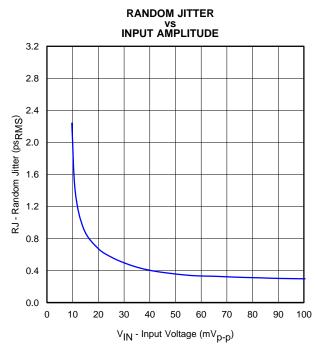


Figure 12.




Figure 11.

LOS ASSERT / DEASSERT VOLTAGE vs REGISTER SETTING (LOSRNG = 0)




Figure 13.



TYPICAL CHARACTERISTICS (continued)

Typical operating condition is at V_{CC} = 3.3 V, T_A = 25°C, and Register 7 set to 0x81 (unless otherwise noted). LOS ASSERT / DEASSERT VOLTAGE LOS HYSTERESIS

REGISTER SETTING (LOSRNG = 1) 220 LOS Deassert Voltage 180 180 140 96 140 20 40 20 158 168 178 188 198 208 218 228 238 248 258

Register Setting (Decimal)



Figure 14. Figure 15.

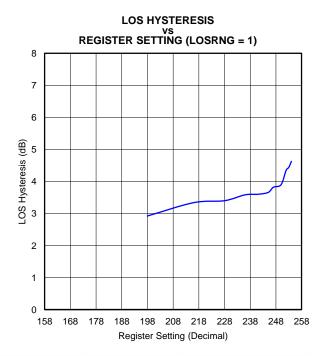


Figure 16.

SLLSEH8 -SEPTEMBER 2013 www.ti.com



TYPICAL CHARACTERISTICS (continued)

Typical operating condition is at $V_{CC} = 3.3 \text{ V}$, $T_A = 25^{\circ}\text{C}$, and Register 7 set to 0x81 (unless otherwise noted).

OUTPUT EYE-DIAGRAM AT 11.3 GBPS AND 20 mV_{p-p} INPUT VOLTAGE Eile Control Setup Measure Calibrate Utilities Apps Help 1) 2) 3 OUTPUT EYE-DIAGRAM AT 11.3 GBPS AND MAXIMUM INPUT VOLTAGE (2000 mV $_{\rm p-p}$) Eile Control Setup Measure Calibrate Utilities Apps Help 1) 2) 3 4 _ = Extinction Ratio Extinction Ratio -X--X-Jitter p⊸p Jitter p⊸p TXX XX %tX %tX More (1 of 3) More (1 of 3) 07 Aug 2013 19:17 07 Aug 2013 19:15 86108 Setup. 86108 Setup. LBW: 1,50 MHz Internal Reference Delay: 24.0387 ns AC Coupled CDR... PTB... Time:14.6 ps/div LMod: CDR LBW: 1.50 MHz Internal Reference Delay:24.0387 ns AC Coupled

Figure 17.

Figure 18.

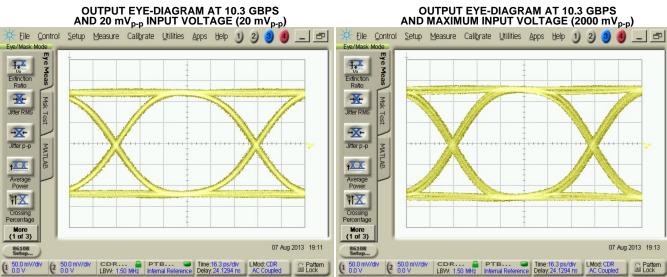


Figure 19. Figure 20.

www.ti.com 19-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
ONET1151PRGTR	Active	Production	VQFN (RGT) 16	3000 LARGE T&R	-	NIPDAU	Level-1-260C-UNLIM	-40 to 100	1151P
ONET1151PRGTR.A	Active	Production	VQFN (RGT) 16	3000 LARGE T&R	-	NIPDAU	Level-1-260C-UNLIM	-40 to 100	1151P

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE MATERIALS INFORMATION

www.ti.com 19-Nov-2025

TAPE AND REEL INFORMATION



TAPE DIMENSIONS KO PI BO BO Cavity AO

	-
A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ONET1151PRGTR	VQFN	RGT	16	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

PACKAGE MATERIALS INFORMATION

www.ti.com 19-Nov-2025



*All dimensions are nominal

Ì	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ı	ONET1151PRGTR	VQFN	RGT	16	3000	346.0	346.0	33.0



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.







PLASTIC QUAD FLATPACK - NO LEAD



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025