

# SN54SC1G08-SEP Radiation Tolerant, Single 2-Input Positive-AND Gate

#### 1 Features

- VID TBD-01XE
- Radiation Total Ionizing Dose (TID):
  - TID characterized up to 50krad(Si)
  - TID performance assurance up to 30krad(Si)
  - Radiation Lot Acceptance Testing (RLAT) for every wafer lot up to 30krad(Si)
- Radiation Single-Event Effects (SEE):
  - Single Event Latch-Up (SEL) immune up to 50MeV-cm<sup>2</sup>/mg at 125°C
  - Single Event Transient (SET) characterized up to LET =  $50MeV-cm^2/mg$
- Wide operating range of 1.2V to 5.5V
- 5.5V tolerant input pins
- Supports standard pinouts
- Up to 150Mbps with 5V or 3.3V  $V_{CC}$
- Latch-up performance exceeds 100mA per JESD
- Space enhanced plastic:
  - Supports Defense and Aerospace Applications
  - Controlled baseline
  - Au bondwire and NiPdAu lead finish
  - Meets NASA ASTM E595 outgassing specification
  - One fabrication, assembly, and test site
  - Extended product life cycle
  - Product traceability

# 2 Applications

- Enable or disable a digital signal
- Controlling an indicator LED

# 3 Description


The SN54SC1G08-SEP device performs the Boolean function or  $Y = A \cdot B$  or  $Y = \overline{A + B}$  in positive logic.

The CMOS device has high output drive while maintaining low static power dissipation over a broad V<sub>CC</sub> operating range.

### **Package Information**

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>	BODY SIZE(3)
SN54SC1G08- SEP	DBV (SOT-23, 5)	2.9mm × 2.8mm	2.9mm × 1.65mm

- For all available packages, see Section 11.
- The package size (length × width) is a nominal value and includes pins, where applicable.
- The body size (length × width) is a nominal value and does not include pins.






# **Table of Contents**

1 Features	1	8 Application and Implementation	12
2 Applications		8.1 Application Information	
3 Description		8.2 Typical Application	
4 Pin Configuration and Functions		8.3 Design Requirements	
5 Specifications	4	8.4 Detailed Design Procedure	
5.1 Absolute Maximum Ratings		8.5 Application Curves	
5.2 ESD Ratings		8.6 Power Supply Recommendations	15
5.3 Recommended Operating Conditions	4	8.7 Layout	15
5.4 Thermal Information	<mark>5</mark>	9 Device and Documentation Support	17
5.5 Electrical Characteristics	6	9.1 Documentation Support	17
5.6 Switching Characteristics	6	9.2 Receiving Notification of Documentation Updates.	17
5.7 Typical Characteristics	<mark>7</mark>	9.3 Support Resources	17
6 Parameter Measurement Information	8	9.4 Trademarks	17
7 Detailed Description	9	9.5 Electrostatic Discharge Caution	17
7.1 Overview	9	9.6 Glossary	17
7.2 Functional Block Diagram	9	10 Revision History	
7.3 Feature Description	10	11 Mechanical, Packaging, and Orderable	
7.4 Device Functional Modes	11	Information	18



# 4 Pin Configuration and Functions



See mechanical drawings for dimensions.

Figure 4-1. DBV Package 5-Pin SOT-23 (Top View)

**Table 4-1. Pin Functions** 

PIN		TYPE <sup>(1)</sup>	DESCRIPTION		
NAME	DBV	I I I PE(*/	DESCRIPTION		
А	1	I	Data Input		
В	2	I	Data Input		
GND	3	-	Ground		
Y	4	0	Data Output		
V <sub>CC</sub>	5	-	Power		

(1) Signal Types: I = Input, O = Output, I/O = Input or Output



# **5 Specifications**

# 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

				MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range			-0.5	6.5	V
VI	Input voltage range <sup>(2)</sup>			-0.5	6.5	V
Vo	Output voltage range <sup>(2)</sup>	Output voltage range <sup>(2)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>1</sub> < 0	V		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> <	0V		-50	mA
Io	Continuous output current				±50	mA
Io	Continuous output current through	Continuous output current through V <sub>CC</sub> or GND			±100	mA
TJ	Junction temperature		-65	150	°C	
T <sub>stg</sub>	Storage temperature			-65	150	°C

<sup>(1)</sup> Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If briefly operating outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.

(2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

# 5.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	V
V <sub>(ESD)</sub>	discharge	Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	±1000	v

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- 2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

# 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

Specifications	Description	Condition	MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage		1.1	5.5	V
VI	Input voltage		0	5.5	V
Vo	Output voltage	(High or low state)	0	V <sub>CC</sub>	V
		V <sub>CC</sub> = 1.65V		-4	
		V <sub>CC</sub> = 2.3V		-8	
I <sub>OH</sub>	High-level output current	V = 3.0V		-16	mA
		$V_{CC} = 3.0V$		-24	
		V <sub>CC</sub> = 4.5V		-32	
		V <sub>CC</sub> = 1.65V		4	
	Low-level output current	V <sub>CC</sub> = 2.3V		8	
I <sub>OL</sub>		V 0.0V		16	mA
		$V_{CC} = 3.0V$		24	
		V <sub>CC</sub> = 4.5V		32	
Δt/Δν	Input transition rise or fall rate	V <sub>cc</sub> = 1.2V to 5.0V		20	ns/V
Δt/Δν	Input transition rise or fall rate	V <sub>cc</sub> = 1.8V ± 0.15V		20	ns/V
Δt/Δν	Input transition rise or fall rate	$V_{cc} = 2.5V \pm 0.2V$		20	ns/V
Δt/Δν	Input transition rise or fall rate (1G04, 1G06, 1G07, 1G34)	V <sub>cc</sub> = 3.3V ± 0.3V		10	ns/V

Submit Document Feedback



over operating free-air temperature range (unless otherwise noted)

Specifications	Description	Condition	MIN	MAX	UNIT
Δt/Δν	Input transition rise or fall rate (1G34)	V <sub>cc</sub> = 5.0V ± 0.5V		10	ns/V
Δt/Δν	Input transition rise or fall rate (1G04, 1G06, 1G07)	V <sub>cc</sub> = 5.0V ± 0.5V		5	ns/V
T <sub>A</sub>	Operating free-air temperature		-55	125	°C
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 1.1V	0.75		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 1.32V	0.78		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 1.5V	0.975		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 1.65V	1.075		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 1.95V	1.2675		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 2.3V	1.7		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 2.7V	1.7		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 3.0V	2		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 3.6V	2		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 4.5V	3.15		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 5.5V	3.85		V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 1.1V		0.3	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 1.32V		0.42	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 1.5V		0.525	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 1.65V		0.5775	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 1.95V		0.6825	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 2.3V		0.7	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 2.7V		0.7	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 3.0V		0.8	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 3.6V		0.8	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 4.5V		1.35	V
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 5.5V		1.65	V

# **5.4 Thermal Information**

PACKAGE	PINS			THERMAL	METRIC <sup>(1)</sup>			UNIT
PACKAGE	FINS	R <sub>0JA</sub>	R <sub>0JC(top)</sub>	R <sub>0JB</sub>	$\Psi_{JT}$	$\Psi_{JB}$	R <sub>0JC(bot)</sub>	ONII
DBV (SOT-23, 5)	5	357.1	263.7	264.4	195.6	262.2	-	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application note.



# 5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST CONDITIONS	V	-55°C to	125°C		UNIT	
PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP	MAX	UNIT	
V <sub>OH</sub>	I <sub>OH</sub> = -100μA	1.1V to 5.5V	V <sub>CC</sub> - 0.1			V	
V <sub>OH</sub>	I <sub>OH</sub> = -4mA	1.65V	1.2			V	
V <sub>OH</sub>	I <sub>OH</sub> = -8mA	2.3V	1.9			V	
V <sub>OH</sub>	I <sub>OH</sub> = -12mA	2.7V	2.2			V	
V <sub>OH</sub>	I <sub>OH</sub> = –16mA	3V	2.4			V	
V <sub>OH</sub>	I <sub>OH</sub> = –24mA	3V	2.3			V	
V <sub>OH</sub>	I <sub>OH</sub> = -32mA	4.5V	3.8			V	
V <sub>OL</sub>	I <sub>OL</sub> = 100μA	1.1V to 5.5V			0.15	V	
V <sub>OL</sub>	I <sub>OL</sub> = 4mA	1.65V			0.45	V	
V <sub>OL</sub>	I <sub>OL</sub> = 8mA	2.3V			0.3	V	
V <sub>OL</sub>	I <sub>OL</sub> = 12mA	2.7V			0.4	V	
V <sub>OL</sub>	I <sub>OL</sub> = 16mA	3V			0.4	V	
V <sub>OL</sub>	I <sub>OL</sub> = 24mA	3V			0.55	V	
V <sub>OL</sub>	I <sub>OL</sub> = 32mA	4.5V			0.55	V	
I <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	V <sub>CC</sub> = 0V to 5.5V		±1	±5	μΑ	
I <sub>off</sub>	$V_{I}$ or $V_{O} = V_{CC}$	V <sub>CC</sub> = 0V		±1	±10	μΑ	
I <sub>cc</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0	V <sub>CC</sub> = 1.1V to 5.5V		1	10	μΑ	
ΔI <sub>CC</sub>	One input at $V_{CC}$ - 0.6V, other inputs at $V_{CC}$ or GND	3.0V to 5.5V			500	μA	
C <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	3.3V		3.5		pF	
Co	V <sub>O</sub> = V <sub>CC</sub> or GND	3.3V				pF	

# 5.6 Switching Characteristics

over operating free-air temperature range; typical values measured at  $T_A$  = 25°C (unless otherwise noted). See #i#Parameter Measurement Information

PARAMETER FROM TO (OUTPUT)		LOAD CADACITANCE	· · · · · · · · · · · · · · · · · · ·	-55°C to 125°C			UNIT
(INPUT) TO (OUTPUT) LOAD CAPACITANCE	V <sub>CC</sub>	MIN	TYP	MAX	UNII		
A or B	Υ	C <sub>L</sub> = 15pF	1.2V ± 0.1V		32.5	47	ns
A or B	Υ	C <sub>L</sub> = 15pF	1.5V ± 0.12V		6	11	ns
A or B	Υ	C <sub>L</sub> = 15pF	1.8V ± 0.15V		5.5	8	ns
A or B	Υ	C <sub>L</sub> = 15pF	2.5V ± 0.2V		4	4.8	ns
A or B	Υ	C <sub>L</sub> = 15pF	3.3V ± 0.3V		3	3.7	ns
A or B	Υ	C <sub>L</sub> = 15pF	5.0V ± 0.5V		2	3.4	ns
A or B	Υ	C <sub>L</sub> = 30pF	1.8V ± 0.15V	2.4	6	11	ns
A or B	Υ	C <sub>L</sub> = 30pF	2.5V ± 0.2V	1.1	4.3	7.5	ns
A or B	Υ	C <sub>L</sub> = 50pF	3.3V ± 0.3V	1	3.8	6.5	ns
A or B	Υ	C <sub>L</sub> = 50pF	5.0V ± 0.5V	1	2.9	5	ns
		f = 10MHz	1.8V		21		pf
		f = 10MHz	2.5V		24		pf
		f = 10MHz	3.3V		26		pf
		f = 10MHz	5V		31		pf
	(INPUT) A or B	(INPUT)  A or B  A or B  Y  A or B  Y	(INPUT)         TO (OUTPUT)         LOAD CAPACITANCE           A or B         Y         C <sub>L</sub> = 15pF           A or B         Y         C <sub>L</sub> = 30pF           A or B         Y         C <sub>L</sub> = 30pF           A or B         Y         C <sub>L</sub> = 50pF           A or B         Y         C <sub>L</sub> = 50pF	Comparison   Com	(INPUT)         TO (OUTPUT)         LOAD CAPACITANCE         V <sub>CC</sub> MIN           A or B         Y         C <sub>L</sub> = 15pF         1.2V ± 0.1V           A or B         Y         C <sub>L</sub> = 15pF         1.5V ± 0.12V           A or B         Y         C <sub>L</sub> = 15pF         1.8V ± 0.15V           A or B         Y         C <sub>L</sub> = 15pF         2.5V ± 0.2V           A or B         Y         C <sub>L</sub> = 15pF         5.0V ± 0.5V           A or B         Y         C <sub>L</sub> = 30pF         1.8V ± 0.15V         2.4           A or B         Y         C <sub>L</sub> = 30pF         2.5V ± 0.2V         1.1           A or B         Y         C <sub>L</sub> = 50pF         3.3V ± 0.3V         1           A or B         Y         C <sub>L</sub> = 50pF         5.0V ± 0.5V         1           A or B         Y         C <sub>L</sub> = 50pF         5.0V ± 0.5V         1           A or B         Y         C <sub>L</sub> = 50pF         5.0V ± 0.5V         1           A or B         Y         C <sub>L</sub> = 50pF         5.0V ± 0.5V         1           A or B         Y         C <sub>L</sub> = 50pF         5.0V ± 0.5V         1           A or B         Y         C <sub>L</sub> = 50pF         5.0V ± 0.5V         1	(INPUT)         TO (OUTPUT)         LOAD CAPACITANCE $V_{CC}$ MIN TYP           A or B         Y $C_L = 15pF$ $1.2V \pm 0.1V$ $32.5$ A or B         Y $C_L = 15pF$ $1.5V \pm 0.12V$ $6$ A or B         Y $C_L = 15pF$ $1.8V \pm 0.15V$ $5.5$ A or B         Y $C_L = 15pF$ $2.5V \pm 0.2V$ $4$ A or B         Y $C_L = 15pF$ $3.3V \pm 0.3V$ $3$ A or B         Y $C_L = 30pF$ $1.8V \pm 0.15V$ $2.4$ $6$ A or B         Y $C_L = 30pF$ $2.5V \pm 0.2V$ $1.1$ $4.3$ A or B         Y $C_L = 30pF$ $2.5V \pm 0.2V$ $1.1$ $4.3$ A or B         Y $C_L = 50pF$ $3.3V \pm 0.3V$ $1$ $3.8$ A or B         Y $C_L = 50pF$ $5.0V \pm 0.5V$ $1$ $2.9$ $f = 10MHz$ $1.8V$ $2.5V$ $2.4$ $2.5V$ $2.5V$ $f = 10MHz$ $1.0MHz$ $3.3V$ $2.5V$ $2.5V$ $2.$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$

Submit Document Feedback



# **5.7 Typical Characteristics**

T<sub>A</sub> = 25°C (unless otherwise noted)

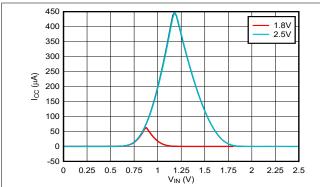


Figure 5-1. Supply Current Across Input Voltage 1.8V and 2.5V Supply

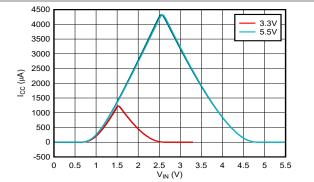


Figure 5-2. Supply Current Across Input Voltage 3.3V and 5.5V Supply




# **6 Parameter Measurement Information**

Phase relationships between waveforms were chosen arbitrarily for the examples listed in the following table. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1MHz,  $Z_O = 50\Omega$ ,  $t_t \leq$  2.5ns.

The outputs are measured individually with one input transition per measurement.


Table 6-1. Push-Pull Outputs

V <sub>CC</sub>	V <sub>t</sub>	RL	CL	ΔV
1.2V ± 0.1V	V <sub>CC</sub> /2	2kΩ	15pF	0.1V
1.5V ± 0.12V	V <sub>CC</sub> /2	2kΩ	15pF	0.1V
1.8V ± 0.15V	V <sub>CC</sub> /2	1kΩ	15pF/30pF	0.15V
2.5V ± 0.2V	V <sub>CC</sub> /2	500Ω	15pF/30pF	0.15V
3.3V ± 0.3V	1.5V	500Ω	15pF/50pF	0.3V
5.0V ± 0.5V	1.5V	500Ω	15pF/50pF	0.3V




(1) C<sub>L</sub> includes probe and test-fixture capacitance.

Figure 6-1. Load Circuit for Push-Pull Outputs

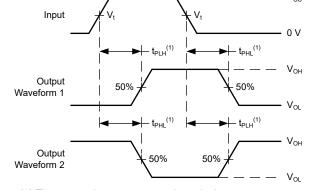

(1) The greater between  $t_{\text{PLH}}$  and  $t_{\text{PHL}}$  is the same as  $t_{\text{pd}}.$ 

Figure 6-2. Voltage Waveforms Propagation Delays

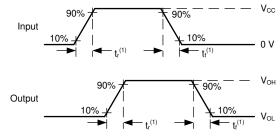

(1) The greater between  $t_r$  and  $t_f$  is the same as  $t_t$ .

Figure 6-3. Voltage Waveforms, Input and Output Transition Times

Submit Document Feedback



# 7 Detailed Description

# 7.1 Overview

The SN54SC1G08-SEP device is a single 2-input positive-AND gate. The device performs the Boolean function  $Y = A \bullet B$  or  $Y = \overline{A + B}$  in positive logic.

# 7.2 Functional Block Diagram



Figure 7-1. Logic Diagram (Positive Side)



# 7.3 Feature Description

# 7.3.1 Balanced CMOS Push-Pull Outputs

This device includes balanced CMOS push-pull outputs. The term *balanced* indicates that the device can sink and source similar currents. The drive capability of this device may create fast edges into light loads, so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. It is important to limit the output power of the device to avoid damage due to overcurrent. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

Unused push-pull CMOS outputs must be left disconnected.

#### 7.3.2 Standard CMOS Inputs

This device includes standard CMOS inputs. Standard CMOS inputs are high impedance and are typically modeled as a resistor in parallel with the input capacitance given in the *Electrical Characteristics*. The worst case resistance is calculated with the maximum input voltage, given in the *Absolute Maximum Ratings*, and the maximum input leakage current, given in the *Electrical Characteristics*, using Ohm's law (R = V ÷ I).

Standard CMOS inputs require that input signals transition between valid logic states quickly, as defined by the input transition time or rate in the *Recommended Operating Conditions* table. Failing to meet this specification will result in excessive power consumption and could cause oscillations. More details can be found in *Implications of Slow or Floating CMOS Inputs*.

Do not leave standard CMOS inputs floating at any time during operation. Unused inputs must be terminated at  $V_{CC}$  or GND. If a system will not be actively driving an input at all times, then a pull-up or pull-down resistor can be added to provide a valid input voltage during these times. The resistor value will depend on multiple factors; a  $10k\Omega$  resistor, however, is recommended and will typically meet all requirements.

Submit Document Feedback



# 7.3.3 Clamp Diode Structure

Figure 7-2 shows the inputs and outputs to this device have negative clamping diodes only.

#### **CAUTION**

Voltages beyond the values specified in the *Absolute Maximum Ratings* table can cause damage to the device. The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

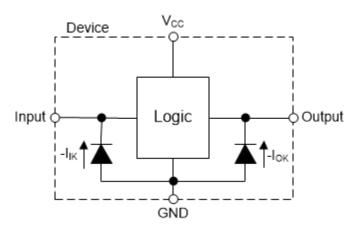


Figure 7-2. Electrical Placement of Clamping Diodes for Each Input and Output

# 7.4 Device Functional Modes

Function Table lists the functional modes for SN54SC1G08-SEP.

**Table 7-1. Function Table** 

INPU	OUTPUT					
Α	В	(2) <b>Y</b>				
Н	Н	Н				
L	Х	L				
Х	L	L				

- (1) H = High Voltage Level, L = Low Voltage Level, X = Don't
- (2) H = Driving High, L = Driving Low, Z = High Impedance State



# 8 Application and Implementation

#### **Note**

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

# 8.1 Application Information

A common application for AND gates is their use in power sequencing. Power sequencing is often employed in applications that require a processor or other delicate device with specific voltage timing requirements in order to protect the device from malfunctioning. Using the SN54SC1G08-SEP to verify that the processor has turned on can protect it from any harmful signals.

# 8.2 Typical Application




Figure 8-1. Power Sequencing Application

Submit Document Feedback



### 8.3 Design Requirements

The SN54SC1G08-SEP device uses CMOS technology and has balanced output drive. Take care to avoid bus contention because it can drive currents that would exceed maximum limits.

The SN54SC1G08-SEP allows switching control of analog and digital signals with a digital control signal. All input signals should remain as close to either 0V or  $V_{CC}$  as possible for optimal operation.

### 8.3.1 Power Considerations

Ensure the desired supply voltage is within the range specified in the *Recommended Operating Conditions*. The supply voltage sets the device's electrical characteristics of the device as described in the *Electrical Characteristics* section.

The positive voltage supply must be capable of sourcing current equal to the total current to be sourced by all outputs of the SN54SC1G08-SEP plus the maximum static supply current,  $I_{CC}$ , listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only source as much current that is provided by the positive supply source. Ensure the maximum total current through  $V_{CC}$  listed in the *Absolute Maximum Ratings* is not exceeded.

The ground must be capable of sinking current equal to the total current to be sunk by all outputs of the SN54SC1G08-SEP plus the maximum supply current, I<sub>CC</sub>, listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only sink as much current that can be sunk into its ground connection. Ensure the maximum total current through GND listed in the *Absolute Maximum Ratings* is not exceeded.

The SN54SC1G08-SEP can drive a load with a total capacitance less than or equal to 50pF while still meeting all of the data sheet specifications. Larger capacitive loads can be applied; however, it is not recommended to exceed 50pF.

The SN54SC1G08-SEP can drive a load with total resistance described by  $R_L \ge V_O / I_O$ , with the output voltage and current defined in the *Electrical Characteristics* table with  $V_{OH}$  and  $V_{OL}$ . When outputting in the HIGH state, the output voltage in the equation is defined as the difference between the measured output voltage and the supply voltage at the  $V_{CC}$  pin.

Total power consumption can be calculated using the information provided in the CMOS Power Consumption and Cpd Calculation application note.

Thermal increase can be calculated using the information provided in the *Thermal Characteristics of Standard Linear and Logic (SLL) Packages and Devices* application note.

#### **CAUTION**

The maximum junction temperature,  $T_{J(max)}$  listed in the *Absolute Maximum Ratings*, is an additional limitation to prevent damage to the device. Do not violate any values listed in the *Absolute Maximum Ratings*. These limits are provided to prevent damage to the device.



### 8.3.2 Input Considerations

Input signals must cross  $V_{IL(max)}$  to be considered a logic LOW, and  $V_{IH(min)}$  to be considered a logic HIGH. Do not exceed the maximum input voltage range found in the *Absolute Maximum Ratings*.

Unused inputs must be terminated to either  $V_{CC}$  or ground. The unused inputs can be directly terminated if the input is completely unused, or they can be connected with a pull-up or pull-down resistor if the input will be used sometimes, but not always. A pull-up resistor is used for a default state of HIGH, and a pull-down resistor is used for a default state of LOW. The drive current of the controller, leakage current into the SN54SC1G08-SEP (as specified in the *Electrical Characteristics*), and the desired input transition rate limits the resistor size. A  $10k\Omega$  resistor value is often used due to these factors.

The SN54SC1G08-SEP has CMOS inputs and thus requires fast input transitions to operate correctly, as defined in the *Recommended Operating Conditions* table. Slow input transitions can cause oscillations, additional power consumption, and reduction in device reliability.

Refer to the *Feature Description* section for additional information regarding the inputs for this device.

#### 8.3.3 Output Considerations

The positive supply voltage is used to produce the output HIGH voltage. Drawing current from the output will decrease the output voltage as specified by the  $V_{OH}$  specification in the *Electrical Characteristics*. The ground voltage is used to produce the output LOW voltage. Sinking current into the output will increase the output voltage as specified by the  $V_{OL}$  specification in the *Electrical Characteristics*.

Push-pull outputs that could be in opposite states, even for a very short time period, should never be connected directly together. This can cause excessive current and damage to the device.

Two channels within the same device with the same input signals can be connected in parallel for additional output drive strength.

Unused outputs can be left floating. Do not connect outputs directly to V<sub>CC</sub> or ground.

Refer to the *Feature Description* section for additional information regarding the outputs for this device.

## 8.4 Detailed Design Procedure

- 1. Recommended input conditions:
  - For rise time and fall time specifications, see Δt/Δv in the Recommended Operating Conditions table.
  - For specified high and low levels, see V<sub>IH</sub> and V<sub>II</sub> in the *Recommended Operating Conditions* table.
  - Inputs and outputs are overvoltage tolerant and can therefore go as high as 5.5 V at any valid V<sub>CC</sub>.
- 2. Recommended output conditions:
  - Load currents should not exceed ±50 mA.
- 3. Frequency selection criterion:
  - The effects of frequency upon the device's power consumption should be studied in CMOS Power Consumption and CPD Calculation, SCAA035.
  - Added trace resistance and capacitance can reduce maximum frequency capability; follow the layout practices listed in the *Layout* section.

#### 8.5 Application Curves



Figure 8-2. Typical Application Timing Diagram



# 8.6 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating listed in the *Recommended Operating Conditions*.

Each  $V_{CC}$  terminal should have a good bypass capacitor to prevent power disturbance. For the SN54SC1G08-SEP, a  $0.1\mu F$  bypass capacitor is recommended. To reject different frequencies of noise, use multiple bypass capacitors in parallel. Capacitors with values of  $0.1\mu F$  and  $1\mu F$  are commonly used in parallel.

# 8.7 Layout

#### 8.7.1 Layout Guidelines

- · Bypass capacitor placement
  - Place near the positive supply terminal of the device
  - Provide an electrically short ground return path
  - Use wide traces to minimize impedance
  - Keep the device, capacitors, and traces on the same side of the board whenever possible
- Signal trace geometry
  - 8mil to 12mil trace width
  - Lengths less than 12cm to minimize transmission line effects
  - Avoid 90° corners for signal traces
  - Use an unbroken ground plane below signal traces
  - Flood fill areas around signal traces with ground
  - Parallel traces must be separated by at least 3x dielectric thickness
  - For traces longer than 12cm
    - Use impedance controlled traces
    - · Source-terminate using a series damping resistor near the output
    - Avoid branches; buffer each signal that must branch separately

#### 8.7.2 Layout Example

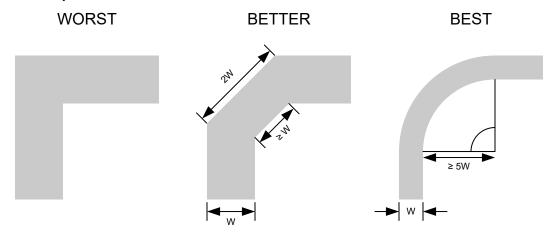


Figure 8-3. Example Trace Corners for Improved Signal Integrity






Figure 8-4. Example Bypass Capacitor Placement for TSSOP and Similar Packages




Figure 8-5. Example Bypass Capacitor Placement for WQFN and Similar Packages




Figure 8-6. Example Bypass Capacitor Placement for SOT, SC70 and Similar Packages




Figure 8-7. Example Damping Resistor Placement for Improved Signal Integrity

Submit Document Feedback



# 9 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

# 9.1 Documentation Support

#### 9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, CMOS Power Consumption and Cpd Calculation application note
- Texas Instruments, Designing With Logic application note
- Texas Instruments, Thermal Characteristics of Standard Linear and Logic (SLL) Packages and Devices application note

# 9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 9.3 Support Resources

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 9.4 Trademarks

TI E2E<sup>™</sup> is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

#### 9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### 9.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

# 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES		
July 2025	*	Advance Information Release		



# 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.




**DBV0005A** 

# PACKAGE OUTLINE

# SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

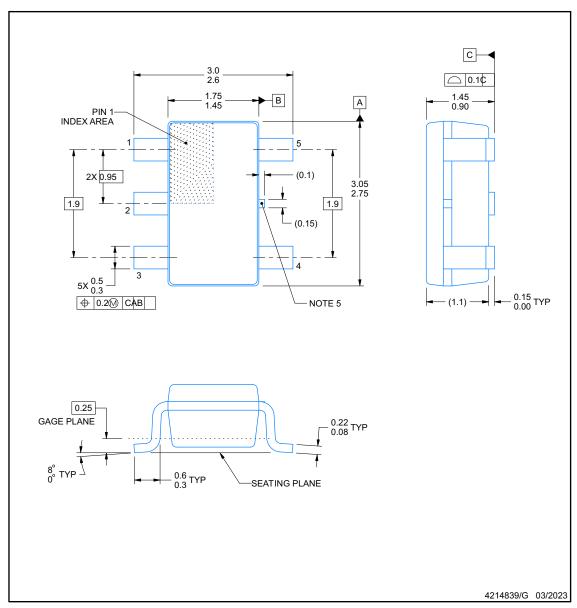

#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

- Reference JEDEC MO-178.
   Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
   Support pin may differ or may not be present.






### **EXAMPLE BOARD LAYOUT**

# **DBV0005A**

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

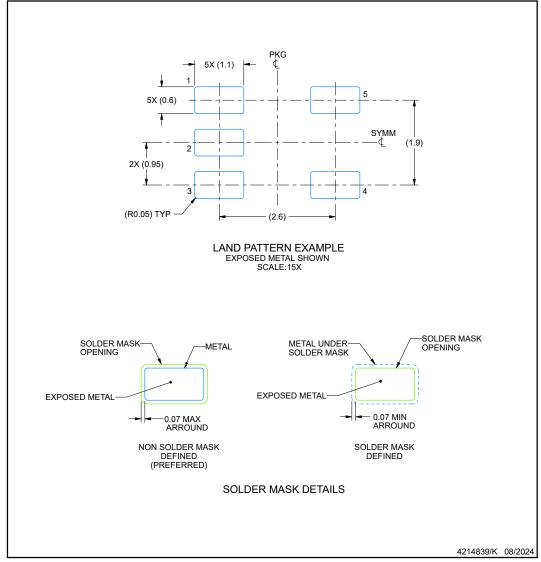

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



www.ti.com 7-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
PN54SC1G08MDBVTSEP	Active	Preproduction	SOT-23 (DBV)   5	250   SMALL T&R	-	Call TI	Call TI	-	

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.



SMALL OUTLINE TRANSISTOR



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
  2. This drawing is subject to change without notice.
  3. Reference JEDEC MO-178.

- 4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
- 5. Support pin may differ or may not be present.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025