







SN65HVD3082E, SN75HVD3082E, SN65HVD3085E, SN65HVD3088E

SLLS562O - AUGUST 2009 - REVISED JULY 2023

SNx5HVD308xE Low-Power RS-485 Transceivers

1 Features

- Meets or exceeds the requirements of the TIA/ EIA-485A standard
- Low quiescent power
 - 0.3-mA Active mode
 - 1-nA Shutdown mode
- 1/8 Unit load up to 256 nodes on a bus
- Bus-pin ESD protection up to 15 kV
- Industry-standard SN75176 footprint
- Fail-safe receiver (bus open, bus shorted, bus idle)
- Glitch-free power-up and power-down bus inputs and outputs

2 Applications

- Energy meter networks
- Motor control
- Power inverters
- Industrial automation
- **Building automation networks**
- **Battery-powered** applications
- Telecommunications equipment

3 Description

The SNx5HVD308xE are half-duplex transceivers designed for RS-485 data bus networks. Powered by a 5-V supply, they are fully compliant with TIA/ EIA-485A standard. With controlled transition times, these devices are suitable for transmitting data over long twisted-pair cables. The SN65HVD3082E and SN75HVD3082E are optimized for signaling rates up to 200 kbps. The SN65HVD3085E is suitable for data transmission up to 1 Mbps, whereas the SN65HVD3088E is suitable for applications that require signaling rates up to 20 Mbps.


These devices are designed to operate with very low supply current, typically 0.3 mA, exclusive of the load. When in the inactive-shutdown mode, the supply current drops to a few nanoamps, which makes these devices ideal for power-sensitive applications.

The wide common-mode range and high ESD protection levels of these devices, make them suitable for demanding applications such as energy meter networks, electrical inverters, status and command signals across telecom racks, as well as cabled chassis interconnects, and industrial automation networks where noise tolerance is essential. These devices match the industry-standard footprint of the SN75176 device. The power-on-reset circuits keep the outputs in a high-impedance state until the supply voltage has stabilized. A thermal-shutdown function protects the device from damage, due to system fault conditions. The SN75HVD3082E is characterized for operation from 0°C to 70°C and SN65HVD308xE is characterized for operation from -40°C to 85°C air temperature. The D package version of the SN65HVD3082E has been characterized for operation from -40°C to 105°C.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
	SOIC (D, 8)	4.9 mm × 6 mm
SN65HVD3082E	VSSOP (DGK, 8)	3 mm × 4.9 mm
	PDIP (P, 8)	9.81 mm × 9.43 mm
	SOIC (D, 8)	4.9 mm × 6 mm
SN65HVD3088E	VSSOP (DGK, 8)	3 mm × 4.9 mm
SNOSITVESCOOL	PDIP (P, 8)	9.81 mm × 9.43 mm
	SO (NS, 14)	10.2 mm × 7.8 mm
SN75HVD3082E	SOIC (D, 8)	4.9 mm × 6 mm
SN65HVD3085E	VSSOP (DGK, 8)	3 mm × 4.9 mm

- For all available packages, see the orderable addendum at the end of the data sheet.
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.

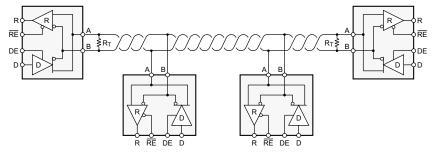

Simplified Schematic



Table of Contents

ed the <i>Thermal Information</i> tables		on J (October 2017)	7
rom Revision J (October 2017) to	Revision	ı K (July 2021)	Page
ed the ψ _{JT} D package value from 78).o เบ ช.ช lf	n the Thermal Information, SNx5HVD3082E	/
	•		
i i i		*	Page
from Revision K / July 2021) to Ba	vision I /	November 2021)	Paga
ed the <i>Thermal Information, SN65H</i>	VD308xE	table	7
storage temperature T _{stg} to <i>Absolut</i>	e Maximu	m Ratings table	6
•	·	· · · · · ·	
pastage raided to the mon		and the second s	
ine SN0อ⊓งบอบดอ⊏เงือ package the NS package values to the <i>Ther</i> i	mal Inform	ation, SN65HVD308xE table	4 7
			Page
B	4- 5	N (l 2000)	
ed pins 11 and 12 to NC in the NS F	ackage Fi	gure 5-2 and Table 5-2	4
			Page
-	-		_
_	nov diffor f	from page numbers in the current version	
			26
			25
		12.5 Electrostatic Discharge Caution	
ching Characteristics	10	12.4 Trademarks	25
		12.3 Support Resources	25
		12.2 Receiving Notification of Documentation Up	
		10 Power Supply Recommendations	
tions	6	9.2 Typical Application	
ons		8.3 Feature Description	
	History	ge numbers for previous revisions may differ for Revision N (June 2023) to Revision Ord pins 11 and 12 to NC in the NS Package File from Revision M (February 2022) to Revision of the Device Information table to the Package the SN65HVD3088E NS package	History. 2 9 Application and Implementation. 9.2 Typical Application Information. 9.2 Typical Application. 16 Power Supply Recommendations. 17 Agaings. 6 10 Power Supply Recommendations. 18 Agaings. 6 11 Layout. 11.1 Layout Guidelines. 11.2 Layout Example. 11.2 Layout Example. 11.2 Layout Example. 11.2 Layout Example. 11.3 Layout. 11.1 Layout Guidelines. 11.2 Layout Example. 11.2 Layout Example. 11.3 Layout. 11.1 Layout Guidelines. 11.2 Layout Example. 11.3 Layout. 11.1 Layout Guidelines. 11.2 Layout Example. 11.3 Layout. 11.3 Layout Example. 11.3 L



Changes from Revision H (August 2015) to Revision I (September 2016)	Page
 Added text to the <i>Description</i>, "The D package version of the SN65HVD3082E has b operation from -40°C to 105°C." 	
• Changed the Operating free-air temperature for SN65HVD3082E (D package) From:	: MAX = 85°C To: 105°C
in Section 6.3	7
Changes from Revision G (May 2009) to Revision H (August 2015)	Page
 Added Pin Configuration and Functions section, ESD Ratings table, Feature Descrip Functional Modes, Application and Implementation section, Power Supply Recomme section, Device and Documentation Support section, and Mechanical, Packaging, an section 	endations section, Layout ad Orderable Information
Deleted Dissipation Ratings table	
Deleted Package Thermal Information table	8
Changes from Revision F (March 2009) to Revision G (May 2009)	Page
Added Graph - Driver Rise and Fall Time vs Temperature	11
Added IDLE Bus to the Function Table	17

Added Receiver Fail-safe section......21



5 Pin Configuration and Functions




Figure 5-1. D (SOIC), P (PDIP), and DGK (VSSOP) Packages, 8-Pin (Top View)

Table 5-1. Pin Functions

PIN		TVDE	DESCRIPTION
NAME	NO.	TYPE	DESCRIPTION
R	1	Digital output	Receive data output
RE	2	Digital input	Receiver enable, active low
DE	3	Digital input	Driver enable, active high
D	4	Digital input	Driver data input
GND	5	Reference potential	Local device ground
А	6	Bus input/output	Driver output or receiver input (complementary to B)
В	7	Bus input/output	Driver output or receiver input (complementary to A)
V _{CC}	8	Supply	4.5-V to 5.5-V supply






Figure 5-2. SN65HVD3088E, NS Package, 14-pin (Top View)

Table 5-2. Pin Functions, NS Package

PIN		TYPE	DESCRIPTION
NAME	NO.	ITPE	DESCRIPTION
NC	1, 8	No Connect	Not Electrically Connected
R	2	Digital output	Receive data output
RE	3	Digital input	Receiver enable, active low
DE	4	Digital input	Driver enable, active high
D	5	Digital input	Driver data input
GND	6, 7	Reference potential	Local device ground
Υ	9	Bus I/O	Differential transceiver input and output (complementary to Z)
Z	10	Bus I/O	Differential transceiver input and output (complementary to Y)
NC	12	No Connect	Not Electrically Connected
NC	11	No Connect	Not Electrically Connected
V _{CC}	13,14	Supply	4.5-V to 5.5-V supply



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range unless otherwise noted(1) (2)

	MIN	MAX	UNIT
Supply voltage, V _{CC}	-0.5	7	V
Voltage at A or B	-9	14	V
Voltage at any logic pin	-0.3	V _{CC} + 0.3	V
Receiver output current	-24	24	mA
Voltage input, transient pulse, A and B, through 100 Ω (see Figure 7-13)	-50	50	V
Junction Temperature, T _J		170	°C
Storage temperature, T _{stg}	-65	150	°C

⁽¹⁾ Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime

(2) All voltage values, except differential I/O bus voltages, are with respect to network ground terminal.

6.2 ESD Ratings

				VALUE	UNIT
	Human body model (HBM), per ANSI/ESDA/JEDEC	Bus pins and GND	±15000		
	Electrostatic discharge	JS-001 ⁽¹⁾	All pins	±4000	\ \ \
V _(ESD)	Electrostatic discriarge	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾		±1000	v
		Electrical Fast Transient/Burst, A, B, and GND ⁽³⁾		±4000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.
- (3) Tested in accordance with IEC 61000-4-4.



6.3 Recommended Operating Conditions

over operating free-air temperature range unless otherwise noted⁽¹⁾

		MIN	NOM M	AX	UNIT
Supply voltage, V _{CC}		4.5		5.5	V
Voltage at any bus terminal (separa	tely or common mode) , V _I	-7		12	V
High-level input voltage (D, DE, or F	RE inputs), V _{IH}	2	1	/cc	V
Low-level input voltage (D, DE, or R	E inputs), V _{IL}	0		0.8	V
Differential input voltage, V _{ID}		-12		12	V
Out-11	Driver	-60		60	Л
Output current, I _O Differential load resistance, R ₂	Receiver	-8		8	mA
Differential load resistance, R _L		54	60		Ω
	SN65HVD3082E, SN75HVD3082E			0.2	
Signaling rate, 1/t _{UI}	SN65HVD3085E		,	1	Mbps
	SN65HVD3088E			20	
	SN65HVD3082E (D package)	-40	,	105	
Operating free-air temperature, T _A	SN65HVD3082E (DGK and P packages), SN65HVD3085E, SN65HVD3088E	-40		85	°C
	SN75HVD3082E	0		70	
Junction temperature, T _J		-40		130	°C

⁽¹⁾ The algebraic convention, in which the least positive (most negative) limit is designated as minimum is used in this data sheet.

6.4 Thermal Information, SN65HVD308xE

		SN65HVD3085E, SN65HVD3088E		SN65HVD3088E	SN65HVD3088E	
THERMAL METRIC(1)		D (SOIC)	DGK (VSSOP)	P (PDIP)	NS (SO)	UNIT
		8 PINS	8 PINS	8 PINS	14 PINS	
R _{0JA}	Junction-to-ambient thermal resistance	116.7	137.8	84.3	88.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	56.3	31.2	65.4	46.13	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	63.4	71.7	62.1	49.12	°C/W
ΨЈТ	Junction-to-top characterization parameter	8.8	0.6	31.3	14.17	°C/W
ΨЈВ	Junction-to-board characterization parameter	62.6	70.5	60.4	48.6	°C/W

For more information about traditional and new thermal metrics, see the <u>Semiconductor and IC Package Thermal Metrics</u> application report.

6.5 Thermal Information, SNx5HVD3082E

		SN65HVD3082E	, SN75HVD3082E	SN65HVD3082E		
	THERMAL METRIC ⁽¹⁾	D (SOIC)	DGK (VSSOP)	P (PDIP)	UNIT	
		8 PINS	8 PINS	8 PINS		
$R_{\theta JA}$	Junction-to-ambient thermal resistance	114.4	142.2	88.1	°C/W	
R _{0JC(top)}	Junction-to-case (top) thermal resistance	55.1	35.8	65.9	°C/W	
$R_{\theta JB}$	Junction-to-board thermal resistance	61.6	75.6	69.0	°C/W	
ΨЈТ	Junction-to-top characterization parameter	8.8	0.8	35.2	°C/W	
ΨЈВ	Junction-to-board characterization parameter	60.8	74.8	64.3	°C/W	

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.



6.6 Electrical Characteristics: Driver

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP ⁽¹⁾	MAX	UNIT
		I _O = 0, No Load	3	4.3		
		R _L = 54 Ω (see Figure 7-1)	1.5	2.3		
V _{OD}	Differential output voltage	R _L = 100 Ω	2			V
		V _{TEST} = -7 V to 12 V (see Figure 7-2)	1.5			
Δ V _{OD}	Change in magnitude of differential output voltage	See Figure 7-1 and Figure 7-2	-0.2	0	0.2	V
V _{OC(SS)}	Steady-state common-mode output voltage	See Figure 7-3	1	2.6	3	V
$\Delta V_{OC(SS)}$	Change in steady-state common- mode output voltage	- See rigule 7-3	-0.1	0	0.1	V
V _{OC(PP)}	Peak-to-peak common-mode output voltage	See Figure 7-3		500		mV
I _{OZ}	High-impedance output current	See receiver input currents in Electrical Characteristics: Receiver				
I _I	Input current	D, DE	-100		100	μΑ
Ios	Short-circuit output current	-7 V ≤ V _O ≤ 12 V (see Figure 7-7)	-250		250	mA

⁽¹⁾ All typical values are at 25°C and with a 5-V supply.

6.7 Electrical Characteristics: Receiver

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP ⁽¹⁾	MAX	UNIT
V _{IT+}	Positive-going differential input threshold voltage	I _O = -8 mA		-85	-10	mV
V _{IT}	Negative-going differential input threshold voltage	I _O = 8 mA	-200	-115		mV
V _{hys}	Hysteresis voltage (V _{IT+} – V _{IT-})			30		mV
V _{OH}	High-level output voltage	V_{ID} = 200 mV, I_{OH} = -8 mA (see Figure 7-8)	4	4.6		V
V _{OL}	Low-level output voltage	V_{ID} = -200 mV, I_{O} = 8 mA (see Figure 7-8)		0.15	0.4	V
I _{OZ}	High-impedance-state output current	$V_O = 0$ or V_{CC} , $\overline{RE} = V_{CC}$	-1		1	μA
		V _{IH} = 12 V, V _{CC} = 5 V		0.04	0.1	
	Pue input current	V _{IH} = 12 V, V _{CC} = 0 V		0.06	0.125	mΛ
1	Bus input current	V _{IH} = -7 V, V _{CC} = 5 V	-0.1	-0.04		mA
		$V_{IH} = -7 \text{ V}, V_{CC} = 0 \text{ V}$	-0.05	-0.03		
I _{IH}	High-level input current, (RE)	V _{IH} = 2 V	-60	-30		μΑ
I _{IL}	Low-level input current, (RE)	V _{IL} = 0.8 V	-60	-30		μA
C _{diff}	Differential input capacitance	V _I = 0.4 sin (4E6πt) + 0.5 V, DE at 0 V		7		pF

⁽¹⁾ All typical values are at 25°C and with a 5-V supply.



6.8 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDI	TIONS	MIN	TYP ⁽¹⁾	MAX	UNIT
	Driver and receiver enabled	D at V _{CC} or open, DE at V _{CC} , RE at 0 V, No load			425	900	μА
	Driver enabled, receiver disabled	D at V_{CC} or open, DE at V_{CC} , RE at V_{CC} , No load			330	600	μА
Icc	Receiver enabled, driver disabled	D at V _{CC} or open, DE at 0 V, RE at 0 V, No load			300	600	μА
	Driver and receiver disabled	D at V _{CC} or open, DE at 0 V, RE at V _{CC}			0.001	2	μА
		Input to D is a 50% duty cycle	ALL HVD3082E			203	
P _(AVG)	Average power dissipation	square wave at max specified signal rate	ALL HVD3085E			205	mW
· (AVG)	, wordge pewer dissipation	$R_L = 54 \Omega V_{CC} = 5.5 V, T_J = 130^{\circ}C$	ALL HVD3088E			276	

⁽¹⁾ All typical values are at 25°C and with a 5-V supply.

6.9 Switching Characteristics: Driver

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
•	Propagation delay time, low-to-high-level output	$R_1 = 54 \Omega, C_1 = 50 pF$	HVD3082E		700	1300	
t _{PLH} t _{PHL}	Propagation delay time, high-	(see Figure 7-4)	HVD3085E		150	500	ns
1112	to-low-level output		HVD3088E		12	1300 500 2 20 1500 0 300 7 15 0 200 5 50 4 2 0 7000 0 2500 3 30 0 200 0 100 2 30	
	Differential output signal rise		HVD3082E	500	900	500 20 1500 300 15 200 50 2 7000 2500 30 200 100	
t _r t _f	time Differential output signal fall	$R_L = 54 \Omega$, $C_L = 50 pF$ (see Figure 7-4)	HVD3085E		200	300	ns
ч	time	(SGC Figure 7-4)	HVD3088E	82E 700 1300 85E 150 500 88E 12 20 82E 500 900 1500 85E 200 300 88E 7 15 82E 20 200 85E 5 50 88E 1.4 2 82E 2500 7000 85E 1000 2500 88E 13 30 82E 80 200 85E 60 100 88E 12 30 88E 3500 7000			
			HVD3082E		20	200	
t _{sk(p)} Pulse skew (t _{PHL} -	Pulse skew (t _{PHL} - t _{PLH})	$R_L = 54 \Omega$, $C_L = 50 pF$ (see Figure 7-4)	HVD3085E		5	50	ns
		(300 rigure r-4)	HVD3088E				
	Propagation delay time,		HVD3082E	2	2500	7000	ns
t _{PZH}		R_L = 110 Ω, \overline{RE} at 0 V (see Figure 7-5 and Figure	HVD3085E	1	000	2500	
t _{PZL}	high-impedance-to-high-level output Propagation delay time, high-impedance-to-low-level output	7-6)	HVD3088E		13	30	113
	Propagation delay time,		HVD3082E		80	200	
touz	high-level-to-high-impedance	$R_L = 110 \Omega$, \overline{RE} at 0 V	HVD3085E		60	100	
чнz t _{PLZ}	output output	(see Figure 7-5 and Figure 7-6)	HVD3088E		12	30	ns
	Propagation delay time,		HVD3082E	3	3500	7000	
t _{PZH(SHDN)}	shutdown-to-high-level output Propagation delay time,	R_L = 110 Ω, \overline{RE} at V_{CC} (see Figure 7-5)	HVD3085E	2	2500	4500	ns
t _{PZL(SHDN)}	shutdown-to-low-level output	(300 rigule r-0)	HVD3088E	1	600	2600	



6.10 Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDIT	TIONS	MIN	TYP	MAX	UNIT
t _{PLH}	Propagation delay time, low-to-high-level output		HVD3082E HVD3085E		75	200	ns
	to-nigh-level output		HVD3086E			100	
t _{PHL}	Propagation delay time, high- to-low-level output	C _L = 15 pF (see Figure 7-9)	HVD3082E HVD3085E		79	200	ns
	to-low-level output		HVD3088E			100	
t _{sk(p)}	Pulse skew (t _{PHL} - t _{PLH})		HVD3082E HVD3085E		4	30	ns
(1)			HVD3088E			10	
t _r	Output signal rise time	$V_{ID} = -1.5 \text{ V to } 1.5 \text{ V},$			1.5	3	no
t _f	Output signal fall time	$C_L = 15 \text{ pF (see Figure 7-9)}$			1.8	3	ns
t _{PZH}	Output enable time to high level		HVD3082E HVD3085E		5	50 ns	ns
	levei		HVD3088E			30	
t_{PZL}	Output enable time to low level	C _L = 15 pF,	HVD3082E HVD3085E		10	50	ns
	levei	DE at 3 V	HVD3088E			30	
t _{PHZ}	Output enable time from high level	(see Figure 7-10 and Figure 7-11)	HVD3082E HVD3085E		5	50	ns
	levei		HVD3088E			30	
t_PLZ	Output disable time from low level		HVD3082E HVD3085E		8	50	ns
	levei		HVD3088E			30	
t _{PZH(SHDN)}	Propagation delay time, shutdown-to-high-level output	C _L = 15 pF, DE at 0 V,			1600	3500	ne
t _{PZL(SHDN)}	Propagation delay time, shutdown-to-low-level output	(see Figure 7-12)			1700	3500	ns



6.11 Typical Characteristics




Figure 6-1. Bus Input Current versus Bus Input Voltage




Figure 6-2. SN65HVD3082E RMS Supply Current versus Signaling Rate




Figure 6-3. SN65HVD3085E RMS Supply Current versus Signaling Rate




Figure 6-4. SN65HVD3088E RMS Supply Current versus Signal Rate




Figure 6-5. Driver Differential Output Voltage versus Driver Output Current





Figure 6-6. Receiver Output Voltage versus Differential Input Voltage



6.11 Typical Characteristics (continued)



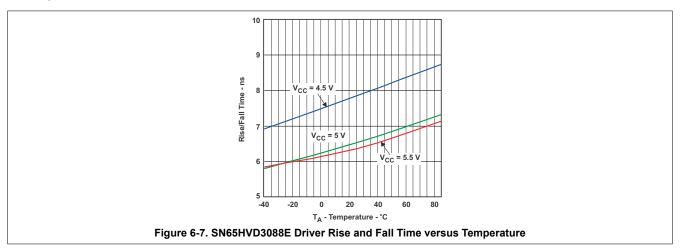

7 Parameter Measurement Information

Test load capacitance includes probe and jig capacitance (unless otherwise specified). Signal generator characteristics: rise and fall time < 6 ns, pulse rate 100 kHz, 50% duty cycle. Z_0 = 50 Ω (unless otherwise specified).




Figure 7-1. Driver Test Circuit, V_{OD} and V_{OC} Without Common-Mode Loading

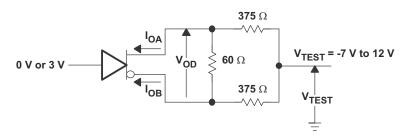


Figure 7-2. Driver Test Circuit, V_{OD} With Common-Mode Loading

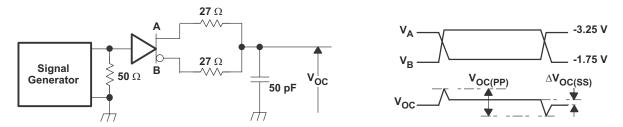


Figure 7-3. Driver V_{OC} Test Circuit and Waveforms

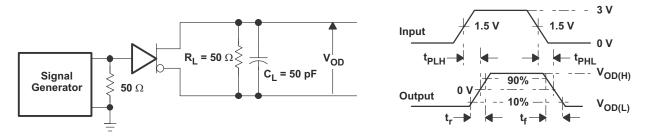


Figure 7-4. Driver Switching Test Circuit and Waveforms

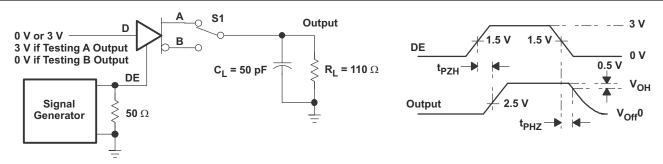


Figure 7-5. Driver Enable and Disable Test Circuit and Waveforms, High Output

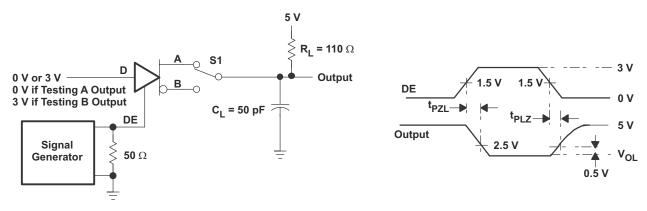


Figure 7-6. Driver Enable and Disable Test Circuit and Waveforms, Low Output




Figure 7-7. Driver Short-Circuit




Figure 7-8. Receiver Switching Test Circuit and Waveforms

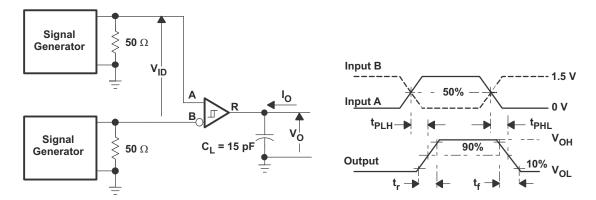


Figure 7-9. Receiver Switching Test Circuit and Waveforms

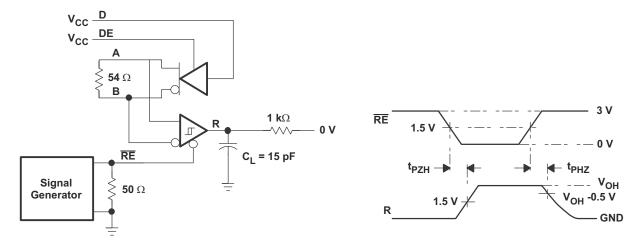


Figure 7-10. Receiver Enable and Disable Test Circuit and Waveforms, Data Output High

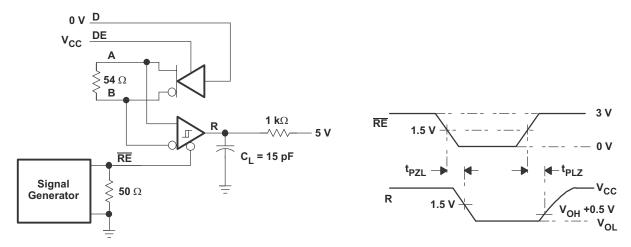


Figure 7-11. Receiver Enable and Disable Test Circuit and Waveforms, Data Output Low

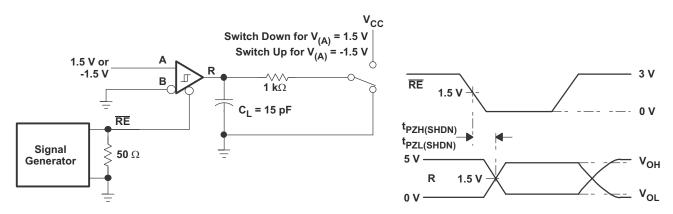


Figure 7-12. Receiver Enable From Shutdown Test Circuit and Waveforms



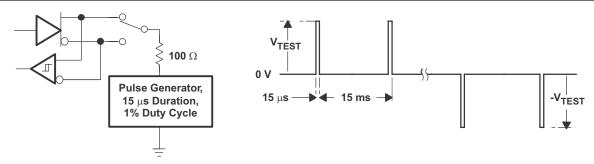


Figure 7-13. Test Circuit and Waveforms, Transient Overvoltage Test

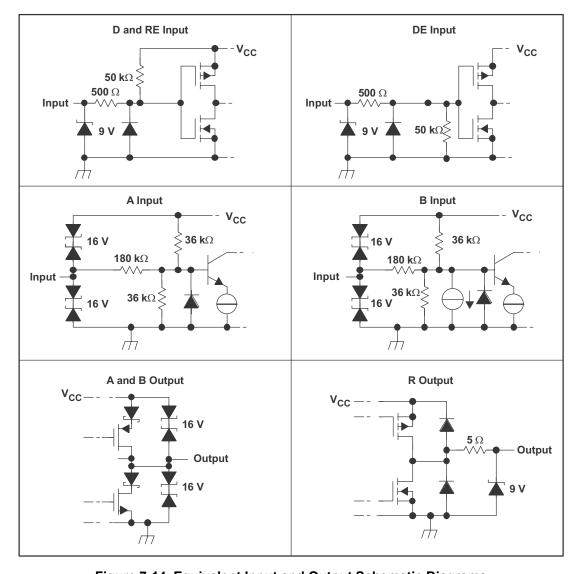


Figure 7-14. Equivalent Input and Output Schematic Diagrams




8 Detailed Description

8.1 Overview

The SNx5HVD308xE family of half-duplex RS-485 transceivers is suitable for data transmission at rates up to 200 kbps (for SN65HVD3082E and SN75HVD3082E), 1 Mbps (for SN65HVD3085E), or 20 Mbps (for SN65HVD3088E) over controlled-impedance transmission media (such as twisted-pair cabling). Up to 256 units of SNx5HVD308xE may share a common RS-485 bus due to the family's low bus input currents. The devices also feature a high degree of ESD protection and typical standby current consumption of 1 nA.

8.2 Functional Block Diagram



8.3 Feature Description

The SNx5HVD308xE provides internal biasing of the receiver input thresholds for open-circuit, bus-idle, or short-circuit fail-safe conditions. It features a typical hysteresis of 30 mV in order to improve noise immunity. Internal ESD protection circuits protect the transceiver bus terminals against ±15-kV Human Body Model (HBM) electrostatic discharges.

The devices protect themselves against damage due to overtemperature conditions, through the use of a thermal shutdown feature. Thermal shutdown is entered at 165°C (nominal) and causes the device to enter a low-power state with high-impedance outputs.

8.4 Device Functional Modes

When the driver enable pin, DE, is logic high, the differential outputs A and B follow the logic states at data input D. A logic high at D causes A to turn high and B to turn low. In this case the differential output voltage defined as $V_{OD} = V_A - V_B$ is positive. When D is low, the output states reverse, B turns high, A becomes low, and V_{OD} is negative.

When DE is low, both outputs turn high-impedance. In this condition the logic state at D is irrelevant. The DE pin has an internal pull-down resistor to ground, thus when left open the driver is disabled (high-impedance) by default. The D pin has an internal pull-up resistor to V_{CC} , thus, when left open while the driver is enabled, output A turns high and B turns low.

INPUT	ENABLE ⁽¹⁾	OUTP	UTS ⁽¹⁾	FUNCTION
D	DE	Α	В	FONCTION
Н	Н	Н	L	Actively drive bus High
L	Н	L	Н	Actively drive bus Low
Х	L	Z	Z	Driver disabled
Х	OPEN	Z	Z	Driver disabled by default
OPEN	Н	Н	L	Actively drive bus High by default

Table 8-1. Driver Function Table

(1) H = high level, L = low level, Z = high impedance, X = irrelevant

When the receiver enable pin, \overline{RE} , is logic low, the receiver is enabled. When the differential input voltage defined as $V_{ID} = V_A - V_B$ is positive and higher than the positive input threshold, V_{IT+} , the receiver output, R, turns high. When V_{ID} is negative and lower than the negative input threshold, V_{IT-} , the receiver output, R, turns low. If V_{ID} is between V_{IT+} and V_{IT-} the output is indeterminate.



When \overline{RE} is logic high or left open, the receiver output is high-impedance and the magnitude and polarity of V_{ID} are irrelevant. Internal biasing of the receiver inputs causes the output to go failsafe-high when the transceiver is disconnected from the bus (open-circuit), the bus lines are shorted (short-circuit), or the bus is not actively driven (idle bus).

Table 8-2. Receiver Function Table

DIFFERENTIAL INPUT	ENABLE (1)	OUTPUT ⁽¹⁾	FUNCTION
$V_{ID} = V_A - V_B$	RE	R	FUNCTION
V _{IT+} < V _{ID}	L	Н	Receive valid bus High
$V_{IT-} < V_{ID} < V_{IT+}$	L	?	Indeterminate bus state
V _{ID} < V _{IT}	L	L	Receive valid bus Low
X	Н	Z	Receiver disabled
X	OPEN	Z	Receiver disabled by default
Open-circuit bus	L	Н	Fail-safe high output
Short-circuit bus	L	Н	Fail-safe high output
Idle (terminated) bus	L	Н	Fail-safe high output

⁽¹⁾ H = high level, L = low level, Z = high impedance, X = irrelevant, ? = indeterminate



9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The SNx5HVD308xE devices are half-duplex RS-485 transceivers commonly used for asynchronous data transmissions. The driver and receiver enable pins allow the configuration of different operating modes.

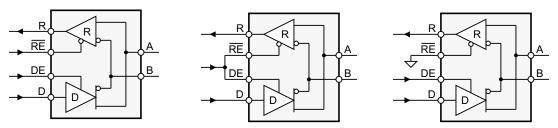


Figure 9-1. Half-Duplex Transceiver Configurations

Using independent enable lines provides the most flexible control, as it allows the driver and the receiver to be turned on and off individually. While this configuration requires two control lines, it allows selective listening into the bus traffic whether the driver is transmitting data or not.

Combining the enable signals simplify the interface to the controller, by forming a single direction-control signal. In this configuration, the transceiver operates as a driver when the direction-control line is high and as a receiver when the direction-control line is low.

Additionally, only one line is required when connecting the receiver-enable input to ground and controlling only the driver-enable input. In this configuration, a node not only receives the data from the bus, but also the data it sends and can verify that the correct data has been transmitted.

9.2 Typical Application

An RS-485 bus consists of multiple transceivers connecting in parallel to a bus cable. To eliminate line reflections, each cable end is terminated with a termination resistor, R_T , whose value matches the characteristic impedance, Z_0 , of the cable. This method, known as parallel termination, allows higher data rates over longer cable length.

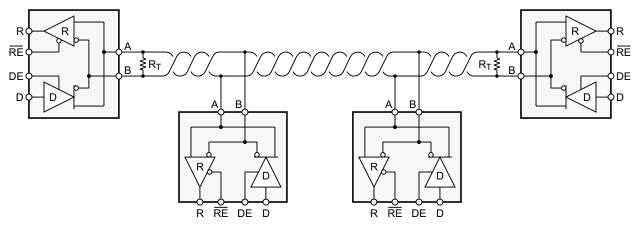


Figure 9-2. Typical Application Circuit

9.2.1 Design Requirements

RS-485 is a robust electrical standard suitable for long-distance networking that may be used in a wide range of applications with varying requirements, such as distance, data rate, and number of nodes.

9.2.1.1 Data Rate and Bus Length

The inverse relationship between the data rate and bus length, means the higher the data rate, the shorter the cable length; and conversely, the lower the data rate, the longer the cable can be without introducing data errors. While most RS-485 systems use data rates between 10 kbps and 100 kbps, some applications require data rates up to 250 kbps at distances of 4,000 feet and longer. The longer distances can be achieved by allowing small signal jitter of up to 5 or 10%.

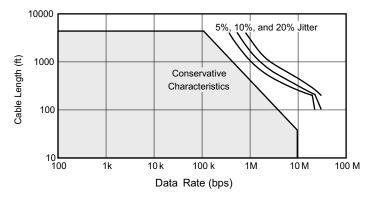


Figure 9-3. Cable Length vs Data Rate Characteristic

9.2.1.2 Stub Length

The distance between the transceiver inputs and the cable trunk, which is known as the **stub**, must be short as possible when connecting a node to the bus. Stubs present a non-terminated piece of bus line which can introduce reflections as the length of the stub increases. As a general guideline, the electrical length, or round-trip delay of a stub, must be less than one-tenth of the rise time of the driver, thus giving a maximum physical stub length as shown in Equation 1.

$$L_{\text{stub}} \le 0.1 \times t_{\text{r}} \times v \times c \tag{1}$$

where:

- t_r is the 10/90 rise time of the driver
- c is the speed of light (3 × 10⁸ m/s)
- v is the signal velocity of the cable or trace as a factor of c

9.2.1.3 Bus Loading

The RS-485 standard specifies that a compliant driver must be able to driver 32 unit loads (UL), where 1 unit load represents a load impedance of approximately 12 k Ω . The SNx5HVD308xE is a 1/8 UL transceiver, which means it can connect up to 256 receivers to the bus.



9.2.1.4 Receiver Fail-safe

The differential receiver is fail-safe to invalid bus states caused by:

- Open bus conditions, such as a disconnected connector
- Shorted bus conditions, such as cable damage shorting the twisted-pair together
- · Idle bus conditions that occur when no driver on the bus is actively driving

In any of these cases, the differential receiver outputs a fail-safe logic High state, so that the output of the receiver is not indeterminate.

Receiver fail-safe is accomplished by offsetting the receiver thresholds, so that the *input indeterminate* range does not include zero volts differential. To comply with the RS-422 and RS-485 standards, the receiver output must output a High when the differential input V_{ID} is more positive than +200 mV, and must output a Low when the V_{ID} is more negative than -200 mV. The receiver parameters which determine the fail-safe performance are V_{IT+} and V_{IT-} and V_{HYS} . As seen in the *Electrical Characteristics* table, differential signals more negative than -200 mV will always cause a Low receiver output and differential signals more positive than +200 mV will always cause a High receiver output.

When the differential input signal is close to zero, it is still above the maximum V_{IT+} threshold, and the receiver output is High. Only when the differential input is more negative than V_{IT-} will the receiver output transition to a Low state. The noise immunity of the receiver inputs during a bus fault condition, includes the receiver hysteresis value V_{HYS} (the separation between V_{IT+} and V_{IT-}) as well as the value of V_{IT+} .

9.2.2 Detailed Design Procedure

In order to protect bus nodes against high-energy transients, the implementation of external transient protection devices is necessary.




Figure 9-4. Transient Protection Against ESD, EFT, and Surge Transients

Figure 9-4 suggests a protection circuit against 10-kV ESD (IEC 61000-4-2), 4-kV EFT (IEC 61000-4-4), and 1-kV surge (IEC 61000-4-5) transients. Table 9-1 shows the associated Bill of Materials.

Table 9-1. Bill of Materials

DEVICE	FUNCTION	ORDER NUMBER	MANUFACTURER
XCVR	RS-485 Transceiver	SNx5HVD308xE	TI
R1, R2	10-Ω, Pulse-Proof Thick-Film Resistor	CRCW060310RJNEAHP	Vishay
TVS	Bidirectional 400-W Transient Suppressor	CDSOT23-SM712	Bourns



9.2.2.1 Power Usage in an RS-485 Transceiver

With power consumption being a concern in many applications, power supply current is delivered to the bus load as well as to the transceiver circuitry. For a typical RS-485 bus configuration, the load that an active driver must drive consists of all of the receiving nodes, plus the termination resistors at each end of the bus.

The load presented by the receiving nodes depends on the input impedance of the receiver. The TIA/EIA-485A standard defines a unit load as allowing up to 1 mA. With up to 32 unit loads allowed on the bus, the total current supplied to all receivers can be as high as 32 mA. The HVD308xE is rated as a 1/8 unit load device. As shown in Figure 6-1, the bus input current is less than 0.125 mA, allowing up to 256 nodes on a single bus.

The current in the termination resistors depends on the differential bus voltage. The standard requires active drivers to produce at least 1.5 V of differential signal. For a bus terminated with one standard 120- Ω resistor at each end, this sums to 25 mA differential output current whenever the bus is active. Typically, the HVD308xE can drive more than 25-mA to a 60- Ω load, resulting in a differential output voltage higher than the minimum required by the standard (see Figure 6-3).

Overall, the total load current can be 60 mA to a loaded RS-485 bus. This is in addition to the current required by the transceiver itself; the HVD308xE circuitry requires only about 0.4 mA with both driver and receiver enabled, and only 0.3 mA with either the driver enabled or with the receiver enabled. In low-power shutdown mode, neither the driver nor receiver is active, and the supply current is low.

Supply current increases with signaling rate primarily due to the totem pole outputs of the driver (see Figure 6-2). When these outputs change state, there is a moment when both the high-side and low-side output transistors are conducting and this creates a short spike in the supply current. As the frequency of state changes increases, more power is used.

9.2.2.2 Low-Power Shutdown Mode

When both the driver and receiver are disabled (DE low and \overline{RE} high) the device is in shutdown mode. If the enable inputs are in this state for less than 60 ns, the device does not enter shutdown mode. This guards against inadvertently entering shutdown mode during driver or receiver enabling. Only when the enable inputs are held in this state for 300 ns or more, the device is assured to be in shutdown mode. In this low-power shutdown mode, most internal circuitry is powered down, and the supply current is typically 1 nA. When either the driver or the receiver is re-enabled, the internal circuitry becomes active.

If only the driver is re-enabled (DE transitions to high) the driver outputs are driven according to the D input after the enable times given by $t_{PZH(SHDN)}$ and $t_{PZL(SHDN)}$ in the driver switching characteristics. If the D input is open when the driver is enabled, the driver outputs defaults to A high and B low, in accordance with the driver fail-safe feature.

If only the receiver is re-enabled (RE transitions to low) the receiver output is driven according to the state of the bus inputs (A and B) after the enable times given by $t_{PZH(SHDN)}$ and $t_{PZL(SHDN)}$ in the receiver switching characteristics. If there is no valid state on the bus the receiver responds as described in the fail-safe operation section.

If both the receiver and driver are re-enabled simultaneously, the receiver output is driven according to the state of the bus inputs (A and B) and the driver output is driven according to the D input.

Note

The state of the active driver affects the inputs to the receiver. Therefore, the receiver outputs are valid as soon as the driver outputs are valid.



10 Power Supply Recommendations

To ensure reliable operation at all data rates and supply voltages, each supply must be decoupled with a 100-nF ceramic capacitor located as close to the supply pins as possible. This helps to reduce supply voltage ripple present on the outputs of switched-mode power supplies and also helps to compensate for the resistance and inductance of the PCB power planes.

11 Layout

11.1 Layout Guidelines

Robust and reliable bus node design often requires the use of external transient protection devices in order to protect against EFT and surge transients that may occur in industrial environments. Due to the wide frequency bandwidth (from approximately 3 MHz to 3 GHz) that the transients have, high-frequency layout techniques must be applied during PCB design.

- Place the protection circuitry close to the bus connector to prevent noise transients from entering the board.
- Use V_{CC} and ground planes to provide low-inductance.

Note

High-frequency currents follow the path of least inductance and not the path of least impedance.

- Design the protection components into the direction of the signal path. Do not force the transients currents to divert from the signal path to reach the protection device.
- Apply 100-nF to 220-nF bypass capacitors as close as possible to the V_{CC} pins of transceiver, UART, and controller ICs on the board.
- Use at least two vias for V_{CC} and ground connections of bypass capacitors and protection devices to minimize effective via-inductance.
- Use 1-kΩ to 10-kΩ pullup or pulldown resistors for enable lines to limit noise currents in these lines during transient events.
- Insert series pulse-proof resistors into the A and B bus lines if the TVS clamping voltage is higher than the specified maximum voltage of the transceiver bus pins. These resistors limit the residual clamping current into the transceiver and prevent it from latching up.
- While pure TVS protection is sufficient for surge transients up to 1 kV, higher transients require metal-oxide varistors (MOVs) that reduce the transients to a few hundred volts of clamping voltage, and transient blocking units (TBUs) that limit transient current to 200 mA.

11.2 Layout Example

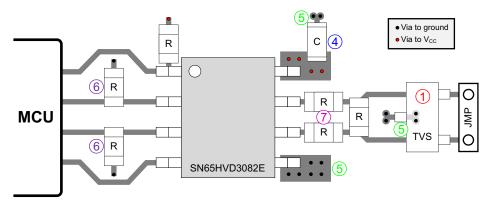


Figure 11-1. Layout Example

11.3 Thermal Considerations for IC Packages

 θ_{JA} (Junction-to-Ambient Thermal Resistance) is defined as the difference in junction temperature to ambient temperature divided by the operating power.

 θ_{JA} is **not** a constant and is a strong function of:

- the PCB design (50% variation)
- altitude (20% variation)
- device power (5% variation)

 θ_{JA} can be used to compare the thermal performance of packages when the specific test conditions are defined and used. Standardized testing includes specification of PCB construction, test chamber volume, sensor locations, and the thermal characteristics of holding fixtures. θ_{JA} is often misused when it is used to calculate junction temperatures for other installations.

TI uses two test PCBs as defined by JEDEC specifications. The low-k board gives average in-use condition thermal performance and consists of a single trace layer 25-mm long and 2-oz thick copper. The high-k board gives best case in-use condition and consists of two 1-oz buried power planes with a single trace layer 25-mm long with 2-oz thick copper. A 4% to 50% difference in θ_{JA} can be measured between these two test cards.

 θ_{JC} (Junction-to-Case Thermal Resistance) is defined as the difference in junction temperature to case divided by the operating power. It is measured by putting the mounted package up against a copper block cold plate, to force heat to flow from the die through the mold compound and into the copper block.

 θ_{JC} is a useful thermal characteristic when a heat sink is applied to package. It is NOT a useful characteristic to predict junction temperature, as it provides pessimistic numbers if the case temperature is measured in a non-standard system and junction temperatures are backed out. It can be used with θ_{JB} in 1-dimensional thermal simulation of a package system.

 θ_{JB} (Junction-to-Board Thermal Resistance) is defined to be the difference in the junction temperature and the PCB temperature at the center of the package (closest to the die) when the PCB is clamped in a cold-plate structure. θ_{JB} is only defined for the high-k test card.

 θ_{JB} provides an overall thermal resistance between the die and the PCB. It includes a bit of the PCB thermal resistance (especially for BGAs with thermal balls) and can be used for simple 1-dimensional network analysis of package system (see Figure 11-2).




Figure 11-2. Thermal Resistance



12 Device and Documentation Support

12.1 Device Support

12.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.3 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

12.4 Trademarks

TI E2E[™] is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

12.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.



13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com

31-Oct-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
SN65HVD3082ED	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	-40 to 85	VP3082
SN65HVD3082EDGKR	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	NWN
SN65HVD3082EDGKR.A	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	NWN
SN65HVD3082EDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3082
SN65HVD3082EDR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3082
SN65HVD3082EDRG4	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3082
SN65HVD3082EP	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	65HVD3082
SN65HVD3082EP.A	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	65HVD3082
SN65HVD3082EPE4	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	65HVD3082
SN65HVD3085EDGKR	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	NWK
SN65HVD3085EDGKR.A	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	NWK
SN65HVD3085EDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3085
SN65HVD3085EDR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3085
SN65HVD3088ED	Obsolete	Production	SOIC (D) 8	-	=	Call TI	Call TI	-40 to 85	VP3088
SN65HVD3088EDGKR	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	NWH
SN65HVD3088EDGKR.A	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	NWH
SN65HVD3088EDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3088
SN65HVD3088EDR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3088
SN65HVD3088EDRG4	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VP3088
SN65HVD3088ENSR	Active	Production	SOP (NS) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HVD3088E
SN65HVD3088ENSR.A	Active	Production	SOP (NS) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HVD3088E
SN75HVD3082ED	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	0 to 70	VN3082
SN75HVD3082EDGKR	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	0 to 70	NWM
SN75HVD3082EDGKR.A	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	0 to 70	NWM
SN75HVD3082EDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	VN3082
SN75HVD3082EDR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	VN3082
SN75HVD3082EDRG4	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	VN3082
SN75HVD3082EP	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	75HVD3082
SN75HVD3082EP.A	Active	Production	PDIP (P) 8	50 TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	75HVD3082

PACKAGE OPTION ADDENDUM

www.ti.com 31-Oct-2025

- (1) Status: For more details on status, see our product life cycle.
- (2) Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



www.ti.com 2-Aug-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN65HVD3082EDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.25	3.35	1.25	8.0	12.0	Q1
SN65HVD3082EDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
SN65HVD3082EDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
SN65HVD3085EDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.25	3.35	1.25	8.0	12.0	Q1
SN65HVD3085EDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
SN65HVD3088EDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.25	3.35	1.25	8.0	12.0	Q1
SN65HVD3088EDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
SN65HVD3088ENSR	SOP	NS	14	2000	330.0	16.4	8.1	10.4	2.5	12.0	16.0	Q1
SN75HVD3082EDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.25	3.35	1.25	8.0	12.0	Q1
SN75HVD3082EDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1



www.ti.com 2-Aug-2025




*All dimensions are nominal

7 til dilliciololio ale Homiliai							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN65HVD3082EDGKR	VSSOP	DGK	8	2500	366.0	364.0	50.0
SN65HVD3082EDR	SOIC	D	8	2500	353.0	353.0	32.0
SN65HVD3082EDR	SOIC	D	8	2500	340.5	338.1	20.6
SN65HVD3085EDGKR	VSSOP	DGK	8	2500	366.0	364.0	50.0
SN65HVD3085EDR	SOIC	D	8	2500	340.5	336.1	25.0
SN65HVD3088EDGKR	VSSOP	DGK	8	2500	366.0	364.0	50.0
SN65HVD3088EDR	SOIC	D	8	2500	340.5	336.1	25.0
SN65HVD3088ENSR	SOP	NS	14	2000	353.0	353.0	32.0
SN75HVD3082EDGKR	VSSOP	DGK	8	2500	366.0	364.0	50.0
SN75HVD3082EDR	SOIC	D	8	2500	340.5	336.1	25.0

PACKAGE MATERIALS INFORMATION

www.ti.com 2-Aug-2025

TUBE

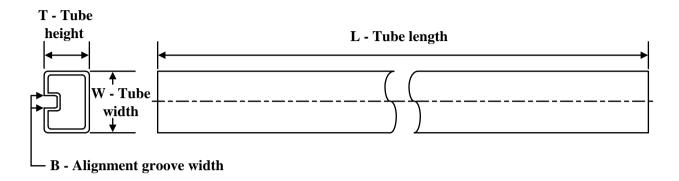

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN65HVD3082EP	Р	PDIP	8	50	506	13.97	11230	4.32
SN65HVD3082EP.A	Р	PDIP	8	50	506	13.97	11230	4.32
SN65HVD3082EPE4	Р	PDIP	8	50	506	13.97	11230	4.32
SN75HVD3082EP	Р	PDIP	8	50	506	13.97	11230	4.32
SN75HVD3082EP.A	Р	PDIP	8	50	506	13.97	11230	4.32



SMALL OUTLINE PACKAGE



NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



MECHANICAL DATA

NS (R-PDSO-G**)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.





SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001 variation BA.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025