











CSD17571Q2

SLPS393A - OCTOBER 2013-REVISED JANUARY 2015

# CSD17571Q2 30V N-Channel NexFET™ Power MOSFETs

#### **Features**

- Low Q<sub>a</sub> and Q<sub>ad</sub>
- Low Thermal Resistance
- Avalanche Rated
- Pb-Free Terminal Plating
- **RoHS Compliant**
- Halogen Free
- SON 2 mm × 2 mm Plastic Package


## Applications

- Optimized for Load Switch Applications
- Storage, Tablets, and Handheld Devices
- Optimized for Control FET Applications


### 3 Description

This 30 V, 20 mΩ, SON 2×2 NexFET™ power MOSFET is designed to minimize losses in power conversion and load management applications, while offering excellent thermal performance for the size of the package.







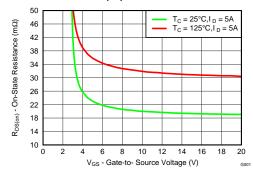

#### **Product Summary**

T <sub>A</sub> = 25°	С	TYPICAL VA	UNIT	
$V_{DS}$	Drain-to-Source Voltage 30			V
$Q_g$	Gate Charge Total (4.5 V) 2.4			
$Q_{gd}$	Gate Charge Gate-to-Drain	0.6	nC	
В	Drain-to-Source On-Resistance	V <sub>GS</sub> = 4.5 V	24	mΩ
R <sub>DS(on)</sub>	Drain-to-Source On-Resistance	V <sub>GS</sub> = 10 V 20		mΩ
V <sub>GS(th)</sub>	Threshold Voltage	1.6		V

## Ordering Information<sup>(1)</sup>

Device	vice Media		Device Media Qty		Package	Ship	
CSD17571Q2	7-Inch Reel	3000	SON 2 x 2 mm Plastic Package	Tape and Reel			


(1) For all available packages, see the orderable addendum at the end of the data sheet.

## **Absolute Maximum Ratings**

Absolute Maximum Natings								
T <sub>A</sub> = 2	5°C	VALUE	UNIT					
$V_{\text{DS}}$	Drain-to-Source Voltage	30	V					
$V_{GS}$	Gate-to-Source Voltage	±20	V					
	Continuous Drain Current (Package Limit)	22	Α					
I <sub>D</sub>	Continuous Drain Current <sup>(1)</sup>	7.6	Α					
$I_{DM}$	Pulsed Drain Current, T <sub>A</sub> = 25°C <sup>(2)</sup>	39	Α					
$P_D$	Power Dissipation <sup>(1)</sup>	2.5	W					
T <sub>J</sub> , T <sub>stg</sub>	Operating Junction and Storage Temperature Range	-55 to 150	ů					
E <sub>AS</sub>	Avalanche Energy, single pulse $I_D$ = 12 A, L = 0.1 mH, $R_G$ = 25 $\Omega$	7.2	mJ					

- (1)  $R_{\theta JA} = 50$  on 1 in<sup>2</sup> Cu (2 oz.) on 0.060" thick FR4 PCB
- (2) Pulse duration 10 µs, duty cycle ≤2%

#### **Gate Charge**

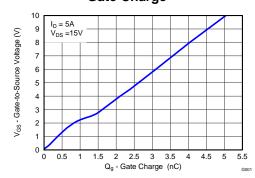



# **Table of Contents**

1	Features 1	6	Device and Documentation Support	7
2	Applications 1		6.1 Trademarks	7
3	Description 1		6.2 Electrostatic Discharge Caution	7
	Revision History2		6.3 Glossary	7
	Specifications	_	Mechanical, Packaging, and Orderable	
	5.1 Electrical Characteristics		Information	
	5.2 Thermal Information		7.1 Q2 Package Dimensions	
	5.3 Typical MOSFET Characteristics		7.2 Q2 Tape and Reel Information 1	0

# 4 Revision History

Cł	nanges from Original (October 2013) to Revision A	Page
•	Updated Figure #8	6



# 5 Specifications

#### 5.1 Electrical Characteristics

 $T_{\Delta} = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
STATIC	CHARACTERISTICS		•		•	
BV <sub>DSS</sub>	Drain-to-Source Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	30			V
I <sub>DSS</sub>	Drain-to-Source Leakage Current	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 24 V			1	μΑ
I <sub>GSS</sub>	Gate-to-Source Leakage Current	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = 20 V			100	nA
$V_{GS(th)}$	Gate-to-Source Threshold Voltage	$V_{DS} = V_{GS}$ , $I_{DS} = 250 \mu A$	1.3	1.6	2	V
р	Drain-to-Source On-Resistance	$V_{GS} = 4.5 \text{ V}, I_{DS} = 5 \text{ A}$		24	29	mΩ
R <sub>DS(on)</sub>	Drain-to-Source On-Resistance	V <sub>GS</sub> = 10 V, I <sub>DS</sub> = 5 A		20	24	mΩ
$g_{fs}$	Transconductance	V <sub>DS</sub> = 15 V, I <sub>DS</sub> = 5 A		43		S
DYNAMI	IC CHARACTERISTICS		·			
C <sub>ISS</sub>	Input Capacitance			360	468	pF
C <sub>OSS</sub>	Output Capacitance	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 15 V, f = 1 MHz		101	131	pF
C <sub>RSS</sub>	Reverse Transfer Capacitance			9	12	pF
R <sub>g</sub>	Series Gate Resistance			3.8	7.6	Ω
Qg	Gate Charge Total (4.5 V)			2.4	3.1	nC
Q <sub>gd</sub>	Gate Charge – Gate-to-Drain	V 45 V 1 5 A		0.6		nC
Q <sub>gs</sub>	Gate Charge Gate-to-Source	V <sub>DS</sub> = 15 V, I <sub>DS</sub> = 5 A		0.9		nC
Q <sub>g(th)</sub>	Gate Charge at V <sub>th</sub>			0.6		nC
Q <sub>OSS</sub>	Output Charge	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 0 V		3.4		nC
t <sub>d(on)</sub>	Turn On Delay Time			5.3		ns
t <sub>r</sub>	Rise Time	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 4.5 V, I <sub>DS</sub> = 5 A		19		ns
t <sub>d(off)</sub>	Turn Off Delay Time	$R_G = 2 \Omega$		8		ns
$t_f$	Fall Time			2.6		ns
DIODE C	CHARACTERISTICS					
V <sub>SD</sub>	Diode Forward Voltage	I <sub>DS</sub> = 5 A, V <sub>GS</sub> = 0 V		0.8	1	V
Q <sub>rr</sub>	Reverse Recovery Charge	V 45 V L 5 A di/d+ 200 A/··-		2.3		nC
t <sub>rr</sub>	Reverse Recovery Time	$V_{DD} = 15 \text{ V}, I_F = 5 \text{ A}, di/dt = 300 \text{ A/}\mu\text{s}$		11		ns

### 5.2 Thermal Information

 $T_A = 25$ °C unless otherwise specified


	THERMAL METRIC	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance (1)			6.2	°C/W
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance (1)(2)			65	C/VV

<sup>(1)</sup> R<sub>θ,JC</sub> is determined with the device mounted on a 1 inch² (6.45 cm²), 2 oz. (0.071 mm thick) Cu pad on a 1.5 inches x 1.5 inches (3.81 cm x 3.81 cm), 0.06 inch (1.52 mm) thick FR4 PCB. R<sub>θ,JC</sub> is specified by design, whereas R<sub>θ,JA</sub> is determined by the user's board design.


(2) Device mounted on FR4 material with 1 inch<sup>2</sup> (6.45 cm<sup>2</sup>), 2 oz. (0.071 mm thick) Cu.

Copyright © 2013–2015, Texas Instruments Incorporated






Max  $R_{\theta JA} = 65$  when mounted on 1 inch<sup>2</sup> (6.45 cm<sup>2</sup>) of 2 oz. (0.071 mm thick) Cu.



Max  $R_{\theta JA} = 235$  when mounted on minimum pad area of 2 oz. (0.071 mm thick) Cu.

## 5.3 Typical MOSFET Characteristics

T<sub>A</sub> = 25°C unless otherwise specified

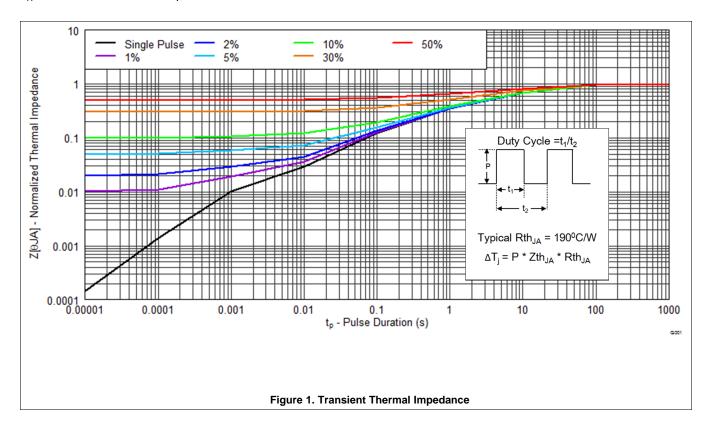


Submit Documentation Feedback

Copyright © 2013–2015, Texas Instruments Incorporated



### **Typical MOSFET Characteristics (continued)**

 $T_A = 25$ °C unless otherwise specified

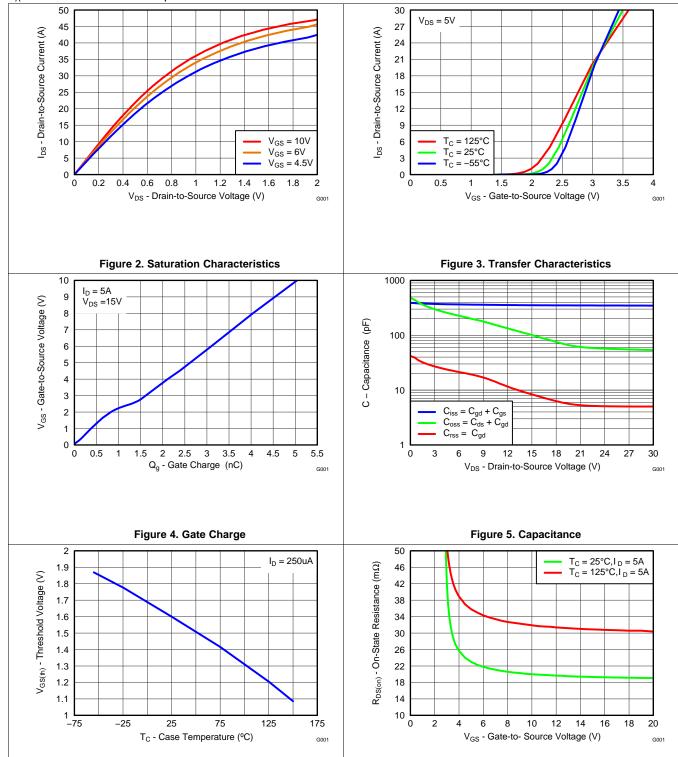

Copyright © 2013–2015, Texas Instruments Incorporated

Figure 6. Threshold Voltage vs Temperature


Submit Documentation Feedback

Figure 7. On-State Resistance vs Gate-to-Source Voltage



## **Typical MOSFET Characteristics (continued)**

 $T_A = 25$ °C unless otherwise specified

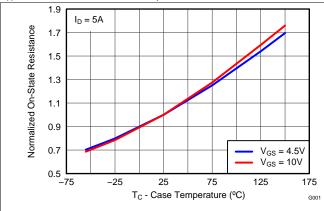

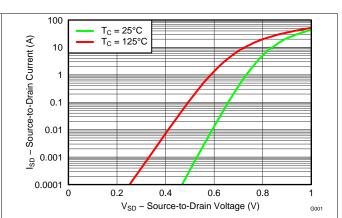
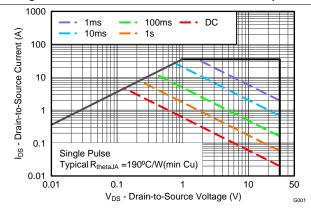


Figure 8. Normalized On-State Resistance vs Temperature





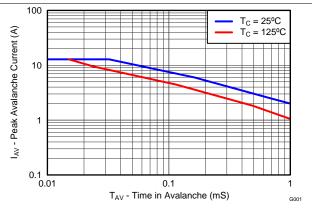


Figure 10. Maximum Safe Operating Area



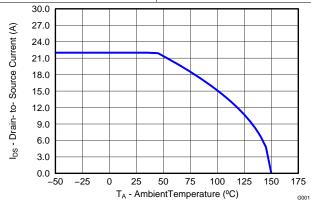


Figure 12. Maximum Drain Current vs Temperature



# 6 Device and Documentation Support

#### 6.1 Trademarks

NexFET is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 6.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## 6.3 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.


Product Folder Links: CSD17571Q2



## 7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

# 7.1 Q2 Package Dimensions

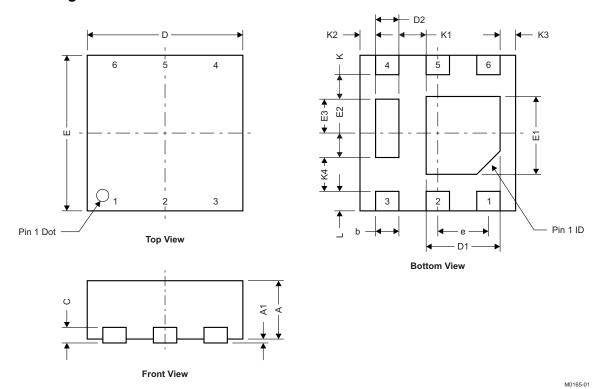


IVIU	100-	ļ

DIM		MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX	
Α	0.700	0.750	0.800	0.028	0.032		
A1	0.000		0.050	0.000		0.002	
b	0.250	0.300	0.350	0.010	0.012	0.014	
С		0.203 TYP			0.008 TYP		
D		2.000 TYP			0.080 TYP		
D1	0.900 0.950		1.000	0.036	0.038	0.040	
D2		0.300 TYP		0.012 TYP			
E		2.000 TYP	0.080 TYP				
E1	0.900	1.000	1.100	0.036	0.044		
E2		0.280 TYP		0.0112 TYP			
E3		0.470 TYP			0.0188 TYP		
е		0.650 BSC			0.026 TYP		
K		0.280 TYP			0.0112 TYP		
K1		0.350 TYP			0.014 TYP		
K2		0.200 TYP			0.008 TYP		
K3		0.200 TYP		0.008 TYP			
K4		0.470 TYP			0.0188 TYP		
L	0.200 0.25 0.300			0.008	0.010	0.012	




#### 7.1.1 Recommended PCB Pattern

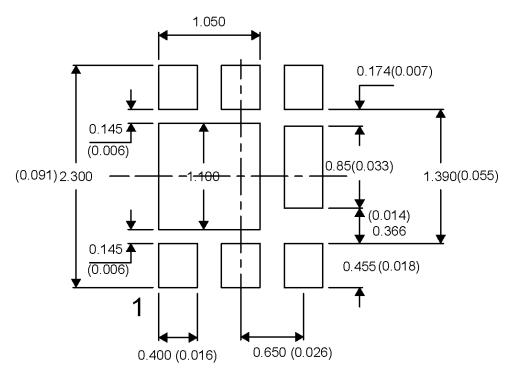

For recommended circuit layout for PCB designs, see application note SLPA005 - Reducing Ringing Through PCB Layout Techniques.

#### 7.1.2 Recommended Stencil Pattern

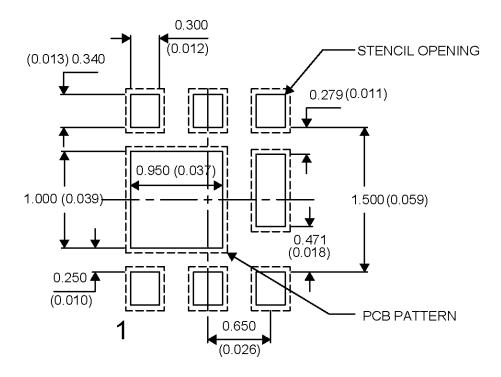



Product Folder Links: CSD17571Q2


All dimensions are in mm, unless otherwise specified. Note:



## 7.2 Q2 Tape and Reel Information

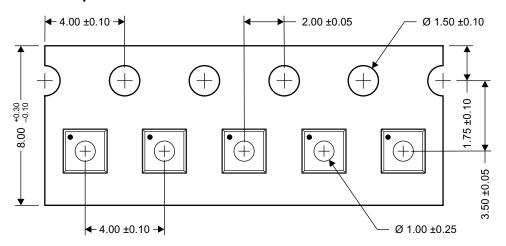





M0168-01

Notes: 1. Measured from centerline of sprocket hole to centerline of pocket

- 2. Cumulative tolerance of 10 sprocket holes is ±0.20
- 3. Other material available
- 4. Typical SR of form tape Max 109 OHM/SQ
- 5. All dimensions are in mm, unless otherwise specified.

www.ti.com 10-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
CSD17571Q2	Active	Production	WSON (DQK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1751
CSD17571Q2.B	Active	Production	WSON (DQK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1751
CSD17571Q2G4.B	Active	Production	WSON (DQK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1751

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025