











CSD18532NQ5B

SLPS440C -JUNE 2013-REVISED FEBRUARY 2018

# CSD18532NQ5B 60-V N-Channel NexFET™ Power MOSFET

### **Features**


- Ultra-Low  $Q_g$  and  $Q_{gd}$
- Low-Thermal Resistance
- Avalanche Rated
- Lead-Free Terminal Plating
- **RoHS Compliant**
- Halogen Free
- SON 5-mm x 6-mm Plastic Package


# **Applications**

- DC-DC Conversion
- Secondary Side Synchronous Rectifier
- Isolated Converter Primary Side Switch
- Motor Control

# **Description**

This 60-V, 2.7-m $\Omega$ , 5-mm × 6-mm SON NexFET<sup>TM</sup> power MOSFET has been designed to minimize losses in power conversion applications.





## **Product Summary**

$T_A = 25^\circ$	С	TYPICAL VA	UNIT	
$V_{DS}$	Drain-to-Source Voltage	60	V	
$Q_g$	Gate Charge Total (10 V)	49		nC
$Q_{gd}$	Gate Charge Gate-to-Drain	7.9	nC	
В	Drain-to-Source On-Resistance	V <sub>GS</sub> = 6 V	3.5	mΩ
R <sub>DS(on)</sub>	Diam-to-Source On-Resistance	V <sub>GS</sub> = 10 V	2.7	11122
$V_{GS(th)}$	Threshold Voltage	2.8	V	

#### **Device Information**


DEVICE	QTY	MEDIA	PACKAGE	SHIP
CSD18532NQ5B	2500	13-Inch Reel	SON	Tape
CSD18532NQ5BT	250	7-Inch Reel	5.00-mm × 6.00-mm Plastic Package	and Reel

#### **Absolute Maximum Ratings**

, toodiato maximum ratingo								
$T_A = 2$	25°C	VALUE	UNIT					
$V_{DS}$	Drain-to-Source Voltage	60	V					
V <sub>GS</sub>	Gate-to-Source Voltage	±20	V					
	Continuous Drain Current (Package Limited)	100						
I <sub>D</sub>	Continuous Drain Current (Silicon Limited), $T_C = 25$ °C	151	Α					
	Continuous Drain Current <sup>(1)</sup>	21						
I <sub>DM</sub>	Pulsed Drain Current <sup>(2)</sup>	400	Α					
_	Power Dissipation <sup>(1)</sup>	3.1	14/					
$P_D$	Power Dissipation, T <sub>C</sub> = 25°C	156	W					
T <sub>J</sub> , T <sub>stg</sub>	Operating Junction Temperature, Storage Temperature	-55 to 150	°C					
E <sub>AS</sub>	Avalanche Energy, Single Pulse $I_D$ = 85 A, L = 0.1 mH, $R_G$ = 25 $\Omega$	360	mJ					

- (1) Typical  $R_{\theta JA}$  = 40°C/W on a 1-in², 2-oz Cu pad on a 0.06-in thick FR4 PCB.
- (2) Max  $R_{\theta,JC} = 0.8^{\circ}C/W$ , pulse duration  $\leq 100 \mu s$ , duty cycle  $\leq$

#### **Gate Charge**





T	ab	le	of	Contents
---	----	----	----	----------

1	Features 1	6.2 Community Resources 7
2	Applications 1	6.3 Trademarks
3	Description 1	6.4 Electrostatic Discharge Caution
	Revision History2	6.5 Glossary
	Specifications3	7 Mechanical, Packaging, and Orderable
	5.1 Electrical Characteristics3	Information
	5.2 Thermal Information	7.1 Q5B Package Dimensions
	5.3 Typical MOSFET Characteristics	7.2 Recommended PCB Pattern9
6	Device and Documentation Support7	7.3 Recommended Stencil Pattern
U	6.1 Receiving Notification of Documentation Updates 7	7.4 Q5B Tape and Reel Information

# **4 Revision History**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision B (May 2017) to Revision C	Page
Extended the V <sub>DS</sub> on Figure 5 to 60 V	4
Changes from Revision A (December 2015) to Revision B	Page
Added Receiving Notification of Documentation Updates section.	7
<ul> <li>Changed the dimension between pads 3 and 4 from 0.028 inches: to 0.050 inches in the Recor Pattern section diagram.</li> </ul>	
Fattern Section diagram.	
	Page
Changes from Original (June 2014) to Revision A  Added part number to title.	1
Changes from Original (June 2014) to Revision A  Added part number to title.	1
Changes from Original (June 2014) to Revision A  Added part number to title.  Added 7" reel to Ordering Information.	1
Changes from Original (June 2014) to Revision A  Added part number to title.  Added 7" reel to Ordering Information.  Updated pulsed current conditions.	1 1 1
Changes from Original (June 2014) to Revision A  Added part number to title.  Added 7" reel to Ordering Information.  Updated pulsed current conditions.	
Changes from Original (June 2014) to Revision A  Added part number to title.  Added 7" reel to Ordering Information.  Updated pulsed current conditions.  Added line for Power Dissipation, T <sub>C</sub> = 25°C in Absolute Maximum Ratings table.	

Submit Documentation Feedback



# 5 Specifications

## 5.1 Electrical Characteristics

 $T_{\Lambda} = 25^{\circ}C$  unless otherwise stated

	PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
STATIC	CHARACTERISTICS				
BV <sub>DSS</sub>	Drain-to-source voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	60		V
I <sub>DSS</sub>	Drain-to-source leakage current	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 48 V		1	μΑ
I <sub>GSS</sub>	Gate-to-source leakage current	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = 20 V		100	nA
V <sub>GS(th)</sub>	Gate-to-source threshold voltage	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$	2.4 2.8	3.4	V
1	Designate accounts on manifestation	V <sub>GS</sub> = 6 V, I <sub>D</sub> = 25 A	3.5	4.4	0
R <sub>DS(on)</sub>	Drain-to-source on-resistance	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 25 A	2.7	3.4	mΩ
9 <sub>fs</sub>	Transconductance	V <sub>DS</sub> = 30 V, I <sub>D</sub> = 25 A	140		S
DYNAMI	IC CHARACTERISTICS		<u>"</u>		
C <sub>iss</sub>	Input capacitance		4100	5340	pF
C <sub>oss</sub>	Output capacitance	$V_{GS} = 0 \text{ V}, V_{DS} = 30 \text{ V}, f = 1 \text{ MHz}$	495	644	pF
C <sub>rss</sub>	Reverse transfer capacitance		16	21	pF
$R_G$	Series gate resistance		1.2	2.4	Ω
Qg	Gate charge total (10 V)	V <sub>DS</sub> = 30 V, I <sub>D</sub> = 25 A	49	64	nC
$Q_{gd}$	Gate charge gate-to-drain		7.9		nC
$Q_{gs}$	Gate charge gate-to-source		16		nC
Q <sub>g(th)</sub>	Gate charge at V <sub>th</sub>		11		nC
Q <sub>oss</sub>	Output charge	V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V	69		nC
t <sub>d(on)</sub>	Turnon delay time		8.2		ns
t <sub>r</sub>	Rise time	$V_{DS} = 30 \text{ V}, V_{GS} = 10 \text{ V},$	8.7		ns
t <sub>d(off)</sub>	Turnoff delay time	$I_{DS} = 25 \text{ A}, R_G = 0 \Omega$	20		ns
t <sub>f</sub>	Fall time		2.7		ns
DIODE C	CHARACTERISTICS			·	
$V_{SD}$	Diode forward voltage	I <sub>SD</sub> = 25 A, V <sub>GS</sub> = 0 V	0.8	1	V
Q <sub>rr</sub>	Reverse recovery charge	V <sub>DS</sub> = 30 V, I <sub>F</sub> = 25 A,	139		nC
t <sub>rr</sub>	Reverse recovery time	di/dt = 300 A/μs	64		ns


# 5.2 Thermal Information

T<sub>A</sub> = 25°C unless otherwise stated


	THERMAL METRIC	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-case thermal resistance <sup>(1)</sup>			0.8	°C/W
$R_{\theta JA}$	Junction-to-ambient thermal resistance <sup>(1)(2)</sup>			50	°C/W

 <sup>(1)</sup> R<sub>θJC</sub> is determined with the device mounted on a 1-in² (6.45-cm²), 2-oz (0.071-mm) thick Cu pad on a 1.5-in x 1.5-in (3.81-cm x 3.81-cm), 0.06-in (1.52-mm) thick FR4 PCB. R<sub>θJC</sub> is specified by design, whereas R<sub>θJA</sub> is determined by the user's board design.
 (2) Device mounted on FR4 material with 1-in² (6.45-cm²), 2-oz (0.071-mm) thick Cu.






Max  $R_{\theta JA} = 50^{\circ}\text{C/W}$  when mounted on 1 in<sup>2</sup> (6.45 cm<sup>2</sup>) of 2-oz (0.071-mm) thick Cu.



Max  $R_{\theta JA} = 125^{\circ} C/W$  when mounted on a minimum pad area of 2-oz. (0.071-mm) thick Cu.

# 5.3 Typical MOSFET Characteristics

 $T_A = 25$ °C unless otherwise stated

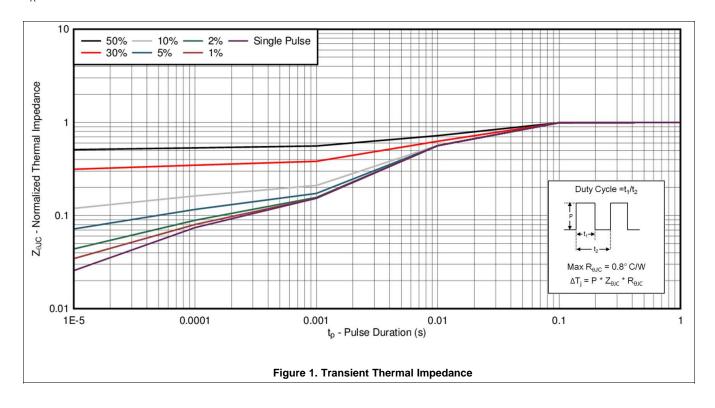

Submit Documentation Feedback

Copyright © 2013–2018, Texas Instruments Incorporated



# **Typical MOSFET Characteristics (continued)**

T<sub>A</sub> = 25°C unless otherwise stated

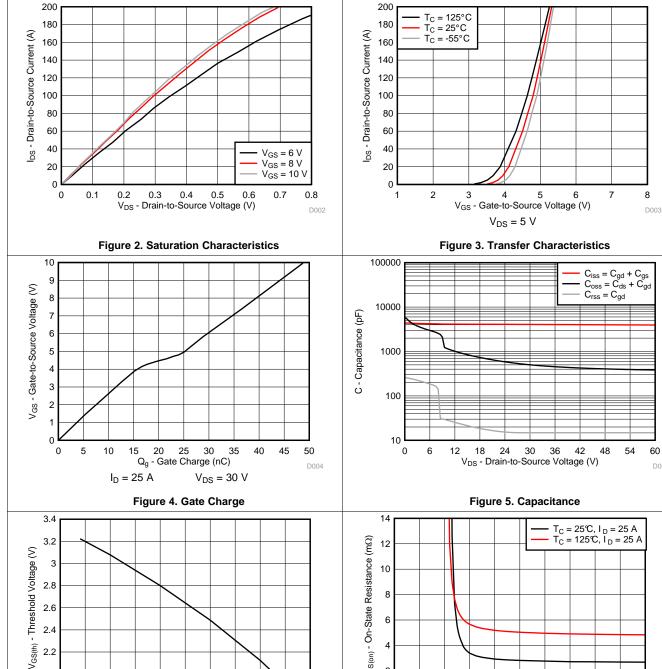


Figure 6. Threshold Voltage vs Temperature

 $T_C$  - Case Temperature ( $^{\circ}$ C)

 $I_D = 250 \mu A$ 

25 50 75 100 125

150




Figure 7. On-State Resistance vs Gate-to-Source Voltage


2.2 2

> -50 -25



# **Typical MOSFET Characteristics (continued)**

 $T_A = 25$ °C unless otherwise stated



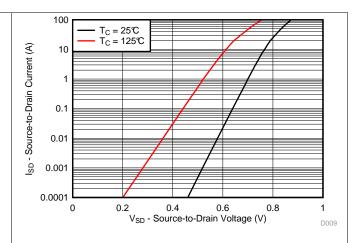



Figure 8. Normalized On-State Resistance vs Temperature








Figure 10. Maximum Safe Operating Area

Figure 11. Single Pulse Unclamped Inductive Switching




Figure 12. Maximum Drain Current vs Temperature

Submit Documentation Feedback

Copyright © 2013–2018, Texas Instruments Incorporated



# 6 Device and Documentation Support

## 6.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 6.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

#### 6.3 Trademarks

NexFET, E2E are trademarks of Texas Instruments.

All other trademarks are the property of their respective owners.

#### 6.4 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## 6.5 Glossary

SLYZ022 — TI Glossary.


This glossary lists and explains terms, acronyms, and definitions.



# 7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

# 7.1 Q5B Package Dimensions

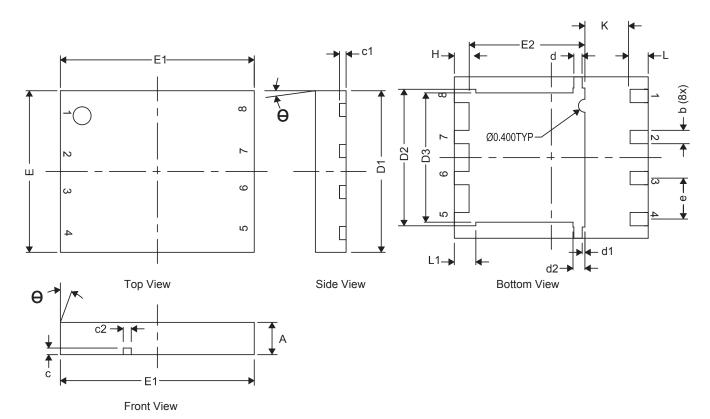


DIM	MILLIMETERS								
DIM	MIN	NOM	MAX						
Α	0.80	1.00	1.05						
b	0.36	0.41	0.46						
С	0.15	0.20	0.25						
c1	0.15	0.20	0.25						
c2	0.20	0.25	0.30						
D1	4.90	5.00	5.10						
D2	4.12	4.22	4.32						
d	0.20	0.25	0.30						
E	4.90	5.00	5.10						
E1	5.90	6.00	6.10						
E2	3.48	3.58	3.68						
е		1.27 TYP							
L	0.46	0.56	0.66						
θ	0°	_							
K		1.40 TYP							

Submit Documentation Feedback

Copyright © 2013–2018, Texas Instruments Incorporated




## 7.2 Recommended PCB Pattern

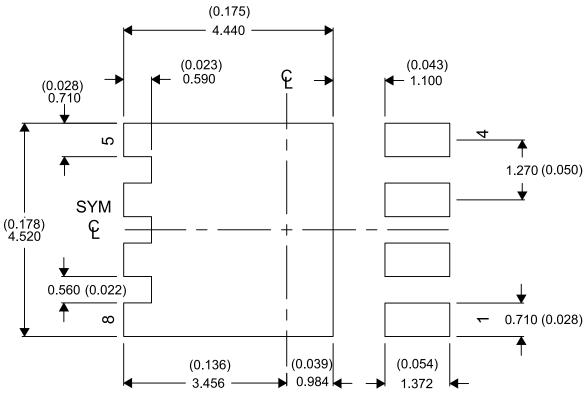

For recommended circuit layout for PCB designs, see *Reducing Ringing Through PCB Layout Techniques* (SLPA005).

# 7.3 Recommended Stencil Pattern

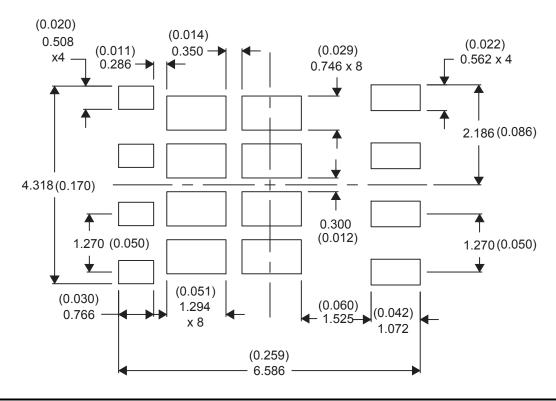


Copyright © 2013–2018, Texas Instruments Incorporated

Submit Documentation Feedback



# 7.4 Q5B Tape and Reel Information

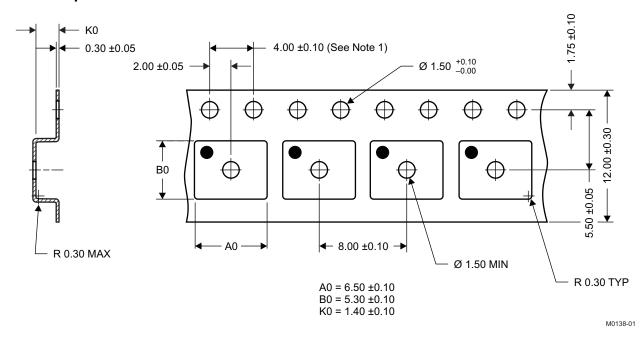

## Notes:

- 1. 10-sprocket hole-pitch cumulative tolerance ±0.2.
- 2. Camber not to exceed 1 mm in 100 mm, noncumulative over 250 mm.
- 3. Material: black static-dissipative polystyrene.
- 4. All dimensions are in mm (unless otherwise specified).
- 5. A0 and B0 measured on a plane 0.3 mm above the bottom of the pocket.

Submit Documentation Feedback

www.ti.com 10-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
CSD18532NQ5B	Active	Production	VSON-CLIP (DNK)   8	2500   LARGE T&R	ROHS Exempt	SN	Level-1-260C-UNLIM	-55 to 150	18532N
CSD18532NQ5B.B	Active	Production	VSON-CLIP (DNK)   8	2500   LARGE T&R	ROHS Exempt	SN	Level-1-260C-UNLIM	-55 to 150	18532N
CSD18532NQ5BT	Active	Production	VSON-CLIP (DNK)   8	250   SMALL T&R	ROHS Exempt	SN	Level-1-260C-UNLIM	-55 to 150	18532N
CSD18532NQ5BT.B	Active	Production	VSON-CLIP (DNK)   8	250   SMALL T&R	ROHS Exempt	SN	Level-1-260C-UNLIM	-55 to 150	18532N

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 3-Jun-2022

# TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

## QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CSD18532NQ5BT	VSON- CLIP	DNK	8	250	330.0	12.4	6.3	5.3	1.2	8.0	12.0	Q1

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 3-Jun-2022



## \*All dimensions are nominal

	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ı	CSD18532NQ5BT	VSON-CLIP	DNK	8	250	335.0	335.0	32.0

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025