



## RAD-TOLERANT CLASS V, WIDEBAND, FULLY DIFFERENTIAL AMPLIFIER

#### **FEATURES**

- **Fully Differential Architecture**
- **Common-Mode Input Range Includes Negative**
- Minimum Gain of 2 V/V (6 dB)
- Bandwidth: 1.1 GHz (Gain = 6 dB)
- Slew Rate: 5100 V/µs
- 1% Settling Time: 5.5 ns
- HD<sub>2</sub>: -76 dBc at 70 MHz
- HD<sub>3</sub>: -88 dBc at 70 MHz
- OIP<sub>2</sub>: 84 dBm at 70 MHz
- OIP<sub>3</sub>: 42 dBm at 70 MHz
- Input Voltage Noise: 2 nV/ $\sqrt{\text{Hz}}$  (f > 10 MHz)
- Noise Figure: 21.8 dB (50  $\Omega$  System, G = 6 dB)
- **Output Common-Mode Control**
- 5 V Power Supply Current: 39.2 mA
- Power-Down Capability: 0.65 mA
- Rad-Tolerant: 150 kRad (Si) TID
- QML-V Qualified, SMD 5962-07222

#### **APPLICATIONS**

- 5 V Data-Acquisition Systems
- **High Linearity ADC Amplifier**
- **Wireless Communication**
- **Medical Imaging**
- **Test and Measurement**

#### **RELATED PRODUCTS**

DEVICE	MINIMUM GAIN	COMMON-MODE RANGE OF INPUT <sup>(1)</sup>
THS4511-SP	6 dB	-0.3 V to 2.3 V
THS4513-SP	6 dB	0.75 V to 4.25 V

(1) Assumes a 5 V single-ended power supply

#### DESCRIPTION/ORDERING INFORMATION


The THS4511 is a fully differential operational amplifier designed for single-supply 5 data-acquisition systems. It has very low noise at 2 nV/\(\overline{Hz}\), and extremely low harmonic distortion of -76 dBc HD<sub>2</sub> and -88 dBc HD<sub>3</sub> at 70 MHz with 2 Vpp, G =  $1\overline{4}$  dB, and 100  $\Omega$  load. Slew rate is very high at 5100 V/µs and with settling time of 5.5 ns to 1% (2 V step) it is ideal for pulsed applications. It is designed for minimum gain of 6 dB.

To allow for dc coupling to ADCs, its unique output common-mode control circuit maintains the output common-mode voltage within 5 mV offset (typical) from the set voltage, when set within ±0.5 V of mid-supply. The common-mode set point is set to mid-supply by internal circuitry, which may be over-driven from an external source.

The THS4511 is a high-performance amplifier that has been optimized for use in 5 V single-supply data acquisition systems. The output has been optimized for best performance with its common-mode voltages set to mid-supply, and the input has been optimized for performance over a wide range of common-mode input voltages. High performance at a low power-supply voltage enables single-supply 5 V data-acquisition systems while minimizing component count.

The THS4511 is offered in a 16-pin ceramic flatpack package (W), and is characterized for operation over the full military temperature range from -55°C to 125°C.

#### Video Buffer, Single Ended to Differential





Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.





This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### PACKAGING/ORDERING INFORMATION(1)

	PACKAGED	DEVICES
TEMPERATURE	CERAMIC FLATPACK W (16) <sup>(2)</sup>	SYMBOL
–55°C to 125°C	5962-0722201VFA	5962-0722201VFA

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.
- (2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

#### ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

			UNIT
V <sub>S</sub> - to V <sub>S</sub> +	Supply voltage		6 V
VI	Input voltage		±V <sub>S</sub>
V <sub>ID</sub>	Differential input	voltage	4 V
Io	Output current		200 mA
	Continuous powe	r dissipation	See Dissipation Rating Table
TJ	Maximum junction	temperature (2)	150°C
T <sub>A</sub>	Operating free-air	temperature range	−55°C to 125°C
T <sub>stg</sub>	Storage temperat	ure range	−65°C to 150°C
		НВМ	2000 V
	ESD ratings	CDM	1500 V
	MM	100 V	

<sup>(1)</sup> Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

#### **DISSIPATION RATINGS TABLE**

DACKACE	۵. ـ	0	POWER RATING	
PACKAGE	<b>A</b> JC	ОЈА	T <sub>A</sub> ≤ 25°C	T <sub>A</sub> = 125°C
W (16)	14.7°C/W	189°C/W	661 mW	132 mW

Submit Documentation Feedback


Copyright © 2007, Texas Instruments Incorporated

<sup>(2)</sup> The absolute maximum temperature under any condition is limited by the constraints of the silicon process.



#### **DEVICE INFORMATION**

#### W PACKAGE TOP VIEW

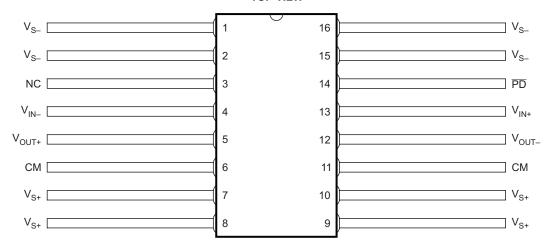

#### **TERMINAL FUNCTIONS**

TERMII (W PAC		DESCRIPTION
NO.	NAME	
3	NC	No internal connection
4	$V_{IN-}$	Inverting amplifier input
5	$V_{OUT+}$	Non-inverting amplifier output
6, 11	CM	Common-mode voltage input
7, 8, 9, 10	V <sub>S+</sub>	Positive amplifier power supply input
12	$V_{OUT-}$	Inverting amplifier output
13	$V_{IN+}$	Non-inverting amplifier input
14	PD	Powerdown, $\overline{PD}$ = logic low puts part into low power mode, $\overline{PD}$ = logic high or open for normal operation
1, 2, 15, 16	V <sub>S-</sub>	Negative amplifier power supply input



### ELECTRICAL CHARACTERISTICS; $V_{S+} - V_{S-} = 5 \text{ V}$ (Unchanged after 150 kRad):

Test conditions unless otherwise noted:  $V_{S+} = 5 \text{ V}$ ,  $V_{S-} = 0 \text{ V}$ , G = 14 dB, CM = open,  $V_{OD} = 2 \text{ Vpp}$ ,  $R_F = 348 \Omega$ ,  $R_L = 200 \Omega$  Differential,  $T_A = 25^{\circ}$ C, Single-Ended Input, Differential Output, Input Referenced to Ground, and Output Referenced to Mid-Supply

PARAMETER	TEST CO	TEST CONDITIONS		TYP	MAX	UNITS
AC PERFORMANCE						
	$G = 6 \text{ dB}, V_O = 100 \text{ mVpp}$			1.1		GHz
Small-Signal Bandwidth	$G = 10 \text{ dB}, V_O = 100 \text{ mVp}$	$G = 10 dB, V_O = 100 mVpp$		1.0		GHZ
	$G = 14 \text{ dB}, V_0 = 100 \text{ mVp}$	p		720		MHz
Gain-Bandwidth Product	G = 10 dB			3		GHz
Dandwidth to 0.4 dB floton-	G = 10 dB, V <sub>O</sub> = 2 Vpp			65		MII-
Bandwidth for 0.1 dB flatness	$G = 14 dB$ , $V_O = 2 Vpp$			115		MHz
Large-Signal Bandwidth	$G = 6 dB, V_O = 2 Vpp$			1.1		GHz
Slew Rate (Differential)				5100		V/µs
Rise Time	V <sub>O</sub> = 2 V Step			0.5		ns
Fall Time				0.5		ns
Settling Time to 1%				5.5		ns
	$f = 10 \text{ MHz}, R_L = 100 \Omega$			-106		
2 <sup>nd</sup> Order Harmonic Distortion	$f = 50 \text{ MHz}, R_L = 100 \Omega$			-90		
	$f = 100 \text{ MHz}, R_L = 100 \Omega$			-87		
	$f = 10 \text{ MHz}, R_L = 100 \Omega$			-108		dBc
3 <sup>rd</sup> Order Harmonic Distortion	$f = 50$ MHz, $R_L = 100$ Ω			-106		
	$f = 100 \text{ MHz}, R_L = 100 \Omega$			-83		
2 <sup>nd</sup> Order Intermodulation Distortion		f <sub>C</sub> = 50 MHz		-83		dBc
	200 kHz tone spacing,	f <sub>C</sub> = 100 MHz		<b>–</b> 75		
	$R_L = 100 \Omega$	f <sub>C</sub> = 50 MHz		-83		
3 <sup>rd</sup> Order Intermodulation Distortion		f <sub>C</sub> = 100 MHz		-74		
		f <sub>C</sub> = 50 MHz		84		dBm
2 <sup>nd</sup> Order Output Intercept Point	200 kHz tone spacing,	f <sub>C</sub> = 100 MHz		77		
	R <sub>L</sub> = 100 Ω	f <sub>C</sub> = 50 MHz		42		
3 <sup>rd</sup> Order Output Intercept Point		f <sub>C</sub> = 100 MHz		38		
Noise Figure	50 Ω system, 10 MHz			21.8		dB
Input Voltage Noise	f > 10 MHz			2		nV/√ <del>Hz</del>
Input Current Noise	f > 10 MHz			1.5		pA/√ <del>Hz</del>
DC PERFORMANCE	, , , , , , , , , , , , , , , , , , ,		1			
Open-Loop Voltage Gain (A <sub>OL</sub> )				63		dB
	T <sub>A</sub> = 25°C			1	4	mV
Input Offset Voltage	$T_A = -55^{\circ}C \text{ to } 125^{\circ}C$				5.5	
Average Offset Voltage Drift				2.3		μV/°C
	T <sub>A</sub> = 25°C			8	15.5	
Input Bias Current	as Current $ T_{A} = -55^{\circ}\text{C to } 125^{\circ}\text{C} $				20	μA
Average Bias Current Drift				20		nA/°C
<del>-</del>	T <sub>A</sub> = 25°C			0.5	3.6	
Input Offset Current	$T_A = -55^{\circ}C \text{ to } 125^{\circ}C$				7	μA
Average Offset Current Drift				7		nA/°C

Submit Documentation Feedback



# ELECTRICAL CHARACTERISTICS; $V_{S_+} - V_{S_-} = 5 \text{ V}$ (Unchanged after 150 kRad): (continued)

Test conditions unless otherwise noted:  $V_{S+} = 5 \text{ V}$ ,  $V_{S-} = 0 \text{ V}$ , G = 14 dB, CM = open,  $V_{OD} = 2 \text{ Vpp}$ ,  $R_F = 348 \Omega$ ,  $R_L = 200 \Omega$  Differential,  $T_A = 25^{\circ}\text{C}$ , Single-Ended Input, Differential Output, Input Referenced to Ground, and Output Referenced to Mid-Supply

PARAMETER	TEST CON	DITIONS	MIN	TYP	MAX	UNITS
INPUT						
Common-Mode Input Range High				2.3		V
Common-Mode Input Range Low				-0.3		V
Common-Mode Rejection Ratio				80		dB
Differential Input Impedance				18.2    0.5		MO II F
Common-Mode Input Impedance				4.0    1.5		MΩ    pF
OUTPUT						
W : 0 : 17 !		T <sub>A</sub> = 25°C		3.8		
Maximum Output Voltage High	Each output with 100 $\Omega$ to	$T_A = -55^{\circ}C \text{ to } 125^{\circ}C$	3.5			V
Mr. O. C.	mid-supply	T <sub>A</sub> = 25°C		1.2	1.3	
Minimum Output Voltage Low		$T_A = -55^{\circ}C$ to $125^{\circ}C$			1.5	
	T <sub>A</sub> = 25°C		4.8	5.2		
Differential Output Voltage Swing	$T_A = -55^{\circ}C$ to 125°C		4.0			V
Differential Output Current Drive	R <sub>L</sub> = 10 Ω			96		mA
Output Balance Error	V <sub>O</sub> = 100 mV, f = 1 MHz			-52		dB
Closed-Loop Output Impedance	f = 1 MHz			0.3		Ω
OUTPUT COMMON-MODE VOLTAGE CONTRO	DL				1	
Small-Signal Bandwidth				250		MHz
Slew Rate				110		V/µs
Gain				1		V/V
Output Common-Mode Offset from CM input	1.5 V < CM < 3.5 V			5		mV
CM Input Bias Current	1.5 V < CM < 3.5 V			±40		μA
CM Input Voltage Range				1.25 to 3.75		V
CM Input Impedance				32    2.8		kΩ    pF
CM Default Voltage	CM pins floating			2.5		V
POWER SUPPLY	*		I			
Specified Operating Voltage			3.75 <sup>(1)</sup>	5	5.25	V
Maximum Quiescent Current	T <sub>A</sub> = 25°C			39.2	42.5	
	$T_A = -55^{\circ}C$ to 125°C				44	_
Minimum Quiescent Current	T <sub>A</sub> = 25°C		35.9	39.2		mA
	$T_A = -55^{\circ}C$ to 125°C		34			
Power Supply Rejection (±PSRR)	To differential output			90		dB
POWER DOWN	Referenced to V <sub>s</sub> _		I			
Enable Voltage Threshold	Device assured on above 2.	1 V		> 2.1		
Disable Voltage Threshold	Device assured off below 0.	7 V		< 0.7		V
	T <sub>A</sub> = 25°C			0.65	0.9	_
Powerdown Quiescent Current	$T_A = -55^{\circ}C \text{ to } 125^{\circ}C$				1.2	mA
Input Bias Current	PD = V <sub>S</sub> _			100		μA
Input Impedance	-			50    2		kΩ    pF
Turn-On Time Delay	Measured to output on			55		ns
Turn-Off Time Delay	Measured to output off			10		μs

<sup>(1)</sup> See the Application Information section of this data sheet for device operation with full supply voltages less than 5 V.



#### **TYPICAL CHARACTERISTICS**

### TYPICAL AC PERFORMANCE: $V_{S+} - V_{S-} = 5 \text{ V}$

Test conditions unless otherwise noted:  $V_{S+}=5$  V,  $V_{S-}=0$  V, G=14 dB, CM=open,  $V_{OD}=2$  Vpp,  $R_F=348$   $\Omega$ ,  $R_L=200$   $\Omega$  Differential, Single-Ended Input, Input Referenced to Ground and Output Referenced to Mid-Rail

0 1101 15	$G = 6 \text{ dB}, V_{OD} = 100 \text{ mV}_{PP}$		Figure 1
Small-Signal Frequency Response	$G = 10 \text{ dB}, V_{OD} = 100 \text{ mV}_{PP}$		Figure 2
. toop one o	$G = 14 dB, V_{OD} = 100 mV_{PP}$		Figure 3
	$G = 6 dB$ , $V_{OD} = 2 V_{PP}$		Figure 4
Large Signal Frequency Response	$G = 10 dB$ , $V_{OD} = 2 V_{PP}$		Figure 5
responds	$G = 14 dB$ , $V_{OD} = 2 V_{PP}$		Figure 6
	$HD_2$ , $G = 14$ dB, $V_{OD} = 2$ $V_{PP}$	vs Frequency	Figure 7
Harmonic	$HD_3$ , $G = 14$ dB, $V_{OD} = 2$ $V_{PP}$	vs Frequency	Figure 8
Distortion	$HD_2$ , $G = 14 dB$	vs Output Voltage	Figure 9
	$HD_3$ , $G = 14 dB$	vs Output Voltage	Figure 10
Intermodulation	$IMD_2$ , $G = 14 dB$	vs Frequency	Figure 11
Distortion	$IMD_3$ , $G = 14 dB$	vs Frequency	Figure 12
Output Intercent Daint	OIP <sub>2</sub>	vs Frequency	Figure 13
Output Intercept Point	OIP <sub>3</sub>	vs Frequency	Figure 14
Transition Rate		vs Output Voltage	Figure 15
Transient Response			Figure 16
Rejection Ratios		vs Frequency	Figure 17
Overdrive Recovery			Figure 18
Output Voltage Swing		vs Load Resistance	Figure 19
Turn-Off Time			Figure 20
Turn-On Time			Figure 21
Input Offset Voltage		vs Input Common-Mode Voltage	Figure 22
Input Referred Noise		vs Frequency	Figure 23
Noise Figure		vs Frequency	Figure 24
Quiescent Current		vs Supply Voltage	Figure 25
Output Balance Error		vs Frequency	Figure 26
CM Input Bias Current		vs CM Input Voltage	Figure 27
Differential Output Offset Vol	tage	vs CM Input Voltage	Figure 28
Output Common-Mode Offse	t	vs CM Input Voltage	Figure 29

Submit Documentation Feedback








Figure 1.





Figure 3.

#### LARGE-SIGNAL FREQUENCY RESPONSE



**SMALL-SIGNAL FREQUENCY RESPONSE** 




Figure 2.

#### LARGE-SIGNAL FREQUENCY RESPONSE




Figure 4.

#### LARGE-SIGNAL FREQUENCY RESPONSE





Figure 6.










Figure 9.




Figure 11.




Figure 8.




Figure 10.





Figure 12.





#### Figure 13.




Figure 15.




Figure 17.




Figure 14.




Figure 16.




Figure 18.



6.4 6

5.6

5.2

4.8


4.4 4 3.6 3.2 2.8 2.4 2 1.6 **A** 

1.2

8.0

0.4





Vo - Output Voltage - V 1.4 1.2 0.8 0.6 0.4 0.2

PD Input

3.2

2.8

2.6

2.4

2.2

1.8

1.6


Figure 19.

Figure 20.

t - Time - (2.5 μs/div)

TURN-OFF TIME

Output







Figure 21.

**NOISE FIGURE vs FREQUENCY** 









Figure 24.









# OUTPUT BALANCE ERROR vs FREQUENCY




Figure 26.

# DIFFERENTIAL OUTPUT OFFSET VOLTAGE VS CM INPUT VOLTAGE




Figure 28.



#### OUTPUT COMMON-MODE OFFSET vs CM INPUT VOLTAGE




Figure 29.



#### **TEST CIRCUITS**

The THS4511 is tested with the following test circuits. For simplicity, the power supply decoupling is not shown – see the layout in the *application information* section for recommendations. Depending on the test conditions, component values are changed per the following tables, or as otherwise noted. The signal generators used are ac coupled 50  $\Omega$  sources, and a 0.22  $\mu F$  capacitor and a 49.9  $\Omega$  resistor to ground are inserted across  $R_{IT}$  on the alternate input to balance the circuit.

**Table 1. Gain Component Values** 

GAIN	R <sub>F</sub>	R <sub>G</sub>	R <sub>IT</sub>
6 dB	348 Ω	165 Ω	61.9 Ω
10 dB	348 Ω	100 Ω	69.8 Ω
14 dB	348 Ω	56.2 Ω	88.7 Ω
20 dB	348 Ω	16.5 Ω	287 Ω

Note: The gain setting includes 50  $\Omega$  source impedance. Components are chosen to achieve gain and 50  $\Omega$  input termination.

**Table 2. Load Component Values** 

R <sub>L</sub>	Ro	R <sub>OT</sub>	Atten
100 Ω	25 Ω	open	6 dB
200 Ω	86.6 Ω	69.8 Ω	16.8 dB
499 Ω	237 Ω	56.2 Ω	25.5 dB
1k Ω	487 Ω	52.3 Ω	31.8 dB

Note: The total load includes 50  $\Omega$  termination by the test equipment. Components are chosen to achieve load and 50  $\Omega$  line termination through a 1:1 transformer.

Due to the voltage divider on the output formed by the load component values, the amplifier's output is attenuated. The column *Atten* in Table 2 shows the attenuation expected from the resistor divider. When using a transformer at the output as shown in Figure 31, the signal will see slightly more loss, and these numbers will be approximate.

#### **Frequency Response**

The circuit shown in Figure 30 is used to measure the frequency response of the circuit.

A network analyzer is used as the signal source and as the measurement device. The output impedance of the network analyzer is 50  $\Omega.$   $R_{\text{IT}}$  and  $R_{\text{G}}$  are chosen to impedance match to 50  $\Omega,$  and to maintain the proper gain. To balance the amplifier, a 0.22  $\mu\text{F}$  capacitor and 49.9  $\Omega$  resistor to ground are inserted across  $R_{\text{IT}}$  on the alternate input.

The output is probed using a high-impedance differential probe across the 100  $\Omega$  resistor. The gain is referred to the amplifier output by adding back the 6 dB loss due to the voltage divider on the output.




Figure 30. Frequency Response Test Circuit

#### Distortion

The circuit shown in Figure 31 is used to measure harmonic distortion and intermodulation distortion of the amplifier.

A signal generator is used as the signal source, and the output is measured with a spectrum analyzer. The output impedance of the signal generator is 50  $\Omega.$   $R_{\text{IT}}$  and  $R_{\text{G}}$  are chosen to impedance-match to 50  $\Omega$  and to maintain the proper gain. To balance the amplifier, a 0.22  $\mu\text{F}$  capacitor and 49.9  $\Omega$  resistor to ground are inserted across  $R_{\text{IT}}$  on the alternate input.

A low-pass filter is inserted in series with the input to reduce harmonics generated at the signal source. The level of the fundamental is measured, then a high-pass filter is inserted at the output to reduce the fundamental so that it does not generate distortion in the input of the spectrum analyzer.

The transformer used in the output to convert the signal from differential to single ended is an ADT1-1WT. It limits the frequency response of the circuit so that measurements cannot be made below approximately 1 MHz.




Figure 31. Distortion Test Circuit

Slew Rate, Transient Response, Settling Time, Output Impedance, Overdrive, Output Voltage,



#### and Turn-On/Off Time

The circuit shown in Figure 32 is used to measure slew rate, transient response, settling time, output impedance, overdrive recovery, output voltage swing, and turn-on/turn-off times of the amplifier. For output impedance, the signal is injected at  $V_{\text{OUT}}$  with  $V_{\text{IN}}$  left open, and the drop across the 49.9  $\Omega$  resistor is used to calculate the impedance seen looking into the amplifier's output.




Figure 32. SR, Transient Response, Settling Time, Z<sub>o</sub>, Overdrive Recovery, V<sub>OUT</sub> Swing, and Turn-on/off Test Circuit

#### **CM** Input

The circuit shown in Figure 33 is used to measure the frequency response and input impedance of the CM input. Frequency response is measured single-ended at  $V_{\text{OUT+}}$  or  $V_{\text{OUT-}}$  with the input injected at  $V_{\text{IN}},\,R_{\text{CM}}=0$   $\Omega$  and  $R_{\text{CMT}}=49.9$   $\Omega.$  The input impedance is measured with  $R_{\text{CM}}=49.9$   $\Omega$  with  $R_{\text{CMT}}=$  open, and calculated by measuring the voltage drop across  $R_{\text{CM}}$  to determine the input current.

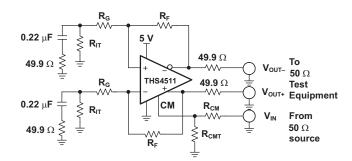


Figure 33. CM Input Test Circuit

#### **CMRR and PSRR**

The circuit shown in Figure 34 is used to measure the CMRR and PSRR of  $V_{S+}$  and  $V_{S-}$ . The input is switched appropriately to match the test being performed.




Figure 34. CMRR and PSRR Test Circuit



#### **APPLICATION INFORMATION**

#### **APPLICATIONS**

The following circuits show application information for the THS4511. For simplicity, power supply decoupling capacitors are not shown in these diagrams. For more detail on the use and operation of fully differential operational amplifiers, refer to application report *Fully-Differential Amplifiers* (SLOA054).

#### **Differential Input to Differential Output Amplifier**

The THS4511 is a fully differential operational amplifier, and can be used to amplify differential input signals to differential output signals. A basic block diagram of the circuit is shown in Figure 35 (CM input not shown). The gain of the circuit is set by  $R_{\rm F}$  divided by  $R_{\rm G}$ .




Figure 35. Differential Input to Differential Ouput Amplifier

Depending on the source and load, input and output termination can be accomplished by adding  $R_{\text{IT}}$  and  $R_{\text{O}}$ .

# Single-Ended Input to Differential Output Amplifier

The THS4511 can be used to amplify and convert single-ended input signals to differential output signals. A basic block diagram of the circuit is shown in Figure 36 (CM input not shown). The gain of the circuit is again set by  $R_{\text{F}}$  divided by  $R_{\text{G}}.$ 




Figure 36. Single-Ended Input to Differential Output Amplifier

#### Input Common-Mode Voltage Range

The input common-mode voltage of a fully differential operational amplifier is the voltage at the (+) and (–) input pins of the operational amplifier.

It is important to not violate the input common-mode voltage range ( $V_{ICR}$ ) of the operational amplifier. Assuming the operational amplifier is in linear operation, the voltage across the input pins is only a few millivolts at most. Finding the voltage at one input pin determines the input common-mode voltage of the operational amplifier.

Treating the negative input as a summing node, the voltage is given by Equation 1:

$$V_{IC} = \left(V_{OUT+} \times \frac{R_G}{R_G + R_F}\right) + \left(V_{IN-} \times \frac{R_F}{R_G + R_F}\right) \tag{1}$$

To determine the  $V_{ICR}$  of the operational amplifier, the voltage at the negative input is evaluated at the extremes of  $V_{OUT+}$ .

As the gain of the operational amplifier increases, the input common-mode voltage becomes closer and closer to the input common-mode voltage of the source.



(3)

#### **Setting the Output Common-Mode Voltage**

The output common-mode voltage is set by the voltage at the CM pin(s). The internal common-mode control circuit maintains the output common-mode voltage within 5 mV offset (typical) from the set voltage, when set within 0.5 V of mid-supply. If left unconnected, the common-mode set point is set to mid-supply by internal circuitry, which may be over-driven from an external source. Figure 37 is representative of the CM input. The internal CM circuit has about 700 MHz of -3 dB bandwidth, which is required for best performance, but it is intended to be a dc-bias input pin. Bypass capacitors are recommended on this pin to reduce noise at the output. The external current required to overdrive the internal resistor divider is given by Equation 2:

$$I_{EXT} = \frac{2V_{CM} - (V_{S+} - V_{S-})}{50 \text{ k}\Omega}$$
 (2)

where  $V_{CM}$  is the voltage applied to the CM pin, and  $V_{S+}$  ranges from 3.75 V to 5 V, and  $V_{S-}$  is 0 V (ground).




Figure 37. CM Input Circuit

# Device Operation with Single Power Supplies Less than 5 V

The THS4511 is optimized to work in systems using 5 V single supplies, and the characterization data presented in this data sheet was taken with 5 V single-supply inputs. For ac-coupled systems or dc-coupled systems operating with supplies less than 5 V and greater than 3.75 V, the amplifier input common-mode range is maximized by adding pull-down resistors at the device inputs. The pull-down resistors provide additional loading at the input, and lower the common-mode voltage that is fed back into the device input through resistor  $R_{\rm F}$ . Figure 38 shows the circuit configuration for this mode of operation where  $R_{\rm PD}$  is added to the dc-coupled circuit to avoid violating the  $V_{\rm ICR}$  of the

operational amplifier. Note  $R_S$  and  $R_{IT}$  are added to the alternate input from the signal input to balance the amplifier. One resistor that is equal to the combined value  $R_I = R_G + R_S ||R_{IT}||$  can be placed at the alternate input.




Figure 38. THS4511 DC Coupled Single-Source Supply Range From 3.75 V to 5 V With R<sub>PD</sub> Used To Set V<sub>IC</sub>

Note that in Figure 38, the source is referenced to ground as is the input termination resistor  $R_{\rm IT}$ . The proper value of resistance to add can be calculated from Equation 3:

$$R P D = \frac{1}{\frac{1}{R_F} \left[ \frac{1.6}{\frac{V_{S+}}{2} - 1.6} \right] - \frac{1}{R_I}}$$

where  $R_I = R_G + R_S ||R_{IT}||$ 

 $V_{S+}$  is the power-supply voltage,  $R_F$  is the feedback resistance,  $R_G$  is the gain-setting resistance,  $R_S$  is the signal source resistance, and  $R_{IT}$  is the termination resistance.

Table 3 is a modification of Table 1 to add the proper values with  $R_{PD}$  assuming  $V_{S+} = 3.75$  V, a dc-coupled 50  $\Omega$  source impedance, and setting the output common-mode voltage to mid-supply.

Table 3.  $R_{PD}$  Values for Various Gains,  $V_{S+}$  = 3.75 V, DC-coupled Signal Source

Gain	R <sub>F</sub>	R <sub>G</sub>	R <sub>IT</sub>	R <sub>PD</sub>
6 dB	348 Ω	169 Ω	64.9 Ω	80.6 Ω
10 dB	348 Ω	102 Ω	78.7 Ω	90.9 Ω
14 dB	348 Ω	61.9 Ω	115 Ω	90.9 Ω
20 dB	348 Ω	40.2 Ω	221 Ω	77.6 Ω

If the signal originates from an ac-coupled 50  $\Omega$  source (see Figure 39), the equivalent dc-source



resistance is an open circuit, and  $R_I = R_G + R_{IT}$ . Table 4 is a modification of Table 1 to add the proper values with  $R_{PD}$  assuming  $V_{S+} = 3.75$  V, an ac-coupled 50  $\Omega$  source impedance, and setting the output common-mode voltage to mid-supply.

Table 4. R<sub>PD</sub> Values for Various Gains, V<sub>S+</sub> = 3.75 V, AC-Coupled Signal Source

Gain	R <sub>F</sub>	$R_G$	R <sub>IT</sub>	R <sub>PD</sub>
6 dB	348 Ω	169 Ω	64.9 Ω	86.6 Ω
10 dB	348 Ω	102 Ω	78.7 Ω	110 Ω
14 dB	348 Ω	61.9 Ω	115 Ω	158 Ω
20 dB	348 Ω	40.2 Ω	221 Ω	226 Ω




Figure 39. THS4511 AC Coupled Single-Source Supply Range From 3.75 V to 5 V With  $R_{PD}$  Used to Set  $V_{IC}$ 

#### Video Buffer

Figure 40 shows a possible application of the THS4511 as a DC-coupled video buffer with a gain of 2. Figure 41 shows a plot of the Y' signal originating from a HDTV 720p video system. The input signal includes a tri-level sync (minimum level at -0.3 V) and the portion of a video signal with maximum amplitude of 0.7 V. Although the buffer draws its power from a 5 V single-ended power supply, internal level shifters allow the buffer to support input signals, which are as much as -0.3 V below ground. This allows maximum design flexibility while maintaining a minimum parts count. Figure 42 shows the differential output of the buffer. Note that the DC-coupled amplifier can introduce a DC offset on a signal applied at its input.




Figure 40. Single-Supply Video Buffer, Gain = 2




Figure 41. Y' Signal With 3-Level Sync and Video Signal




Figure 42. Video Buffer Differential Output Signal



#### THS4511 + ADS5500 Combined Performance

The THS4511 is designed to be a high-performance drive amplifier for high-performance data converters like the ADS5500 14 bit 125 MSPS ADC. Figure 43 shows a circuit combining the two devices. The THS4511 amplifier circuit provides 10 dB of gain and converts the single-ended input signal to a differential output signal. The default common-mode output of the THS4511 (2.5 V) is not compatible with the required common-mode input of the ADS5500 (1.55 V), so dc-blocking capicitors are added (0.22 μF). Note that a biasing circuit (not shown in Figure 43) is needed to provide the required common-mode, dc-input for the ADS5500. The 100  $\Omega$ resistors and 2.7 pF capacitor between the THS4511 outputs and ADS5500 inputs, along with the input capacitance of the ADS5500, limit the bandwidth of the signal to 115 MHz (-3 dB). For testing, a signal generator is used for the signal source. The generator is an ac-coupled 50 Ω source. A band-pass filter is inserted in series with the input to reduce harmonics and noise from the signal source. Input termination is accomplished via the 69.8  $\Omega$  resistor and 0.22 µF capacitor to ground in conjunction with the input impedance of the amplifier circuit. A 0.22 µF capacitor and 49.9 Ω resistor are inserted to ground across the 69.8 Ω resistor and 0.22 μF capacitor on the alternate input to balance the circuit. Gain is a function of the source impedance, termination, and 348  $\Omega$  feedback resistor. See Table 1 for component values to set proper 50  $\Omega$  termination for other common gains.




Figure 43. THS4511 + ADS5500 Circuit

#### THS4511 + ADS5424 Combined Performance

Figure 44 shows the THS4511 driving the ADS5424 ADC.

The THS4511 amplifier provides 10 dB of gain, converts the single-ended input to differential, and sets the proper input common-mode voltage to the ADS5424. Input termination and circuit testing is the same as described above for the THS4511 + ADS5500 circuit.

The 225  $\Omega$  resistors and 2.7 pF capacitor between the THS4511 outputs and ADS5424 inputs (along with the input capacitance of the ADC) limit the bandwidth of the signal to about 100MHz (–3dB).

When the THS4511 is operated from a single power supply with  $V_{S+} = 5$  V and  $V_{S-} =$  ground, the 2.5 V output common-mode voltage is compatable with the recommended value of the ADS5424 input common-mode voltage (2.4 V).




Figure 44. THS4511 + ADS5424 Circuit

Submit Documentation Feedback



#### **Layout Recommendations**

It is recommended to follow the layout of the external components near the amplifier, ground plane construction, and power routing of the EVM as closely as possible. General guidelines are:

- Signal routing should be direct and as short as possible into and out of the operational amplifier circuit.
- 2. The feedback path should be short and direct avoiding vias.
- Ground or power planes should be removed from directly under the amplifier's input and output pins.
- 4. An output resistor is recommended on each output, as near the output pin as possible.

- 5. Two 10 μF and two 0.1 μF power-supply decoupling capacitors should be placed as near the power-supply pins as possible.
- Two 0.1 μF capacitors should be placed between the CM input pins and ground. This limits noise coupled into the pins. One each should be placed to ground near pin 4 and pin 9.
- It is recommended to split the ground pane on layer 2 (L2) as shown below and to use a solid ground on layer 3 (L3). A single-point connection should be used between each split section on L2 and L3.
- A single-point connection to ground on L2 is recommended for the input termination resistors R1 and R2. This should be applied to the input gain resistors if termination is not used.

Copyright © 2007, Texas Instruments Incorporated

Submit Documentation Feedback



#### **THS4511 EVM**

Figure 45 is the THS4511 EVAL1 EVM schematic for the plastic QFN (RGT) package. Layers 1 through 4 of the PCB are shown in Figure 46, and Table 5 is the bill of material for the EVM as supplied from TI. The same layout recommendations should be followed for the THS4511 ceramic flatpack devices. Contact your TI representative for availability of the THS4511 EVM.

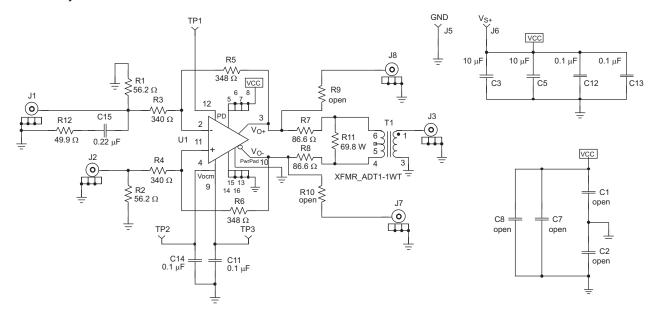


Figure 45. THS4511 EVAL1 EVM Schematic

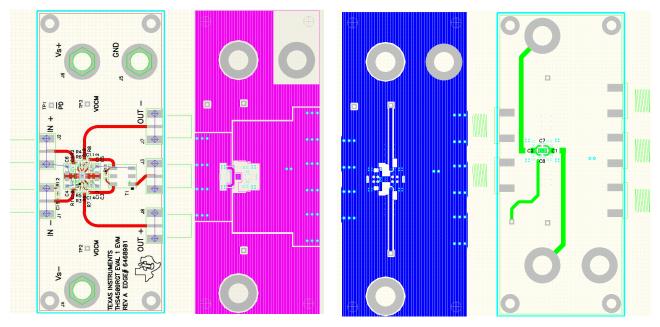


Figure 46. THS4511 EVAL1 EVM Layer 1 Through 4



#### Table 5. THS4511RGT EVM Bill of Materials

ITEM	DESCRIPTION	SMD SIZE	REFERENCE DESIGNATOR	PCB QTY	MANUFACTURER'S PART NUMBER <sup>(1)</sup>
1	CAP, 10.0 µF, Ceramic, X5R, 6.3V	0805	C3, C5	2	(AVX) 08056D106KAT2A
2	CAP, 0.1 µF, Ceramic, X5R, 10V	0402	C11, C12, C13, C14	4	(AVX) 0402ZD104KAT2A
3	CAP, 0.22 µF, Ceramic, X5R, 6.3V	0402	C15	1	(AVX) 04026D224KAT2A
4	OPEN	0402	C1, C2, C7, C8, C9, C10	6	
5	OPEN	0402	R9, R10	2	
6	Resistor, 49.9 Ω, 1/16W, 1%	0402	R12	1	(KOA) RK73H1ETTP49R9F
7	Resistor, 56.2 Ω, 1/16W, 1%	0402	R1, R2		(KOA) RK73H1ETTP56R2F
8	Resistor, 69.8 Ω, 1/16W, 1%	0402	R11	3	(KOA) RK73H1ETTP69R8F
9	Resistor, 86.6 Ω, 1/16W, 1%	0402	R7, R8	2	(KOA) RK73H1ETTP86R6F
10	Resistor, 340 Ω, 1/16W, 1%	0402	R3, R4	2	(KOA) RK73H1ETTP3400F
11	Resistor, 348 Ω, 1/16W, 1%	0402	R5, R6	2	(KOA) RK73H1ETTP3480F
12	Resistor, 0 Ω, 5%	0805	C4, C6	2	(KOA) RK73Z2ATTD
13	Transformer, RF		T1	1	(MINI-CIRCUITS) ADT1-1WT
14	Jack, banana receptance, 0.25" diameter hole		J5, J6	2	(HH SMITH) 101
15	OPEN		J1, J7, J8	3	
16	Connector, edge, SMA PCB Jack		J2, J3	2	(JOHNSON) 142-0701-801
17	Test point, Red		TP1, TP2, TP3	3	(KEYSTONE) 5000
18	IC, THS4511		U1	1	(TI) THS4511RGT
19	Standoff, 4-40 HEX, 0.625" length			4	(KEYSTONE) 1808
20	SCREW, PHILLIPS, 4-40, 0.250"			4	SHR-0440-016-SN
21	Printed circuit board			1	(TI) EDGE# 6475513

<sup>(1)</sup> The manufacturer's part numbers were used for test purposes only.

#### **EVM WARNINGS AND RESTRICTIONS**

It is important to operate this EVM within the input and output voltage ranges as specified in the following table.

Input Range, V <sub>S+</sub> to V <sub>S-</sub>	3.0 V to 6.0 V
Input Range, V <sub>I</sub>	3.0 V to 6.0 V NOT TO EXCEED $V_{S+}$ or $V_{S-}$
Output Range, V <sub>O</sub>	3.0 V to 6.0 V NOT TO EXCEED $V_{S+}$ or $V_{S-}$

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the product data sheet or EVM user's guide (if user's guide is available) prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 30°C. The EVM is designed to operate properly with certain components above 50°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the material provided. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

11-Nov-2025 www.ti.com

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
5962-0722201VFA	Active	Production	CFP (HKT)   16	25   TUBE	Yes	NIAU	N/A for Pkg Type	-55 to 125	5962-0722201VF A THS4511M
THS4511HKT/EM	Active	Production	CFP (HKT)   16	25   TUBE	Yes	NIAU	N/A for Pkg Type	25 to 25	THS4511HKT/EM EVAL ONLY

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF THS4511-SP:

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

### **PACKAGE OPTION ADDENDUM**

www.ti.com 11-Nov-2025

• Catalog : THS4511

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product

### **PACKAGE MATERIALS INFORMATION**

www.ti.com 21-May-2025

#### **TUBE**




#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
5962-0722201VFA	HKT	CFP (HSL)	16	25	506.98	26.16	6220	NA
THS4511HKT/EM	HKT	CFP (HSL)	16	25	506.98	26.16	6220	NA



CERAMIC DUAL FLATPACK

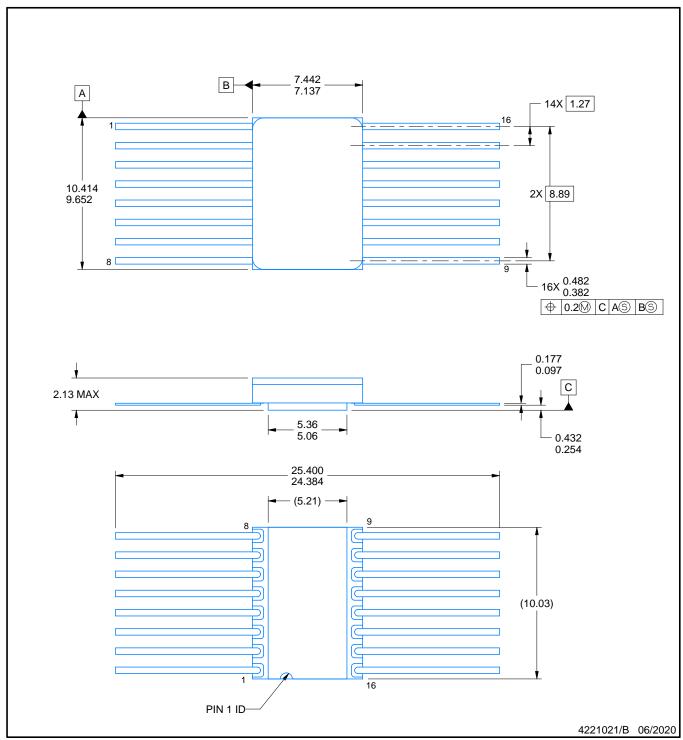

### NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
   This drawing is subject to change without notice.
   This package is hermetically sealed with a metal lid. Lid and cavity are electrically isolated

- 4. The terminals are gold plated.
- 5. Falls within MIL-STD-1835 CDFP-F11A.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025