

# **DLP470NE 0.47-Inch 1080P Digital Micromirror Device**

### 1 Features

- 0.47-inch diagonal micromirror array
  - Full HD/1080P (1920 × 1080)
  - 5.4-micron micromirror pitch
  - ±17° micromirror tilt (relative to the flat surface)
  - Bottom illumination
- 2xLVDS input data bus
- The DLP470NE chipset includes:
  - DLP470NE DMD
  - DLPC4420 controller
  - DLPA100 controller power management and motor driver IC

# 2 Applications

- Full HD (1080P) display
- Laser TV
- Mobile smart TV
- Digital signage
- Gaming
- Home cinema

# 3 Description

TI DLP® DLP470NE digital device (DMD) is a digitally controlled microelectromechanical system (MEMS) spatial light modulator (SLM) that enables bright full HD display systems. The DLP470NE DMD-together with the DLPC4420 display controller and the DLPA100 controller power and motor driver-provides the capability to achieve high performance systems and is a great fit for display applications that require high resolution and 16:9 aspect ratio, high brightness, and system simplicity in a smaller package. The DLP470NE DMD can also use the DLPC4430 as a display controller.


The DMD ecosystem includes established resources to help the user accelerate the design cycle, visit the DLP® Products third-party search tools to find approved optical module manufacturers and third party providers.

Visit Getting Started With TI DLP Display Technology to learn more about how to start designing with the DMD.

### **Device Information**

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE
DLP470NE	FXH (257)	33.2mm × 22.3mm

For more information, see the orderable addendum at the end of the data sheet

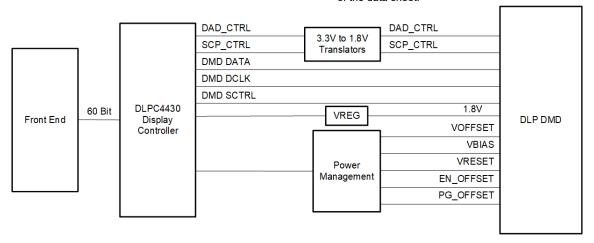

**DLP470NE Simplified Application** 



# **Table of Contents**

1 Features	
2 Applications	
3 Description	
4 Pin Configuration and Functions	
5 Specifications	
5.1 Absolute Maximum Ratings	
5.2 Storage Conditions	
5.3 ESD Ratings	
5.4 Recommended Operating Conditions	
5.5 Thermal Information	
5.6 Electrical Characteristics	14
5.7 Capacitance at Recommended Operating	
Conditions	14
5.8 Timing Requirements	15
5.9 System Mounting Interface Loads	18
5.10 Micromirror Array Physical Characteristics	19
5.11 Micromirror Array Optical Characteristics	21
5.12 Window Characteristics	
5.13 Chipset Component Usage Specification	
6 Detailed Description	
6.1 Overview	
6.2 Functional Block Diagram	
6.3 Feature Description	
6.4 Device Functional Modes	
6.5 Optical Interface and System Image Quality	
Considerations	25

	6.6 Micromirror Array Temperature Calculation	. Zt
	6.7 Micromirror Power Density Calculation	.27
	6.8 Micromirror Landed-On/Landed-Off Duty Cycle	28
7	Application and Implementation	. 32
	7.1 Application Information	32
	7.2 Typical Application	32
	7.3 DMD Die Temperature Sensing	34
8	Power Supply Recommendations	.36
	8.1 DMD Power Supply Power-Up Procedure	
	8.2 DMD Power Supply Power-Down Procedure	36
9	Layout	.39
	9.1 Layout Guidelines	39
	9.2 Layout Example	39
1	0 Device and Documentation Support	.41
	10.1 Third-Party Products Disclaimer	41
	10.2 Device Support	41
	10.3 Documentation Support	41
	10.4 Receiving Notification of Documentation Updates.	.42
	10.5 Support Resources	42
	10.6 Trademarks	.42
	10.7 Electrostatic Discharge Caution	.42
	10.8 Glossary	.42
1	1 Revision History	42

# 4 Pin Configuration and Functions

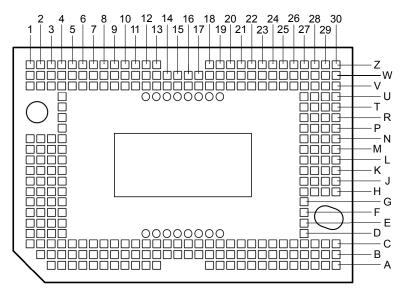


Figure 4-1. Series 410 257-pin FXH Bottom View

#### **CAUTION**

To ensure reliable, long-term operation of the .47-inch 1080P s410 DMD, it is critical to properly manage the layout and operation of the signals identified in the table below. For specific details and guidelines, refer to the *PCB Design Requirements for TI DLP Standard TRP Digital Micromirror Devices* application report before designing the board.

**Table 4-1. Pin Functions** 

PIN		(2)		DATA	INTERNAL		TRACE
NAME	NO.	I/O <sup>(3)</sup>	SIGNAL	RATE TERMINATION DESCRIPTION		DESCRIPTION	LENGTH (mil)
D_AN(0)	C6						
D_AN(1)	C3						
D_AN(2)	E1						
D_AN(3)	C4						
D_AN(4)	D1						
D_AN(5)	B8			VDC DDD Differential No. of			
D_AN(6)	F4				DDR Differential	No connect	805.0
D_AN(7)	E3	NC	LVDS				
D_AN(8)	C11	INC	LVDS	DUK			
D_AN(9)	F3						
D_AN(10)	K4						
D_AN(11)	H3						
D_AN(12)	J3						
D_AN(13)	C13						
D_AN(14)	A5	1					
D_AN(15)	A3	1					



PIN		VO(3)		DATA	INTERNAL		TRACE				
NAME	NO.	I/O <sup>(3)</sup>	SIGNAL	RATE	TERMINATION	DESCRIPTION	LENGTH (mil)				
D_AP(0)	C7										
D_AP(1)	C2										
D_AP(2)	E2										
D_AP(3)	B4										
D_AP(4)	C1										
D_AP(5)	B7										
D_AP(6)	E4										
D_AP(7)	D3	NC	LVDS	DDR	Differential	No compact	805.0				
D_AP(8)	C12	INC	LVDS	DDR	Dillerential	No connect	805.0				
D_AP(9)	F2										
D_AP(10)	J4										
D_AP(11)	G3										
D_AP(12)	J2										
D_AP(13)	C14										
D_AP(14)	A6	1									
D_AP(15)	A4										
D_BN(0)	N4										
D_BN(1)	Z11	1									
D_BN(2)	W4										
D_BN(3)	W10										
D_BN(4)	L1										
D_BN(5)	V8										
D_BN(6)	W6	1									
D_BN(7)	M1	NO	LV/DC	DDR	Differential		00				
D_BN(8)	R4	NC	LVDS	DDK	Dillerential	No connect	805.0				
D_BN(9)	W1										
D_BN(10)	U4										
D_BN(11)	V2										
D_BN(12)	Z5	1									
D_BN(13)	N3	1									
D_BN(14)	Z2										
D_BN(15)	L4	1									



PIN				DATA	INTERNAL		TRACE
NAME	NO.	I/O <sup>(3)</sup>	SIGNAL	RATE	TERMINATION	DESCRIPTION	LENGTH (mil)
D_BP(0)	M4						
D_BP(1)	Z12						
D_BP(2)	Z4						
D_BP(3)	Z10						
D_BP(4)	L2	1					
D_BP(5)	V9						
D_BP(6)	W7						
D_BP(7)	N1	NC	LVDS	DDR	Differential	No connect	805.0
D_BP(8)	P4	INC	LVDS	DDK	Differential	INO COTTRECT	005.0
D_BP(9)	V1						
D_BP(10)	T4						
D_BP(11)	V3						
D_BP(12)	Z6						
D_BP(13)	N2						
D_BP(14)	Z3						
D_BP(15)	L3						
D_CN(0)	H27						
D_CN(1)	A20						
D_CN(2)	H28						
D_CN(3)	K28						
D_CN(4)	K30						
D_CN(5)	C23						
D_CN(6)	G27						
D_CN(7)	J30		LVDS	DDR	Differential	Data negative	805.0
D_CN(8)	B24	] '	LVDS	DUK	Differential	Data negative	003.0
D_CN(9)	A21						
D_CN(10)	A27						
D_CN(11)	C29						
D_CN(12)	A26						
D_CN(13)	C25						
D_CN(14)	A29						
D_CN(15)	C30						



PIN				DATA	INTERNAL		TRACE				
NAME	NO.	I/O <sup>(3)</sup>	SIGNAL	RATE	TERMINATION	DESCRIPTION	LENGTH (mil)				
D_CP(0)	J27										
D_CP(1)	A19										
D_CP(2)	H29										
D_CP(3)	K27										
D_CP(4)	K29										
D_CP(5)	C22										
D_CP(6)	F27										
D_CP(7)	H30		LVDS	DDR	Differential	Data positive	805.0				
D_CP(8)	B25	] <b>'</b>	LVDS	DDK	Differential	Data positive	005.0				
D_CP(9)	B21										
D_CP(10)	B27										
D_CP(11)	C28										
D_CP(12)	A25	-									
D_CP(13)	C24										
D_CP(14)	A28										
D_CP(15)	B30										
D_DN(0)	V25						805.0				
D_DN(1)	V28										
D_DN(2)	T30										
D_DN(3)	V27										
D_DN(4)	U30										
D_DN(5)	W23										
D_DN(6)	R27										
D_DN(7)	T28	ı	LVDS	DDR	Differential	Data negative					
D_DN(8)	V20	'	LVDS	DDIX	Differential	Data negative					
D_DN(9)	R28										
D_DN(10)	L27										
D_DN(11)	N28										
D_DN(12)	M28										
D_DN(13)	V18										
D_DN(14)	Z26										
D_DN(15)	Z28										



PIN				DATA	INTERNAL		TRACE
NAME	NO.	I/O <sup>(3)</sup>	SIGNAL	RATE	TERMINATION	DESCRIPTION	LENGTH (mil)
D_DP(0)	V24						805.0
D_DP(1)	V29						
D_DP(2)	T29						
D_DP(3)	W27						
D_DP(4)	V30						
D_DP(5)	W24						
D_DP(6)	T27						
D_DP(7)	U28	1.	1.450	200	D:00 0: 1	<b>D</b>	
D_DP(8)	V19	- I	LVDS	DDR	Differential	Data positive	
D_DP(9)	R29						
D_DP(10)	M27						
D_DP(11)	P28						
D_DP(12)	M29						
D_DP(13)	V17						
D_DP(14)	Z25						
D_DP(15)	Z27						
SCTRL_AN	G1						
SCTRL_AP	F1		1.450	200	D:00 0: 1		225.0
SCTRL_BN	V5	NC	LVDS	VDS DDR Differential No connect		No connect	805.0
SCTRL_BP	V4						
SCTRL_CN	C26	I	LVDS	DDR	Differential	Serial control negative	805.0
SCTRL_CP	C27	I	LVDS	DDR	Differential	Serial control positive	805.0
SCTRL_DN	P30	I	LVDS	DDR	Differential	Serial control negative	805.0
SCTRL_DP	R30	1	LVDS	DDR	Differential	Serial control positive	805.0
DCLK_AN	H2						
DCLK_AP	H1	NO	1)/D0		Differential	No comment	005.0
DCLK_BN	V6	NC	LVDS		Differential	No connect	805.0
DCLK_BP	V7						
DCLK_CN	D27	1	LVDS		Differential	Clock negative	805.0
DCLK_CP	E27	1	LVDS		Differential	Clock positive	805.0
DCLK_DN	N29	1	LVDS		Differential	Clock negative	805.0
DCLK_DP	N30	I	LVDS		Differential	Clock positive	805.0
SCPCLK	A10	ı	LVCMOS		Pull down	Serial communications port clock. Active only when SCPENZ is logic low	
SCPDI	A12	1	LVCMOS	SDR	Pull down	Serial communications port data input. Synchronous to SCPCLK rising edge	
SCPENZ	C10	I	LVCMOS		Pull down	Serial communications port enable active low	
SCPDO	A11	0	LVCMOS	SDR		Serial communications port output	
RESET_ADDR(0)	Z13						
RESET_ADDR(1)	W13	1.	11/01/02		Dull days:	Death driven address as least	
RESET_ADDR(2)	V10		LVCMOS		Pull down	Reset driver address select	
RESET_ADDR(3)	W14						



PIN				DATA	INTERNAL		TRACE
NAME	NO.	I/O <sup>(3)</sup>	SIGNAL	RATE	TERMINATION	DESCRIPTION	LENGTH (mil)
RESET_MODE(0)	W9					Reset driver mode select	
RESET_SEL(0)	V14	ı	LVCMOS	Pull down		Reset driver level select	
RESET_SEL(1)	Z8					Reset driver level select	
RESET_STROBE	Z9	I	LVCMOS		Pull down	Rising edge latches in RESET_ADDR, RESET_MODE, and RESET_SEL	
PWRDNZ	A8	I	LVCMOS		Pull down	Active low device reset	
RESET_OEZ	W15	I	LVCMOS		Pull up	Active low output enable for internal reset driver circuits	
RESET_IRQZ	V16	0	LVCMOS			Active low output interrupt to DLP display controller	
EN_OFFSET	C9	0	LVCMOS			Active high enable for external VOFFSET regulator	
PG_OFFSET	A9	I	LVCMOS		Pull up	Active low fault from external VOFFSET regulator	
TEMP_N	B18		Analog			Temperature sensor diode cathode	
TEMP_P	B17		Analog			Temperature sensor diode anode	
RESERVED	D12, D13, D14, D15, D16, D17, D18, D19, U12, U13, U14, U15	NC	Analog		Pull Down	Do not connect on DLP system board. No connect. No electrical connections from CMOS bond pad to package pin	
No Connect	U16, U17, U18, U19	NC				No connect. No electrical connection from CMOS bond pad to package pin	
RESERVED_BA	W11						
RESERVED_BB	B11	0	LVCMOS			Do not connect on DLP system board.	
RESERVED_BC	Z20		LVCIVIOS			Do not connect on DEL System board.	
RESERVED_BD	C18						
RESERVED_PFE	A18	ı	LVCMOS		Pull down	Connect to ground on DLP system board.	
RESERVED_TM	C8		2.000		i un donni	Someon to ground on BE. System Board.	
RESERVED_TP0	Z19						
RESERVED_TP1	W20	I	Analog			Do not connect on DLP system board.	
RESERVED_TP2	W19						
VBIAS <sup>(1)</sup>	C15, C16, V11, V12	Р	Analog			Supply voltage for positive bias level of micromirror reset signal	
VRESET <sup>(1)</sup>	G4, H4, J1, K1	Р	Analog			Supply voltage for negative reset level of micromirror reset signal	
VOFFSET <sup>(1)</sup>	A30, B2, M30, Z1, Z30	Р	Analog			Supply voltage for HVCMOS logic. Supply voltage for positive offset level of micromirror reset signal. Supply voltage for stepped high voltage at micromirror address electrodes	



PIN		(2)		DATA	INTERNAL		TRACE LENGTH	
NAME	NO.	I/O <sup>(3)</sup>	SIGNAL	RATE				
VCC <sup>(1)</sup>	A24, A7, B10, B13, B16, B19, B22, B28, B5, C17, C20, D4, J29, K2, L29, M2, N27, U27, V13, V15, V22, W17, W21, W26, W29, W3, Z18, Z23, Z29, Z7	Р	Analog			Supply voltage for LVCMOS core. Supply voltage for positive offset level of micromirror reset signal during Power down. Supply voltage for normal high level at micromirror address electrodes		
VSS <sup>(2)</sup>	A13, A22, A23, B12, B14, B15, B20, B23, B26, B29, B3, B6, B9, C19, C21, C5, D2, G2, J28, K3, L28, L30, M3, P27, P29, U29, V21, V23, V26, W12, W16, W18, W2, W22, W25, W28, W30, W5, W8, Z21, Z22, Z24	G				Device ground. Common return for all power		

V<sub>BIAS</sub>, V<sub>CC</sub>, V<sub>OFFSET</sub>, and V<sub>RESET</sub> power supplies must be connected for proper DMD operation.
 V<sub>SS</sub> must be connected for proper DMD operation.
 I = Input, O = Output, P = Power, G = Ground, NC = No connect



# **5 Specifications**

# 5.1 Absolute Maximum Ratings

		MIN	MAX	UNIT
SUPPLY VOLTAGE	S			
V <sub>CC</sub>	Supply voltage for LVCMOS core logic <sup>(1)</sup>	-0.5	2.3	V
V <sub>OFFSET</sub>	Supply voltage for HVCMOS and micromirror electrode <sup>(1)</sup> (2)	-0.5	11	V
V <sub>BIAS</sub>	Supply voltage for micromirror electrode <sup>(1)</sup>	-0.5	19	V
V <sub>RESET</sub>	Supply voltage for micromirror electrode <sup>(1)</sup>	-15	-0.3	V
V <sub>BIAS</sub> – V <sub>OFFSET</sub>	Supply voltage difference (absolute value) <sup>(3)</sup>		11	V
V <sub>BIAS</sub> – V <sub>RESET</sub>	Supply voltage difference (absolute value) <sup>(4)</sup>		34	V
INPUT VOLTAGES			-	
	Input voltage for all other LVCMOS input pins <sup>(1)</sup>	-0.5	V <sub>CC</sub> + 0.5	V
V <sub>ID</sub>	Input differential voltage (absolute value) <sup>(5)</sup>		500	mV
I <sub>ID</sub>	Input differential current <sup>(6)</sup>		6.3	mA
Clocks			-	
fCLOCK	Clock frequency for LVDS interface, DCLK_C		400	MHz
$f_{ extsf{CLOCK}}$	Clock frequency for LVDS interface, DCLK_D		400	MHz
ENVIRONMENTAL				
T <sub>ARRAY</sub> and	Temperature, operating <sup>(7)</sup>	0	90	°C
T <sub>WINDOW</sub>	Temperature, non-operating <sup>(7)</sup>	-40	90	°C
T <sub>DELTA</sub>	Absolute temperature delta between any point on the window edge and the ceramic test point TP1 <sup>(8)</sup>		30	°C
T <sub>DP</sub>	Dew point temperature, operating and non–operating (noncondensing)		81	°C

- All voltages are referenced to common ground V<sub>SS</sub>. V<sub>BIAS</sub>, V<sub>CC</sub>, V<sub>OFFSET</sub>, and V<sub>RESET</sub> power supplies are all required for proper DMD operation. V<sub>SS</sub> must also be connected.
- (2) V<sub>OFFSET</sub> supply transients must fall within specified voltages.
- (3) Exceeding the recommended allowable voltage difference between V<sub>BIAS</sub> and V<sub>OFFSET</sub> may result in excessive current draw.
- (4) Exceeding the recommended allowable voltage difference between V<sub>BIAS</sub> and V<sub>RESET</sub> may result in excessive current draw.
- (5) This maximum LVDS input voltage rating applies when each input of a differential pair is at the same voltage potential.
- (6) LVDS differential inputs must not exceed the specified limit or damage may result to the internal termination resistors.
- (7) The highest temperature of the active array (as calculated using Micromirror Array Temperature Calculation) or of any point along the window edge as defined in Figure 6-2. The locations of thermal test points TP2, TP3, TP4 and TP5 in Figure 6-2 are intended to measure the highest window edge temperature. If a particular application causes another point on the window edge to be at a higher temperature, use that point.
- (8) Temperature delta is the highest difference between the ceramic test point 1 (TP1) and anywhere on the window edge as shown in Figure 6-2. The window test points TP2, TP3, TP4, and TP5 shown in Figure 6-2 are intended to result in the worst case delta. If a particular application causes another point on the window edge to result in a larger delta temperature, use that point.

#### **5.2 Storage Conditions**

Applicable for the DMD as a component or non-operating in a system.

		MIN	MAX	UNIT
T <sub>DMD</sub>	DMD storage temperature	-40	80	°C
T <sub>DP-AVG</sub>	Average dew point temperature, (non-condensing) (1)		28	°C
T <sub>DP-ELR</sub>	Elevated dew point temperature range , (non-condensing) (2)	28	36	°C
CT <sub>ELR</sub>	Cumulative time in elevated dew point temperature range		24	Months

- (1) The average over time (including storage and operating) that the device is not in the elevated dew point temperature range.
- (2) Limit the exposure to dew point temperatures in the elevated range during storage and operation to less than a total cumulative time of CT<sub>ELR</sub>.



# 5.3 ESD Ratings

			VALUE	UNIT
10.7	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	V	
V <sub>(ESD)</sub>	Electrostatic discharge	Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	±500	V

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- 2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

# **5.4 Recommended Operating Conditions**

Over operating free-air temperature range (unless otherwise noted). The functional performance of the device specified in this data sheet is achieved when operating the device within the limits defined by this table. No level of performance is implied when operating the device above or below these limits.

$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	5 V 5 V 5 V 5 V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	5 V 5 V 5 V 5 V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	5 V 5 V 5 V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	5 V 5 V 8 V
$ \begin{vmatrix} V_{\text{BIAS}} - \\ V_{\text{OFFSET}} \end{vmatrix}                                  $	5 V 3 V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	3 V
LVCMOS INTERFACE $V_{IH(DC)}$ DC input high voltage(5) $0.7 \times V_{CC}$ $V_{CC} + 0.00$ $V_{IL(DC)}$ DC input low voltage(5) $-0.3$ $0.3 \times V_{CC}$ $V_{IH(AC)}$ AC input high voltage(5) $0.8 \times V_{CC}$ $V_{CC} + 0.00$ $V_{IL(AC)}$ AC input low voltage(5) $-0.3$ $0.2 \times V_{CC}$ $t_{PWRDNZ}$ PWRDNZ pulse duration(6)       10         SCP INTERFACE         FSCPCLK       SCP clock frequency(7)       50         Propagation delay, Clock to Q, from rising-edge of SCPCLK to valid	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	s V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	3 V
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	V
$V_{\rm IL(AC)}$ AC input low voltage <sup>(5)</sup> -0.3 0.2 × $V_{\rm C}$ $t_{\rm PWRDNZ}$ PWRDNZ pulse duration <sup>(6)</sup> 10 SCP INTERFACE $f_{\rm SCPCLK}$ SCP clock frequency <sup>(7)</sup> 50 Propagation delay, Clock to Q, from rising-edge of SCPCLK to valid	3 V
t <sub>PWRDNZ</sub> PWRDNZ pulse duration <sup>(6)</sup> 10  SCP INTERFACE  f <sub>SCPCLK</sub> SCP clock frequency <sup>(7)</sup> 50  Propagation delay, Clock to Q, from rising-edge of SCPCLK to valid	V
f <sub>SCPCLK</sub> SCP clock frequency <sup>(7)</sup> Propagation delay, Clock to Q, from rising–edge of SCPCLK to valid  O OR	ns
Propagation delay, Clock to Q, from rising–edge of SCPCLK to valid	
	) kHz
	) ns
t <sub>SCP_NEG_ENZ</sub> Time between falling-edge of SCPENZ and the first rising- edge of SCPCLK	μs
t <sub>SCP_POS_ENZ</sub> Time between falling-edge of SCPCLK and the rising-edge of SCPENZ 1	μs
t <sub>SCP_DS</sub> SCPDI Clock setup time (before SCPCLK falling edge) <sup>(8)</sup> 800	ns
t <sub>SCP_DH</sub> SCPDI Hold time (after SCPCLK falling edge) <sup>(8)</sup> 900	ns
t <sub>SCP_PW_ENZ</sub> SCPENZ inactive pulse duration (high level) 2	μs

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



# 5.4 Recommended Operating Conditions (continued)

Over operating free-air temperature range (unless otherwise noted). The functional performance of the device specified in this data sheet is achieved when operating the device within the limits defined by this table. No level of performance is implied when operating the device above or below these limits.

		MIN	NOM	MAX	UNIT
LVDS INTERI	FACE				
$f_{CLOCK}$	Clock frequency for LVDS interface (all channels), DCLK <sup>(9)</sup>			400	MHz
V <sub>ID</sub>	Input differential voltage (absolute value) <sup>(10)</sup>	150	300	440	mV
V <sub>CM</sub>	Common mode voltage <sup>(10)</sup>	1100	1200	1300	mV
V <sub>LVDS</sub>	LVDS voltage <sup>(10)</sup>	880		1520	mV
t <sub>LVDS_RSTZ</sub>	Time required for LVDS receivers to recover from PWRDNZ			2000	ns
Z <sub>IN</sub>	Internal differential termination resistance	80	100	120	Ω
Z <sub>LINE</sub>	Line differential impedance (PWB/trace)	90	100	110	Ω
ENVIRONME	NTAL				
т	Array temperature, long-term operational <sup>(11)</sup> (12) (13)	10		40 to 70 <sup>(14)</sup>	°C
T <sub>ARRAY</sub>	Array temperature, short–term operational, 500-hour max <sup>(12)</sup> (15)	0		10	°C
T <sub>WINDOW</sub>	Window temperature – operational <sup>(16)</sup> (22)			85	°C
T <sub>DELTA</sub>	Absolute temperature delta between any point on the window edge and the ceramic test point TP1 <sup>(17)</sup>			14	°C
T <sub>DP -AVG</sub>	Average dew point temperature (non-condensing) <sup>(18)</sup>			28	°C
T <sub>DP-ELR</sub>	Elevated dew point temperature range (non-condensing) <sup>(19)</sup>	28		36	°C
CT <sub>ELR</sub>	Cumulative time in elevated dew point temperature range			24	Months
ILL <sub>θ</sub>	Illumination marginal ray angle <sup>(22)</sup>			55	degrees
SOLID STATE	EILLUMINATION				
ILL <sub>UV</sub>	Illumination power at wavelengths < 410nm <sup>(11)</sup> (21)			10	mW/cm2
ILL <sub>VIS</sub>	Illumination power at wavelengths ≥ 410nm and ≤ 800nm <sup>(20)</sup> (21)			44.9	W/cm2
ILL <sub>IR</sub>	Illumination power at wavelengths > 800nm <sup>(21)</sup>			10	mW/cm2
ILL <sub>BLU</sub>	Illumination power at wavelengths ≥ 410nm and ≤ 475nm <sup>(20)</sup> (21)			14.3	W/cm2
ILL <sub>BLU1</sub>	Illumination power at wavelengths ≥ 410nm and ≤ 440nm (20) (21)			2.3	W/cm2
LAMP ILLUM	IINATION				
ILL <sub>UV</sub>	Illumination power at wavelengths < 395nm <sup>(11)</sup> (21)			2.0	mW/cm2
ILL <sub>VIS</sub>	Illumination power at wavelengths ≥ 395nm and ≤ 800nm <sup>(20)</sup> (21)			36.8	W/cm2
ILL <sub>IR</sub>	Illumination power at wavelengths > 800nm <sup>(21)</sup>			10	mW/cm2

- (1) All voltages are referenced to common ground V<sub>SS</sub>. V<sub>BIAS</sub>, V<sub>CC</sub>, V<sub>OFFSET</sub>, and V<sub>RESET</sub> power supplies are all required for proper DMD operation. V<sub>SS</sub> must also be connected.
- V<sub>OFFSET</sub> supply transients must fall within specified max voltages.
- To prevent excess current, the supply voltage delta |V<sub>BIAS</sub> V<sub>OFFSET</sub>| must be less than specified limit. See Section 8, Figure 8-1, Table (3) 8-1.
- To prevent excess current, the supply voltage delta  $|V_{BIAS} V_{RESET}|$  must be less than specified limit. See Section 8, Figure 8-1, Table (4)
- Low-speed interface is LPSDR and adheres to the Electrical Characteristics and AC/DC Operating Conditions table in JEDEC Standard No. 209B, "Low-Power Double Data Rate (LPDDR)" JESD209B.Tester Conditions for VIH and VIL.
  - Frequency = 60MHz. Maximum Rise Time = 2.5ns @ (20% 80%)
  - Frequency = 60MHz. Maximum Fall Time = 2.5ns @ (80% 20%)
- PWRDNZ input pin resets the SCP and disables the LVDS receivers. PWRDNZ input pin overrides SCPENZ input pin and tristates the (6) SCPDO output pin.
- The SCP clock is a gated clock. Duty cycle shall be 50% ± 10%. SCP parameter is related to the frequency of DCLK.
- (8) See Figure 5-2
- (9) See LVDS Timing Requirements in Section 5.8 and Figure 5-6.
- (10) Refer to Figure 5-5.
- (11) Simultaneous exposure of the DMD to the maximum Section 5.4 for temperature and UV illumination reduces device lifetime.
- (12) The array temperature cannot be measured directly and must be computed analytically from the temperature measured at test point 1 (TP1) shown in Figure 6-2 and the package Section 5.5 using the calculation in Section 6.6.

#### www.ti.com

- (13) Long-term is defined as the usable life of the device.
- (14) Per Figure 5-1, the maximum operational array temperature should be derated based on the micromirror landed duty cycle that the DMD experiences in the end application. See Section 6.8 for a definition of micromirror landed duty cycle.
- (15) Short-term is defined as cumulative time over the usable life of the device.
- (16) The locations of thermal test points TP2, TP3, TP4, and TP5 in Figure 6-2 are intended to measure the highest window edge temperature. For most applications, the locations shown are representative of the highest window edge temperature. If a particular application causes additional points on the window edge to be at a higher temperature, test points should be added to those locations.
- (17) Temperature delta is the highest difference between the ceramic test point 1 (TP1) and anywhere on the window edge as shown in Figure 6-2. The window test points TP2, TP3, TP4, and TP5 shown in Figure 6-2 are intended to result in the worst-case delta temperature. If a particular application causes another point on the window edge to result in a larger delta in temperature, that point should be used.
- (18) The average over time (including storage and operating) that the device is not in the "elevated dew point temperature range."
- (19) Exposure to dew point temperatures in the elevated range during storage and operation should be limited to less than a total cumulative time of CT<sub>ELR</sub>.
- (20) The maximum allowable optical power incident on the DMD is limited by the maximum optical power density for each wavelength range specified and the micromirror array temperature (T<sub>ARRAY</sub>).
- (21) To calculate see Section 6.7.
- (22) The maximum marginal ray angle of the incoming illumination light at any point in the micromirror array, including pond of micromirrors (POM), should not exceed 55 degrees from the normal to the device array plane. The device window aperture has not necessarily been designed to allow incoming light at higher maximum angles to pass to the micromirrors, and the device performance has not been tested nor qualified at angles exceeding this. Illumination light exceeding this angle outside the micromirror array (including POM) will contribute to thermal limitations described in this document, and may negatively affect lifetime.

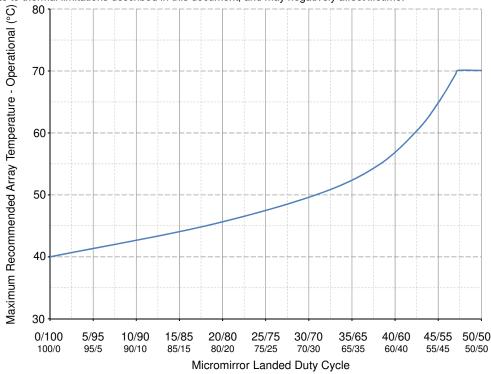


Figure 5-1. Maximum Recommended Array Temperature—Derating Curve

### 5.5 Thermal Information

	DLP470NE	
THERMAL METRIC	FXH Package	UNIT
	257 PINS	
Thermal resistance, active area to test point 1 (TP1) <sup>(1)</sup>	0.90	°C/W

(1) The DMD is designed to conduct absorbed and dissipated heat to the back of the package. The cooling system must be capable of maintaining the package within the temperature range specified in the Recommended Operating Conditions.

The total heat load on the DMD is largely driven by the incident light absorbed by the active area; although other contributions include

light energy absorbed by the window aperture and electrical power dissipation of the array.

Optical systems must be designed to minimize the light energy falling outside the window's clear aperture since any additional thermal

Copyright © 2024 Texas Instruments Incorporated

load in this area can significantly degrade the reliability of the device.

Submit Document Feedback



### **5.6 Electrical Characteristics**

Over operating free-air temperature range (unless otherwise noted).

	PARAMETER	TEST CONDITIONS	MIN	TYP MAX	UNIT <sup>(1)</sup>
V <sub>OH</sub>	High level output voltage	V <sub>CC</sub> = 1.8V, I <sub>OH</sub> = -2mA	0.8 × V <sub>CC</sub>		V
$V_{OL}$	Low level output voltage	V <sub>CC</sub> = 1.95V, I <sub>OL</sub> = 2mA		0.2 × V <sub>CC</sub>	V
l <sub>oz</sub>	High impedance output current	V <sub>CC</sub> = 1.95V	-40	25	μΑ
I <sub>IL</sub>	Low level input current	V <sub>CC</sub> = 1.95V, V <sub>I</sub> = 0	-1		μA
I <sub>IH</sub>	High level input current <sup>(2) (3)</sup>	V <sub>CC</sub> = 1.95V, V <sub>I</sub> = V <sub>CC</sub>		110	μA
Icc	Supply current VCC	V <sub>CC</sub> = 1.95V		715	mA
I <sub>OFFSET</sub>	Supply current VOFFSET <sup>(3)</sup>	V <sub>OFFSET</sub> = 10.5V		7	mA
I <sub>BIAS</sub>	Supply current VBIAS(3) (4)	V <sub>BIAS</sub> = 18.5V		2.75	mA
I <sub>RESET</sub>	Supply current VRESET <sup>(4)</sup>	V <sub>RESET</sub> = -14.5V		-5	mA
P <sub>CC</sub>	Supply power dissipation V <sub>CC</sub>	V <sub>CC</sub> = 1.95V		1394.25	mW
P <sub>OFFSET</sub>	Supply power dissipation V <sub>OFFSET</sub> (3)	V <sub>OFFSET</sub> = 10.5V		73.50	mW
P <sub>BIAS</sub>	Supply power dissipation V <sub>BIAS</sub> (3) (4)	V <sub>BIAS</sub> = 18.5V		50.87	mW
P <sub>RESET</sub>	Supply power dissipation V <sub>RESET</sub> <sup>(4)</sup>	V <sub>RESET</sub> = 14.5V		72.5	mW
P <sub>TOTAL</sub>	Supply power dissipation V <sub>TOTAL</sub>			1591.12	mW

- (1) All voltage values are with respect to the ground pins (VSS).
- (2) Applies to LVCMOS pins only. Excludes LVDS pins and MBRST (15:0) pins.
- (3) To prevent excess current, the supply voltage difference |VBIAS VOFFSET| must be less than the specified limits listed in the Recommended Operating Conditions table.
- (4) To prevent excess current, the supply voltage difference |VBIAS VRESET| must be less than the specified limit in *Recommended Operating Conditions*.

# 5.7 Capacitance at Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C <sub>I_lvds</sub>	LVDS input capacitance 2xLVDS	f = 1MHz			20	pF
C <sub>I_nonlvds</sub>	Non-LVDS input capacitance 2xLVDS	f = 1MHz			20	pF
C <sub>I_tdiode</sub>	Temperature diode input capacitance 2xLVDS	f = 1MHz			30	pF
Co	Output capacitance	f = 1MHz			20	pF



# 5.8 Timing Requirements

			MIN	NOM	MAX	UNIT
SCP <sup>(1)</sup>						
t <sub>r</sub>	Rise time	20% to 80% reference points			30	ns
t <sub>f</sub>	Fall time	80% to 20% reference points			30	ns
LVDS <sup>(2)</sup>						
t <sub>r</sub>	Rise slew rate	20% to 80% reference points	0.7	1		V/ns
t <sub>f</sub>	Fall slew rate	80% to 20% reference points	0.7	1		V/ns
+	Clock avole	DCLK_C,LVDS pair	2.5			ns
t <sub>C</sub> Clock cycle	Clock cycle	DCLK_D, LVDS pair	2.5			ns
t <sub>W</sub> Pulse duration	Dulco duration	DCLK_C LVDS pair	1.19	1.25		ns
	DCLK_D LVDS pair	1.19	1.25		ns	
		D_C(15:0) before DCLK_C, LVDS pair	0.275			ns
	Cation times	D_D(15:0) before DCLK_D, LVDS pair	0.275			ns
t <sub>Su</sub>	Setup time	SCTRL_C before DCLK_C, LVDS pair	0.275			ns
		SCTRL_D before DCLK_D, LVDS pair	0.275			ns
		D_C(15:0) after DCLK_C, LVDS pair	0.195			ns
	Hold time	D_D(15:0) after DCLK_D, LVDS pair	0.195			ns
t <sub>h</sub>	Hola lime	SCTRL_C after DCLK_C, LVDS pair	0.195			ns
		SCTRL_D after DCLK_D, LVDS pair	0.195			ns
t <sub>SKEW</sub>	Skew time	Channel D relative to Channel C <sup>(3)</sup> (4), LVDS pair	-1.25		1.25	ns

- (1) See Figure 5-3 for Rise Time and Fall Time for SCP.
- (2) See Figure 5-5 for Timing Requirements for LVDS.
- (3) Channel C (Bus C) includes the following LVDS pairs: DCLK\_CN and DCLK\_CP, SCTRL\_CN and SCTRL\_CP, D\_CN(15:0) and D\_CP(15:0).
- (4) Channel D (Bus D) includes the following LVDS pairs: DCLK\_DN and DCLK\_DP, SCTRL\_DN and SCTRL\_DP, D\_DN(15:0) and D\_DP(15:0).



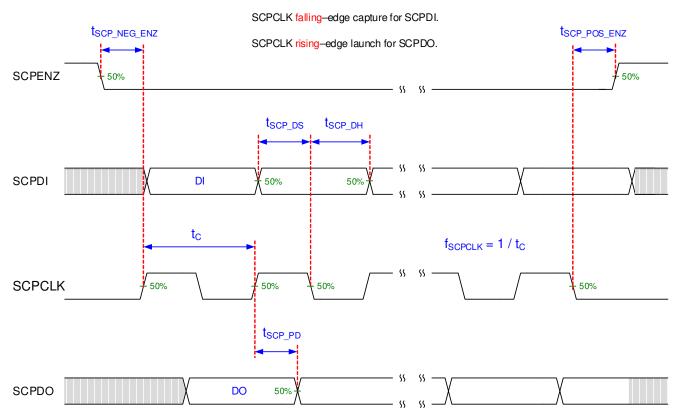


Figure 5-2. SCP Timing Requirements

See Recommended Operating Conditions for  $f_{SCPCLK}$ ,  $t_{SCP\_DS}$ ,  $t_{SCP\_DH}$ , and  $t_{SCP\_PD}$  specifications.

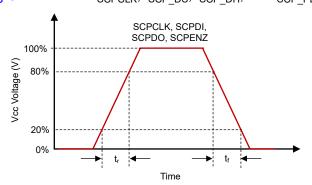


Figure 5-3. SCP Requirements for Rise and Fall

See Timing Requirements for t<sub>r</sub> and t<sub>f</sub> specifications and conditions.

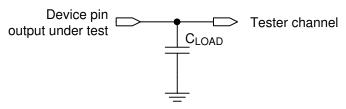


Figure 5-4. Test Load Circuit for Output Propagation Measurement

For output timing analysis, the tester pin electronics and its transmission line effects must be taken into account. System designers use IBIS or other simulation tools to correlate the timing reference load to a system environment. See Figure 5-4.

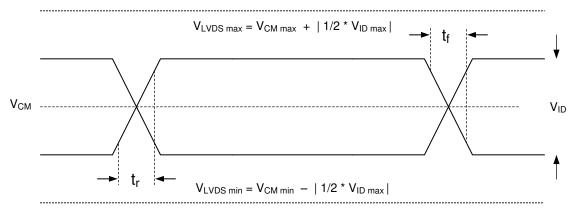


Figure 5-5. LVDS Waveform Requirements

See Recommended Operating Conditions for  $V_{CM}$ ,  $V_{ID}$ , and  $V_{LVDS}$  specifications and conditions.



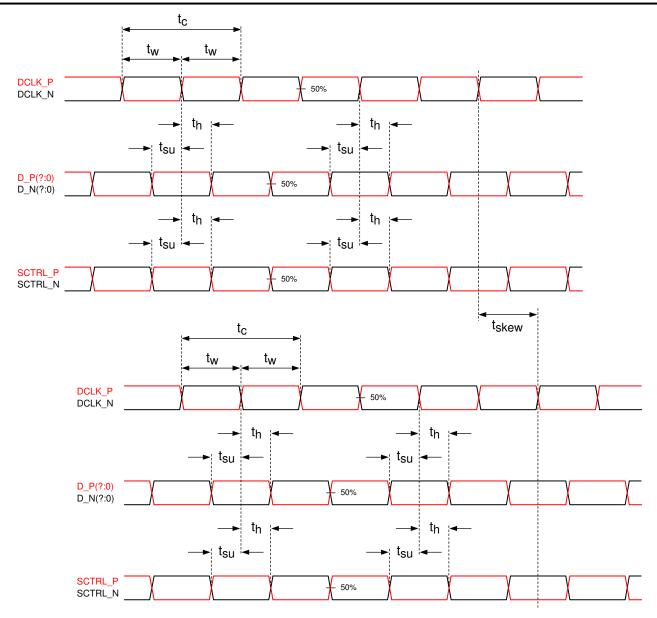


Figure 5-6. Timing Requirements

See Timing Requirements for timing requirements and LVDS pairs per channel (bus) defining  $D_P(?:0)$  and  $D_N(?:0)$ .

# 5.9 System Mounting Interface Loads

Table 5-1. System Mounting Interface Loads

PARAMETER	MIN	NOM	MAX	UNIT
Thermal interface area <sup>(1)</sup>			12	kg
Electrical interface area <sup>(1)</sup>			25	kg

(1) Uniformly distributed within area shown in Figure 5-7



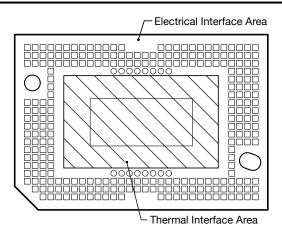


Figure 5-7. System Mounting Interface Loads

# **5.10 Micromirror Array Physical Characteristics**

**Table 5-2. Micromirror Array Physical Characteristics** 

i auto o El mioronimo o 7 may 1 my oroni o minuo con cono					
PARAMETER DESCRIPTION					
M	1920	micromirrors			
N	1080	micromirrors			
Р	5.4	μm			
Micromirror Pitch × number of active columns	10.368	mm			
Micromirror Pitch × number of active rows	5.832	mm			
Pond of micromirrors (POM)	80	micromirrors/side			
Pond of micromirrors (POM)	84	micromirrors/side			
	M  N  P  Micromirror Pitch × number of active columns  Micromirror Pitch × number of active rows  Pond of micromirrors (POM)	M         1920           N         1080           P         5.4           Micromirror Pitch × number of active columns         10.368           Micromirror Pitch × number of active rows         5.832           Pond of micromirrors (POM)         80			

<sup>(1)</sup> See Figure 5-8.

<sup>(2)</sup> The structure and qualities of the border around the active array includes a band of partially functional micromirrors referred to as the *Pond Of Mirrors* (POM). These micromirrors are structurally and electrically prevented from tilting toward the bright or ON state but still require an electrical bias to tilt toward the OFF state.



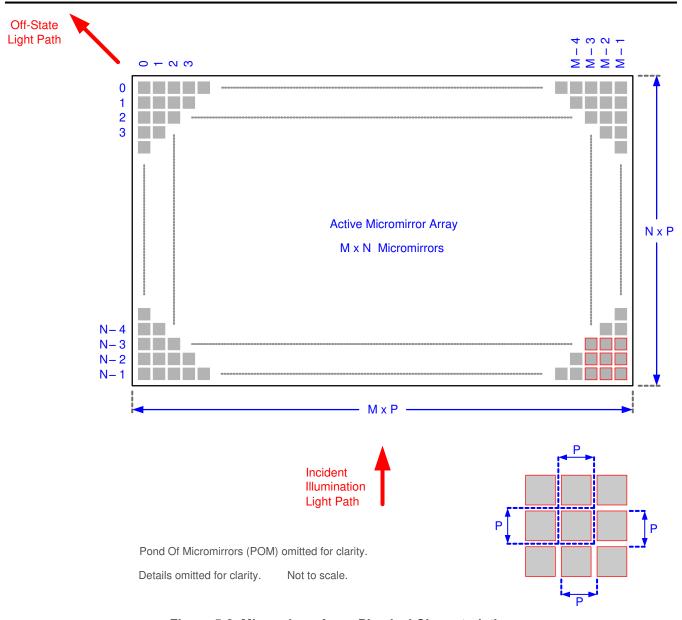


Figure 5-8. Micromirror Array Physical Characteristics

Submit Document Feedback



## 5.11 Micromirror Array Optical Characteristics


PARAMETER		TEST CONDITION	MIN	NOM	MAX	UNIT
Micromirror tilt angle, variation device to device (2) (3) (4) (5)		Landed State <sup>(1)</sup>	15.6	17	18.4	degrees
	Bright pixel(s) in active area <sup>(7)</sup>	Gray 10 screen <sup>(10)</sup>			0	
	Bright pixel(s) in the POM <sup>(7)</sup> (9)	Gray 10 screen <sup>(10)</sup>			1	
Image performance <sup>(6)</sup>	Dark pixel(s) in the active area <sup>(8)</sup>	White screen <sup>(11)</sup>			4	micromirrors
	Adjacent pixel(s)(12)	Any screen			0	
	Unstable pixel(s) in active area <sup>(13)</sup>	Any screen			0	

- (1) Measured relative to the plane formed by the overall micromirror array.
- (2) Additional variation exists between the micromirror array and the package datums.
- (3) This represents the variation that can occur between any two individual micromirrors, locaed on the same device or located on different devices.
- (4) For some applications it is critical to account for the micromirror tilt angle variation in the overall system optical design. With some system optical designs the micromirror tilt angle variations within a device may result in perceivable non-uniformities in the light field reflected from the micromirror array. With some system optical designs the micromirror tilt angle variation between devices may result in colorimetry variations, system efficiency variations, or system contrast variations.
- (5) See figure Figure 5-9.
- (6) Conditions of acceptance. All DMD image performance returns are evaluated using the following projected image test conditions:
  - Test set degamma shall be linear.
  - · Test set brightness and contrast shall be set to nominal.
  - The diagonal size of the projected image shall be a minimum of 60 inches.
  - The projections screen shall be a 1× gain.
  - The projected image shall be inspected from an 8-foot minimum viewing distance.
  - · The image shall be in focus during all image performance tests.
- (7) Bright pixel definition: a single pixel or mirror that is stuck in the ON position and is visibly brighter than the surrounding pixels.
- (8) Dark pixel definition: a single pixel or mirror that is stuck in the OFF position and is visibly darker than the surrounding pixels.
- (9) POM definition: The rectangular border of off-state mirrors surrounding the active area.
- (10) Gray 10 screen definition: A full screen with RGB values set to R=10/255, G=10/255, B=10/255.
- (11) White screen definition: A full screen with RGB values set to R=255/255, G=255/255, B=255/255.
- (12) Adjacent pixel definition: Two or more stuck pixels sharing a common border or common point. Also referred to as a cluster.
- (13) Unstable pixel definition: A single pixel or mirror that does not operate in sequence with parameters loaded into memory. The unstable pixel appears to be flickering asynchronously with the image.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



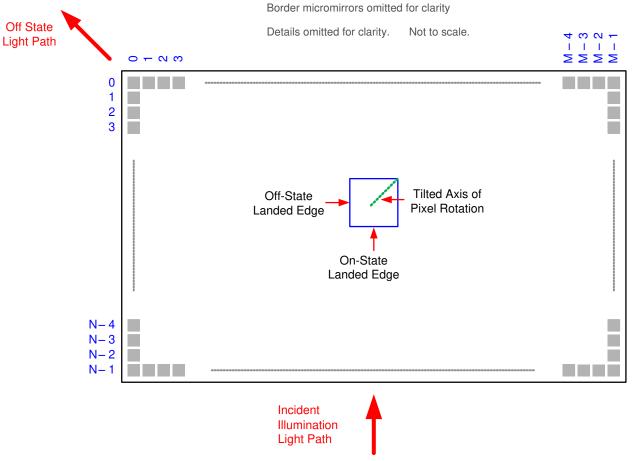

- A. Pond of Mirrors (POM) omitted for clarity
- B. Refer to Micromirror Array Physical Characteristics table for M, N, and P specifications.

Figure 5-9. Micromirror Landed Orientation and Tilt

Submit Document Feedback

#### 5.12 Window Characteristics

#### Table 5-3. DMD Window Characteristics

DESCRIPTION	MIN	NOM			
Window Material		Corning Eagle XG			
Window Refractive Index at 546.1nm		1.5119			
Window Transmittance, minimum within the wavelength range between 420nm and 680nm. Applies to all angles between 0°–30° AOI. (1) (2)	97%				
Window Transmittance, average over the wavelength range 420nm and 680nm. Applies to all angles 30°–45° AOI. (1) (2)	97%				

- (1) Single-pass through both surfaces and glass.
- (2) The angle of incidence (AOI) is the angle between an incident ray and the normal to a reflecting or refracting surface.

# 5.13 Chipset Component Usage Specification

The DLP470NE DMD's reliable function and operation require that it be used in conjunction with the other components of the applicable DLP chipset, including those components that contain or implement TI DMD control technology. TI DMD control technology is the TI technology and devices for operating or controlling a DLP DMD.

## 6 Detailed Description


#### 6.1 Overview

The DMD is a 0.47-inch diagonal spatial light modulator that consists of an array of highly reflective aluminum micromirrors. The DMD is an electrical input, optical output micro-electrical-mechanical system (MEMS). The electrical interface is Low Voltage Differential Signaling (LVDS). The DMD consists of a two-dimensional array of 1-bit CMOS memory cells. The array is organized in a grid of M memory cell columns by N memory cell rows. Refer to the Section 6.2. The positive or negative deflection angle of the micromirrors can be individually controlled by changing the address voltage of underlying CMOS addressing circuitry and micromirror reset signals (MBRST).

The DLP470NE DMD is part of the chipset comprising of the DLP470NE DMD, the DLPC4420 display controller, and the DLPA100 power and motor driver. To ensure reliable operation, the DLP470NE DMD must always be used with the DLPC4420 display controller and the DLPA100 power and motor driver.



# 6.2 Functional Block Diagram

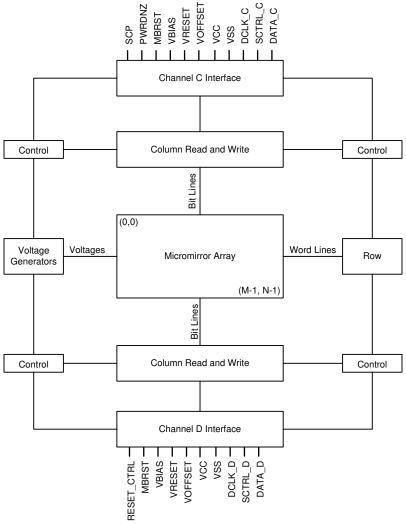

Copyright © 2017, Texas Instruments Incorporated

For pin details on Channels C, and D, refer to Pin Configuration and Functions and LVDS Interface section of Section 5.8. RESET\_CTRL is used in applications when an external reset signal is required.

Figure 6-1. Functional Block Diagram

Submit Document Feedback

### **6.3 Feature Description**

#### 6.3.1 Power Interface

The DMD requires five DC voltages: DMD\_P3P3V, DMD\_P1P8V, VOFFSET, VRESET, and VBIAS. DMD\_P3P3V is created by the DLPA100 power and motor driver and is used on the DMD board to create the other four DMD voltages, as well as powering various peripherals (TMP411, I2C, and TI level translators). DMD\_P1P8V is created by the TI PMIC LP38513S and provides the VCC voltage required by the DMD. VOFFSET (10V), VRESET (-14V), and VBIAS (18V) are made by the TI PMIC TPS65145 and are supplied to the DMD to control the micromirrors.

## **6.3.2 Timing**

The data sheet provides timing at the device pin. For output timing analysis, the tester pin electronics and its transmission line effects must be taken into account. Figure 5-4 shows an equivalent test load circuit for the output under test. Timing reference loads are not intended as a precise representation of any particular system environment or depiction of the actual load presented by a production test. System designers: Use IBIS or other simulation tools to correlate the timing reference load to a system environment. The load capacitance value stated is only for characterization and measurement of AC timing signals. This load capacitance value does not indicate the maximum load the device is capable of driving.

#### 6.4 Device Functional Modes

DMD functional modes are controlled by the DLPC4420 display controller. See the *DLPC4420 Display Controller Data Sheet* or contact a TI applications engineer.

## 6.5 Optical Interface and System Image Quality Considerations

TI assumes no responsibility for end-equipment optical performance. Achieving the desired end-equipment optical performance involves making trade-offs between numerous component and system design parameters. System optical performance and image quality strongly relate to optical system design parameter trade-offs. Although it is not possible to anticipate every conceivable application, projector image quality and optical performance are contingent on compliance with the optical system operating conditions described in the following sections.

#### 6.5.1 Numerical Aperture and Stray Light Control

The angle defined by the numerical aperture of the illumination and projection optics at the DMD optical area needs to be the same. This angle should not exceed the nominal device micromirror tilt angle unless appropriate apertures are added in the illumination and projection pupils to block out flat-state and stray light from the projection lens. The micromirror tilt angle defines DMD capability to separate the "ON" optical path from any other light path, including undesirable flat-state specular reflections from the DMD window, DMD border structures, or other system surfaces near the DMD such as prism or lens surfaces. If the numerical aperture exceeds the micromirror tilt angle, or if the projection numerical aperture angle is more than two degrees larger than the illumination numerical aperture angle, contrast degradation and objectionable artifacts may occur in the display border or active area.

#### 6.5.2 Pupil Match

TI's optical and image quality specifications assume that the exit pupil of the illumination optics is nominally centered within 2° of the entrance pupil of the projection optics. Misalignment of pupils can create objectionable artifacts in the display border and active area, which may require additional system apertures to control, especially if the numerical aperture of the system exceeds the pixel tilt angle.

#### 6.5.3 Illumination Overfill

The active area of the device is surrounded by an aperture on the inside DMD window surface that masks structures of the DMD chip assembly from normal view and is sized to anticipate several optical operating conditions. Overfill light illuminating the window aperture can create artifacts from the edge of the window aperture opening and other surface anomalies that may be visible on the screen. Design the illumination optical system to limit light flux incident anywhere on the window aperture from exceeding approximately 10% of the

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



average flux level in the active area. Depending on the particular system's optical architecture, overfill light may have to be further reduced below the suggested 10% level to be acceptable.

## **6.6 Micromirror Array Temperature Calculation**

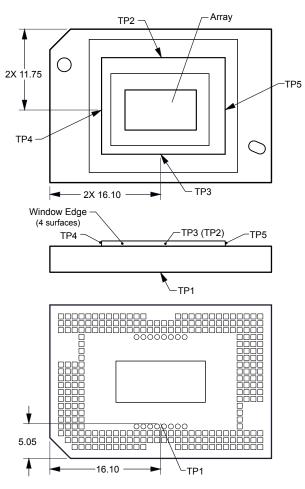


Figure 6-2. DMD Thermal Test Points

Micromirror array temperature cannot be measured directly, therefore it must be computed analytically from measurement points on the outside of the package, the package thermal resistance, the electrical power, and the illumination heat load. The following equations show the relationship between array temperature and the reference ceramic temperature, thermal test TP1 Figure 6-2 shown above:

 $T_{ARRAY} = T_{CERAMIC} + (Q_{ARRAY} \times R_{ARRAY-TO-CERAMIC})$   $Q_{ARRAY} = Q_{ELECTRICAL} + (Q_{ILLUMINATION})$ 

#### where

- T<sub>ARRAY</sub> = Computed array temperature (°C)
- T<sub>CERAMIC</sub> = Measured ceramic temperature (°C), TP1 Figure 6-2
- R<sub>ARRAY-TO-CERAMIC</sub> = Thermal resistance of package specified in Section 5.5 from array to ceramic TP1 Figure 6-2 (°C/W).
- Q<sub>ARRAY</sub> = Total DMD Power (electrical + absorbed) on the array (W)
- Q<sub>ELECTRICAL</sub> = Nominal electrical power (W)
- Q<sub>INCIDENT</sub> = Incident illumination optical power (W)
- Q<sub>ILLUMINATION</sub> = (DMD average thermal absorptivity × Q<sub>INCIDENT</sub> (W)

Submit Document Feedback

DMD average thermal absorptivity = 0.41

The electrical power dissipation of the DMD is variable and depends on the voltages, data rates, and operating frequencies. A nominal electrical power dissipation to use when calculating array temperature is 0.9W. The absorbed optical power from the illumination source is variable and depends on the operating state of the micromirrors and the intensity of the light source. The equations shown above are valid for a single chip or multichip DMD system. It assumes an illumination distribution of 83.7% on the active array and 16.3% on the array border.

The sample calculation for a typical projection application is as follows:

```
Q_{INCIDENT} = 31W \text{ (measured)}
T_{CERAMIC} = 55.0^{\circ} \text{ (measured)}
Q_{ELECTRICAL} = 0.9W
Q_{ARRAY} = 0.9W + (0.41 \times 31W) = 13.61W
T_{ARRAY} = 55.0^{\circ}C + (13.61W \times 0.90^{\circ}C/W) = 67.2^{\circ}C
```

## 6.7 Micromirror Power Density Calculation

The calculation of the optical power density of the illumination on the DMD in the different wavelength bands uses the total measured optical power on the DMD, percent illumination overfill, area of the active array, and the ratio of the spectrum in the wavelength band of interest to the total spectral optical power.

- ILL<sub>UV</sub> = [OP<sub>UV-RATIO</sub> × Q<sub>INCIDENT</sub>] × 1000mW/W ÷ A<sub>ILL</sub> (mW/cm<sup>2</sup>)
- ILL<sub>VIS</sub> = [OP<sub>VIS-RATIO</sub> × Q<sub>INCIDENT</sub>] ÷ A<sub>ILL</sub> (W/cm<sup>2</sup>)
- ILL<sub>IR</sub> = [OP<sub>IR-RATIO</sub> × Q<sub>INCIDENT</sub>] × 1000mW/W ÷ A<sub>ILL</sub> (mW/cm<sup>2</sup>)
- ILL<sub>BLU</sub> = [OP<sub>BLU-RATIO</sub> × Q<sub>INCIDENT</sub>] ÷ A<sub>ILL</sub> (W/cm<sup>2</sup>)
- ILL<sub>BLU1</sub> = [OP<sub>BLU1-RATIO</sub> × Q<sub>INCIDENT</sub>] ÷ A<sub>ILL</sub> (W/cm<sup>2</sup>)
- $A_{ILL} = A_{ARRAY} \div (1 OV_{ILL}) (cm^2)$

#### where:

- ILL<sub>UV</sub> = UV illumination power density on the DMD (mW/cm<sup>2</sup>)
- ILL<sub>VIS</sub> = VIS illumination power density on the DMD (W/cm<sup>2</sup>)
- ILL<sub>IR</sub> = IR illumination power density on the DMD (mW/cm<sup>2</sup>)
- ILL<sub>BLU</sub> = BLU illumination power density on the DMD (W/cm<sup>2</sup>)
- ILL<sub>BLU1</sub> = BLU1 illumination power density on the DMD (W/cm<sup>2</sup>)
- A<sub>ILL</sub> = illumination area on the DMD (cm<sup>2</sup>)
- Q<sub>INCIDENT</sub> = total incident optical power on DMD (W) (measured)
- A<sub>ARRAY</sub> = area of the array (cm<sup>2</sup>) (data sheet)
- OV<sub>ILL</sub> = percent of total illumination on the DMD outside the array (%) (optical model)
- OP<sub>UV-RATIO</sub> = ratio of the optical power for wavelengths <410nm to the total optical power in the illumination spectrum (spectral measurement)
- OP<sub>VIS-RATIO</sub> = ratio of the optical power for wavelengths ≥410 and ≤800nm to the total optical power in the illumination spectrum (spectral measurement)



- OP<sub>IR-RATIO</sub> = ratio of the optical power for wavelengths >800nm to the total optical power in the illumination spectrum (spectral measurement)
- OP<sub>BLILRATIO</sub> = ratio of the optical power for wavelengths ≥410nm and ≤475nm to the total optical power in the illumination spectrum (spectral measurement)
- OP<sub>BLU1-RATIO</sub> = ratio of the optical power for wavelengths ≥410nm and ≤440nm to the total optical power in the illumination spectrum (spectral measurement)

The illumination area varies and depends on the illumination overfill. The total illumination area on the DMD is the array area and the overfill area around the array. The optical model is used to determine the percent of the total illumination on the DMD that is outside the array (OV<sub>ILL</sub>) and the percent of the total illumination that is on the active array. From these values, the illumination area (A<sub>ILL</sub>) is calculated. The illumination is assumed to be uniform across the entire array.

From the measured illumination spectrum, the ratio of the optical power in the wavelength bands of interest to the total optical power is calculated.

### Sample calculation:

```
Q<sub>INCIDENT</sub> = 31W (measured)
A_{ARRAY} = (10.3680 \text{mm} \times 5.8320 \text{mm}) \div 100 \text{mm}^2/\text{cm}^2 = 0.6047 \text{cm}^2 \text{ (data sheet)}
OV<sub>ILL</sub> = 16.3% (optical model)
OP<sub>UV-RATIO</sub> = 0.00017 (spectral measurement)
OP<sub>VIS-RATIO</sub> = 0.99977 (spectral measurement)
OP<sub>IR-RATIO</sub> = 0.00006 (spectral measurement)
OP<sub>BLU-RATIO</sub> = 0.28100 (spectral measurement)
OP_{BI U1-RATIO} = 0.03200 (spectral measurement)
A_{III} = 0.6047 \text{cm}^2 \div (1 - 0.163) = 0.7224 \text{cm}^2
ILL_{IJV} = [0.00017 \times 31W] \times 1000 \text{mW/W} \div 0.7224 \text{cm}^2 = 7.295 \text{mW/cm}^2
ILL_{VIS} = [0.99977 \times 31W] \div 0.7224 \text{cm}^2 = 42.90W/\text{cm}^2
ILL_{IR} = [0.00006 \times 31W] \times 1000 \text{mW/W} \div 0.7224 \text{cm}^2 = 2.575 \text{mW/cm}^2
ILL_{BLU} = [0.28100 \times 31W] \div 0.7224 \text{cm}^2 = 12.06W/\text{cm}^2
ILL_{BLU1} = [0.03200 \times 31W] \div 0.7224 \text{cm}^2 = 1.37W/\text{cm}^2
```

### 6.8 Micromirror Landed-On/Landed-Off Duty Cycle

### 6.8.1 Definition of Micromirror Landed-On/Landed-Off Duty Cycle

The micromirror landed-on/landed-off duty cycle (landed duty cycle) denotes the amount of time (as a percentage) that an individual micromirror is landed in the On state versus the amount of time the same micromirror is landed in the OFF state.

As an example, a landed duty cycle of 100/0 indicates that the referenced pixel is in the ON state 100% of the time (and in the Off state 0% of the time); whereas, 0/100 indicates that the pixel is in the OFF state 100% of the time. Likewise, 50/50 indicates that the pixel is ON for 50% of the time (and OFF for 50% of the time).



Note that when assessing the landed duty cycle, the time spent switching from one state (ON or OFF) to the other state (OFF or ON) is considered negligible and is thus ignored.

Since a micromirror can only be landed in one state or the other (ON or OFF), the two numbers (percentages) always add to 100.

# 6.8.2 Landed Duty Cycle and Useful Life of the DMD

Knowing the long-term average landed duty cycle (of the end product or application) is important because subjecting all (or a portion) of the DMD micromirror array (also called the active array) to an asymmetric landed duty cycle for a prolonged period of time can reduce the DMD usable life.

Note that it is the symmetry or asymmetry of the landed duty cycle that is of relevance. The symmetry of the landed duty cycle is determined by how close the two numbers (percentages) are to being equal. For example, a landed duty cycle of 50/50 is perfectly symmetrical whereas a landed duty cycle of 100/0 or 0/100 is perfectly asymmetrical.

## 6.8.3 Landed Duty Cycle and Operational DMD Temperature

Operational DMD temperature and landed duty cycle interact to affect DMD usable life, and this interaction can be exploited to reduce the impact that an asymmetrical landed duty cycle has on the DMD usable life. This is quantified in the derating curve shown in Figure 5-1. The importance of this curve is that:

- · All points along this curve represent the same usable life.
- All points above this curve represent lower usable life (and the further away from the curve, the lower the usable life).
- All points below this curve represent higher usable life (and the further away from the curve, the higher the usable life).

In practice, this curve specifies the maximum operating DMD Temperature at a given long-term average Landed Duty Cycle.

### 6.8.4 Estimating the Long-Term Average Landed Duty Cycle of a Product or Application

During a given period of time, the Landed Duty Cycle of a given pixel follows from the image content being displayed by that pixel.

For example, in the simplest case, when displaying pure-white on a given pixel for a given time period, that pixel operates under a 100/0 Landed Duty Cycle during that time period. Likewise, when displaying pure-black, the pixel operates under a 0/100 Landed Duty Cycle.

Between the two extremes (ignoring for the moment color and any image processing that may be applied to an incoming image), the Landed Duty Cycle tracks one-to-one with the gray scale value, as shown in Table 6-1.

Table 6-1. Grayscale Value and Landed Duty Cycle

GRAYSCALE VALUE	LANDED DUTY CYCLE
0%	0/100
10%	10/90
20%	20/80
30%	30/70
40%	40/60
50%	50/50
60%	60/40
70%	70/30
80%	80/20
90%	90/10
100%	100/0

Accounting for color rendition (but still ignoring image processing) requires knowing both the color intensity (from 0% to 100%) for each constituent primary color (red, green, and blue) for the given pixel as well as the color cycle time for each primary color, where "color cycle time" is the total percentage of the frame time that a given primary must be displayed in order to achieve the desired white point.

Use this equation to calculate the landed duty cycle of a given pixel during a given time period:

```
Landed Duty Cycle =

(Red_Cycle_% × Red_Scale_Value) +

(Green_Cycle_% × Green_Scale_Value) +

(Blue_Cycle_% × Blue_Scale_Value)
```

#### where

- Red\_Cycle\_%, represents the percentage of the frame time that red is displayed to achieve the desired white
  point
- Green\_Cycle\_% represents the percentage of the frame time that green is displayed to achieve the desired white point
- Blue\_Cycle\_%, represents the percentage of the frame time that blue is displayed to achieve the desired white point

For example, assume that the red, green and blue color cycle times are 50%, 20%, and 30% respectively (in order to achieve the desired white point), then the Landed Duty Cycle for various combinations of red, green, blue color intensities are as shown in Table 6-2 and Table 6-3.

Table 6-2. Example Landed Duty Cycle for Full-Color, Color Percentage

CYCLE PERCENTAGE				
RED	GREEN	BLUE		
50%	20%	30%		

Table 6-3. Example Landed Duty Cycle for Full-Color

SCALE VALUE			LANDED DUTY
RED	GREEN	BLUE	CYCLE
0%	0%	0%	0/100
100%	0%	0%	50/50
0%	100%	0%	20/80
0%	0%	100%	30/70
12%	0%	0%	6/94
0%	35%	0%	7/93
0%	0%	60%	18/82
100%	100%	0%	70/30
0%	100%	100%	50/50
100%	0%	100%	80/20
12%	35%	0%	13/87
0%	35%	60%	25/75
12%	0%	60%	24/76
100%	100%	100%	100/0

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback

# 7 Application and Implementation

#### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## 7.1 Application Information

Texas Instruments DLP technology is a micro-electro-mechanical systems (MEMS) technology that modulates light using a digital micromirror device (DMD). The DMD is a spatial light modulator, which reflects incoming light from an illumination source in one of two directions, towards the projection optics or collection optics. Typical applications using the DLP470NE include home theater, digital signage, interactive displays, low-latency gaming displays, and portable smart displays.

The most recent class of chipsets from Texas Instruments is based on a breakthrough micromirror technology, called TRP. With a smaller pixel pitch of 5.4 µm and an increased tilt angle of 17 degrees, TRP chipsets enable higher resolution in a smaller form factor and enhanced image processing features while maintaining high optical efficiency. DLP chipsets are a great fit for any system that requires high-resolution and high-brightness displays.


The following orderables were replaced by the DLP470NE.

## **Device Information**

PART NUMBER	PACKAGE	BODY SIZE (NOM)	Mechanical ICD
DLP470NETA	FXH (257)	33.2mm × 22.3mm	2516206
1910-5432B	FXH (257)	33.2mm × 22.3mm	2516206
1910-5437B	FXH (257)	33.2mm × 22.3mm	2516206
1910-543AB	FXH (257)	33.2mm × 22.3mm	2516206

### 7.2 Typical Application

The DLP470NE digital micromirror device (DMD), combined with a DLPC4420 (or DLPC4430) digital controller and DLPA100 power management device, provides full HD resolution for bright, colorful display applications. Figure 7-1 shows a typical display system using the DLP470NE and additional system components.

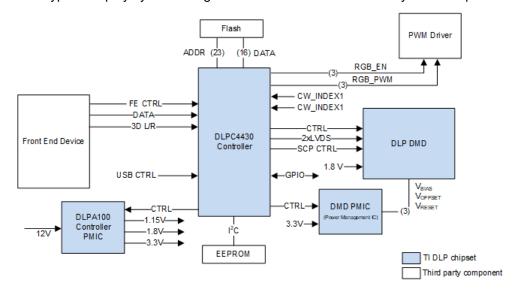

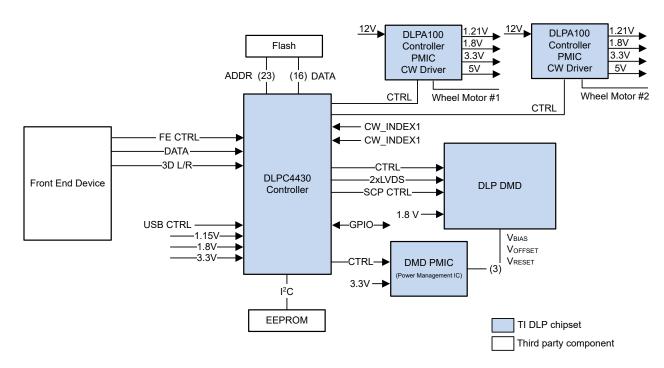


Figure 7-1. Typical DLPC4430 Application (LED, Top; LPCW, Bottom)

### 7.2.1 Design Requirements

A DLP470NE projection system is created by using the DMD chipset, including the DLP470NE, DLPC4420, and DLPA100. The DLP470NE is used as the core imaging device in the display system and contains a 0.47-inch array of micromirrors. The DLPC4420 controller is the digital interface between the DMD and the rest of the system, taking digital input from the front-end receiver and driving the DMD over a high-speed interface. The DLPA100 power management device provides voltage regulators for the DMD, controller, and illumination functionality.

Other core components of the display system include an illumination source, an optical engine for the illumination and projection optics, other electrical and mechanical components, and software. The illumination source options include lamp, LED, laser, or laser phosphor. The type of illumination used and desired brightness have a major effect on the overall system design and size.

### 7.2.2 Detailed Design Procedure

For connecting the DLPC4420 display controller and the DLP470NE DMD, see the reference design schematic. For a complete DLP system, an optical module or light engine is required that contains the DLP470NE DMD, associated illumination sources, optical elements, and necessary mechanical components.

To ensure reliable operation, the DLP470NE DMD must always be used with the DLPC4420 display controller and a DLPA100 PMIC driver. Refer to PCB Design Requirements for DLP Standard TRP Digital Micromirror Devices for the DMD board design and manufacturing handling of the DMD subassemblies.

### 7.2.3 Application Curves

When LED illumination is used, a typical LED-current-to-Luminance relationship is shown in Figure 7-2.


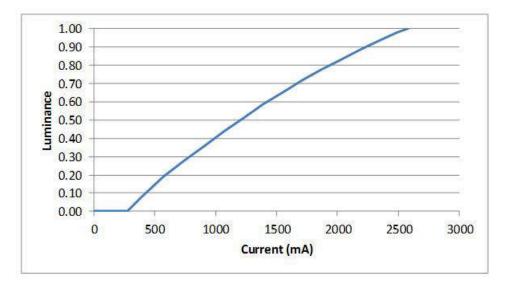


Figure 7-2. Luminance vs. Current

### 7.3 DMD Die Temperature Sensing

The DMD features a built-in thermal diode that measures the temperature at one corner of the die outside the micromirror array. The thermal diode can be interfaced with the TMP411 temperature sensor, as shown in Figure 7-3. The serial bus from the TMP411 can be connected to the DLPC4420 display controller to enable its temperature-sensing features. See the *DLPC4420 Programmers' Guide* for instructions on installing the DLPC4420 controller support firmware bundle and obtaining the temperature readings.

The software application contains functions to configure the TMP411 to read the DMD temperature sensor diode. This data can be leveraged to incorporate additional functionality in the overall system design such as adjusting illumination, fan speeds, and so forth. All communication between the TMP411 and the DLPC4420 controller is completed using the I<sup>2</sup>C interface. The TMP411 connects to the DMD via pins B17 and B18, as outlined in Section 4.

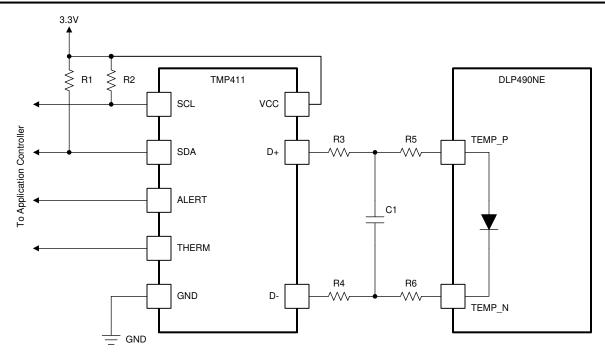

- A. Details omitted for clarity, see the TI Reference Design for connections to the DLPC4420 controller.
- B. See the TMP411 data sheet for system board layout recommendation.
- C. See the TMP411 data sheet and the TI reference design for suggested component values for R1, R2, R3, R4, and C1.
- D. R5 =  $0\Omega$ . R6 =  $0\Omega$ . Zero-ohm resistors need to be located close to the DMD package pins.

Figure 7-3. TMP411 Sample Schematic



# 8 Power Supply Recommendations

The following power supplies are all required to operate the DMD:

- VSS
- VBIAS
- VCC
- VOFFSET
- VRESET

DMD power-up and power-down sequencing is strictly controlled by the DLP display controller.

#### **CAUTION**

For reliable operation of the DMD, the following power supply sequencing requirements must be followed. Failure to adhere to any of the prescribed power-up and power-down requirements may affect device reliability. See Figure 8-1 DMD Power Supply Sequencing Requirements.


VBIAS, VCC, VOFFSET, and VRESET power supplies must be coordinated during power-up and power-down operations. Failure to meet any of the below requirements will result in a significant reduction in the DMD reliability and lifetime. Common ground VSS must also be connected.

## 8.1 DMD Power Supply Power-Up Procedure

- During power-up, VCC must always start and settle before VOFFSET plus Delay1 specified in Table 8-1, VBIAS, and VRESET voltages are applied to the DMD.
- During power-up, it is a strict requirement that the voltage difference between VBIAS and VOFFSET must be within the specified limit shown in Section 5.4.
- During power-up, there is no requirement for the relative timing of VRESET with respect to VBIAS.
- Power supply slew rates during power-up are flexible, provided that the transient voltage levels follow the requirements specified in Section 5.1, in Section 5.4, and in Figure 8-1.
- During power-up, LVCMOS input pins must not be driven high until after VCC have settled at operating voltages listed in Section 5.4.

#### 8.2 DMD Power Supply Power-Down Procedure

- During power-down, VCC must be supplied until after VBIAS, VRESET, and VOFFSET are discharged to within the specified limit of ground. See Table 8-1.
- During power-down, it is a strict requirement that the voltage difference between VBIAS and VOFFSET must be within the specified limit shown in Section 5.4.
- During power-down, there is no requirement for the relative timing of VRESET with respect to VBIAS.
- Power supply slew rates during power-down are flexible, provided that the transient voltage levels follow the requirements specified in Section 5.1, in Section 5.4, and in Figure 8-1.
- During power-down, LVCMOS input pins must be less than specified in Section 5.4.

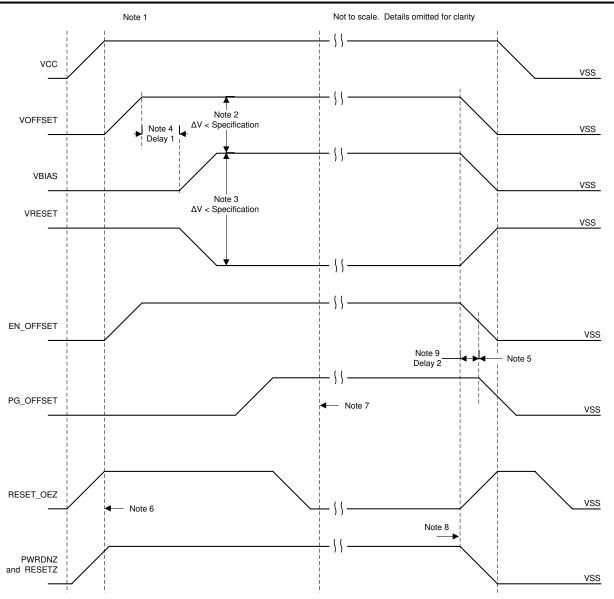

- A. See Section 5.4 and Pin Configuration and Functions.
- B. To prevent excess current, the supply voltage difference |VOFFSET VBIAS| must be less than specified limit in Section 5.4.
- C. To prevent excess current, the supply difference |VBIAS VRESET| must be less than specified limit in Section 5.4.
- D. VBIAS must power up after VOFFSET has powered up, per the Delay1 specification in Table 8-1.
- E. PG\_OFFSET must turn off after EN\_OFFSET has turned off, per the Delay2 specification in Table 8-1.
- F. DLP controller software enables the DMD power supplies to turn on after RESET\_OEZ is at logic high.
- G. DLP controller software initiates the global VBIAS command.
- H. After the DMD micromirror park sequence is complete, the DLP controller software initiates a hardware power-down that activates PWRDNZ and disables VBIAS, VRESET and VOFFSET.
- I. Under power-loss conditions where emergency DMD micromirror park procedures are being enacted by the DLP controller hardware, EN\_OFFSET may turn off after PG\_OFFSET has turned off. The OEZ signal goes high prior to PG\_OFFSET turning off to indicate the DMD micromirror has completed the emergency park procedures.

Figure 8-1. DMD Power Supply Requirements

**Table 8-1. DMD Power-Supply Requirements** 

PARAMETER	DESCRIPTION	MIN	NOM	MAX	UNIT
Delay1	Delay from VOFFSET settled at recommended operating voltage to VBIAS and VRESET power up	1	2		ms



### Table 8-1. DMD Power-Supply Requirements (continued)

PARAMETER	DESCRIPTION	MIN	NOM	MAX	UNIT
Delay2	PG_OFFSET hold time after EN_OFFSET goes low	100			ns

# 9 Layout

### 9.1 Layout Guidelines

The DLP470NE DMD is part of a chipset controlled by the DLPC4420 display controller in conjunction with the DLP4100 power and motor driver. These guidelines help to design a PCB board with the DLP470NE DMD. The DLP470NE DMD board is a high-speed multilayer PCB, with primarily high-speed digital logic using dual-edge clock rates up to 400MHz for DMD LVDS signals. The remaining traces are comprised of low speed digital LVTTL signals. TI recommends that mini power planes are used for VOFFSET, VRESET, and VBIAS. Solid planes are required for DMD\_P3P3V(3.3V), DMD\_P1P8V and Ground. The target impedance for the PCB is  $50\Omega \pm 10\%$  with the LVDS traces being  $100\Omega \pm 10\%$  differential. Use an 8-layer stack-up, as described in Table 9-1.

### 9.2 Layout Example

#### 9.2.1 Layers

The layer stack-up and copper weight for each layer are shown in Table 9-1. Small subplanes are allowed on signal routing layers to connect components to major subplanes on top or bottom layers if necessary.

Table 9-1. Layer Stack-Op							
LAYER NO.	LAYER NAME COPPER WT. (oz.)		COMMENTS				
1	Side A - DMD only	1.5	DMD, escapes, low-frequency signals, power subplanes				
2	Ground	1	Solid ground plane (net GND)				
3	Signal	0.5	$50\Omega$ and $100\Omega$ differential signals				
4	Ground	1	Solid ground plane (net GND)				
5	DMD_P3P3V 1		+3.3V power plane (net DMD_P3P3V)				
6	Signal	0.5	$50\Omega$ and $100\Omega$ differential signals				
7	Ground	1	Solid ground plane (net GND)				
8	Side B - All other Components	1.5	Discrete components, low-frequency signals, power subplanes				

Table 9-1. Layer Stack-Up

#### 9.2.2 Impedance Requirements

TI recommends that the board has matched impedance of  $50\Omega \pm 10\%$  for all signals. The exceptions are listed in Table 9-2.

Table 6 21 openial imposition of the first o							
Signal Type	Signal Name	Impedance (ohms)					
	DDCP(0:15), DDCN(0:15)						
C channel LVDS differential pairs	DCLKC_P, DCLKC_N	100 ±10% differential across each					
	SCTRL_CP, SCTRL_CN	, pair					
	DDDP(0:15), DDDN(0:15)						
D channel LVDS differential pairs	DCLKD_P, DCLKD_N	100 ±10% differential across each					
	SCTRL_DP, SCTRL_DN	7					

Table 9-2. Special Impedance Requirements

# 9.2.3 Trace Width, Spacing

Unless otherwise specified, TI recommends that all signals follow the 0.005-inch / 0.005-inch design rule. Minimum trace clearance from the ground ring around the PWB has a 0.1-inch minimum. An analysis of impedance and stack-up requirements determine the actual trace widths and clearances.

#### 9.2.3.1 Voltage Signals

**Table 9-3. Special Trace Widths, Spacing Requirements** 

SIGNAL NAME	MINIMUM TRACE WIDTH TO PINS (MIL)	LAYOUT REQUIREMENT
GND	15	Maximize trace width to connecting pin

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



# **Table 9-3. Special Trace Widths, Spacing Requirements (continued)**

SIGNAL NAME	MINIMUM TRACE WIDTH TO PINS (MIL)	LAYOUT REQUIREMENT			
DMD_P3P3V	15	Maximize trace width to connecting pin			
DMD_P1P8V	15	Maximize trace width to connecting pin			
VOFFSET	15	Create mini plane from U2 to U3			
VRESET	15	Create mini plane from U2 to U3			
VBIAS	15	Create mini plane from U2 to U3			
All U3 control connections	10	Use 10mil etch to connect all signals/voltages to DMD pads			

# 10 Device and Documentation Support

### 10.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

#### 10.2 Device Support

#### 10.2.1 Device Nomenclature

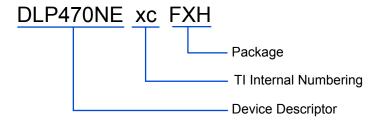


Figure 10-1. Part Number Description

### 10.2.2 Device Markings

The device marking includes both human-readable information and a 2-dimensional matrix code. The human-readable information is described in Figure 10-2. The 2-dimensional matrix code is an alpha-numeric character string that contains the DMD part number, part 1 of serial number, and part 2 of serial number.

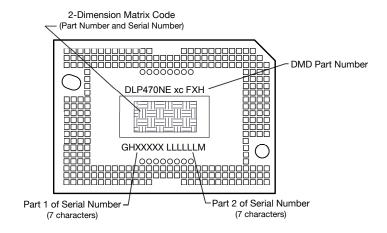


Figure 10-2. DMD Marking Locations

### 10.3 Documentation Support

#### 10.3.1 Related Documentation

The following documents contain additional information related to the chipset components used with the DLP470NE.

- DLPC4430 Display Controller Data Sheet
- DLPC4420 Display Controller Data Sheet
- DLPA100 Power and Motor Driver Data Sheet

Copyright © 2024 Texas Instruments Incorporated



# 10.4 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### 10.5 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 10.6 Trademarks

TI E2E™ is a trademark of Texas Instruments.

DLP® is a registered trademark of Texas Instruments.

All trademarks are the property of their respective owners.

#### 10.7 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 10.8 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

# 11 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

C	nanges from Revision C (February 2023) to Revision D (December 2024)	Page
•	Updated the main controller to DLPC4420 throughout document	1
•	Added DLPC4420 as supported display controller	1
•	Added links to DLP Products third-party search tools, and Getting Started With TI DLP Display Technol	ogy 1
•	Updated section Recommended Operating Conditions	11
•	Updated Micromirror Array Optical Characteristics Table	<mark>2</mark> 1
•	Updated controller name to DLPC4420 and added link to DLPC4420 data sheet	25
•	Updated Micromirror Array Temperature Calculation	26
•	Added section Micromirror Power Density Calculation	27
	Changed controller name to DLPC4420	

Changes from Revision B (June 2022) to Revision C (February 2023)	Page
<ul> <li>Updated the controller to DLPC4430, linked the chipset components to product page</li> </ul>	es1
Changed controller name to DLPC4430	1
Added the lamp illumination section to the table	11
Changed controller name to DLPC4430	23
Changed controller name to DLPC4430	25
Added a table with legacy device information, added the mechanical ICD	32
Changed controller name to DLPC4430	32
Changed controller name to DLPC4430	33
Changed controller name to DLPC4430	



DLP470NE DLPS159D – APRIL 2019 – REVISED DECEMBER 2024



#### www.ti.com

34 35
4



# Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 7-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
DLP470NEAAFXH	Active	Production	CLGA (FXH)   257	33   JEDEC TRAY (5+1)	Yes	Call TI	N/A for Pkg Type	0 to 70	
DLP470NEAAFXH.B	Active	Production	CLGA (FXH)   257	33   JEDEC TRAY (5+1)	Yes	Call TI	N/A for Pkg Type	0 to 70	

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.


<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.


<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

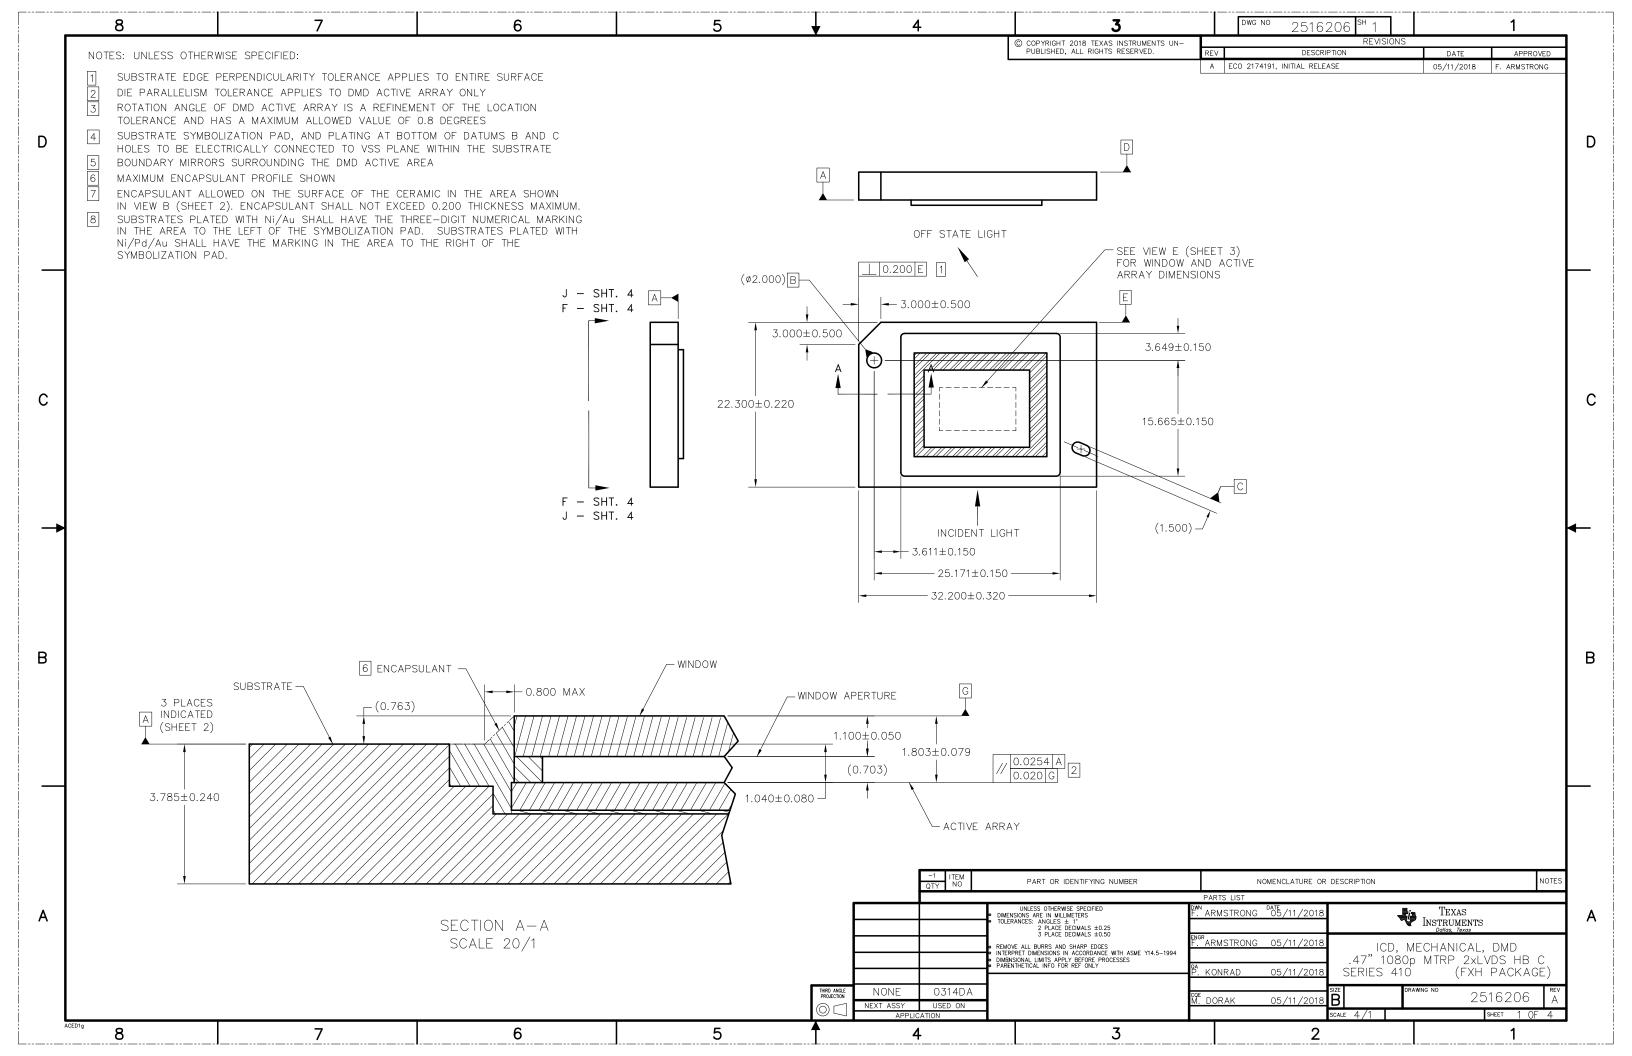

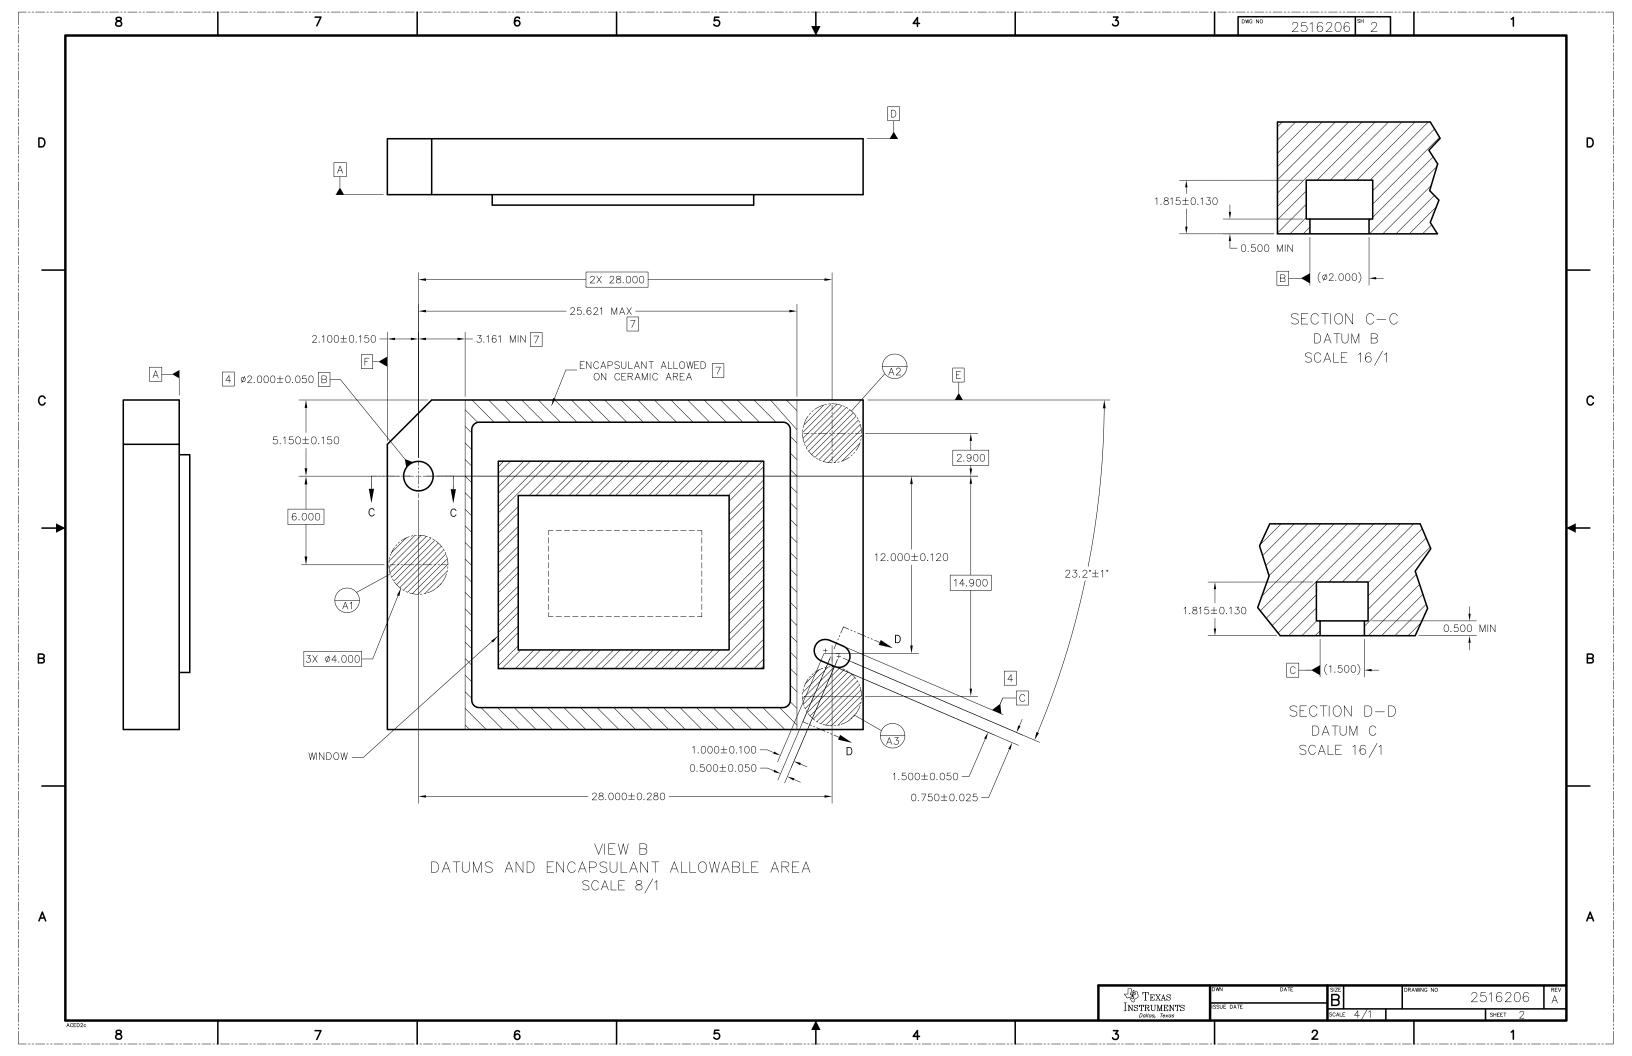

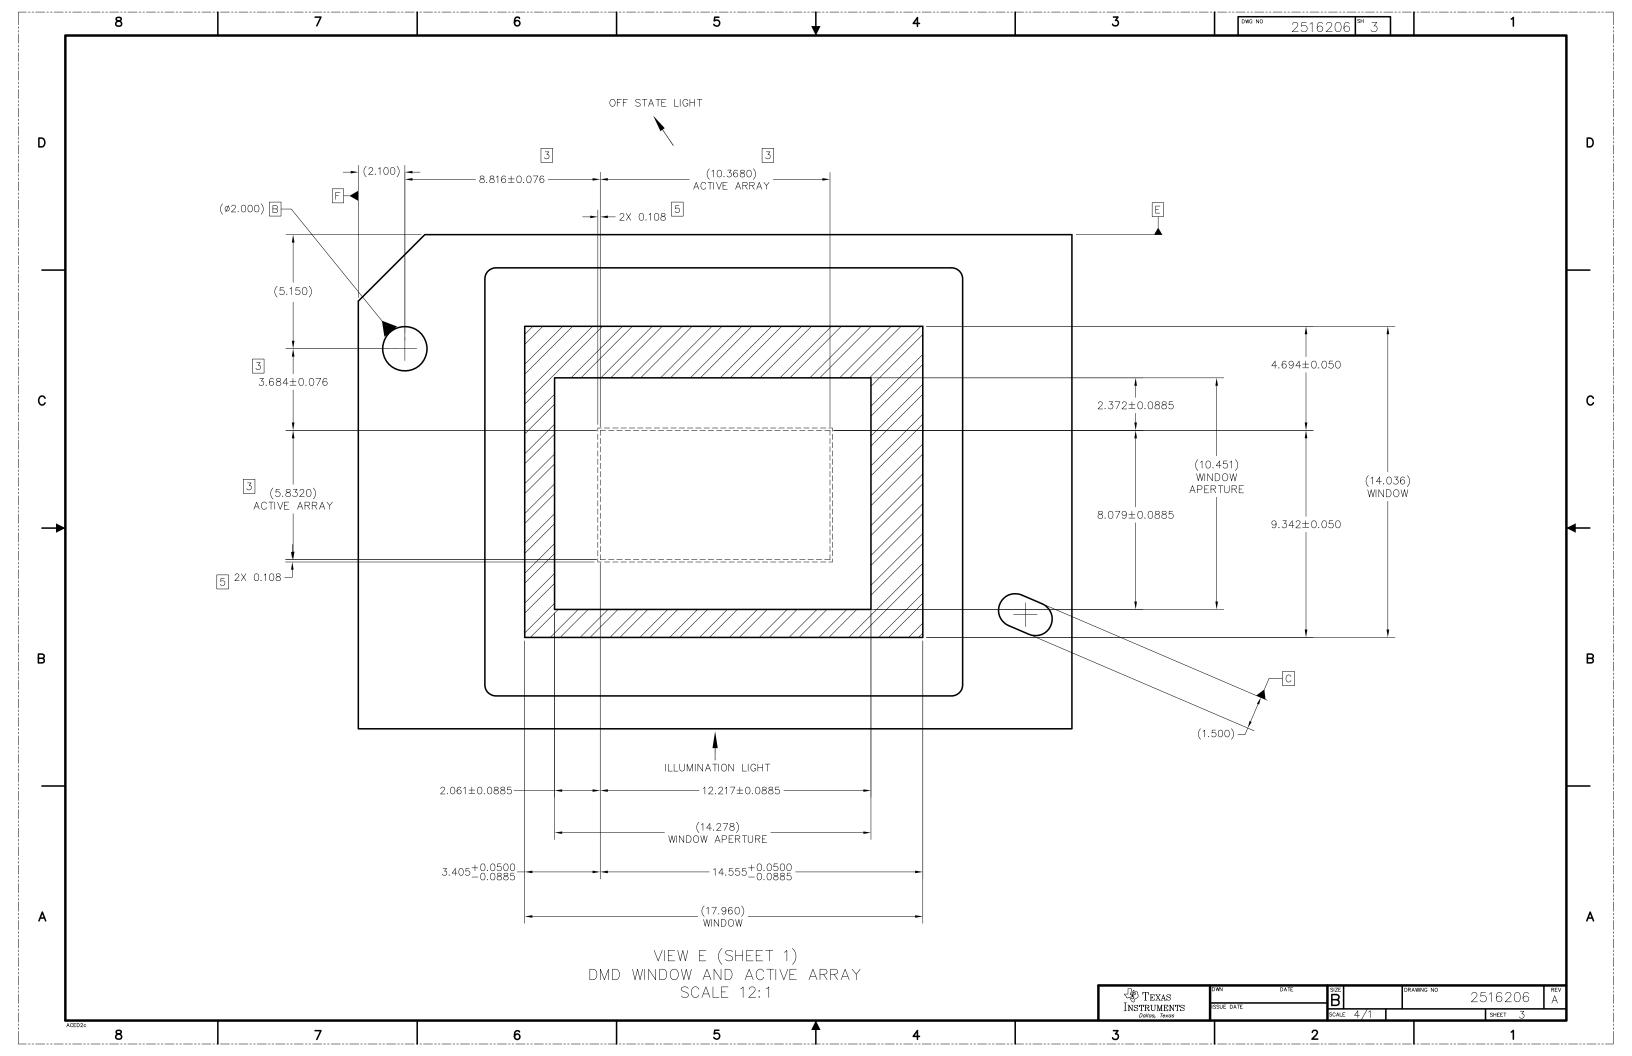

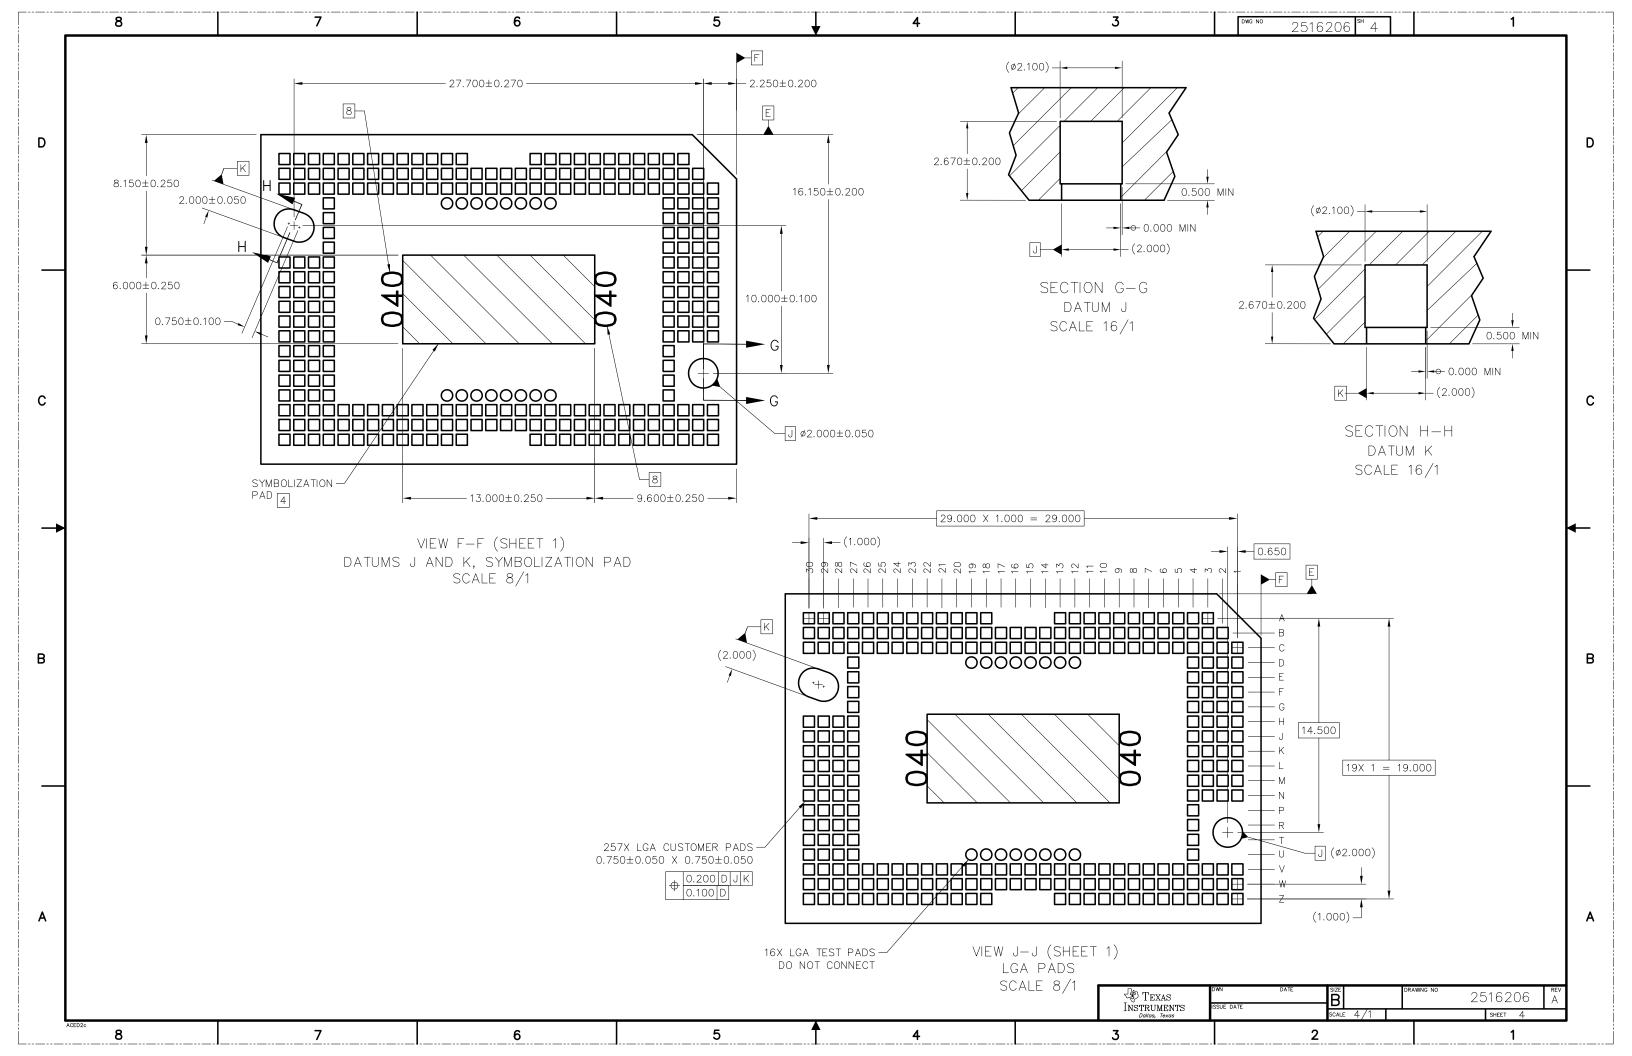

#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025