













**TMUX1247** 

SCDS399 - AUGUST 2019

# TMUX1247 5-V Bidirectional, 2:1 (SPDT) General Purpose Switch

#### **Features**

Rail to rail operation

Bidirectional signal path

1.8 V Logic compatible

Fail-safe logic

Low on-resistance: 3  $\Omega$ 

Wide supply range: 1.08 V to 5.5 V

-40°C to +125°C Operating temperature

Low supply current: 4 nA Transition time: 14 ns

Break-before-make switching

ESD protection HBM: 2000 V

# **Applications**

Analog and Digital Switching

I2C and SPI bus Multiplexing

Remote radio units

Active antenna system mMIMO (AAS)

Barcode scanner

Motor drives

**Building automation** 

Analog input module

Power delivery


Video surveillance

Electronic point of sale

**Appliances** 

Consumer audio

#### Application Example

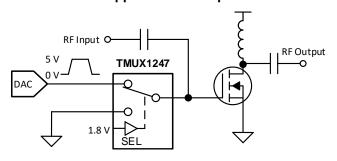

## 3 Description

The TMUX1247 is a general purpose complementary metal-oxide semiconductor (CMOS) single-pole (SPDT) switch. TMUX1247 double-throw The switches between two source inputs based on the state of the SEL pin. Wide operating supply of 1.08 V to 5.5 V allows for use in a broad array of applications from personal electronics to building automation. The device supports bidirectional analog and digital signals on the source (Sx) and drain (D) pins ranging from GND to V<sub>DD</sub>. A low supply current of 4 nA enables use in portable applications.


All logic inputs have 1.8 V logic compatible thresholds, ensuring both TTL and CMOS logic compatibility when operating in the valid supply voltage range. Fail-Safe Logic circuitry allows voltages on the control pins to be applied before the supply pin, protecting the device from potential damage.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TMUX1247	SC70 (6)	2.00 mm × 1.25 mm

(1) For all available packages, see the package option addendum at the end of the data sheet.

#### TMUX1247 Block Diagram





# **Table of Contents**

1	Features 1		7.7 Off Isolation	16
2	Applications 1		7.8 Crosstalk	16
3	Description 1		7.9 Bandwidth	17
4	Revision History2	8	Detailed Description	18
5	Pin Configuration and Functions3		8.1 Overview	18
6	Specifications4		8.2 Functional Block Diagram	18
•	6.1 Absolute Maximum Ratings 4		8.3 Feature Description	
	6.2 ESD Ratings		8.4 Device Functional Modes	19
	6.3 Recommended Operating Conditions		8.5 Truth Tables	
	6.4 Thermal Information	9	Application and Implementation	20
	6.5 Electrical Characteristics (V <sub>DD</sub> = 5 V ±10 %), GND =		9.1 Application Information	
	0 V unless otherwise specified 5		9.2 Typical Application	20
	6.6 Electrical Characteristics (V <sub>DD</sub> = 3.3 V ±10 %), GND	10	Power Supply Recommendations	23
	= 0 V unless otherwise specified 7	11	Layout	24
	6.7 Electrical Characteristics (V <sub>DD</sub> = 1.8 V ±10 %), GND		11.1 Layout Guidelines	24
	= 0 V unless otherwise specified		11.2 Layout Example	24
	6.8 Electrical Characteristics (V <sub>DD</sub> = 1.2 V ±10 %), GND = 0 V unless otherwise specified	12	Device and Documentation Support	25
	6.9 Typical Characteristics		12.1 Documentation Support	25
7	Parameter Measurement Information		12.2 Receiving Notification of Documentation Update	es 25
•	7.1 On-Resistance		12.3 Community Resources	25
	7.2 Off-Leakage Current		12.4 Trademarks	25
	7.3 On-Leakage Current		12.5 Electrostatic Discharge Caution	
	7.4 Transition Time		12.6 Glossary	25
	7.5 Break-Before-Make	13	Mechanical, Packaging, and Orderable	
	7.6 Charge Injection 15		Information	25

# 4 Revision History


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
August 2019	*	Initial release.



www.ti.com

# **5 Pin Configuration and Functions**



### **Pin Functions**

PIN		TYPE <sup>(1)</sup>	DESCRIPTION
NAME	NO.	ITPE\"	DESCRIPTION
S2	1	I/O	Source pin 2. Can be an input or output.
V <sub>DD</sub>	2	Р	Positive power supply. This pin is the most positive power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1 $\mu$ F to 10 $\mu$ F between V <sub>DD</sub> and GND.
S1	3	I/O	Source pin 1. Can be an input or output.
D	4	I/O	Drain pin. Can be an input or output.
GND	5	Р	Ground (0 V) reference
SEL	6	I	Select pin: controls state of the switch according to Table 1. (Logic Low = S1 to D, Logic High = S2 to D)

(1) I = input, O = output, I/O = input and output, P = power

SCDS399 – AUGUST 2019 www.ti.com

# TEXAS INSTRUMENTS

### 6 Specifications

#### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)(2)(3)

		MIN	MAX	UNIT
$V_{DD}$	Supply voltage	-0.5	6	V
$V_{\text{SEL}}$ or $V_{\text{EN}}$	Logic control input pin voltage (SEL)	-0.5	6	V
I <sub>SEL</sub> or I <sub>EN</sub>	Logic control input pin current (SEL)	-30	30	mA
$V_S$ or $V_D$	Source or drain voltage (Sx, D)	-0.5	V <sub>DD</sub> +0.5	V
I <sub>S</sub> or I <sub>D (CONT)</sub>	Source or drain continuous current (Sx, D)	-50	50	mA
$I_{K}$	Diode clamp current <sup>(4)</sup>	-30	30	mA
T <sub>stg</sub>	Storage temperature	<b>–</b> 65	150	°C
$T_J$	Junction temperature		150	°C

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Rating may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Condition. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.

(3) All voltages are with respect to ground, unless otherwise specified.

### 6.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub> Electrostatic discharge	Flootrootatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins (2)	±750	V

<sup>(1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

#### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
$V_{DD}$	Supply voltage	1.08	5.5	V
$V_S$ or $V_D$	Signal path input/output voltage (source or drain pin) (Sx, D)	0	$V_{DD}$	V
V <sub>SEL</sub>	Logic control input pin voltage (SEL)	0	5.5	V
T <sub>A</sub>	Ambient temperature	-40	125	°C

#### 6.4 Thermal Information

		TMUX1247	
THERMAL METRIC <sup>(1)</sup>		DCK (SC70)	UNIT
		6 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	243.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	180.9	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	106.3	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	89.1	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	106.0	°C/W
R <sub>0</sub> JC(bot)	Junction-to-case (bottom) thermal resistance	N/A	°C/W

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

<sup>4)</sup> Pins are diode-clamped to the power-supply rails. Over voltage signals must be voltage and current limited to maximum ratings.

<sup>(2)</sup> JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

# www.ti.com

6.5 Electrical Characteristics ( $V_{DD}$  = 5 V ±10 %), GND = 0 V unless otherwise specified.

at  $T_A = 25$ °C,  $V_{DD} = 5$  V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALO	G SWITCH						
		$V_S = 0 \text{ V to } V_{DD}$	25°C		3		Ω
$R_{ON}$	On-resistance	I <sub>SD</sub> = 10 mA	-40°C to +85°C			5	Ω
		Refer to On-Resistance	-40°C to +125°C			6	Ω
		$V_S = 0 \text{ V to } V_{DD}$	25°C		0.15		Ω
$\Delta R_{\text{ON}}$	On-resistance matching between channels	I <sub>SD</sub> = 10 mA	-40°C to +85°C			1	Ω
	Giamicis	Refer to On-Resistance	-40°C to +125°C			1	Ω
		$V_S = 0 \text{ V to } V_{DD}$	25°C		1.5		Ω
R <sub>ON</sub>	On-resistance flatness	$I_{SD} = 10 \text{ mA}$	-40°C to +85°C		2		Ω
FLAT		Refer to On-Resistance	-40°C to +125°C		3		Ω
		V <sub>DD</sub> = 5 V	25°C		±75		nA
	Source off leakage current <sup>(1)</sup>	Switch Off $V_D = 4.5 \text{ V} / 1.5 \text{ V}$ $V_S = 1.5 \text{ V} / 4.5 \text{ V}$ Refer to Off-Leakage Current	-40°C to +85°C	-150		150	nA
I <sub>S(OFF)</sub>			-40°C to +125°C	-175		175	nA
		V <sub>DD</sub> = 5 V	25°C		±200		nA
$I_{D(ON)}$	Channel on leakage current	Switch On	-40°C to +85°C	-500		500	nA
I <sub>S(ON)</sub>	g. cancer	$V_D = V_S = 4.5 \text{ V} / 1 \text{ V}$ Refer to On-Leakage Current	-40°C to +125°C	-750		750	nA
LOGIC	INPUTS						
V <sub>IH</sub>	Input logic high		-40°C to 125°C	1.42		5.5	V
V <sub>IL</sub>	Input logic low		-40°C to 125°C	0		0.87	V
I <sub>IH</sub>	Input leakage current		25°C	±	±0.005		μΑ
I <sub>IH</sub> I <sub>IL</sub>	Input leakage current		-40°C to +125°C			±0.05	μΑ
C <sub>IN</sub>	Digital input capacitance		25°C		1		pF
C <sub>IN</sub>	Digital input capacitance		-40°C to +125°C			2	pF
POWER	SUPPLY						
	V cumply current	Digital Inputs 0 V or 5 5 V	25°C		0.007		μA
$I_{DD}$	V <sub>DD</sub> supply current	Digital Inputs = 0 V or 5.5 V	-40°C to +125°C			1.5	μΑ

<sup>(1)</sup> When  $V_S$  is 4.5 V,  $V_D$  is 1.5 V or when  $V_S$  is 1.5 V,  $V_D$  is 4.5 V.

# TEXAS INSTRUMENTS

# Electrical Characteristics ( $V_{DD}$ = 5 V ±10 %), GND = 0 V unless otherwise specified. (continued)

at  $T_A = 25$ °C,  $V_{DD} = 5$  V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
DYNAN	IIC CHARACTERISTICS						
		., .,	25°C		12		ns
t <sub>TRAN</sub>	Switching time between channels	$V_S = 3 V$ $R_L = 200 \Omega, C_L = 15 pF$	-40°C to +85°C			18	ns
		π_ = 200 12, Θ_ = 10 μ	-40°C to +125°C			19	ns
		., .,	25°C		8		ns
t <sub>OPEN</sub>	Break before make time	$V_S = 3 V$ $R_L = 200 \Omega, C_L = 15 pF$	-40°C to +85°C	1			ns
(BBM)		π_ = 200 Ω, Θ_ = 13 μ	-40°C to +125°C	1			ns
$Q_{\mathbb{C}}$	Charge Injection	$V_S = V_{DD}/2$ $R_S = 0 \Omega$ , $C_L = 1 nF$	25°C		-10		рС
•	Off Isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz	25°C		-65		dB
O <sub>ISO</sub>		$R_L = 50 \Omega, C_L = 5 pF$ f = 10 MHz	25°C		<b>–45</b>		dB
V		$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz	25°C		-65		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega, C_L = 5 pF$ f = 10 MHz	25°C		<b>–45</b>		dB
BW	Bandwidth	$R_L = 50 \Omega$ , $C_L = 5 pF$	25°C		250		MHz
C <sub>SOFF</sub>	Source off capacitance	f = 1 MHz	25°C		7		pF
C <sub>SON</sub> C <sub>DON</sub>	On capacitance	f = 1 MHz	25°C		23		pF

www.ti.com SCDS399-AUGUST 2019

# 6.6 Electrical Characteristics ( $V_{DD}$ = 3.3 V ±10 %), GND = 0 V unless otherwise specified.

at  $T_A = 25^{\circ}$ C.  $V_{PR} = 3.3$  V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALO	G SWITCH						-
		$V_S = 0 \text{ V to } V_{DD}$	25°C		4.5		Ω
R <sub>ON</sub>	On-resistance	I <sub>SD</sub> = 10 mA	-40°C to +85°C			12.5	Ω
		Refer to On-Resistance	-40°C to +125°C			13	Ω
$\Delta R_{ON}$		$V_S = 0 \text{ V to } V_{DD}$	25°C		0.15		Ω
	On-resistance matching between channels	$I_{SD} = 10 \text{ mA}$	-40°C to +85°C			1	Ω
	ona mois	Refer to On-Resistance	-40°C to +125°C			1	Ω
		$V_S = 0 \text{ V to } V_{DD}$	25°C		3.5		Ω
R <sub>ON</sub>	On-resistance flatness	I <sub>SD</sub> = 10 mA	-40°C to +85°C		4		Ω
FLAT		Refer to On-Resistance	-40°C to +125°C		5		Ω
		V <sub>DD</sub> = 3.3 V	25°C		±75		nA
	Source off leakage current <sup>(1)</sup>	Switch Off $V_D = 3 \text{ V / 1 V}$ $V_S = 1 \text{ V / 3 V}$ Refer to Off-Leakage Current	-40°C to +85°C	-150		150	nA
I <sub>S(OFF)</sub>			-40°C to +125°C	-175		175	nA
	Channel on leakage current	V <sub>DD</sub> = 3.3 V	25°C		±200		nA
$I_{D(ON)}$		Switch On	-40°C to +85°C	-500		500	nA
I <sub>S(ON)</sub>		$V_D = V_S = 3 \text{ V} / 1 \text{ V}$ Refer to On-Leakage Current	-40°C to +125°C	-750		750	nA
LOGIC	INPUTS						•
$V_{IH}$	Input logic high		-40°C to 125°C	1.35		5.5	V
$V_{IL}$	Input logic low		-40°C to 125°C	0		8.0	V
I <sub>IH</sub> I <sub>IL</sub>	Input leakage current		25°C	:	±0.005		μΑ
I <sub>IH</sub> I <sub>IL</sub>	Input leakage current		-40°C to +125°C			±0.05	μΑ
C <sub>IN</sub>	Logic input capacitance		25°C		1		pF
C <sub>IN</sub>	Logic input capacitance		-40°C to +125°C			2	pF
POWER	RSUPPLY						
	V supply supply	Digital lagrata 0 V as 5 5 V	25°C		0.004		μA
$I_{DD}$	V <sub>DD</sub> supply current	Digital Inputs = 0 V or 5.5 V	-40°C to +125°C			0.8	μA

<sup>(1)</sup> When  $V_S$  is 3 V,  $V_D$  is 1 V or when  $V_S$  is 1 V,  $V_D$  is 3 V.



# Electrical Characteristics ( $V_{DD}$ = 3.3 V ±10 %), GND = 0 V unless otherwise specified. (continued)

at  $T_A = 25$ °C,  $V_{DD} = 3.3$  V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
DYNAN	MIC CHARACTERISTICS		<u>'</u>				
			25°C		14		ns
t <sub>TRAN</sub>	Switching time between channels	$V_S = 2 V$ $R_L = 200 \Omega, C_L = 15 pF$	-40°C to +85°C			20	ns
		N <sub>L</sub> = 200 Ω, O <sub>L</sub> = 13 pi	-40°C to +125°C			22	ns
			25°C		8		ns
t <sub>OPEN</sub>	Break before make time	$V_S = 2 V$ $R_L = 200 \Omega, C_L = 15 pF$	-40°C to +85°C	1			ns
(BBM)		π_ = 200 Ω, Θ_ = 10 μ	-40°C to +125°C	1			ns
$Q_{\mathbb{C}}$	Charge Injection	$V_S = V_{DD}/2$ $R_S = 0 \Omega$ , $C_L = 1 nF$	25°C		-6		рС
	Off Isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz Refer to Off Isolation	25°C		-65		dB
O <sub>ISO</sub>		$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 10 MHz Refer to Off Isolation	25°C		-45		dB
V	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz Refer to Crosstalk	25°C		-65		dB
X <sub>TALK</sub>		$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 10 MHz Refer to Crosstalk	25°C		<b>–45</b>		dB
BW	Bandwidth	$R_L = 50 \Omega$ , $C_L = 5 pF$ Refer to Bandwidth	25°C		250		MHz
C <sub>SOFF</sub>	Source off capacitance	f = 1 MHz	25°C		7		pF
C <sub>SON</sub> C <sub>DON</sub>	On capacitance	f = 1 MHz	25°C		23		pF

www.ti.com SCDS399-AUGUST 2019

# 6.7 Electrical Characteristics ( $V_{DD}$ = 1.8 V ±10 %), GND = 0 V unless otherwise specified.

at  $T_A = 25$ °C,  $V_{DD} = 1.8$  V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALO	G SWITCH	<u>'</u>	'			1	
		$V_S = 0 \text{ V to } V_{DD}$	25°C		40		Ω
$R_{ON}$	On-resistance	$I_{SD} = 10 \text{ mA}$	-40°C to +85°C			80	Ω
		Refer to On-Resistance	-40°C to +125°C			80	Ω
		$V_S = 0 \text{ V to } V_{DD}$	25°C		0.4		Ω
$\Delta R_{ON}$	On-resistance matching between channels	I <sub>SD</sub> = 10 mA	-40°C to +85°C			1.5	Ω
	Gianicis	Refer to On-Resistance	-40°C to +125°C			1.5	Ω
		V <sub>DD</sub> = 1.98 V	25°C		±75		nA
I <sub>S(OFF)</sub>	(1)	Switch Off	-40°C to +85°C	-150		150	nA
	Source off leakage current <sup>(1)</sup>	$V_D = 1.8 \text{ V} / 1 \text{ V}$ $V_S = 1 \text{ V} / 1.8 \text{ V}$ Refer to Off-Leakage Current	-40°C to +125°C	-175		175	nA
I <sub>D(ON)</sub>	Channel on leakage current	V <sub>DD</sub> = 1.98 V	25°C		±200		nA
		Switch On	-40°C to +85°C	-500		500	nA
I <sub>S(ON)</sub>		$V_D = V_S = 1.62 \text{ V} / 1 \text{ V}$	-40°C to +125°C	-750		750	nA
DIGITA	LINPUTS						
V <sub>IH</sub>	Input logic high		-40°C to +125°C	1.07		5.5	V
$V_{IL}$	Input logic low		-40°C to +125°C	0		0.68	V
I <sub>IH</sub> I <sub>IL</sub>	Input leakage current		25°C		±0.005		μΑ
I <sub>IH</sub> I <sub>IL</sub>	Input leakage current		-40°C to +125°C			±0.05	μΑ
C <sub>IN</sub>	Logic input capacitance		25°C		1		pF
C <sub>IN</sub>	Logic input capacitance		-40°C to +125°C			2	pF
POWER	SUPPLY					•	
	V cumply current	Logic Inpute OV or F.T.V	25°C		0.002		μA
$I_{DD}$	V <sub>DD</sub> supply current	Logic Inputs = 0 V or 5.5 V	-40°C to +125°C			0.52	μA

<sup>(1)</sup> When  $V_S$  is 1.8 V,  $V_D$  is 1 V or when  $V_S$  is 1 V,  $V_D$  is 1.8 V.

# TEXAS INSTRUMENTS

# Electrical Characteristics ( $V_{DD}$ = 1.8 V ±10 %), GND = 0 V unless otherwise specified. (continued)

at  $T_A = 25$ °C,  $V_{DD} = 1.8$  V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT				
LOGIC	INPUTS										
		.,	25°C		24		ns				
t <sub>TRAN</sub>	Switching time between channels	$V_S = 1 V$ $R_1 = 200 \Omega, C_1 = 15 pF$	-40°C to +85°C			44	ns				
		π_ = 200 Ω, Θ_ = 10 μ	-40°C to +125°C			45	ns				
		., .,,	25°C		16		ns				
t <sub>OPEN</sub>	Break before make time	$V_S = 1 V$ $R_L = 200 \Omega, C_L = 15 pF$	-40°C to +85°C	1			ns				
(BBM)		π_ = 200 32, Θ_ = 10 βι	-40°C to +125°C	1			ns				
$Q_{\mathbb{C}}$	Charge Injection	$V_S = V_{DD}/2$ $R_S = 0 \Omega$ , $C_L = 1 nF$	25°C		-3		рС				
•	Off Isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz Refer to Off Isolation	25°C	-4			dB				
O <sub>ISO</sub>		$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 10 MHz Refer to Off Isolation	25°C		-45		dB				
V	Connectelli	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz Refer to Crosstalk	25°C		-65		dB				
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 10 MHz Refer to Crosstalk	25°C		-45		dB				
BW	Bandwidth	$R_L = 50 \Omega$ , $C_L = 5 pF$	25°C		250		MHz				
C <sub>SOFF</sub>	Source off capacitance	f = 1 MHz	25°C		7		pF				
C <sub>SON</sub> C <sub>DON</sub>	On capacitance	f = 1 MHz	25°C		23		pF				

www.ti.com SCDS399-AUGUST 2019

# 6.8 Electrical Characteristics ( $V_{DD}$ = 1.2 V ±10 %), GND = 0 V unless otherwise specified.

at  $T_A = 25^{\circ}$ C.  $V_{PR} = 1.2$  V (unless otherwise noted)


	PARAMETER	TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALO	G SWITCH		'				
			25°C		70		Ω
R <sub>ON</sub>	On-resistance	$V_S = 0 \text{ V to } V_{DD}$ $I_{DS} = 10 \text{ mA}$	-40°C to +85°C			105	Ω
		IDS = TO THA	-40°C to +125°C			105	Ω
		.,	25°C		0.4		Ω
$\Delta R_{ON}$	On-resistance matching between channels	$V_S = 0 \text{ V to } V_{DD}$ $I_{DS} = 10 \text{ mA}$	-40°C to +85°C			1.5	Ω
		102 - 10 1101	-40°C to +125°C			1.5	Ω
		$V_{DD} = 1.32 \text{ V}$	25°C		±75		nA
S(OFF)	Source off leakage current <sup>(1)</sup>	Switch Off V <sub>D</sub> = 1.2 V / 1 V	-40°C to +85°C	-150		150	nA
		$V_S = 1 \text{ V} / 1.2 \text{ V}$	-40°C to +125°C	-175		175	nA
		V <sub>DD</sub> = 1.32 V	25°C		±200		nA
I <sub>D(ON)</sub>	Channel on leakage current	Switch On	-40°C to +85°C	-500		500	nA
I <sub>S(ON)</sub>		$V_D = V_S = 1 \text{ V} / 0.8 \text{ V}$	-40°C to +125°C	-750		750	nA
DIGITA	L INPUTS						
$V_{IH}$	Input logic high		-40°C to +125°C	0.96			V
$V_{IL}$	Input logic low		-40°C to +125°C			0.36	V
I <sub>IH</sub> I <sub>IL</sub>	Input leakage current		25°C		±0.005		μΑ
I <sub>IH</sub> I <sub>IL</sub>	Input leakage current		-40°C to +125°C			±0.10	μΑ
C <sub>IN</sub>	Digital input capacitance		25°C		1		pF
C <sub>IN</sub>	Digital input capacitance		-40°C to +125°C			2	рF
POWER	SUPPLY		•				
	V gunnly gurrent	Digital Inputs = 0 V or 5.5 V	25°C		0.0015		μΑ
I <sub>DD</sub>	V <sub>DD</sub> supply current	Digital inputs = 0 v of 5.5 v	-40°C to +125°C			0.45	μΑ
DYNAN	IIC CHARACTERISTICS	<b>.</b>					
		$V_{IN} = V_{DD}$	25°C		40		ns
t <sub>TRAN</sub>	Switching time between channels	V <sub>S</sub> = 1 V	-40°C to +85°C			175	ns
		$R_L = 200 \Omega, C_L = 15 pF$	-40°C to +125°C			175	ns
<b>+</b>		V <sub>S</sub> = 1 V	25°C		27		ns
t <sub>open</sub> (BBM)	Break before make time	$R_L = 200 \Omega, C_L = 15 pF$	-40°C to +85°C	1			ns
		·	-40°C to +125°C	1			ns
Q <sub>C</sub>	Charge Injection	$V_S = (V_{DD} + V_{SS})/2$ $R_S = 0 \Omega, C_L = 1 \text{ nF}$	25°C		±5		рC
0	Off Isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz	25°C		-64		dB
O <sub>ISO</sub>	On isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 10 MHz	25°C		-44		dB
	0	$R_L = 50 \Omega$ , $C_L = 5 pF$ f = 1 MHz	25°C		-64		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega, C_L = 5 pF$ f = 10 MHz	25°C		-44		dB
BW	Bandwidth	$R_L = 50 \Omega, C_L = 5 pF$	25°C		250		MHz
C <sub>SOFF</sub>	Source off capacitance	f = 1 MHz	25°C		7		pF
C <sub>SON</sub> C <sub>DON</sub>	On capacitance	f = 1 MHz	25°C		23		pF

<sup>(1)</sup> When  $V_S$  is 1 V,  $V_D$  is 1.2 V or when  $V_S$  is 1.2 V,  $V_D$  is 1 V.

## TEXAS INSTRUMENTS

### 6.9 Typical Characteristics

at  $T_A = 25$ °C,  $V_{DD} = 5$  V (unless otherwise noted)

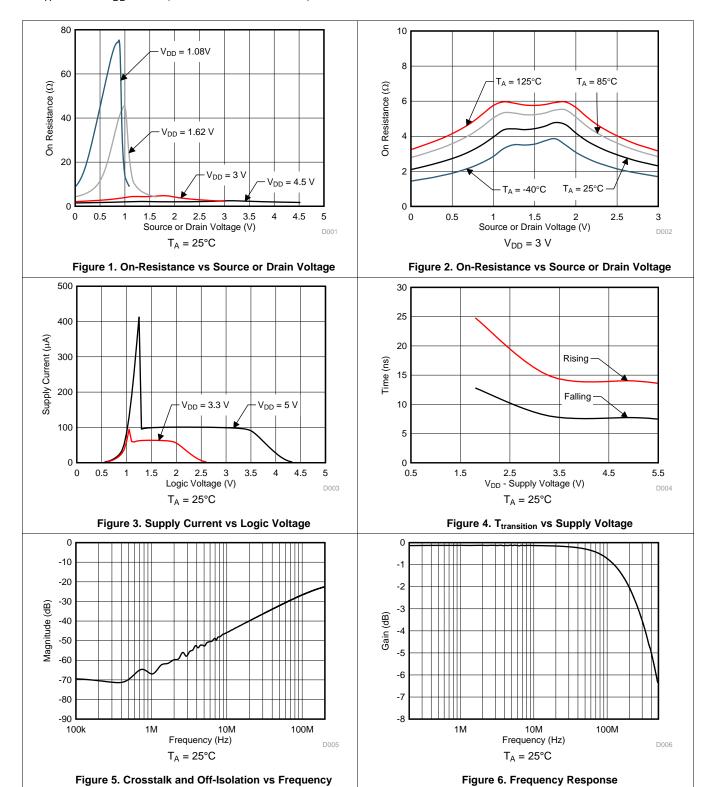



### 7 Parameter Measurement Information

#### 7.1 On-Resistance

The on-resistance of a device is the ohmic resistance between the source (Sx) and drain (D) pins of the device. The on-resistance varies with input voltage and supply voltage. The symbol  $R_{ON}$  is used to denote on-resistance. The measurement setup used to measure  $R_{ON}$  is shown in Figure 7. Voltage (V) and current ( $I_{SD}$ ) are measured using this setup, and  $R_{ON}$  is computed with  $R_{ON} = V / I_{SD}$ :

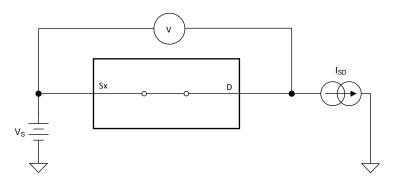


Figure 7. On-Resistance Measurement Setup

## 7.2 Off-Leakage Current

Source leakage current is defined as the leakage current flowing into or out of the source pin when the switch is off. This current is denoted by the symbol  $I_{S(OFF)}$ .

The setup used to measure off-leakage current is shown in Figure 8.

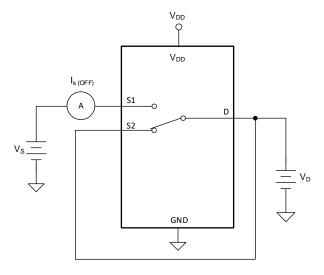


Figure 8. Off-Leakage Measurement Setup

SCDS399 – AUGUST 2019 www.ti.com

# TEXAS INSTRUMENTS

#### 7.3 On-Leakage Current

Source on-leakage current is defined as the leakage current flowing into or out of the source pin when the switch is on. This current is denoted by the symbol  $I_{S(ON)}$ .

Drain on-leakage current is defined as the leakage current flowing into or out of the drain pin when the switch is on. This current is denoted by the symbol  $I_{D(ON)}$ .

Either the source pin or drain pin is left floating during the measurement. Figure 9 shows the circuit used for measuring the on-leakage current, denoted by  $I_{S(ON)}$  or  $I_{D(ON)}$ .

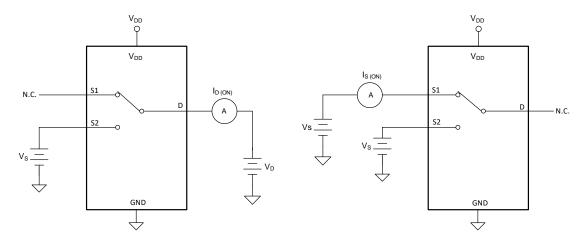


Figure 9. On-Leakage Measurement Setup

#### 7.4 Transition Time

Transition time is defined as the time taken by the output of the device to rise or fall 10% after the logic control signal has risen or fallen past the logic threshold. The 10% transition measurement is utilized to provide the timing of the device. System level timing can then account for the time constant added from the load resistance and load capacitance. Figure 10 shows the setup used to measure transition time, denoted by the symbol  $t_{\text{TRANSITION}}$ .

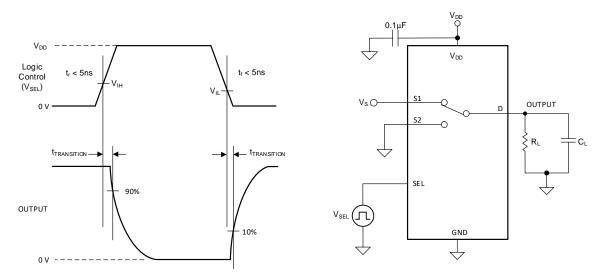


Figure 10. Transition-Time Measurement Setup



www.ti.com

#### 7.5 Break-Before-Make

Break-before-make delay is a safety feature that prevents two inputs from connecting when the device is switching. The output first breaks from the on-state switch before making the connection with the next on-state switch. The time delay between the *break* and the *make* is known as break-before-make delay. Figure 11 shows the setup used to measure break-before-make delay, denoted by the symbol t<sub>OPEN(BBM)</sub>.

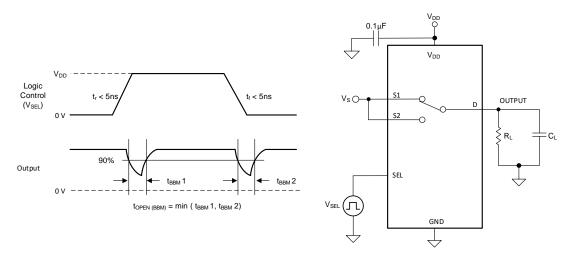


Figure 11. Break-Before-Make Delay Measurement Setup

### 7.6 Charge Injection

The TMUX1247 has a transmission-gate topology. Any mismatch in capacitance between the NMOS and PMOS transistors results in a charge injected into the drain or source during the falling or rising edge of the gate signal. The amount of charge injected into the source or drain of the device is known as charge injection, and is denoted by the symbol Q<sub>C</sub>. Figure 12 shows the setup used to measure charge injection from Drain (D) to Source (Sx).

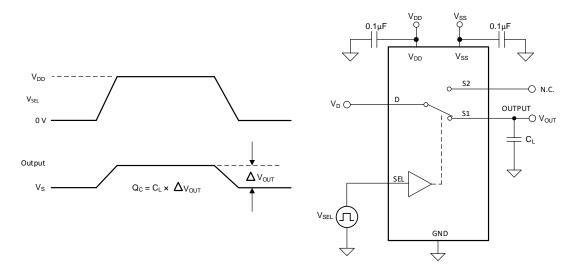


Figure 12. Charge-Injection Measurement Setup

# TEXAS INSTRUMENTS

#### 7.7 Off Isolation

Off isolation is defined as the ratio of the signal at the drain pin (D) of the device when a signal is applied to the source pin (Sx) of an off-channel. Figure 13 shows the setup used to measure, and the equation used to calculate off isolation.

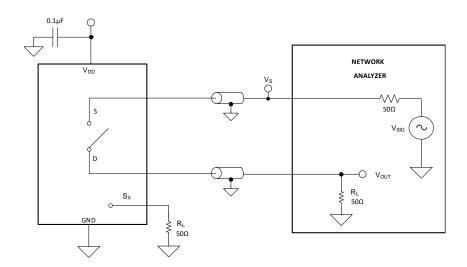


Figure 13. Off Isolation Measurement Setup

Off Isolation = 
$$20 \cdot \text{Log}\left(\frac{V_{\text{OUT}}}{V_{\text{S}}}\right)$$
 (1)

### 7.8 Crosstalk

Crosstalk is defined as the ratio of the signal at the drain pin (D) of a different channel, when a signal is applied at the source pin (Sx) of an on-channel. Figure 14 shows the setup used to measure, and the equation used to calculate crosstalk.

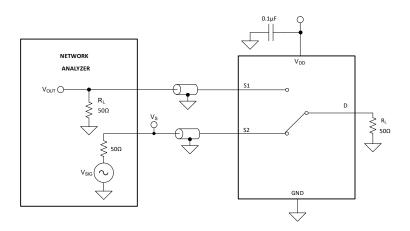


Figure 14. Crosstalk Measurement Setup

Channel-to-Channel Crosstalk = 
$$20 \cdot Log\left(\frac{V_{OUT}}{V_{S}}\right)$$
 (2)

Submit Documentation Feedback



#### 7.9 Bandwidth

www.ti.com

Bandwidth is defined as the range of frequencies that are attenuated by less than 3 dB when the input is applied to the source pin (Sx) of an on-channel, and the output is measured at the drain pin (D) of the device. Figure 15 shows the setup used to measure bandwidth.

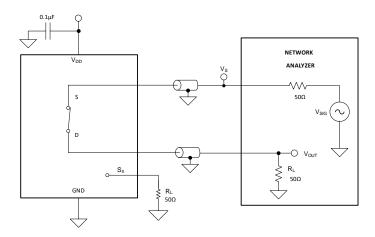


Figure 15. Bandwidth Measurement Setup

# TEXAS INSTRUMENTS

#### 8 Detailed Description

#### 8.1 Overview

The TMUX1247 is an 2:1 (SPDT), 1-channel switch where the input is controlled with a single select (SEL) control pin.

#### 8.2 Functional Block Diagram




Figure 16. TMUX1247 Functional Block Diagram

#### 8.3 Feature Description

#### 8.3.1 Bidirectional Operation

The TMUX1247 conducts equally well from source (Sx) to drain (D) or from drain (D) to source (Sx). The device has very similar characteristics in both directions and supports both analog and digital signals.

#### 8.3.2 Rail to Rail Operation

The valid signal path input/output voltage for TMUX1247 ranges from GND to V<sub>DD</sub>.

#### 8.3.3 1.8 V Logic Compatible Inputs

The TMUX1247 has 1.8-V logic compatible control for the logic control input (SEL). The logic input threshold scales with supply but still provides 1.8-V logic control when operating at 5.5 V supply voltage. 1.8-V logic level inputs allow the TMUX1247 to interface with processors that have lower logic I/O rails and eliminates the need for an external translator, which saves both space and BOM cost. For more information on 1.8 V logic implementations refer to Simplifying Design with 1.8 V logic Muxes and Switches

#### 8.3.4 Fail-Safe Logic

The TMUX1247 supports Fail-Safe Logic on the control input pin (SEL) allowing for operation up to 5.5 V, regardless of the state of the supply pin. This feature allows voltages on the control pin to be applied before the supply pin, protecting the device from potential damage. Fail-Safe Logic minimizes system complexity by removing the need for power supply sequencing on the logic control pins. For example, the Fail-Safe Logic feature allows the select pin of the TMUX1247 to be ramped to 5.5 V while  $V_{DD} = 0$  V. Additionally, the feature enables operation of the TMUX1247 with  $V_{DD} = 1.2$  V while allowing the select pin to interface with a logic level of another device up to 5.5 V.



www.ti.com

#### 8.4 Device Functional Modes

The select (SEL) pin of the TMUX1247 controls which switch is connected to the drain of the device. When a given input is not selected, that source pin is in high impedance mode (HI-Z). The control pins can be as high as 5.5 V.

The TMUX1247 can be operated without any external components except for the supply decoupling capacitors. Unused logic control pins should be tied to GND or  $V_{DD}$  in order to ensure the device does not consume additional current as highlighted in *Implications of Slow or Floating CMOS Inputs*. Unused signal path inputs (Sx or D) should be connected to GND.

#### 8.5 Truth Tables

Table 1. TMUX1247 Truth Table

CONTROL LOGIC (SEL)	Selected Source (Sx) Connected To Drain (D) Pin
0	S1
1	S2

SCDS399 – AUGUST 2019 www.ti.com



#### 9 Application and Implementation

#### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TMUX12xx family offers good system performance across a wide operating supply (1.08V to 5.5V). These devices include 1.8V logic compatible control input pins that enable operation in systems with 1.8V I/O rails. Additionally, the control input pin supports Fail-Safe Logic which allows for operation up to 5.5V, regardless of the state of the supply pin. This protection stops the logic pins from back-powering the supply rail. These features of the TMUX12xx, a family of general purpose multiplexers and switches, reduce system complexity, board size, and overall system cost.

#### 9.2 Typical Application

#### 9.2.1 Input Control for Power Amplifier

One application of the TMUX1247 is for input control of a power amplifier. Utilizing a switch allows a system to control when the DAC is connected to the power amplifier, and can stop biasing the power amplifier by switching the gate to GND. Figure 17 shows the TMUX1247 configured for control of the power amplifier.

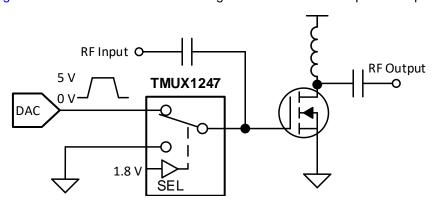


Figure 17. Input Control of Power Amplifier

Submit Documentation Feedback



## **Typical Application (continued)**

#### 9.2.1.1 Design Requirements

This design example uses the parameters listed in Table 3.

**Table 2. Design Parameters** 


PARAMETERS	VALUES			
Supply (V <sub>DD</sub> )	5 V			
Mux I/O signal range	0 V to V <sub>DD</sub> (Rail to Rail)			
Control logic thresholds	1.8 V compatible (up to 5.5V)			

#### 9.2.1.2 Detailed Design Procedure

The application shown in Figure 17 demonstrates how to toggle between the DAC output and GND for control of a power amplifier using a single control input. The DAC output is utilized to bias the gate of the power amplifier and can be disconnected from the circuit using the select pin of the switch. The TMUX1247 can support 1.8-V logic signals on the control input, allowing the device to interface with low logic controls of an FPGA or MCU. The TMUX1247 can be operated without any external components except for the supply decoupling capacitors. The select pin is recommended to have a weak pull-down or pull-up resistor to ensure the input is in a known state. All inputs to the switch must fall within the recommend operating conditions of the TMUX1247 including signal range and continuous current. For this design with a supply of 5 V the signal range can be 0 V to 5 V and the max continuous current can be 30 mA.

#### 9.2.1.3 Application Curve

A key parameter for this application is the transition time of the device. Faster transition time allows the system to toggle between input sources at a faster rate and allows the output to settle to the final value. The TMUX1247 has a transition time that varies with supply voltage and is shown in Figure 18

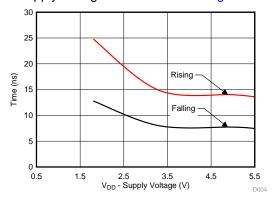

 $T_A = 25^{\circ}C$ 

Figure 18. T<sub>transition</sub> vs Supply Voltage

SCDS399 – AUGUST 2019 www.ti.com

# TEXAS INSTRUMENTS

### 9.2.2 Switchable Operational Amplifier Gain Setting

Another example application of the TMUX1247 is to change an Op Amp from unity gain setting to an inverting amplifier configuration. Utilizing a switch allows a system to have a configurable gain and allows the same architecture to be utilized across the board for various inputs to the system. Figure 19 shows the TMUX1247 configured for gain setting application.

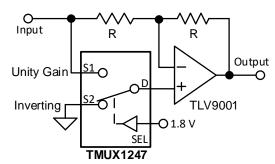


Figure 19. Switchable Op Amp Gain Setting

#### 9.2.2.1 Design Requirements

This design example uses the parameters listed in Table 3.

**Table 3. Design Parameters** 

PARAMETERS	VALUES
Input Signal	0 V to 2.75 V
Mux Supply (V <sub>DD</sub> )	2.75 V
Op Amp Supply (V <sub>+</sub> / V <sub>-</sub> )	±2.75 V
Mux I/O signal range	0 V to V <sub>DD</sub> (Rail to Rail)
Control logic thresholds	1.8 V compatible (up to 5.5V)


www.ti.com

#### 9.2.2.2 Detailed Design Procedure

The application shown in Figure 19 demonstrates how to use a single control input and toggle between gain settings of -1 and +1. If switching between inverting and unity gain is not required, the TMUX1247 can be utilized in the feedback path to select different feedback resistors and provide scalable gain settings for configurable signal conditioning.

The TMUX1247 can be operated without any external components except for the supply decoupling capacitors. The select pin is recommended to have a weak pull-down or pull-up resistor to ensure the input is in a known state. All inputs to the switch must fall within the recommend operating conditions of the TMUX1247 including signal range and continuous current. For this design with a supply of 2.75 V the signal range can be 0 V to 2.75 V and the max continuous current can be 30 mA.

#### 9.2.2.3 Application Curve

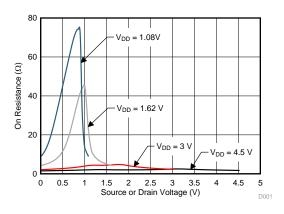

 $T_A = 25^{\circ}C$ 

Figure 20. On-Resistance vs Source or Drain Voltage

## 10 Power Supply Recommendations

The TMUX1247 operates across a wide supply range of 1.08 V to 5.5 V. Do not exceed the absolute maximum ratings because stresses beyond the listed ratings can cause permanent damage to the devices.

Power-supply bypassing improves noise margin and prevents switching noise propagation from the  $V_{DD}$  supply to other components. Good power-supply decoupling is important to achieve optimum performance. For improved supply noise immunity, use a supply decoupling capacitor ranging from 0.1  $\mu F$  to 10  $\mu F$  from  $V_{DD}$  to ground. Place the bypass capacitors as close to the power supply pins of the device as possible using low-impedance connections. TI recommends using multi-layer ceramic chip capacitors (MLCCs) that offer low equivalent series resistance (ESR) and inductance (ESL) characteristics for power-supply decoupling purposes. For very sensitive systems, or for systems in harsh noise environments, avoiding the use of vias for connecting the capacitors to the device pins may offer superior noise immunity. The use of multiple vias in parallel lowers the overall inductance and is beneficial for connections to ground planes.

SCDS399 – AUGUST 2019 www.ti.com



## 11 Layout

#### 11.1 Layout Guidelines

#### 11.1.1 Layout Information

When a PCB trace turns a corner at a 90° angle, a reflection can occur. A reflection occurs primarily because of the change of width of the trace. At the apex of the turn, the trace width increases to 1.414 times the width. This increase upsets the transmission-line characteristics, especially the distributed capacitance and self–inductance of the trace which results in the reflection. Not all PCB traces can be straight and therefore some traces must turn corners. Figure 21 shows progressively better techniques of rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.

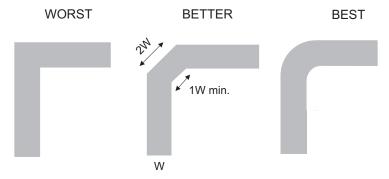


Figure 21. Trace Example

Route high-speed signals using a minimum of vias and corners which reduces signal reflections and impedance changes. When a via must be used, increase the clearance size around it to minimize its capacitance. Each via introduces discontinuities in the signal's transmission line and increases the chance of picking up interference from the other layers of the board. Be careful when designing test points, throughhole pins are not recommended at high frequencies.

Figure 22 illustrates an example of a PCB layout with the TMUX1247. Some key considerations are:

- Decouple the V<sub>DD</sub> pin with a 0.1-µF capacitor, placed as close to the pin as possible. Make sure that the
  capacitor voltage rating is sufficient for the V<sub>DD</sub> supply.
- Keep the input lines as short as possible.
- Use a solid ground plane to help reduce electromagnetic interference (EMI) noise pickup.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when necessary.

#### 11.2 Layout Example

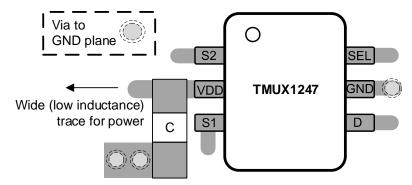


Figure 22. TMUX1247 Layout Example



www.ti.com

# 12 Device and Documentation Support

#### 12.1 Documentation Support

#### 12.1.1 Related Documentation

Texas Instruments, Improve Stability Issues with Low CON Multiplexers.

Texas Instruments, Simplifying Design with 1.8 V logic Muxes and Switches.

Texas Instruments, Eliminate Power Sequencing with Powered-off Protection Signal Switches.

Texas Instruments, System-Level Protection for High-Voltage Analog Multiplexers.

#### 12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 12.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

#### 12.4 Trademarks

E2E is a trademark of Texas Instruments.

#### 12.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 12.6 Glossary

SLYZ022 — TI Glossarv.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 18-Oct-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
TMUX1247DCKR	Active	Production	SC70 (DCK)   6	3000   LARGE T&R	Yes	NIPDAU   SN	Level-1-260C-UNLIM	-40 to 125	247
TMUX1247DCKR.A	Active	Production	SC70 (DCK)   6	3000   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	247
TMUX1247DCKRG4	Active	Production	SC70 (DCK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	247
TMUX1247DCKRG4.A	Active	Production	SC70 (DCK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	247

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents Tl's knowledge and belief as of the date that it is provided. Tl bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. Tl has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. Tl and Tl suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 6-Nov-2025

### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TMUX1247DCKR	SC70	DCK	6	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3
TMUX1247DCKR	SC70	DCK	6	3000	180.0	8.4	2.3	2.5	1.2	4.0	8.0	Q3
TMUX1247DCKRG4	SC70	DCK	6	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3

www.ti.com 6-Nov-2025



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TMUX1247DCKR	SC70	DCK	6	3000	180.0	180.0	18.0
TMUX1247DCKR	SC70	DCK	6	3000	210.0	185.0	35.0
TMUX1247DCKRG4	SC70	DCK	6	3000	180.0	180.0	18.0



SMALL OUTLINE TRANSISTOR



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.

  4. Falls within JEDEC MO-203 variation AB.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025