





TPS3762 SNVSCM8A - OCTOBER 2023 - REVISED DECEMBER 2023

TPS3762 65 V Window (OV & UV) Supervisor with Built-In Self-Test and Latch

1 Features

- SIL-3 Functional Safety-compliant product targeted
 - Documentation to aid IEC 61508 system design
 - Systematic capability up to SIL-3 targeted
 - Hardware capability up to SIL-3 targeted
- Device flexibility to meet design requirements
 - Wide voltage threshold range: 2.7 V to 60 V
 - 800mV option use with external resistor divider to set threshold
 - Built-in hysteresis (2 %, 5 %, and 10 % options)
 - Fixed and programmable reset time delay
 - Fixed and programmable detection delay
- Monitor high voltage power rails
 - Wide input voltage range: 2.7 V to 65 V
 - Reverse polarity protection on sense pin -65 V
 - No external components required to power off of high voltage rail
- Fast UV/OV protection in 12/24/48 V systems
 - Output reset latching feature
 - Ultra-fast detection time delay option(<5 µs)
 - **Built-In Self-Test**

2 Applications

- Single & Multiaxis Servo Drive
- Industrial & Collaborative Robot
- **Avionics**
- PLC, DCS & PAC

3 Description

The TPS3762 is a 65 V input voltage supervisor with 4 μA I_{DD}, 0.9% accuracy, fast detection time, and a Built-In Self-Test feature. This device can be connected directly to 12 V / 24 V industrial SELV power rails for continuous monitoring of overvoltage (OV) and undervoltage (UV) conditions; with its internal resistor divider, TPS3762 offers the smallest total solution size. Wide hysteresis voltage options are available to ignore large voltage transients. Builtin hysteresis on the SENSE pin prevents false reset signals when monitoring a supply voltage rail.

The separate VDD and SENSE pins allow redundancy sought by high-reliability systems and SENSE can monitor higher and lower voltages than VDD. Optional use of external resistors are supported by the high impedance input of the SENSE pin. CTS and CTR pins allow delay adjustability on the falling and rising edges of the RESET signal. The CTS functions as a debouncer by ignoring voltage glitches on the monitored voltage rails.

The TPS3762 is available in a 2.9 mm × 1.6 mm SOT23 8-pin package. TPS3762 operates over -40°C to +150°C T_△.

Device Information

PART NUMBER	PACKAGE (1)	BODY SIZE (NOM)	
TPS3762	SOT-23 (8) (DDF)	2.9 mm x 1.6 mm	

(1)For package details, see the mechanical drawing addendum at the end of the data sheet.

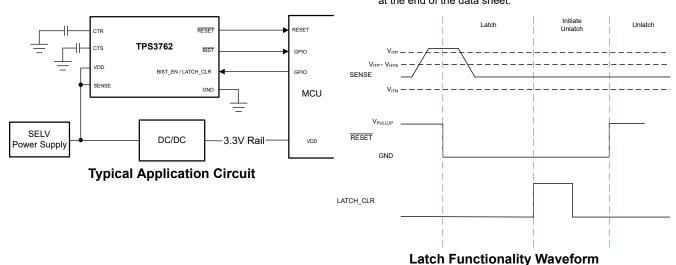





Table of Contents

1 Features	1	7.3 Feature Description	15
2 Applications		7.4 Device Functional Modes	
3 Description		8 Application and Implementation	27
4 Device Comparison		8.1 Application Information	
5 Pin Configuration and Functions	4	8.2 Adjustable Voltage Thresholds	27
6 Specifications		8.3 Typical Application	28
6.1 Specifications		8.4 Power Supply Recommendations	
6.2 Absolute Maximum Ratings		8.5 Layout	
6.3 Recommended Operating Conditions	5	9 Device and Documentation Support	
6.4 Thermal Information	5	9.1 Device Nomenclature	34
6.5 Electrical Characteristics	6	9.2 Receiving Notification of Documentation Updates.	34
6.6 Switching Requirements	8	9.3 Support Resources	34
6.7 Timing Requirements	9	9.4 Trademarks	34
6.8 Timing Diagrams		9.5 Electrostatic Discharge Caution	
6.9 Typical Characteristic		9.6 Glossary	
7 Detailed Description		10 Revision History	
7.1 Overview		11 Mechanical, Packaging, and Orderable	
7.2 Functional Block Diagram		Information	34
ŭ			



4 Device Comparison

Device Decoder shows some of the device naming nomenclature of the TPS3762. Not all device namings will follow this nomenclature table. For a detailed breakdown of every device part number by threshold voltage options, BIST configurations, Latch configurations, CTR options, CTS options, and UVbypass, see Section 9.1 for more details. Contact TI sales representatives or on TI's E2E forum for detail and availability of other options.

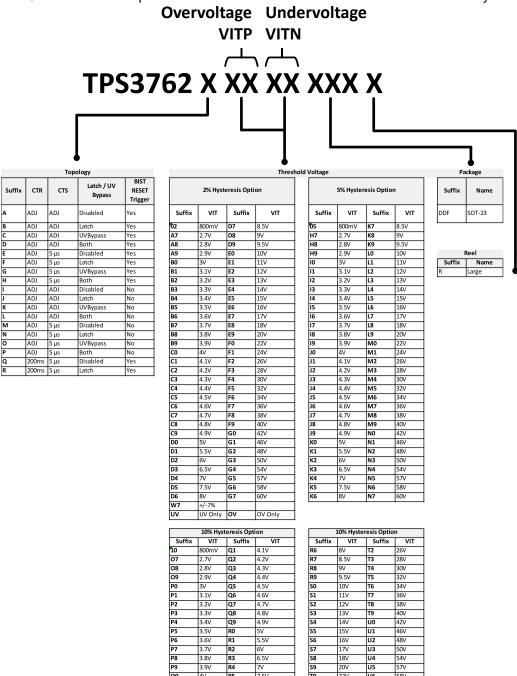

- Suffix 02, 05, and 10 with VIT of 800mV corresponds to the adjustable variant, do not have internal voltage divider
- 2. Not all TPS3762 devices can be decoded by this table. Refer to Section 9.1 for a decoding table by part number.

Copyright © 2023 Texas Instruments Incorporated

Submit Document Feedback



5 Pin Configuration and Functions




Figure 5-1. DDF Package, 8-Pin SOT-23, TPS3762 (Top View)

Table 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.	"/0	DESCRIPTION
VDD	1	I	Input Supply Voltage: Supply voltage pin. For noisy systems, bypass with a 0.1 μF capacitor to GND.
SENSE	2	I	Sense Voltage: Connect this pin to the supply rail that must be monitored. See SENSE for more details. Sensing Topology: Overvoltage (OV), Undervoltage (UV), or Window (OV + UV)
GND	3	-	Ground. Ground pin. All GND pins must be electrically connected to the board ground.
RESET	4	0	Output Reset Signal: RESET asserts when SENSE crosses the voltage threshold after the sense time delay, set by CTS and remains asserted for the reset time delay period after SENSE transitions out of a fault condition. For latch variants RESET remains asserted until the latch is cleared. The active low open-drain reset output requires an external pullup resistor. See Section 7.3.3 for more details. Output topology: Open-Drain Active-Low
BIST	5	0	Built-In Self-Test: BIST asserts when a logic high input occurs on the BIST_EN / LATCH_CLR or BIST_EN pin, this initiates the internal BIST testing. BIST recovers after t _{BIST} to signify BIST completed successfully. BIST will remain asserted for a time period longer than t _{BIST} if there is a failure during BIST. BIST active-low open-drain output requires an external pullup resistor. See Section 7.3.6 for more details.
BIST_EN / LATCH_CLR	6	I	Built-In Self-Test Enable and Latch Clear: A logic high input must occur on the BIST_EN / LATCH_CLR to initate BIST and clear a latched OV/UV fault. See Section 7.3.6 and Section 7.3.3.3 for more details.
CTR	7	0	RESET Time Delay: User-programmable reset time delay for RESET. Connect an external capacitor for adjustable time delay or leave the pin floating for the shortest delay. See Section 7.3.4 for more details.
стѕ	8	О	SENSE Time Delay: User-programmable sense time delay for SENSE. Connect an external capacitor for adjustable time delay or leave the pin floating for the shortest delay. See Section 7.3.5 for more details.

6 Specifications

6.1 Specifications

6.2 Absolute Maximum Ratings

over operating free-air temperature range, unless otherwise noted (1)

		MIN	MAX	UNIT
Voltage	V _{DD} , V _{SENSE(Adjustable)} , V _{RESET}	-0.3	70	V
Voltage	V _{SENSE(Fixed)}	-65	70	V
Voltage	V _{CTS} , V _{CTR}	-0.3	6	V
Voltage	V _{BIST} , V _{BIST_EN} , V _{BIST_EN/LATCH_CLR}	-0.3	6	V
Current	I _{RESET} , I _{BIST}		10	mA
Temperature (2)	Operating junction temperature, T _J	-40	150	°C
Temperature (2)	Operating Ambient temperature, T _A	-40	150	°C
Temperature (2)	Storage, T _{stg}	-65	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
Voltage	V_{DD}	2.7	65	V
Voltage	V _{SENSE} , V _{RESET}	0	65	V
Voltage	V _{CTS} , V _{CTR}	0	5.5	V
Voltage	V _{BIST} , V _{BIST_EN} , V _{BIST_EN/LATCH_CLR}	0	5.5	V
Current	I _{RESET} , I _{BIST}	0	5	mA
T _J ⁽¹⁾	Junction temperature (free air temperature)	-40	125	°C

As a result of the low dissipated power in this device, it is assumed that $T_J = T_A$.

6.4 Thermal Information

Copyright © 2023 Texas Instruments Incorporated

		TPS3762	
	THERMAL METRIC (1)	DDF	UNIT
		8-PIN	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	154.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	77.4	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	73.2	°C/W
Ψιτ	Junction-to-top characterization parameter	4.8	°C/W
ΨЈВ	Junction-to-board characterization parameter	72.9	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

⁽²⁾ As a result of the low dissipated power in this device, it is assumed that $T_J = T_A$.



6.5 Electrical Characteristics

At $V_{DD(MIN)} \le V_{DD} \le V_{DD~(MAX)}$, CTR = CTS = open, output \overline{RESET} pull-up resistor R_{PU} = 10 k Ω , voltage V_{PU} = 5.5 V, output \overline{BIST} pull-up resistor R_{PU} = 10 k Ω , voltage V_{PU} = 5.5 V, and load C_{LOAD} = 10 pF. The operating free-air temperature range T_A = -40°C to 125°C, unless otherwise noted. Typical values are at T_A = 25°C and V_{DD} = 12 V and V_{IT} = 6.5 V (V_{IT} refers to V_{ITN} or V_{ITP}).

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
POWER SUP	PLY					
V _{DD}	Supply Voltage		2.7		65	V
UVLO (1)	Undervoltage Lockout	V _{DD} rising above V _{DD (MIN)}			2.6	V
UVLO(HYS)	Undervoltage Lockout Hysteresis	V _{DD} falling below V _{DD (MIN)}		500		mV
V _{POR(RESET)}	Power on Reset Voltage ⁽²⁾ RESET, Active Low (Open-Drain)	V _{OL(MAX)} = 300 mV I _{OUT (Sink)} = 15 μA			1.4	V
V _{POR(BIST)}	Power on Reset Voltage (2) BIST, Active Low (Open-Drain)	V _{OL(MAX)} = 300 mV I _{OUT (Sink)} = 15 μA			1.4	V
I _{DD}	Supply current into V _{DD} pin	$V_{IT} = 800 \text{ mV}$ $V_{DD \text{ (MIN)}} \le V_{DD} \le V_{DD \text{ (MAX)}}$		4	8.1	μΑ
SENSE (Inpu	t)					
I _{SENSE}	Input current	V _{IT} = 800 mV			200	nA
V _{ITN}	Input Threshold Negative (Undervoltage)	V _{IT} = 800 mV ⁽³⁾	-0.9		0.9	%
V _{ITP}	Input Threshold Positive (Overvoltage)	V _{IT} = 800 mV ⁽³⁾	-0.9		0.9	%
V _{HYS}	Hysteresis Accuracy (4)	V _{IT} = 0.8 V V _{HYS} Range = 2%	1.5	2	2.5	%
RESET (Outp	out)					
I _{lkg(OD)}	Open-Drain leakage	V _{RESET} = 5.5 V V _{ITN} < V _{SENSE} < V _{ITP}			300	nA
I _{lkg(OD)}	Open-Drain leakage	V _{RESET} = 65 V V _{ITN} < V _{SENSE} < V _{ITP}			300	nA
V _{OL} ⁽⁵⁾	Low level output voltage	2.7 V ≤ VDD ≤ 65 V I _{RESET} = 2.7 mA			350	mV

Copyright © 2023 Texas Instruments Incorporated Product Folder Links: *TPS3762*

6.5 Electrical Characteristics (continued)

At $V_{DD(MIN)} \le V_{DD} \le V_{DD~(MAX)}$, CTR = CTS = open, output \overline{RESET} pull-up resistor R_{PU} = 10 k Ω , voltage V_{PU} = 5.5 V, output \overline{BIST} pull-up resistor R_{PU} = \overline{BIST} = 10 k Ω , voltage V_{PU} \overline{BIST} = 5.5 V, and load C_{LOAD} = 10 pF. The operating free-air temperature range T_A = $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at T_A = $25^{\circ}C$ and V_{DD} = 12 V and V_{IT} = 6.5 V (V_{IT} refers to V_{ITN} or V_{ITP}).

refers to V _{ITN} or V _{ITP}).							
	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Capacitor Ti	ming (CTS, CTR)						
R _{CTR}	Internal resistance (CTR)		3.2	4	4.8	МΩ	
R _{CTS}	Internal resistance (CTS)		3.2	4	4.8	МΩ	
Built-in Self-	test						
I _{lkg(BIST)}	Open-Drain leakage	V _{BIST} = 5.5 V V _{ITN} < V _{SENSE} < V _{ITP}			300	nA	
$I_{lkg(\overline{BIST})}$	Open-Drain leakage	$V_{BIST} = 3.3 \text{ V}$ $V_{ITN} < V_{SENSE} < V_{ITP}$			300	nA	
$V_{\overline{BIST}_OL}$	Low level output voltage	2.7 V ≤ VDD ≤ 65 V I _{BIST} = 5 mA			300	mV	
V _{BIST_EN}	BIST_EN pin logic low input				500	mV	
V _{BIST_EN}	BIST_EN pin logic high input		1300			mV	
V _{BIST_EN/}	LATCH_CLR pin logic low input				500	mV	
V _{BIST_EN/}	LATCH_CLR pin logic high input		1300			mV	

- (1) When V_{DD} voltage falls below UVLO, \overline{RESET} is asserted. V_{DD} slew rate \leq 100 mV / μs
- (2) V_{POR} is the minimum V_{DD} voltage for a controlled output state. Below V_{POR}, the output cannot be determined. V_{DD} slew rate ≤ 100mV/μs
- (3) For adjustable voltage guidelines and resistor selection refer to Adjustable Voltage Thresholds in Application and Implementation section
- (4) Hysteresis is with respect to V_{ITP} and V_{ITN} voltage threshold. V_{ITP} has negative hysteresis and V_{ITN} has positive hysteresis.
- (5) For V_{OH} and V_{OL} relation to output variants refer to Timing Figures after the Timing Requirement Table

Copyright © 2023 Texas Instruments Incorporated

Submit Document Feedback

6.6 Switching Requirements

At $V_{DD(MIN)} \le V_{DD} \le V_{DD}$ (MAX), CTR = CTS = open and enabled, output \overline{RESET} pull-up resistor R_{PU} = 10 k Ω , voltage V_{PU} = 5.5 V, output \overline{BIST} pull-up resistor R_{PU} = \overline{BIST} = 10 k Ω , voltage V_{PU} = \overline{BIST} = 5.5 V, and load C_{LOAD} = 10 pF. The operating free-air temperature range T_A = $-40^{\circ}C$ to 125 $^{\circ}C$, unless otherwise noted. Typical values are at T_A = 25 $^{\circ}C$ and V_{DD} = 12 V and V_{IT} = 6.5 V (V_{IT} refers to V_{ITN} or V_{ITP}).

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Common Sv	vitching Requirements				•	
t _{CTR(No Cap)}	RESET release time delay (CTR) ⁽¹⁾	VIT = 800 mV C _{CTR} = Open 20% Overdrive from Hysteresis		350	600	μs
t _{CTS(No Cap)}	Sense detect time delay (CTS) ⁽²⁾	VIT = 800 mV C _{CTS} = Open 20% Overdrive from V _{IT}		85	100	μs
t _{SD}	Startup Delay (3)	C _{CTR} = Open		1		ms
BIST Switch	ing Requirements					
t _{BIST_en_pd}	Rising edge of BIST_EN to BIST asserting			2.3		μs
t _{BIST_en_pd}	Rising edge of BIST_EN to RESET asserting			2.3		μs
t _{BIST_recover}	Rising edge of BIST to SENSE input valid	C _{CTR} = Open, BIST = Enabled		350	600	μs
t _{BIST}	BIST run time				3.5	ms
t _{SD+BIST}	Startup time with BIST run time				4.5	ms
LATCH Swit	ching Requirements					
t _{BIST_EN/} LATCH_CLR_R ecover	Rising edge of BIST to SENSE input valid	C _{CTR} = Open, BIST = Disabled		10		μs

(1) CTR Reset detect time delay:

Overvoltage active-low output is measure from $V_{ITP\,-\,HYS}$ to V_{OH} Undervoltage active-low output is measure from $V_{ITN\,+\,HYS}$ to V_{OH}

(2) CTS Sense detect time delay:

Overvoltage active-low output is measure from V_{ITP} to V_{OL} Undervoltage active-low output is measure from V_{ITN} to V_{OL}

(3) During the power-on sequence, V_{DD} must be at or above V_{DD (MIN)} for at least t_{SD+BIST} + t_{CTR} before the output is in the correct state based on V_{SENSE}.

 t_{SD} time includes the propagation delay (C_{CTR} = Open). Capacitor on CTR will add time to t_{SD}

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated




6.7 Timing Requirements

At $V_{DD(MIN)} \le V_{DD} \le V_{DD\ (MAX)}$, CTR = CTS = open and enabled, output \overline{RESET} pull-up resistor R_{PU} = 10 k Ω , voltage V_{PU} = 5.5 V, output \overline{BIST} pull-up resistor $R_{PU\ \overline{BIST}}$ = 10 k Ω , voltage $V_{PU\ \overline{BIST}}$ = 5.5 V, and load C_{LOAD} = 10 pF. The operating free-air temperature range T_A = $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at T_A = 25°C and V_{DD} = 12 V and V_{IT} = 6.5 V (V_{IT} refers to V_{ITN} or V_{ITP}).

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Common tin	ning parameters				•	
BIST timing	parameters					
t _{BIST_en Glitch}	BIST_EN Glitch immunity			1.1		μs
t _{BIST_en}	Minimum BIST_EN input width to initate BIST			1.2	8	μs
LATCH timir	ng parameters					
t _{BIST_EN/} LATCH_CLR Glitch	Latch Glitch immunity			1.5		μs
t _{BIST_EN/}	Latch input width to clear latch			1.6		μs




6.8 Timing Diagrams

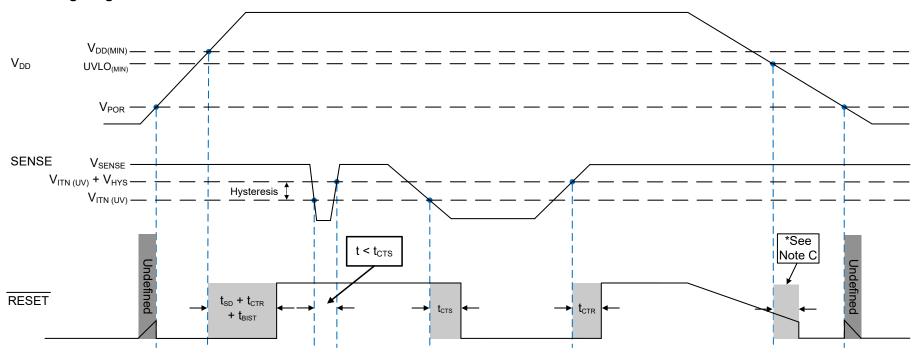

- A. The timing diagram assumes the open-drain output RESET pin is connected via an external pull-up resistor to VDD.
- B. Be advised that Figure 6-1 shows the VDD falling slew rate is slow or the VDD decay time is much larger than the propagation detect delay (t_{CTR}) time.
- C. RESET is asserted when VDD goes below the UVLO_(MIN) threshold after the time delay, t_{CTR}, is reached.

Figure 6-1. SENSE Undervoltage (UV) Timing Diagram

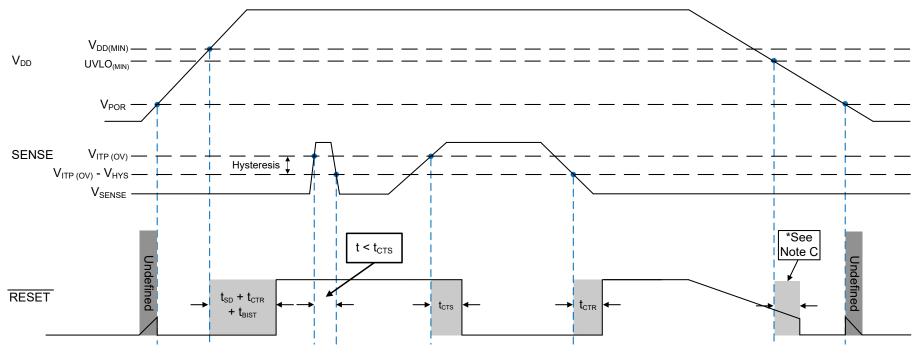


- A. The timing diagram assumes the open-drain output RESET pin is connected via an external pull-up resistor to VDD.
- B. Be advised that Figure 6-2 shows the VDD falling slew rate is slow or the VDD decay time is much larger than the propagation detect delay (t_{CTR}) time.
- C. RESET is asserted when VDD goes below the UVLO(MIN) threshold after the time delay, t_{CTR}, is reached.

Figure 6-2. SENSE Overvoltage (OV) Timing Diagram




6.9 Typical Characteristic

Typical characteristics show the typical performance of the TPS3762 device. Test conditions are $T_A = 25$ °C, unless otherwise noted.

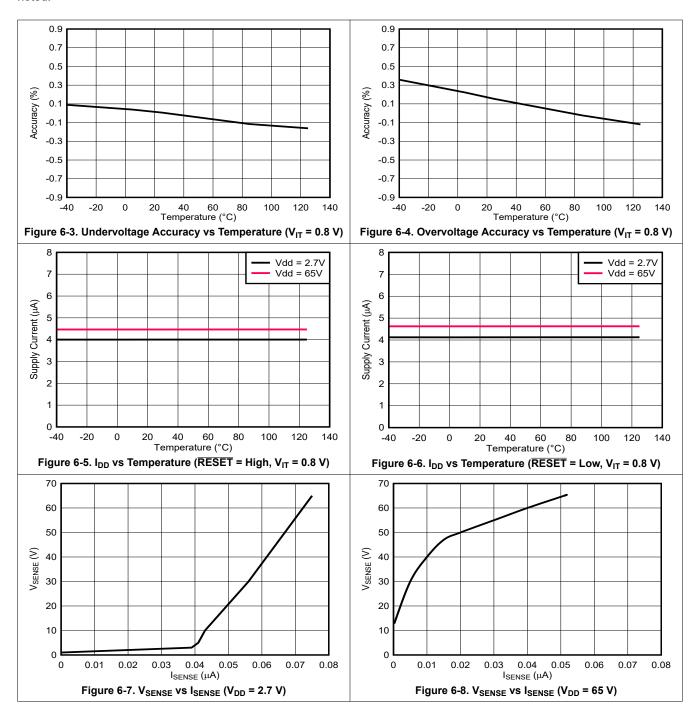

6.9 Typical Characteristic (continued)

Typical characteristics show the typical performance of the TPS3762 device. Test conditions are $T_A = 25$ °C, unless otherwise noted.

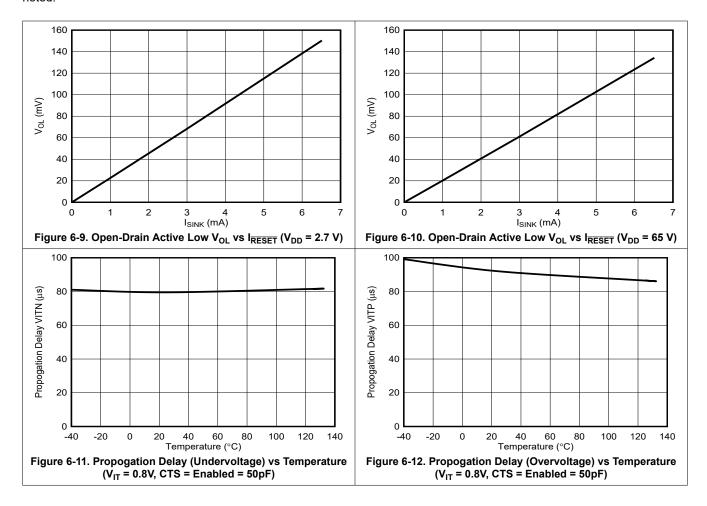

7 Detailed Description

7.1 Overview

The TPS3762 is a family of high voltage and low quiescent current voltage supervisors with overvoltage and undervoltage threshold voltage options, delay timings, Built-In Self-Test, and latch. The TPS3762 over and undervoltage thresholds are device specific and are offered in either adjustable thresholds or fixed thresholds. The adjustable threshold option uses an external resistor ladder to make a voltage divider on SENSE pin which uses the internal 800 mV threshold to trigger overvoltage and undervoltage faults. The benefit of using an adjustable option with external resistors is the faster reaction speed compared to a fixed internal threshold variant. The TPS3762 fixed threshold option utilizes an integrated voltage divider to eliminate the need for external resistors and provides a lower system leakage current.

VDD, SENSE and RESET pins can support 65 V continuous operation. SENSE has -65 V reverse polarity protection. Both VDD and SENSE voltage levels can be independent of each other. TPS3762 includes a reset output latching feature that holds the output active to help system achieve safe state. Fixed and programmable sense and reset delay are available to avoid false resets and false reset releases.

7.2 Functional Block Diagram

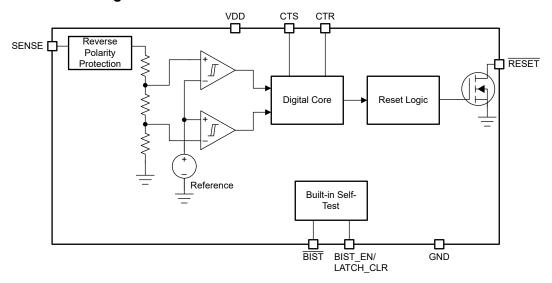


Figure 7-1. Fixed Threshold Functional Block Diagram

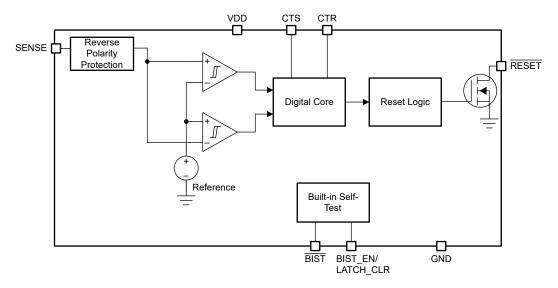


Figure 7-2. Adjustable Threshold Functional Block Diagram

7.3 Feature Description

7.3.1 Input Voltage (VDD)

VDD operating voltage ranges from 2.7 V to 65 V. An input supply capacitor is not required for this device; however, if the input supply is noisy good analog practice is to place a 0.1 μ F capacitor between the VDD and GND.

VDD needs to be at or above V_{DD(MIN)} for at least the start-up time delay (t_{SD}) for the device to be fully functional.

VDD voltage is independent of V_{SENSE} and V_{RESET} , meaning that VDD can be higher or lower than the other pins.

7.3.1.1 Undervoltage Lockout ($V_{POR} < V_{DD} < UVLO$)

When the voltage on V_{DD} is less than the UVLO voltage, but greater than the power-on reset voltage (V_{POR}), the RESET and BIST pins will be asserted, regardless of the voltage at SENSE pins.

7.3.1.2 Power-On Reset ($V_{DD} < V_{POR}$)

When the voltage on VDD is lower than the power on reset voltage (V_{POR}), the output signal is undefined and is not to be relied upon for proper device function.

Note: Figure 7-3 and Figure 7-4 assume an external pull-up resistor is connected the reset pin to VDD.

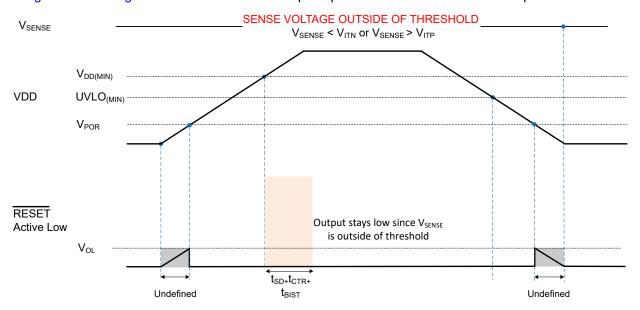


Figure 7-3. Power Cycle (SENSE Outside of Nominal Voltage)



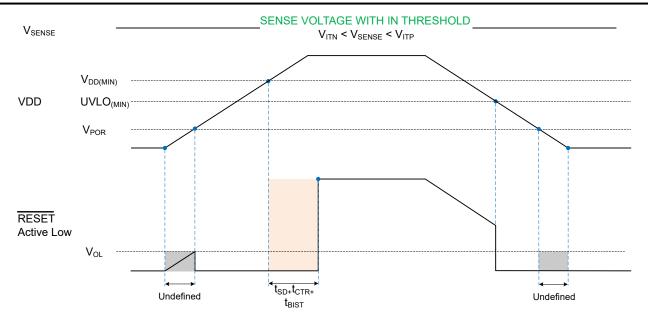


Figure 7-4. Power Cycle (SENSE Within Nominal Voltage)

7.3.2 SENSE

The SENSE pin connects to the supply rail that is to be monitored. The sense pin on each device is configured to monitor either overvoltage (OV), undervoltage (UV), and window (OV&UV) conditions. TPS3762 device offers built-in hysteresis that provides noise immunity and maintains stable operation.


Although not required in most cases, for noisy applications good analog design practice is to place a 10 nF to 100 nF bypass capacitor at the SENSE inputs to reduce sensitivity to transient voltages on the monitored signal. SENSE can be connected directly to VDD pin.

7.3.2.1 Reverse Polarity Protection

The TPS3762 has reverse polarity protection on the sense pin up to -65 V. This allows the TPS3762 to support accidental or test simulated reverse connections without damaging the device. This protection permits the TPS3762 to connect directly off of the supply prior to any reverse polarity protection diodes for accurate voltage measurement.

7.3.2.2 SENSE Hysteresis

TPS3762 device offers built-in hysteresis around the UV and OV thresholds to avoid erroneous $\overline{\text{RESET}}$ deassert. The hysteresis is opposite to the threshold voltage; for overvoltage options the hysteresis is subtracted from the positive threshold (V_{ITP}), for undervoltage options hysteresis is added to the negative threshold (V_{ITN}).

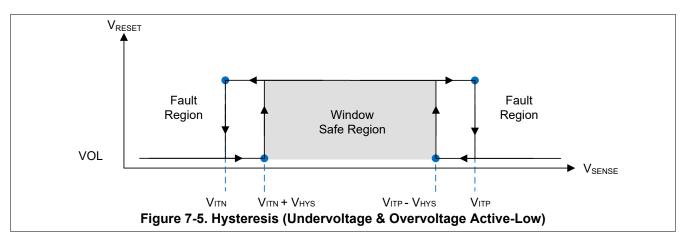

Copyright © 2023 Texas Instruments Incorporated

Submit Document Feedback



Table 7-1. Common Adjustable Hysteresis Lookup Table

	TARGET		
ADJUSTABLE THRESHOLD	TOPOLOGY	RELEASE VOLTAGE (V)	DEVICE ACTUAL HYSTERESIS OPTION
800 mV	Overvoltage	784 mV	-2%
800 mV	Overvoltage	760 mV	-5%
800 mV	Overvoltage	720 mV	-10%
800 mV	Undervoltage	816 mV	2%
800 mV	Undervoltage	840 mV	5%
800 mV	Undervoltage	880 mV	10%

Table 7-1 shows a sample of hysteresis for the 800 mV adjustable variant for the TPS3762.

Knowing the amount of hysteresis voltage, the release voltage for the undervoltage (UV) channel is $(V_{ITN} + V_{HYS})$ and for the overvoltage (OV) channel is $(V_{ITP} - V_{HYS})$.

Undervoltage (UV) Channel

 $V_{ITN} = 800 \text{ mV}$

Voltage Hysteresis (V_{HYS}) = 2% = 16 mV

Hysteresis Accuracy = +1.5% to +2.5% = 16.24 mV to 16.4 mV

Release Voltage = V_{ITN} + V_{HYS} = 816.24 mV to 816.4 mV

Overvoltage (OV) Channel

 $V_{ITP} = 800 \text{ mV}$

Voltage Hysteresis (V_{HYS}) = 2% = 16 mV

Hysteresis Accuracy = +1.5% to +2.5% = 16.24 mV to 16.4 mV

Release Voltage = V_{ITP} - V_{HYS} = 783.6 mV to 783.76 mV

7.3.3 Output Logic Configurations

TPS3762 is a single channel device that has a single input sense pin and a single reset pin. The single reset is available with open drain topology.

7.3.3.1 Open-Drain

Open-drain output requires an external pull-up resistor to hold the voltage high to the required voltage logic. Connect the pull-up resistor to the proper voltage rail to enable the output to be connected to other devices at the correct interface voltage levels.

To select the right pull-up resistor consider system V_{OH} and the Open-Drain Leakage Current (I_{lkg}) provided in the electrical characteristics, high resistors values will have a higher voltage drop affecting the output voltage high. The open-drain output can be connected as a wired-AND logic with other open-drain signals such as another TPS3762 open-drain output pin.

7.3.3.2 Active-Low (RESET)

RESET (active low) denoted with a bar above the pin label. RESET remains high voltage (V_{OH} , deasserted) (open-drain variant V_{OH} is measured against the pullup voltage) as long as sense voltage is in normal operation within the threshold boundaries and VDD voltage is above UVLO. To assert a reset sense pins needs to meet the condition below:

- For undervoltage variant the SENSE voltage need to cross the lower boundary (V_{ITN}).
- For overvoltage variant the SENSE voltage needs to cross the upper boundary (V_{ITP}).

7.3.3.3 Latching

The TPS3762 comes with the optional output reset latching feature for the window (OV & UV) and OV variants, check the Section 4 to verify variant specific latch functionality. When using a variant with latch enabled ($V_{BIST_EN/LATCH_CLR}$ <0.5 V), whenever a fault, OV or UV, occurs \overline{RESET} asserts and goes low and remains low until cleared by a logic high input ($V_{BIST_EN/LATCH_CLR}$ > 1.3 V) on the BIST_EN / LATCH_CLR pin. If the SENSE pin is in a safe region and latch is disabled, the \overline{RESET} will deassert after a delay. This delay is dependent on BIST and CTR timing. See Section 7.3.6 for more details. While $V_{BIST_EN/LATCH_CLR}$ > 1.3 V, the device is in latch disabled mode and the \overline{RESET} will not latch for OV and UV on SENSE pin. While the device is in latch disabled mode the \overline{RESET} will still assert for OV and UV faults. When $V_{BIST_EN/LATCH_CLR}$ < 0.5 V, latch mode will be enabled.

Product Folder Links: TPS3762

Copyright © 2023 Texas Instruments Incorporated



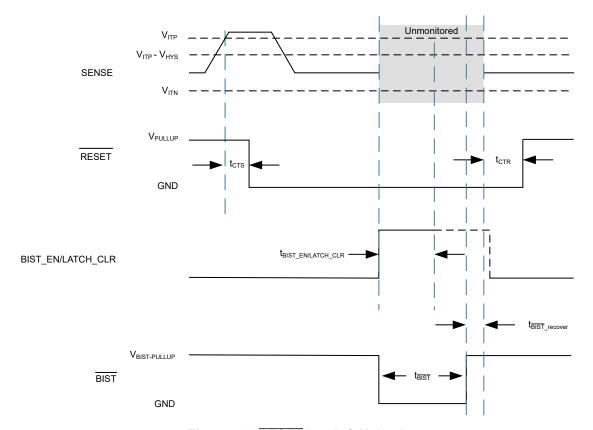


Figure 7-6. RESET Latch & Unlatch

7.3.4 User-Programmable Reset Time Delay

TPS3762 has adjustable reset release time delay with external capacitors.

- · A capacitor on CTR programs the reset time delay of the output.
- No capacitor on this pin gives the fastest reset delay time indicated by t_{CTR} in Section 6.7.
- Variants such as TPS3762Q use a fixed internal time delay, check the Section 4 to verify variant specific timing.

7.3.4.1 Reset Time Delay Configuration

The time delay (t_{CTR}) can be programmed by connecting a capacitor between CTR pin and GND.

The relationship between external capacitor C_{CTR} EXT (typ) and the time delay t_{CTR} (typ) is given by Equation 1.

$$t_{CTR (typ)} = R_{CTR (typ)} \times C_{CTR EXT (typ)} + t_{CTR (no cap)}$$
(1)

 $R_{CTR (typ)} = is in kilo ohms (k\Omega)$

C_{CTR} EXT (typ) = is given in microfarads (μF)

 $t_{CTR (tvp)}$ = is the reset time delay (ms)

The reset delay varies according to three variables: the external capacitor (C_{CTR_EXT}), CTR pin internal resistance (R_{CTR}) provided in Section 6, and a constant. The minimum and maximum variance due to the constant is show in Equation 2 and Equation 3:

$$t_{\text{CTR (min)}} = R_{\text{CTR (min)}} \times C_{\text{CTR EXT (min)}} + t_{\text{CTR (no cap (min))}}$$
(2)

$$t_{\text{CTR (max)}} = R_{\text{CTR (max)}} \times C_{\text{CTR_EXT (max)}} + t_{\text{CTR (no cap (max))}}$$
(3)

There is no limit to the capacitor on CTR pin. Having a too large of a capacitor value can cause very slow charge up (rise times) due to capacitor leakage and system noise can cause the internal circuit to hold $\overline{\text{RESET}}$ active.

* Leakages on the capacitor can effect accuracy of reset time delay.



7.3.5 User-Programmable Sense Delay

TPS3762 has adjustable sense release time delay with external capacitors.

- A capacitor in CTS programs the excursion detection on SENSE.
- No capacitor on this pin gives the fastest sense delay time indicated by t_{CTS}in Section 6.7.
- The TPS3762 comes with an optional fixed internal time delay that ignores the capacitor value at the CTS pin, check the Section 4 to verify variant specific functionality.

7.3.5.1 Sense Time Delay Configuration

The time delay (t_{CTS}) can be programmed by connecting a capacitor between CTS pin and GND.

The relationship between external capacitor C_{CTS} EXT (typ) and the time delay t_{CTS} (typ) is given by Equation 4.

$$t_{\text{CTS (typ)}} = R_{\text{CTS (typ)}} \times C_{\text{CTS EXT (typ)}} + t_{\text{CTS (no cap)}}$$
(4)

 R_{CTS} = is in kilo ohms (k Ω)

 C_{CTS} EXT = is given in microfarads (μF)

 t_{CTS} = is the sense time delay (ms)

The sense delay varies according to three variables: the external capacitor (C_{CTS_EXT}), CTS pin internal resistance (R_{CTS}) provided in Electrical Characteristics, and a constant. The minimum and maximum variance due to the constant is show in Equation 5 and Equation 6:

$$t_{\text{CTS (min)}} = R_{\text{CTS (min)}} \times C_{\text{CTS EXT (min)}} + t_{\text{CTS (no cap (min))}}$$
(5)

$$t_{\text{CTR (max)}} = R_{\text{CTS (max)}} \times C_{\text{CTS_EXT (max)}} + t_{\text{CTSx (no cap (max))}}$$
(6)

The recommended maximum sense delay capacitor for the TPS3762 is limited to 10 μ F as this makes sure enough time for the capacitor to fully discharge when a voltage fault occurs. Also, having a too large of a capacitor value can cause very slow charge up (rise times) and system noise can cause the internal circuit to trip earlier or later near the threshold. This leads to variation in time delay where it can make the delay accuracy worse in the presence of system noise.

* Leakages on the capacitor can effect accuracy of sense time delay.

7.3.6 Built-In Self-Test

The TPS3762 has a Built-In Self-Test (BIST) feature that runs diagnostics internally in the device. During power-up BIST is initiated automatically after crossing $V_{DD(min)}$. During BIST the \overline{BIST} pin and \overline{RESET} output asserts low and deasserts if the \overline{BIST} test completes successfully indicating no internal faults in the device. The length of the BIST and \overline{BIST} assertion is specified by $t_{\overline{BIST}}$. If BIST is not successful, the \overline{BIST} pin will say asserted low signifying an internal fault. The \overline{RESET} output will stay assert on \overline{BIST} failure. During BIST, the device is not monitoring the SENSE pin for faults and the \overline{RESET} is not dependent on the SENSE pin voltage. The \overline{BIST} sequence of internal tests verifies the internal signal chain of the device by checking for faults on the internal comparators on the SENSE pin, bandgap voltage, and the \overline{RESET} output. See Figure 7-7 for more details.

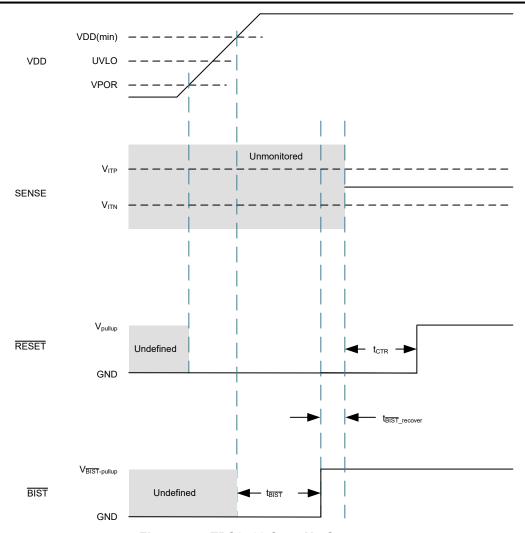


Figure 7-7. TPS3762 Start-Up Sequence

After a successful power-up sequence, BIST can be initiated any time with a logic high input (V_{BIST_EN} or $V_{BIST_EN/LATCH_CLR} > 1.3$ V) on the BIST_EN / LATCH_CLR pin. BIST initiates and the \overline{BIST} pin asserts only if the SENSE pin is not in a overvoltage or undervoltage fault mode. During this BIST test time period, $t_{\overline{BIST}}$, \overline{BIST} pin asserts low to signify that \overline{BIST} has started and \overline{RESET} assertion is dependent on the device variant. Upon a successful BIST the \overline{BIST} pin and \overline{RESET} pin are deasserted. If BIST is not successful due to the internal device not working properly, the \overline{RESET} pin and \overline{BIST} pin remain asserted low signifying a fault internal to the device. See Figure 7-8 and for Figure 7-9 more details.



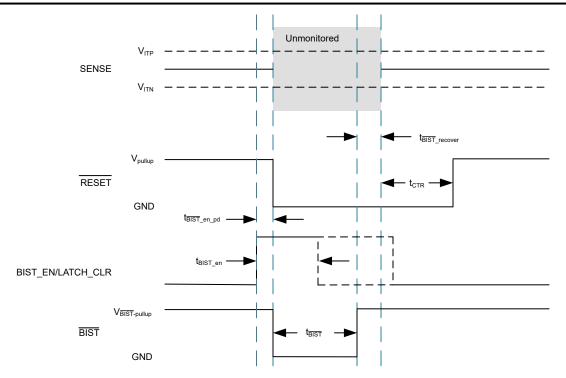


Figure 7-8. BIST With RESET Assertion

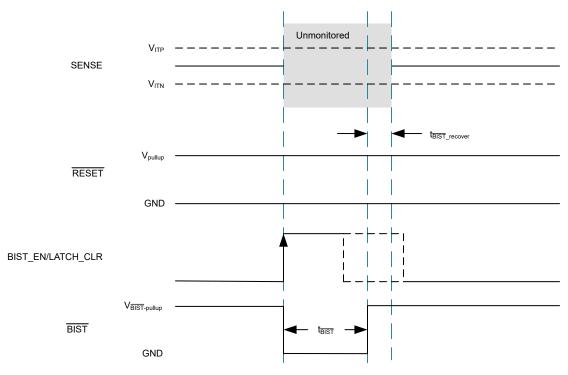


Figure 7-9. BIST With No RESET Assertion



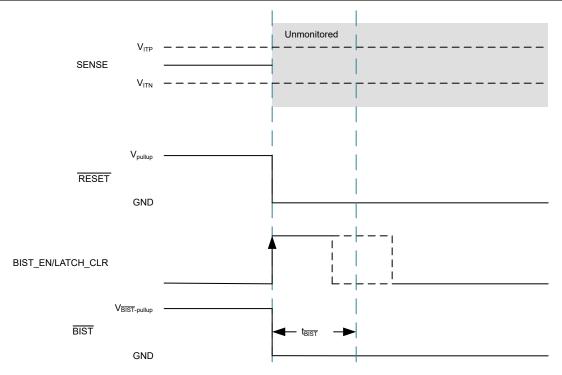


Figure 7-10. BIST Fail With RESET Assertion

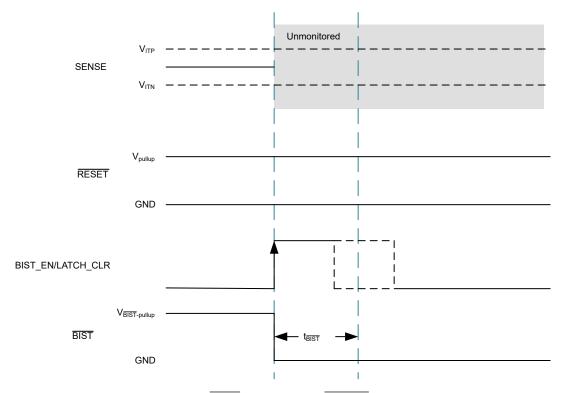


Figure 7-11. BIST Fail With No RESET Assertion



7.4 Device Functional Modes

Table 7-2. Undervoltage Detect Functional Mode Truth Table

	Table 1 21 ender totage 2 etect 1 another mode 11 and 14 another							
	S	SENSE			OUTPUT (2)			
DESCRIPTION	PREVIOUS CONDITION CURRENT CONDITION		CTR ⁽¹⁾	VDD PIN	(RESET PIN)			
Normal Operation	SENSE > V _{ITN}	SENSE > V _{ITN}	Open or capacitor connected	$V_{DD} > V_{DD(MIN)}$	High			
Undervoltage Detection	SENSE > V _{ITN}	SENSE < V _{ITN}	Open or capacitor connected	$V_{DD} > V_{DD(MIN)}$	Low			
Undervoltage Detection	SENSE < V _{ITN}	SENSE > V _{ITN}	Open or capacitor connected	$V_{DD} > V_{DD(MIN)}$	Low			
Normal Operation	SENSE < V _{ITN}	SENSE > V _{ITN} + HYS	Open or capacitor connected	$V_{DD} > V_{DD(MIN)}$	High			
UVLO Engaged	SENSE > V _{ITN}	SENSE > V _{ITN}	Open or capacitor connected	$V_{POR} < V_{DD} < V_{DD(MIN)}$	Low			
Below V _{POR} , Undefined Output	SENSE > V _{ITN}	SENSE > V _{ITN}	Open or capacitor connected	V _{DD} < V _{POR}	Undefined			

⁽¹⁾ Reset time delay is ignored in the truth table.

Table 7-3. Overvoltage Detect Functional Mode Truth Table

	S	SENSE			OUTPUT (2)	
DESCRIPTION	PREVIOUS CONDITION	CURRENT CONDITION	CTR ⁽¹⁾	VDD PIN	(RESET PIN)	
Normal Operation	SENSE < V _{ITN}	SENSE < V _{ITN}	Open or capacitor connected	$V_{DD} > V_{DD(MIN)}$	High	
Overvoltage Detection	SENSE < V _{ITN}	SENSE > V _{ITN}	Open or capacitor connected	$V_{DD} > V_{DD(MIN)}$	Low	
Overvoltage Detection	SENSE > V _{ITN}	SENSE < V _{ITN} Open or capacitor connected		$V_{DD} > V_{DD(MIN)}$	Low	
Normal Operation	SENSE > V _{ITN}	SENSE < V _{ITN} - HYS	Open or capacitor connected	$V_{DD} > V_{DD(MIN)}$	High	
UVLO Engaged	SENSE < V _{ITN}	SENSE < V _{ITN}	Open or capacitor connected	V _{POR} < V _{DD} < UVLO	Low	
Below V _{POR} , Undefined Output	SENSE < V _{ITN}	SENSE < V _{ITN}	Open or capacitor connected	V _{DD} < V _{POR}	Undefined	

⁽¹⁾ Reset time delay is ignored in the truth table.

⁽²⁾ Open-drain active low output requires an external pull-up resistor to a pull-up voltage.

⁽²⁾ Open-drain active low output requires an external pull-up resistor to a pull-up voltage.

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

The following sections describe in detail proper device implementation, depending on the final application requirements.

8.2 Adjustable Voltage Thresholds

Figure 8-1 illustrates an example of how to adjust the voltage threshold with external resistor dividers. The resistors can be calculated depending on the desired voltage threshold and device part number. TI recommends using the 0.8 V voltage threshold device when using an adjustable voltage variant. This variant bypasses the internal resistor ladder.

For example, consider a 12 V rail, V_{MON} , being monitored for overvoltage (OV) using of the TPS3762D02OVDDFR variant, as shown in Figure 8-1. The monitored OV threshold, denoted as V_{MON+} , is the desired voltage where the device asserts the reset. For this example $V_{MON+} = 35$ V. To assert an overvoltage reset the voltage at the sense pin, V_{SENSE} , needs to be equal to the input threshold positive, V_{ITP} . For this example variant $V_{SENSE} = V_{ITP} = 0.8$ V. Using R_1 and R_2 the correlation between V_{MON+} and V_{SENSE} can be seen in Equation 8. Assuming $R_2 = 10$ k Ω , and R_1 can be calculated as $R_1 = 427.5$ k Ω .

$$V_{SENSE} = V_{MON+} \times (R_2 \div (R_1 + R_2))$$
 (7)

The TPS3762D02OVDDFR comes with variant specific 2 %, 5 %, or 10 % voltage threshold hysteresis. For the reset signal to become deasserted, V_{MON} must go below V_{ITP} - V_{HYS} . For this example variant a 2 % voltage threshold hysteresis was selected. Therefore, V_{MON} equals 34.3 V when the reset signal becomes deasserted.

There are inaccuracies that must be taken into consideration while adjusting voltage thresholds. Aside from the tolerance of the resistor divider, there is an internal resistance of the SENSE pin that can affect the accuracy of the resistor divider. Although expected to be very high impedance, users are recommended to calculate the values for the design specifications. The internal SENSE resistance (R_{SENSE}) can be calculated by the SENSE voltage (V_{SENSE}) divided by the SENSE current (I_{SENSE}) as shown in Equation 9. V_{SENSE} can be calculated using Equation 7 depending on the resistor divider and monitored voltage. I_{SENSE} can be calculated using Equation 8.

$$I_{SENSF} = [(V_{MON} - V_{SENSF}) \div R_1] - (V_{SENSF} \div R_2)$$
(8)

$$R_{SENSE} = V_{SENSE} \div I_{SENSE}$$
 (9)

Copyright © 2023 Texas Instruments Incorporated

Submit Document Feedback



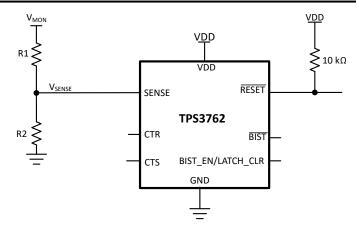


Figure 8-1. Adjustable Voltage Threshold with External Resistor Dividers

8.3 Typical Application

8.3.1 Design 1: SELV Power Supply Monitoring

This application is intended for the initial power stage in applications with 24 V SELV power rails. The TPS3762 utilizes high-voltage SENSE and V_{DD} inputs to monitor a 24 V SELV power rail.

Figure 8-6 illustrates an example of how the TPS3762 is monitoring the rail voltage while being powered by it, as well.

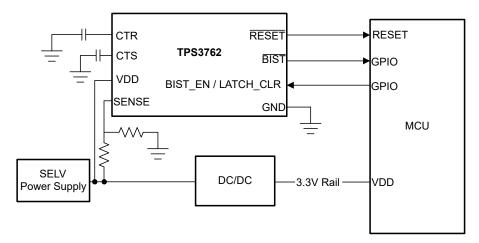


Figure 8-2. TPS3762 Overvoltage Supervisor with SELV Monitoring

8.3.1.1 Design Requirements

Table 8-1. Design Parameters

PARAMETER	DESIGN REQUIREMENT			
Voltage Threshold	Typical OV voltage threshold 30V.			
Maximum Input Power	Operate with power supply input up to 65V			
Output logic	Open-Drain			
SENSE delay	>100ms			
RESET delay	>300ms			
Output Features	Output latching and built-in self-test			

8.3.1.2 Detailed Design Procedure

The TPS3762 utilizes high-voltage SENSE and V_{DD} inputs to monitor a 24V SELV power rail.

In this design example TPS3762D02OVDDFR is used.

8.3.1.2.1 Setting Voltage Threshold

The positive-going threshold voltage, V_{ITP} , is set by the device variant. In this example, the nominal supply voltage from the SELV supply is 24 V. Setting a overvoltage threshold of 30 V (~25% buffer) makes sure that the device resets before supply voltage violates the allowed boundary. The adjustable voltage variant is chosen and R_1 and R_2 are adusted to meet the threshold. Assuming R_2 equal to 10 k Ω and R_1 is calculated as 365 k Ω . For additional information on selecting resistor values see Section 8.2. TPS3762 also supports fixed voltage threshold variants. Threshold voltage decoding can be found in Device Decoder.

8.3.1.2.2 Meeting the Sense and Reset Delay

The TPS3762 features both reset assertion (sense) delay, t_{CTS} , and reset deassertion (reset) delay, t_{CTR} . The TPS3762 features two options for selecting sense and reset delays: fixed delays and capacitor-programmable delays. For the device variant used in this design, TPS3762D02OVDDFR, the capacitor programmable delay is chosen. Section 7.3.5 and Section 7.3.4 show how to set the timings for the capacitor-programmable delays. The application requires greater than 100 ms sense delay, thus a 0.033 μ F capacitor is used. The application requires greater than 300 ms reset delay, thus a 0.1 μ F capacitor is used.

8.3.1.2.3 Setting Supply Voltage

Setting the supply voltage is done by connecting the V_{DD} input directly to the 24V rail without the need for external circuitry. The device being able to handle 65 V on V_{DD} means the monitored voltage rail can handle any voltage transience up to 65 V. Good analog design practice recommends using a 0.1 μ F capacitor on the V_{DD} pin.

8.3.1.2.4 Initiating Built-In Self-Test and Clearing Latch

Built-In Self-Test (BIST) is asserted on device power-up, as outlined in Figure 7-7. BIST can also be initiated any time by a rising edge that crosses the voltage logic high input (V_{BIST_EN} or $V_{BIST_EN/LATCH_CLR} > 1.3$ V) on the BIST_EN / LATCH_CLR pin, as outlined in Figure 7-8. Output reset latching is set by the device variant. For the device variant used in this design, TPS3762D02OVDDFR, the output has latch. Device specific output reset latching feature can be found in #none#. In order to clear the latch a logic high input on the BIST_EN / LATCH_CLR pin is required. When clearing latch, BIST is initiated and the RESET returns logic level high once $t_{BIST} + t_{BIST_recover} + t_{CTR}$ has expired, outlined in Figure 7-6. While $V_{BIST_EN/LATCH_CLR} > 1.3$ V, the device is in latch disabled mode and the RESET will not latch for OV and UV on SENSE pin. While the device is in latch disabled mode the RESET will still assert for OV and UV faults.



8.3.1.3 Application Curves

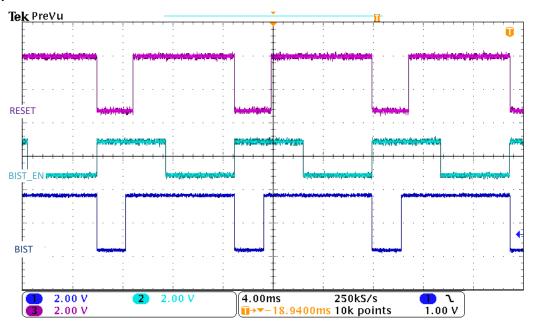


Figure 8-3. BIST with RESET Assertion Waveform

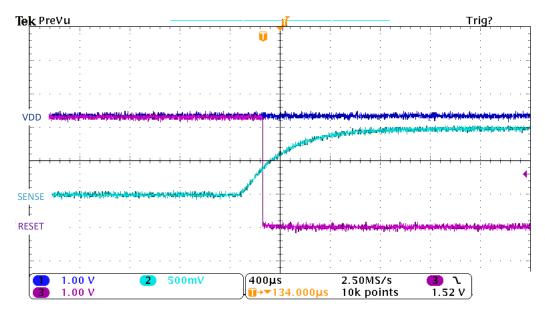


Figure 8-4. Overvoltage RESET Latching Waveform

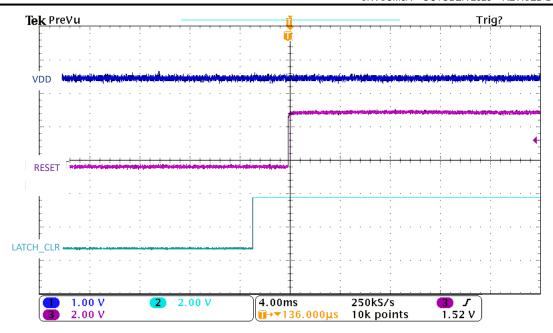


Figure 8-5. Overvoltage RESET Unlatching Waveform

8.4 Power Supply Recommendations

TPS3762 is designed to operate from an input supply with a V_{DD} voltage between 2.7 V (minimum operation) to 65 V (maximum operation). Good analog design practice recommends placing a minimum 0.1 µF ceramic capacitor as near as possible to the V_{DD} pin.

8.4.1 Power Dissipation and Device Operation

The permissible power dissipation for any package is a measure of the capability of the device to pass heat from the power source, the junctions of the IC, to the ultimate heat sink, the ambient environment. Thus, the power dissipation is dependent on the ambient temperature and the thermal resistance across the various interfaces between the die junction and ambient air.

The maximum continuous allowable power dissipation for the device in a given package can be calculated using Equation 10:

$$P_{D-MAX} = \left(\left(T_{J-MAX} - T_A \right) / R_{\theta,JA} \right) \tag{10}$$

The actual power being dissipated in the device can be represented by Equation 11:

$$P_D = V_{DD} \times I_{DD} + P_{RESET} \tag{11}$$

p_{RESET} is calculated by Equation 12 or Equation 13

$$p_{RESET (PUSHPULL)} = VDD - V_{RESET} \times I_{RESET}$$
 (12)

$$p_{RESET (OPEN-DRAIN)} = V_{RESET} \times I_{RESET}$$
 (13)

Equation 10 and Equation 11 establish the relationship between the maximum power dissipation allowed due to thermal consideration, the voltage drop across the device, and the continuous current capability of the device. These two equations should be used to determine the optimum operating conditions for the device in the application.

In applications where lower power dissipation (P_D) and/or excellent package thermal resistance ($R_{A,IA}$) is present, the maximum ambient temperature (T_{A-MAX}) may be increased.

In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature (T_{A-MAX}) may have to be de-rated. T_{A-MAX} is dependent on the maximum operating junction temperature (T_{J-MAX-OP} = 125°C), the maximum allowable power dissipation in the device package in the application (P_{D-MAX}), and the junction-to ambient thermal resistance of the part/package in the application (R_{B.IA}), as given by Equation 14:

$$T_{A-MAX} = (T_{J-MAX-OP} - (R_{\theta,JA} \times P_{D-MAX})) \tag{14}$$

8.5 Layout

8.5.1 Layout Guidelines

- Make sure that the connection to the VDD pin is low impedance. Good analog design practice is to place a greater than 0.1 µF ceramic capacitor as near as possible to the VDD pin.
- To further improve the noise immunity on the SENSE pins, placing a 10 nF to 100 nF capacitor between the SENSE pin and GND can reduce the sensitivity to transient voltages on the monitored signal.
- If a capacitor is used on CTS or CTR, place these components as close as possible to the respective pins. If the capacitor adjustable pins are left unconnected, make sure to minimize the amount of parasitic capacitance on the pins to less than 5 pF.
- Place the pull-up resistors on RESET as close to the pin as possible.
- When laying out metal traces, separate high voltage traces from low voltage traces as much as possible. If high and low voltage traces need to run close by, spacing between traces should be greater than 20 mils (0.5 mm).

www.ti.com

• Do not have high voltage metal pads or traces closer than 20 mils (0.5 mm) to the low voltage metal pads or traces.

8.5.2 Layout Example

The layout example in Figure 8-6 shows how the TPS3762 is laid out on a printed circuit board (PCB) with user-defined delays.

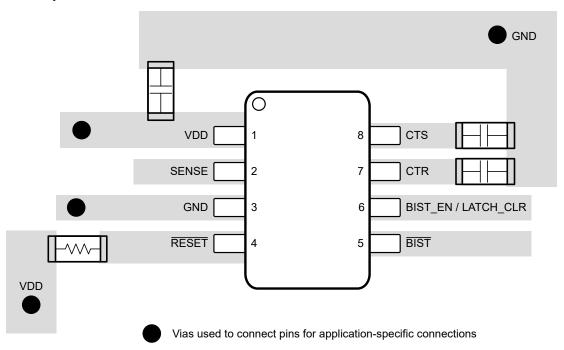


Figure 8-6. TPS3762 Recommended Layout

9 Device and Documentation Support

9.1 Device Nomenclature

Device Decoder in Section 4 describe how to decode certain device function of the device based on its part number. Not all part numbers follow this nomenclature. Use Table 9-1 as the part number decoding table for all devices.

Table 9-1. Device Configuration Table

ORDERABLE PART	NAME t	vervol	Overvolt age Hysteres is	Undervoltage (V _{ITN})	Undervoltage Hysteresis	CTR / CTS	Latch / UVbypass	BIST RESETTrigger
TPS3762D02OVDI	OFR 80	00mV	2%	N/A	N/A	ADJ / ADJ	Both Enabled	Yes

9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.3 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

9.4 Trademarks

TI E2E[™] is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision * (October 2023) to Revision A (December 2023)

Page

Production Data Release.....

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
TPS3762D02OVDDFR	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	62D02
TPS3762D02OVDDFR.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	62D02

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS3762:

Automotive: TPS3762-Q1

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

NOTE: Qualified Version Definiti	ons	initio	Defin	ersion	٧	Qualified	F:	10.	١
----------------------------------	-----	--------	-------	--------	---	-----------	----	-----	---


• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

PACKAGE MATERIALS INFORMATION

www.ti.com 23-Dec-2023

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS3762D02OVDDFR	SOT-23- THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

PACKAGE MATERIALS INFORMATION

www.ti.com 23-Dec-2023



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS3762D02OVDDFR	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0



PLASTIC SMALL OUTLINE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.



PLASTIC SMALL OUTLINE



NOTES: (continued)

- 4. Publication IPC-7351 may have alternate designs.
- 5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



PLASTIC SMALL OUTLINE



NOTES: (continued)

- 6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 7. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025