











INA203-Q1

SBOS539A - DECEMBER 2010-REVISED APRIL 2016

INA203-Q1 Automotive Grade, -16 V to +80 V, Low- or High-Side, High-Speed, Voltage Output Current Shunt Monitor With Dual Comparators and Reference

1 Features

- Qualified for Automotive Applications
- Current Sense Amplifier
 - Common-Mode Range: -16 V to +80 V
 - Accuracy: 3.5% (Maximum) Over Temperature
 - Bandwidth: 500 kHz
 - Gain: 20 V/V
- Integrated Dual Comparators:
 - Comparator 1 With Latch
 - Comparator 2 With Optional Delay
- Quiescent Current: 1.8 mA
- Latch-Up Performance Meets 100 mA Per AEC-Q100, Level I
- Packages: TSSOP-14

2 Applications

- Electric Power Steering (EPS) Systems
- Body Control Modules
- Brake Systems
- Electronic Stability Control (ESC) Systems

3 Description

The INA203-Q1 is a unidirectional current-shunt monitor (also called a current sense amplifier) with voltage output, dual comparators, and voltage reference. The INA203-Q1 can sense drops across shunts at common-mode voltages from -16 V to +80 V. The INA203-Q1 is available with 20-V/V gain with up to 500-kHz bandwidth.

The INA203-Q1 incorporates two open-drain comparators with internal 0.6-V references and also provides a 1.2-V reference output. The comparator references can be overridden by external inputs. Comparator 1 includes a latching capability, and Comparator 2 has a user-programmable delay.


The INA203-Q1 operates from a single 2.7 V to 18 V supply. It is specified over the extended operating temperature range of -40° C to $+125^{\circ}$ C.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
INA203-Q1	TSSOP (14)	5.00 mm × 4.40 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Basic Connections Schematic

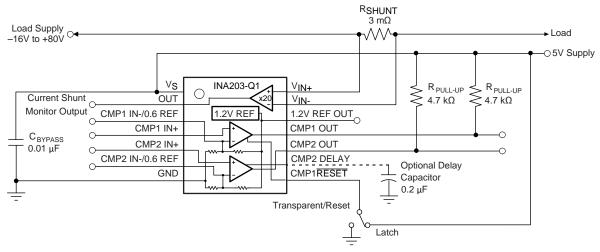

Copyright © 2016, Texas Instruments Incorporated



Table of Contents

1	Features 1		8.1 Overview	12
2	Applications 1		8.2 Functional Block Diagram	
3	Description 1		8.3 Feature Description	
4	Revision History2		8.4 Device Functional Modes	14
5	Device Comparison Table	9	Application and Implementation	15
6	Pin Configuration and Functions		9.1 Application Information	15
7	_		9.2 Typical Applications	19
′	Specifications 4 7.1 Absolute Maximum Ratings 4	10	Power Supply Recommendations	<mark>2</mark> 1
	7.1 Absolute Maximum Ratings	11	Layout	21
	7.3 Recommended Operating Conditions		11.1 Layout Guidelines	21
	7.4 Thermal Information		11.2 Layout Example	21
	7.5 Electrical Characteristics: Current-Shunt Monitor 5	12	Device and Documentation Support	22
	7.6 Electrical Characteristics: Comparator		12.1 Community Resources	22
	7.7 Electrical Characteristics: Reference		12.2 Trademarks	22
	7.8 Electrical Characteristics: General		12.3 Electrostatic Discharge Caution	22
	7.9 Typical Characteristics		12.4 Glossary	22
8	Detailed Description	13	Mechanical, Packaging, and Orderable Information	22

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

С	hanges from Original (December 2010) to Revision A	Page
•	Updated data sheet title, Features, Applications, and Description	1
•	Added ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, Mechanical, Packaging, and Orderable Information section, Pin Configuration and Functions section, Recommended Operating Conditions Table, and Thermal Information Table	
•	Added Device Comparison Table	3
•	Changed V+ to V _S throughout	4
•	Changed MAX value 18 to (V _S) + 0.3 for Comparator output pins	4
•	Changed MAX value 10 to (V _S) up to 10 for 1.2-V REF and CMP2 DELAY pins	4
•	Changed pin names in Absolute Maximum Ratings to show correct names	4
•	Added Operating Temperature to Absolute Maximum Ratings table	4
•	Changed CMP2 IN- to CMP2 IN+ in Electrical Characteristics: Current-Shunt Monitor condition statement	5
•	Changed CMP2 IN- to CMP2 IN+ in Electrical Characteristics: General condition statement	7
•	Updated Overview section	12
•	Deleted 10-pin device image	12
•	Changed text from "RFILT – 3%" to "RFILT + 3%" in 2nd paragraph of Input Filtering section	16
•	Changed Figure 35 caption	16

Product Folder Links: INA203-Q1

Diffit Documentation Feedback




5 Device Comparison Table

Table 1. Related Products

PRODUCT	DESCRIPTION
INA200-Q1	Single comparator alternative to the INA203's dual comparators
INA193A-Q1	Same amplifier performance without the comparators integrated
INA282-Q1	High-accuracy, high common-mode capable current sense amplifier
INA300-Q1	36-V overcurrent protection comparator
INA301	High-accuracy, high slew-rate current sense amplifier with integrated high-speed comparator optimized for overcurrent protection.

6 Pin Configuration and Functions

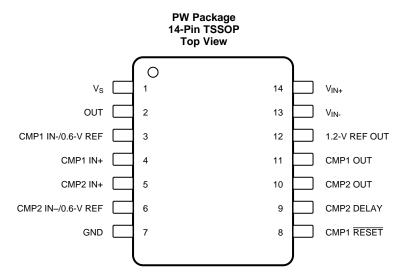

Pin Functions

PIN		I/O	DESCRIPTION	
NO.	NAME	1/0	DESCRIPTION	
1	V _S	I	Power supply	
2	OUT	0	Output voltage	
3	CMP1 IN-/0.6-V REF	I	Comparator 1 negative input, can be used to override the internal 0.6-V reference	
4	CMP1 IN+	I	Comparator 1 positive input	
5	CMP2 IN+	1	Comparator 2 positive input	
6	CMP2 IN-/0.6-V REF	1	Comparator 2 negative input, can be used to override the internal 0.6-V reference	
7	GND	I	Ground	
8	CMP1 RESET	I	Comparator 1 ouput reset, active low	
9	CMP2 DELAY	I	Connect an optional capacitor to adjust comparator 2 delay	
10	CMP2 OUT	0	Comparator 2 output	
11	CMP1 OUT	0	Comparator 1 output	
12	1.2-V REF OUT	0	1.2-V reference output	
13	V _{IN} _	I	Amplifier Negative Input. Connect to shunt low side	
14	V _{IN+}	I	Amplifier Positive Input. Connect to shunt high side	



7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
Supply voltage	V _S		18	V
Current-shunt monitor analog	Differential (V _{IN+}) – (V _{IN} –)	-18	18	V
inputs, V _{IN+} and V _{IN-}	Common-mode	-16	80	V
Comparator analog input	CMP1 IN+, CMP1 IN-/0.6-V REF, CMP2 IN+, CMP2 IN-/0.6-V REF	GND - 0.3	$(V_S) + 0.3$	V
Comparator reset	CMP1 RESET	GND - 0.3	$(V_S) + 0.3$	
Analog output	OUT	GND - 0.3	$(V_S) + 0.3$	V
Comparator output	CMP1 OUT, CMP2 OUT	GND - 0.3	$(V_S) + 0.3$	V
1.2-V REF and CMP2 DELAY pir	ns	GND - 0.3	(V _S) up to 10	V
Input current into any pin			5	mA
Operating temperature		-55	150	°C
Junction temperature			150	°C
Storage temperature, T _{stg}		-65	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

			VALUE	UNIT
\/	Floatroototic discharge	Human-body model (HBM), per AEC Q100-002 ⁽¹⁾	±2000	V
V _(ESD)	Electrostatic discharge	Charged-device model (CDM), per AEC Q100-011	±500	V

⁽¹⁾ AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{CM}	Common-mode input voltage	-16	12	80	V
V _S	Operating supply voltage	2.7	12	18	V
T _A	Operating free-air temperature	-40	25	125	°C

7.4 Thermal Information

		INA203-Q1	
	THERMAL METRIC ⁽¹⁾	PW (TSSOP)	UNIT
		14 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	112.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	37.2	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	55.4	°C/W
ΨЈТ	Junction-to-top characterization parameter	2.7	°C/W
ΨЈВ	Junction-to-board characterization parameter	54.7	°C/W
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	150	°C/W

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.



7.5 Electrical Characteristics: Current-Shunt Monitor

At T_A = 25°C, V_S = 12 V, V_{CM} = 12 V, V_{SENSE} = 100 mV, R_L = 10 k Ω to GND, $R_{PULL-UP}$ = 5.1 k Ω each connected from CMP1 OUT and CMP2 OUT to V_S , and CMP1 IN+ = 1 V and CMP2 IN+ = GND, unless otherwise noted.

	PARAMETER	TEST CONI	DITIONS	MIN	TYP	MAX	UNIT
INPUT						-	
V _{SENSE}	Full-scale sense input voltage	$V_{SENSE} = V_{IN+} - V_{IN-}$			0.15	(V _S - 0.25)/Gain	V
V _{CM}	Common-mode input range	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$		-16		80	V
CMRR	Common-mode rejection ratio	$V_{CM} = -16 \text{ V to } +80 \text{ V}$		80	100		dB
	•	V _{CM} = 12 V to 80 V	T _A = 25°C to 125°C	100	123		dB
	Over temperature	$T_A = -40$ °C to +25°C	1	90	100		dB
					±0.5	±2.5	mV
Vos	Offset voltage, RTI ⁽¹⁾	T _A = 25°C to 125°C				±3	mV
		$T_A = -40$ °C to +25°C				±3.5	mV
dV _{OS} /dT	Versus temperature	T _{MIN} to T _{MAX}	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$		5		μV/°C
PSR	Versus power supply	V _{OUT} = 2 V, V _{CM} = +18 V	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$		2.5	100	μV/V
I _B	Input bias current, V _{IN} - Pin	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$	1		±9	±16	μA
OUTPUT	Γ (V _{SENSE} ≥ 20 mV)					<u> </u>	
G	Gain				20		V/V
	Gain error	V _{SENSE} = 20 mV to 100 mV			±0.2%	±1%	
	Over temperature	V _{SENSE} = 20 mV to 100 mV	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$			±2%	
	Total output error ⁽²⁾	V _{SENSE} = 120 mV, V _S = +16 V			±0.75%	±2.2%	
	Over temperature	V _{SENSE} = 120 mV, V _S = +16 V	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$			±3.5%	
	Nonlinearity error ⁽³⁾	V _{SENSE} = 20 mV to 100 mV			±0.002%		
Ro	Output impedance, Pin 2				1.5		Ω
	Maximum capacitive load	No sustained oscillation			10		nF
OUTPUT	Γ (V _{SENSE} < 20 mV) ⁽⁴⁾						
	<u> </u>	-16 V ≤ V _{CM} < 0 V			300		mV
V _{OUT}	Output voltage	$0 \text{ V} \le \text{V}_{\text{CM}} \le \text{V}_{\text{S}}, \text{V}_{\text{S}} = 5 \text{ V}$				0.4	V
		V _S < V _{CM} ≤ 80 V			300		mV
VOLTAG	SE OUTPUT ⁽⁵⁾	1 1					
	Output swing to the positive rail	V _{IN-} = 11 V, V _{IN+} = 12 V	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$		(V _S) - 0.15	$(V_S) - 0.25$	V
	Output Swing to GND ⁽⁶⁾	$V_{IN-} = 0 \text{ V}, V_{IN+} = -0.5 \text{ V}$	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$	(V ₀	_{SND}) + 0.004	$(V_{GND}) + 0.05$	V
FREQUE	ENCY RESPONSE	1				<u> </u>	
BW	Bandwidth	C _{LOAD} = 5 pF			500		kHz
	Phase margin	C _{LOAD} < 10 nF			40		Degrees
SR	Slew rate				1		V/µs
	Settling time (1%)	$V_{SENSE} = 10 \text{ mV}_{PP} \text{ to } 100 \text{ mV}_{F}$ $C_{LOAD} = 5 \text{ pF}$	PP,		2		μs
NOISE, I	RTI	•				<u> </u>	
	Output Voltage Noise Density				40		nV/√ Hz

⁽¹⁾ Offset is extrapolated from measurements of the output at 20 mV and 100 mV V_{SENSE}.

⁽²⁾ Total output error includes effects of gain error and V_{OS}.

⁽³⁾ Linearity is best fit to a straight line.

⁽⁴⁾ For details on this region of operation, see the Accuracy Variations section.

⁽⁵⁾ See Typical Characteristics curve Positive Output Voltage Swing vs Output Current (Figure 8).

⁶⁾ Specified by design; not production tested.



7.6 Electrical Characteristics: Comparator

At T_A = +25°C, V_S = +12 V, V_{CM} = +12 V, V_{SENSE} = 100 mV, R_L = 10 k Ω to GND, and $R_{PULL-UP}$ = 5.1 k Ω each connected from CMP1 OUT and CMP2 OUT to V_S , unless otherwise noted.

OFFSET VOLTAGE Offset voltage Comparator common-mode voltage = threshold voltage Offset voltage drift, comparator 1 $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ Offset voltage drift, comparator 2 $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ Threshold Rising Edge on Non-Inverting input, $T_A = +25^{\circ}\text{C}$ Over temperature $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ Hysteresis(1), CMP1 $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ Hysteresis(1), CMP2 $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ INPUT BIAS CURRENT(2) TA = -40°C to $+85^{\circ}\text{C}$ CMP1 IN+, CMP2 IN+ Over temperature TA = -40°C to $+125^{\circ}\text{C}$ INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE The standard CMP2 IN+ Pins 3 and 6 (3) The standard common of the standard comm	500	2 ±2		
Offset voltage drift, comparator 1 $T_A = -40^{\circ}\text{C}$ to +125°C Offset voltage drift, comparator 2 $T_A = -40^{\circ}\text{C}$ to +125°C Threshold Rising Edge on Non-Inverting input, $T_A = +25^{\circ}\text{C}$ Over temperature $T_A = -40^{\circ}\text{C}$ to +125°C Hysteresis ⁽¹⁾ , CMP1 $T_A = -40^{\circ}\text{C}$ to +85°C Hysteresis ⁽¹⁾ , CMP2 $T_A = -40^{\circ}\text{C}$ to +85°C INPUT BIAS CURRENT ⁽²⁾ CMP1 IN+, CMP2 IN+ Over temperature $T_A = -40^{\circ}\text{C}$ to +125°C INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+	500			
Offset voltage drift, comparator 2 $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ Threshold Rising Edge on Non-Inverting input, $T_A = +25^{\circ}\text{C}$ Over temperature $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ Hysteresis ⁽¹⁾ , CMP1 $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ Hysteresis ⁽¹⁾ , CMP2 $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ INPUT BIAS CURRENT ⁽²⁾ CMP1 IN+, CMP2 IN+ Over temperature $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+	500	±2		mV
Threshold Rising Edge on Non-Inverting input, $T_A = +25^{\circ}C$ Over temperature $T_A = -40^{\circ}C$ to $+125^{\circ}C$ Hysteresis ⁽¹⁾ , CMP1 $T_A = -40^{\circ}C$ to $+85^{\circ}C$ Hysteresis ⁽¹⁾ , CMP2 $T_A = -40^{\circ}C$ to $+85^{\circ}C$ INPUT BIAS CURRENT ⁽²⁾ CMP1 IN+, CMP2 IN+ Over temperature $T_A = -40^{\circ}C$ to $+125^{\circ}C$ INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+	500			μV/°C
Over temperature $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ Hysteresis ⁽¹⁾ , CMP1 $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ Hysteresis ⁽¹⁾ , CMP2 $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ INPUT BIAS CURRENT ⁽²⁾ CMP1 IN+, CMP2 IN+ Over temperature $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+	500	5.4		μV/°C
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	590	608	620	mV
Hysteresis (1), CMP2	586	-	625	mV
INPUT BIAS CURRENT ⁽²⁾ CMP1 IN+, CMP2 IN+ Over temperature T _A = -40°C to +125°C INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+		-8		mV
CMP1 IN+, CMP2 IN+ Over temperature		8		mV
Over temperature T _A = -40°C to +125°C INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+				
INPUT IMPEDANCE Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+		0.005	10	nA
Pins 3 and 6 INPUT RANGE CMP1 IN+ and CMP2 IN+		-	15	nA
INPUT RANGE CMP1 IN+ and CMP2 IN+				
CMP1 IN+ and CMP2 IN+		10		kΩ
Pins 3 and 6 ⁽³⁾	0 V	/ to V _S – 1.5 V		V
1 ino o dila o	0 V	/ to V _S – 1.5 V		V
OUTPUT				
Large-signal differential voltage gain CMP V _{OUT} 1 V to 4 V, R _L ≥ 15 kΩ connected to 5 V		200		V/mV
High-level output current $V_{ID} = 0.4 \text{ V}, V_{OH} = V_{S}$		0.0001	1	μA
Low-level output voltage $V_{ID} = -0.6 \text{ V}, I_{OL} = 2.35 \text{ mA}$		220	300	mV
RESPONSE TIME ⁽⁴⁾				
Comparator 1 R _L to 5 V, C _L = 15 pF, 100 mV input step with 5 mV overdrive	re l	1.3		μs
Comparator 2 R _L to 5 V, C _L = 15 pF, 100 mV input step with 5 mV overdrive C _{DELAY} pin open	re,	1.3		μs
RESET	*			
RESET threshold ⁽⁵⁾		1.1		V
Logic input impedance		2		МΩ
Minimum RESET pulse width		1.5		μs
RESET propagation delay		3		μs
Comparator 2 delay equation ⁽⁶⁾		$C_{DELAY} = t_D/5$		μF
t_D Comparator 2 delay $C_{DELAY} = 0.1 \mu F$		ODELAY - ID/O		

⁽¹⁾ Hysteresis refers to the threshold (the threshold specification applies to a rising edge of a noninverting input) of a falling edge on the noninverting input of the comparator; refer to Figure 1.

(6) The Comparator 2 delay applies to both rising and falling edges of the comparator output.

Submit Documentation Feedback

Copyright © 2010–2016, Texas Instruments Incorporated

⁽²⁾ Specified by design; not production tested.

⁽³⁾ See the Comparator Maximum Input Voltage Range section.

⁽⁴⁾ The comparator response time specified is the interval between the input step function and the instant when the output crosses 1.4 V.

⁽⁵⁾ The CMP1 RESET input has an internal 2 MΩ (typical) pull-down. Leaving the CMP1 RESET open results in a LOW state, with transparent comparator operation.



7.7 Electrical Characteristics: Reference

At T_A = +25°C, V_S = +12 V, V_{CM} = +12 V, V_{SENSE} = 100 mV, R_L = 10 k Ω to GND, and $R_{PULL-UP}$ = 5.1 k Ω each connected from CMP1 OUT and CMP2 OUT to V_S , unless otherwise noted.

	PARAMETER	TEST C	ONDITIONS	MIN	TYP	MAX	UNIT
REFERENCE	VOLTAGE	-					
	1.2 V _{REFOUT} output voltage			1.188	1.2	1.212	V
dV _{OUT} /dT	Reference drift ⁽¹⁾	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$			40	100	ppm/°C
0.6 V _{REF}	Output voltage (Pins 3 and 6)				0.6		V
dV _{OUT} /dT	Reference drift ⁽¹⁾	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$			40	100	ppm/°C
LOAD REGUL	ATION						
-1\/ /-11	Sourcing	0.774	V _{REFOUT} – 1.2 V		0.4	2	mV/mA
dV_{OUT}/dI_{LOAD}	Sinking	0 mA < I _{SINK} < 0.5 mA	0 mA < I _{SOURCE} < 0.5 mA		0.4		mV/mA
LOAD CURRE	ENT						
I _{LOAD}					1		mA
LINE REGULA	ATION						
dV _{OUT} /dV _S		2.7 V < V _S < 18 V			30		μV/V
CAPACITIVE	LOAD						
	Reference output maximum capacitive load	No sustained oscillation	s		10		nF
OUTPUT IMP	EDANCE						
	Pins 3 and 6				10		kΩ

⁽¹⁾ Specified by design; not production tested.

7.8 Electrical Characteristics: General

All specifications at T_A = +25°C, V_S = +12 V, V_{CM} = +12 V, V_{SENSE} = 100 mV, R_L = 10 k Ω to GND, $R_{PULL-UP}$ = 5.1 k Ω each connected from CMP1 OUT and CMP2 OUT to V_S , and CMP1 IN+ = 1 V and CMP2 IN+ = GND, unless otherwise noted.

	GENERAL PARAMETERS	CONDI	MIN	TYP	MAX	UNIT	
POWER SUPPLY							
V_S	Operating Power Supply	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$			18	V
I_Q	Quiescent current	V _{OUT} = 2 V		1.8	2.2	mA	
	Over temperature	V _{SENSE} = 0 mV	$T_A = -40^{\circ}C \text{ to } +125^{\circ}C$			2.8	mA
	Comparator power-on reset threshold (1)				1.5		V

(1) The INA203-Q1 is designed to power-up with the comparator in a defined reset state as long as CMP1 RESET is open or grounded. The comparator will be in reset as long as the power supply is below the voltage shown here. The comparator assumes a state based on the comparator input above this supply voltage. If CMP1 RESET is high at power-up, the comparator output comes up high and requires a reset to assume a low state, if appropriate.

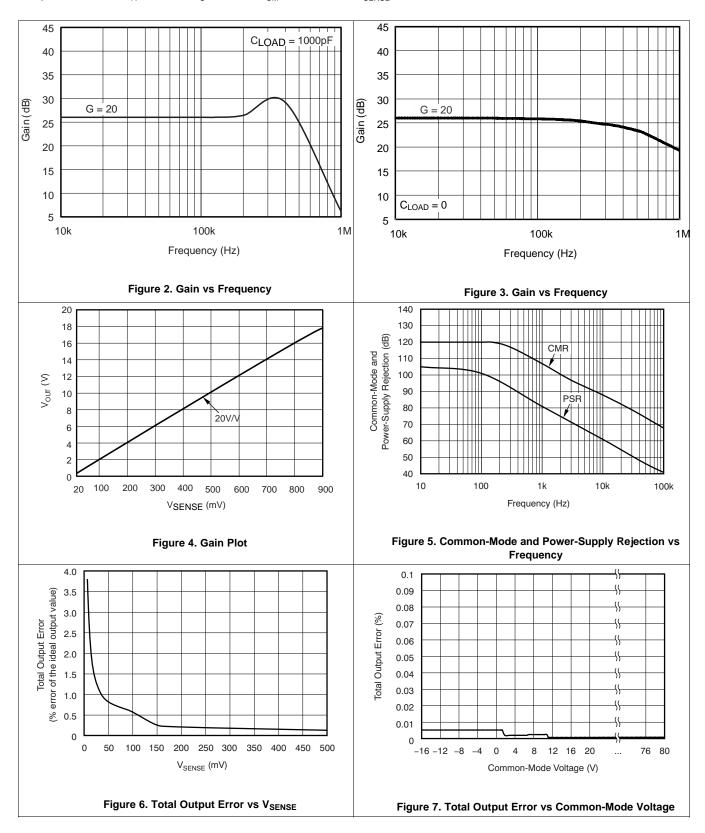


Figure 1. Comparator Hysteresis

TEXAS INSTRUMENTS

7.9 Typical Characteristics


All specifications at $T_A = +25$ °C, $V_S = +12$ V, $V_{CM} = +12$ V, and $V_{SENSE} = 100$ mV, unless otherwise noted.





Typical Characteristics (continued)

All specifications at $T_A = +25$ °C, $V_S = +12$ V, $V_{CM} = +12$ V, and $V_{SENSE} = 100$ mV, unless otherwise noted.







Figure 8. Positive Output Voltage Swing vs Output Current

Figure 9. Quiescent Current vs Output Voltage







Figure 10. Quiescent Current vs Common-Mode Voltage

Figure 11. Output Short-Circuit Current vs Supply Voltage






Figure 12. Step Response

Figure 13. Step Response


Copyright © 2010–2016, Texas Instruments Incorporated

Submit Documentation Feedback

TEXAS INSTRUMENTS

Typical Characteristics (continued)

All specifications at $T_A = +25$ °C, $V_S = +12$ V, $V_{CM} = +12$ V, and $V_{SENSE} = 100$ mV, unless otherwise noted.






Figure 14. Step Response




Figure 15. Comparator Vol vs ISINK




Figure 16. Comparator Trip Point vs Supply Voltage




Figure 17. Comparator Trip Point vs Temperature




Figure 18. Comparator 1 Propagation Delay vs Overdrive Voltage

Figure 19. Comparator 2 Propagation Delay vs Overdrive Voltage


Submit Documentation Feedback

Copyright © 2010–2016, Texas Instruments Incorporated



Typical Characteristics (continued)

All specifications at T_A = +25°C, V_S = +12 V, V_{CM} = +12 V, and V_{SENSE} = 100 mV, unless otherwise noted.







Figure 20. Comparator Reset Voltage vs supply Voltage

Figure 21. Comparator 1 Propagation Delay vs Temperature







Figure 22. Comparator 2 Propagation Delay vs Capacitance

Figure 23. Comparator 1 Propagation Delay






Figure 24. Comparator 2 Propagation Delay

Figure 25. Reference Voltage vs Temperature




8 Detailed Description

8.1 Overview

The INA203-Q1 device is a unidirectional voltage output current-sense amplifier with dual comparators and voltage reference. The INA203-Q1 operates over a wide range of common-mode voltage (–16 V to +80 V) and incorporates two open-drain comparators with internal 0.6-V references. Comparator 1 includes a latching capability, and Comparator 2 has a user-programmable delay. The device also incorporates a 1.2-V reference output.

8.2 Functional Block Diagram



8.3 Feature Description

8.3.1 Comparator

The INA203-Q1 incorporates two open-drain comparators. These comparators typically have 2 mV of offset and a 1.3-µs (typical) response time. The output of Comparator 1 latches and is reset through the CMP1 RESET pin, as shown in Figure 26.

The INA203-Q1 device includes additional features for comparator functions. The comparator reference voltage of both Comparator 1 and Comparator 2 can be overridden by external inputs for increased design flexibility. Comparator 2 has a programmable delay.

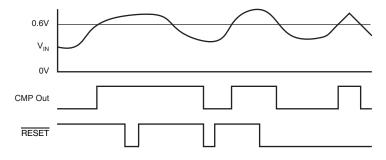


Figure 26. Comparator Latching Capability

8.3.2 Comparator Delay

The Comparator 2 programmable delay is controlled by a capacitor connected to the CMP2 Delay Pin; see Figure 30. The capacitor value (in μ F) is selected by using Equation 1:

$$C_{DELAY} (in \mu F) = \frac{t_D}{5}$$
 (1)

A simplified version of the delay circuit for Comparator 2 is shown in Figure 27. The delay comparator consists of two comparator stages with the delay between them.



Feature Description (continued)

NOTE

I1 and I2 cannot be turned on simultaneously; I1 corresponds to a U1 low output and I2 corresponds to a U1 high output.

Using an initial assumption that the U1 output is low, I1 is on, then U2 +IN is zero. If U1 goes high, I2 supplies 120 nA to C_{DELAY} . The voltage at U2 +IN begins to ramp toward a 0.6-V threshold. When the voltage crosses this threshold, the U2 output goes high while the voltage at U2 +IN continues to ramp up to a maximum of 1.2 V when given sufficient time (twice the value of the delay specified for C_{DELAY}). This entire sequence is reversed when the comparator outputs go low, so that returning to low exhibits the same delay.




Figure 27. Simplified Model of The Comparator 2 Delay Circuit

It is important to note the behavior of the Comparator 2 when the events at the inputs occur more rapidly than the set delay timeout. For example, when the U1 output goes high (turning on I2), but returns low (turning I1 back on) prior to reaching the 0.6 V transition for U2. The voltage at U2 +IN ramps back down at a rate determined by the value of C_{DFLAY} , and only returns to zero if given sufficient time.


In essence, when analyzing Comparator 2 for behavior with events more rapid than its delay setting, use the model shown in Figure 27.

8.3.3 Comparator Maximum Input Voltage Range

The maximum voltage at the comparator input for normal operation is up to $(V_S)-1.5$ V. There are special considerations when overdriving the reference inputs (pins 3 and 6). Driving either or both inputs high enough to drive 1 mA back into the reference introduces errors into the reference. Figure 28 shows the basic input structure. A general guideline is to limit the voltage on both inputs to a total of 20 V. The exact limit depends on the available voltage and whether either or both inputs are subject to the large voltage. When making this determination, consider the 20 k Ω from each input back to the comparator. Figure 29 shows the maximum input voltage that avoids creating a reference error when driving both inputs (an equivalent resistance back into the reference of 10 k Ω).



Feature Description (continued)



Copyright © 2016, Texas Instruments Incorporated

Figure 28. Limit Current Into Reference ≤ 1 mA

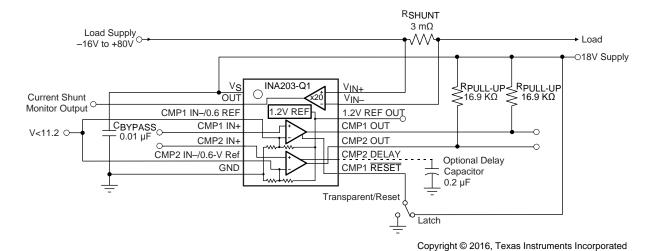


Figure 29. Overdriving Comparator Inputs Without Generating a Reference Error

8.3.4 Reference

The INA203-Q1 include an internal voltage reference that has a load regulation of 0.4 mV/mA (typical), and not more than 100 ppm/°C of drift. The device allows external access to reference voltages, where voltages of 1.2 V and 0.6 V are both available. Output current versus output voltage is illustrated in the *Typical Characteristics* section.

8.3.5 Output Voltage Range

The output of the INA203-Q1 is accurate within the output voltage swing range set by the power-supply pin, V_S . Given the device gain of 20, where a 250 mV full-scale input from the shunt resistor requires an output voltage swing of +5 V, and a power-supply voltage sufficient to achieve +5 V on the output.

8.4 Device Functional Modes

The INA203-Q1 has a single functional mode and is operational when the power-supply voltage is greater than 2.7 V. The common-mode voltage must be between -16 V and +80 V. The maximum power supply voltage for the INA203-Q1 is 18 V.



9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The INA203-Q1 device is designed to enable easy configuration for detecting overcurrent conditions and current monitoring in an application. This device is also incorporate two open-drain comparators with internal 0.6-V references. The comparator references can be overridden by external inputs. Comparator 1 includes a latching capability, and Comparator 2 has a user-programmable delay. The INA203-Q1 also provides a 1.2-V reference output. This device can also be paired with minimum additional devices to create more sophisticated monitoring functional blocks.

9.1.1 Basic Connections

Figure 30 shows the basic connections of the INA203-Q1. Connect the input pins, V_{IN+} and V_{IN-} , as closely as possible to the shunt resistor to minimize any resistance in series with the shunt resistance.

Power-supply bypass capacitors are required for stability. Applications with noisy or high-impedance power supplies may require additional decoupling capacitors to reject power-supply noise. Connect bypass capacitors close to the device pins.

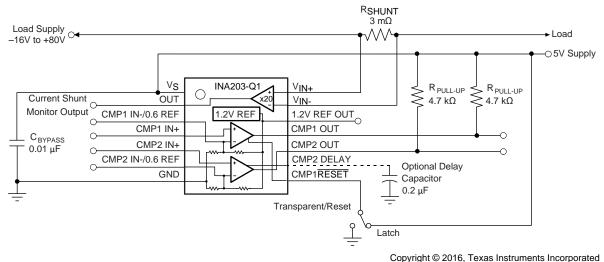


Figure 30. INA203-Q1 Basic Connection

9.1.2 Selecting R_{SHUNT}

The value chosen for the shunt resistor, R_{SHUNT} , depends on the application and is a compromise between small-signal accuracy and maximum permissible voltage loss in the measurement line. High values of R_{SHUNT} provide better accuracy at lower currents by minimizing the effects of offset, while low values of R_{SHUNT} minimize voltage loss in the supply line. For most applications, best performance is attained with an R_{SHUNT} value that provides a full-scale shunt voltage range of 50 mV to 100 mV. Maximum input voltage for accurate measurements is $(V_{SHUNT} - 0.25)/Gain$.




Application Information (continued)

9.1.3 Input Filtering

An obvious and straightforward location for filtering is at the output of the INA203-Q1 series; however, this location negates the advantage of the low output impedance of the internal buffer. The only other option for filtering is at the input pins of the INA203-Q1, which is complicated by the internal 5 k Ω + 30% input impedance; this configuration is illustrated in Figure 31. Using the lowest possible resistor values minimizes both the initial shift in gain and effects of tolerance. Equation 2 gives the effect on initial gain:

Gain Error % =
$$100 - \left[100 \times \frac{5k\Omega}{5k\Omega + R_{FILT}}\right]$$
 (2)

To calculate the total effect on gain error, replace the 5-k Ω term with 5 k Ω – 30%, (or 3.5 k Ω) or 5 k Ω + 30% (or 6.5 k Ω). The tolerance extremes of R_{FILT} can also be inserted into the equation. If a pair of 100- Ω 1% resistors are used on the inputs, then the initial gain error will be 1.96%. Worst-case tolerance conditions will always occur at the lower excursion of the internal 5-k Ω resistor (3.5 k Ω), and the higher excursion of R_{FILT} + 3% in this case.

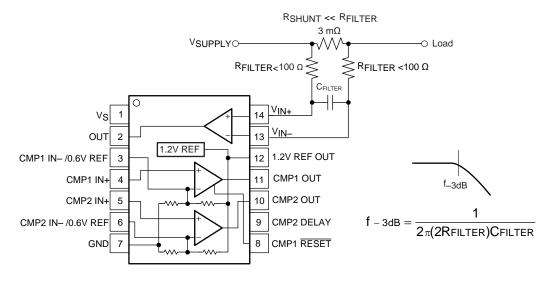

Copyright © 2016, Texas Instruments Incorporated

Figure 31. Input Filter

NOTE

The specified accuracy of the INA203-Q1 must then be combined in addition to these tolerances. While this discussion treated accuracy worst-case conditions by combining the extremes of the resistor values, it is appropriate to use geometric-mean or root-sumsquare calculations to total the effects of accuracy variations.

9.1.4 Accuracy Variations as a Result of V_{SENSE} and Common-Mode Voltage

The accuracy of the INA203-Q1 current-shunt monitors is a function of two main variables: V_{SENSE} ($V_{IN+} - V_{IN-}$) and common-mode voltage, V_{CM} , relative to the supply voltage, V_S . V_{CM} is expressed as ($V_{IN+} + V_{IN-}$)/2; however, in practice, V_{CM} is seen as the voltage at V_{IN+} because the voltage drop across V_{SENSE} is usually small.

This section addresses the accuracy of these specific operating regions:

- Normal Case 1: $V_{SENSE} \ge 20 \text{ mV}$, $V_{CM} \ge V_{S}$
- Normal Case 2: V_{SENSE} ≥ 20 mV, V_{CM} < V_S
- Low V_{SENSE} Case 1: V_{SENSE} < 20 mV, -16 V \leq V_{CM} < 0
- Low V_{SENSE} Case 2: V_{SENSE} < 20 mV, 0 V ≤ V_{CM} ≤ V_S
- Low V_{SENSE} Case 3: V_{SENSE} < 20 mV, V_S < V_{CM} ≤ 80 V

Submit Documentation Feedback

Copyright © 2010–2016, Texas Instruments Incorporated



Application Information (continued)

9.1.4.1 Normal Case 1: $V_{SENSE} \ge 20 \text{ mV}$, $V_{CM} \ge V_{S}$

This region of operation provides the highest accuracy. Here, the input offset voltage is characterized and measured using a two-step method. First, the gain is determined by Equation 3.

$$G = \frac{V_{OUT1} - V_{OUT2}}{100mV - 20mV}$$

where

• V_{OUT1} = output voltage with V_{SENSE} = 100 mV

•
$$V_{OUT2}$$
 = output voltage with V_{SENSE} = 20 mV (3)

Then the offset voltage is measured at $V_{SENSE} = 100$ mV and referred to the input (RTI) of the current shunt monitor, as shown in Equation 4.

$$V_{OS}RTI \text{ (Referred-To-Input)} = \left[\frac{V_{OUT1}}{G}\right] - 100\text{mV}$$
(4)

In the *Typical Characteristics* section, the *Output Error vs Common-Mode Voltage* curve (Figure 7) shows the highest accuracy for this region of operation. In this plot, $V_S = 12 \text{ V}$; for $V_{CM} \ge 12 \text{ V}$, the output error is at its minimum. This case is also used to create the $V_{SENSE} \ge 20 \text{ mV}$ output specifications in the *Electrical Characteristics* table.

9.1.4.2 Normal Case 2: $V_{SENSE} \ge 20 \text{ mV}$, $V_{CM} < V_{S}$

This region of operation has slightly less accuracy than Normal Case 1 as a result of the common-mode operating area in which the part functions, as seen in the *Output Error vs Common-Mode Voltage* curve (Figure 7). As noted, for this graph $V_S = 12 \text{ V}$; for $V_{CM} < 12 \text{ V}$, the output error increases as V_{CM} becomes less than 12 V, with a typical maximum error of 0.005% at the most negative $V_{CM} = -16 \text{ V}$.

9.1.4.3 Low V_{SFNSF} Case 1:

 V_{SENSE} < 20 mV, -16 V \leq V_{CM} < 0; and

Low V_{SENSE} Case 3:

 $V_{SENSE} < 20 \text{ mV}, V_S < V_{CM} \le 80 \text{ V}$


Although the INA203-Q1 is not designed for accurate operation in either of these regions, some applications are exposed to these conditions; for example, when monitoring power supplies that are switched on and off while V_S is still applied to the INA203-Q1. It is important to know what the behavior of the devices will be in these regions.

As V_{SENSE} approaches 0 mV, in these V_{CM} regions, the device output accuracy degrades. A larger-than-normal offset can appear at the current shunt monitor output with a typical maximum value of $V_{OUT} = 300$ mV for $V_{SENSE} = 0$ mV. As V_{SENSE} approaches 20 mV, V_{OUT} returns to the expected output value with accuracy as specified in the *Electrical Characteristics*. Figure 32 illustrates this effect (Gain = 100).

Submit Documentation Feedback

STRUMENTS

Application Information (continued)




Data taken from INA205, a device of INA20x family with Gain = 100

Figure 32. Example for Low V_{SENSE} Cases 1 and 3 (Gain = 100)

9.1.4.4 Low V_{SENSE} Case 2: $V_{SENSE} < 20 \text{ mV}$, 0 V $\leq V_{CM} \leq V_{S}$

This region of operation is the least accurate for the INA203-Q1. To achieve the wide input common-mode voltage range, this device uses two operational amplifiers (Opamp) front ends in parallel. One Opamp front end operates in the positive input common-mode voltage range, and the other in the negative input region. For this case, neither of these two internal amplifiers dominate and overall loop gain is very low. Within this region, Vour approaches voltages close to linear operation levels for Normal Case 2. This deviation from linear operation becomes greatest the closer V_{SENSE} approaches 0 V. Within this region, as V_{SENSE} approaches 20 mV, device operation is closer to that described by Normal Case 2. Figure 33 illustrates this behavior. The V_{OUT} maximum peak for this case is tested by maintaining a constant V_S , setting $V_{SENSE} = 0$ mV, and sweeping V_{CM} from 0 V to Vs. The exact V_{CM} at which V_{OUT} peaks during this test varies from part to part, but the V_{OUT} maximum peak is tested to be less than the specified V_{OUT} Tested Limit.



Data taken from INA205, a device of INA20x family with Gain = 100

Figure 33. Example for Low V_{SENSE} Case 2 (Gain = 100)




Application Information (continued)

9.1.5 Transient Protection

The -16 V to +80 V common-mode range of the INA203-Q1 is ideal for withstanding automotive fault conditions ranging from 12-V battery reversal up to 80-V transients, since no additional protective components are needed up to those levels. In the event that the INA203-Q1 is exposed to transients on the inputs in excess of their ratings, then external transient absorption with semiconductor transient absorbers (zeners or *Transzorbs*) are necessary. Use of metal oxide varistors (MOVs) or video disk recorders (VDRs) is not recommended except when they are used in addition to a semiconductor transient absorber. Select the transient absorber such that it will never allow the INA203-Q1 to be exposed to transients greater than 80 V (that is, allow for transient absorber tolerance, as well as additional voltage because of transient absorber dynamic impedance). Despite the use of internal zener-type ESD protection, the INA203-Q1 does not lend itself to using external resistors in series with the inputs because the internal gain resistors can vary up to ±30% but are closely matched. (If gain accuracy is not important, then resistors can be added in series with the INA203-Q1 inputs with two equal resistors on each input.)

9.2 Typical Applications

9.2.1 Polyswitch Warning and Fault Detection Circuit

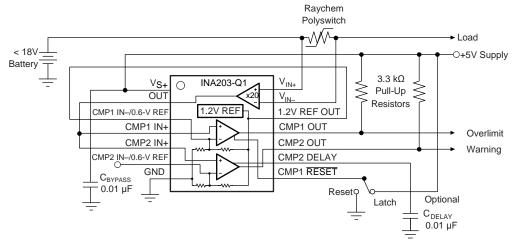

Copyright © 2016, Texas Instruments Incorporated

Figure 34. Polyswitch Warning and Fault Detection Circuit Schematic

9.2.1.1 Design Requirements

The device measures current through a resistive shunt with current flowing in one direction, thus enabling detection of an overlimit or warning event only when the differential input voltage exceeds the corresponding threshold limits. When the current reaches the warning limit of 0.6 V, the output of CMP2 will transition high indicating a warning condition. When the current further increases to or past the overlimit limit of 1.2 V, the output of CMP1 will transition high indicating an overlimit condition. Optional C_{DELAY} can be sized to add delay to CMP2.


9.2.1.2 Detailed Design Procedure

Figure 34 shows the basic connections of the device. The input terminals, V_{IN+} and V_{IN-} , should be connected as close as possible to the current-sensing resistor or polymeric switch to minimize any resistance in series with the shunt resistance. Additional resistance between the current-sensing resistor and input terminals can result in errors in the measurement. When input current flows through this external input resistance, the voltage developed across the shunt resistor can differ from the voltage reaching the input terminals.

TEXAS INSTRUMENTS

Typical Applications (continued)

9.2.1.3 Application Curves

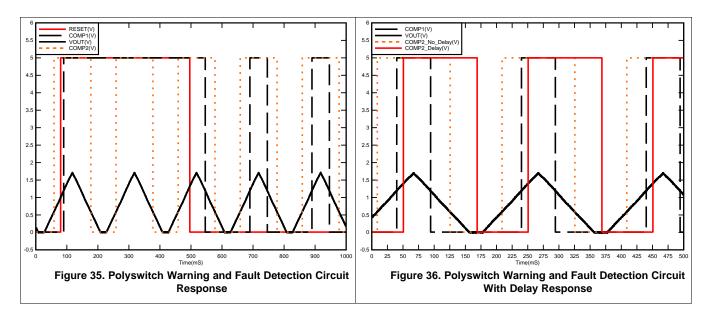

9.2.2 Lead-Acid Battery Protection Circuit

See Figure 37 for a protection scheme using INA203-Q1 for a lead-acid battery application.

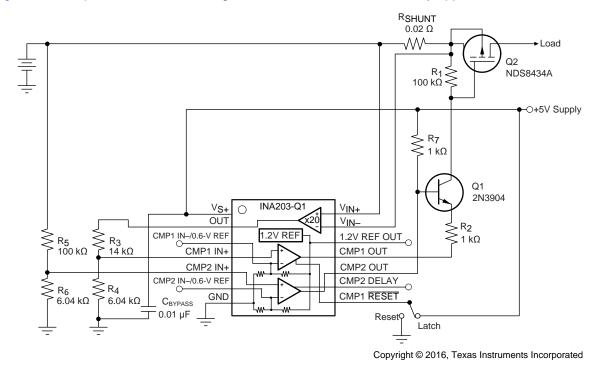


Figure 37. Lead-Acid Battery Protection Circuit Schematic

Submit Documentation Feedback



10 Power Supply Recommendations

The input circuitry of the INA203-Q1 can accurately measure beyond the power-supply voltage, V_S . For example, the V_S power supply can be 5 V, whereas the load power-supply voltage is up to 80 V. The output voltage range of the OUT terminal, however, is limited by the voltages on the power-supply pin.

11 Layout

11.1 Layout Guidelines

- Connect the input pins to the sensing resistor using a Kelvin or 4-wire connection. This connection technique
 ensures that only the current-sensing resistor impedance is detected between the input pins. Poor routing of
 the current-sensing resistor commonly results in additional resistance present between the input pins. Given
 the very low ohmic value of the current resistor, any additional high-current carrying impedance can cause
 significant measurement errors.
- The power-supply bypass capacitor should be placed as closely as possible to the supply and ground pins. TI
 recommends the value of this bypass capacitor is 0.1 μF. Additional decoupling capacitance can be added to
 compensate for noisy or high-impedance power supplies.

11.2 Layout Example

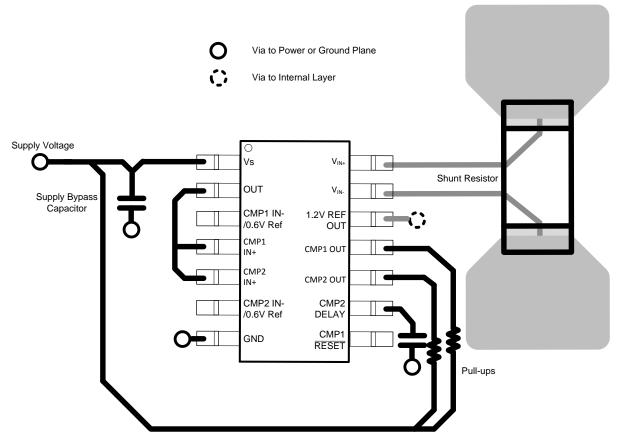


Figure 38. Layout Recommendation



12 Device and Documentation Support

12.1 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.2 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.4 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
INA203AQPWRQ1	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	I203AQ
INA203AQPWRQ1.A	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	I203AQ

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF INA203-Q1:

Catalog: INA203

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

NOTE: Qualified Version Definitions:

 $_{\bullet}$ Catalog - TI's standard catalog product

PACKAGE MATERIALS INFORMATION

www.ti.com 25-Jul-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
INA203AQPWRQ1	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

PACKAGE MATERIALS INFORMATION

www.ti.com 25-Jul-2025



*All dimensions are nominal

	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
ı	INA203AQPWRQ1	TSSOP	PW	14	2000	353.0	353.0	32.0	



SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025