





TPS8802 SLVSF25C - SEPTEMBER 2019 - REVISED AUGUST 2021

TPS8802 Smoke Alarm AFE

1 Features

- Photo Chamber AFE
 - Dual 8-bit programmable current LED drivers
 - Temperature compensation of LED current
 - Ultra-low offset op-amp for photodiodes
 - Programmable and bypassable gain stage
- Carbon Monoxide Sensor AFE
 - Ultra-low offset gain stage
 - Programmable gain and reference
- Horn Driver
 - Self-resonant driver for three-terminal piezos
 - PWM support for voice on two-terminal piezos
- **Power Management**
 - Programmable LDO for external microcontroller
 - Boost converter for horn, interconnect
- Interconnection bus for multi-alarm communication
- Ultra-low power consumption
- I²C serial interface
- Programmable battery test load

2 Applications

Smoke and CO alarm

3 Description


The TPS8802 integrates all of the regulators, amplifiers, and drivers required for a dual-wave photoelectric smoke alarm and carbon monoxide (CO) detection system. Its high flexibility is ideal for smoke alarm systems where precision and power consumption are critical.

The wide input voltage range combined with low standby power consumption and power-saving features support 10-year battery life operation from a single lithium primary battery. The TPS8802 also supports battery backup smoke alarms, seamlessly remaining powered when the mains supply drops or if the battery is disconnected.

Device Information⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|------------|-----------------|
| TPS8802 | TSSOP (38) | 9.7 mm x 4.4 mm |

For all available packages, see the orderable addendum at the end of the data sheet.

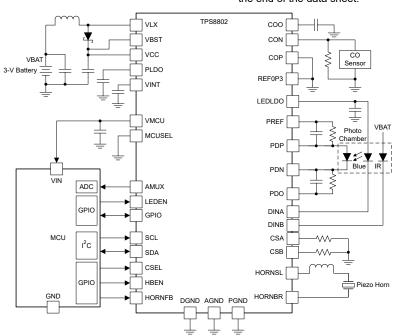

Simplified Application



Table of Contents

| 1 Features | 1 | 8.4 Device Functional Modes | .40 |
|--------------------------------------|----|---|-----|
| 2 Applications | | 8.5 Programming | |
| 3 Description | | 8.6 Register Maps | |
| 4 Revision History | | 9 Application and Implementation | |
| 5 Pin Configuration and Functions | | 9.1 Application Information | |
| Pin Functions | | 9.2 Typical Application | |
| 6 Specifications | | 10 Power Supply Recommendations | |
| 6.1 Absolute Maximum Ratings | | 11 Layout | |
| 6.2 ESD Ratings | | 11.1 Layout Guidelines | |
| 6.3 Recommended Operating Conditions | | 11.2 Layout Example | |
| 6.4 Thermal Information | 6 | 12 Device and Documentation Support | .68 |
| 6.5 Electrical Characteristics | | 12.1 Receiving Notification of Documentation Updates. | |
| 6.6 Typical Characteristics | 20 | 12.2 Support Resources | 68 |
| 7 Typical Characteristics | | 12.3 Trademarks | |
| 8 Detailed Description | | 12.4 Electrostatic Discharge Caution | .68 |
| 8.1 Overview | | 12.5 Glossary | .68 |
| 8.2 Functional Block Diagram | 24 | 13 Mechanical, Packaging, and Orderable | |
| 8.3 Feature Description | | Information | 69 |
| | | | |

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from F | evision B (march 2021) to Revision C (August 2021) | Page |
|-----------------------------------|--|------------------|
| Updated Figu | re 3-1 | 1 |
| Updated Figu | re 8-4 | <mark>2</mark> 9 |
| Added Conne | ct a capacitor with a value between 1 μ F and 100 μ F to the LEDLDO. to Section 8. | 3.4.230 |
| | LOW description in Section 8.6.2 | |
| | re 9-1 | |
| Updated Figu | re 9-10 | <mark>5</mark> 9 |
| Changes from F | evision A (March 2020) to Revision B (March 2021) | Page |
| Changed typic | cal I _{MCULDO.O} based on measurement data | 6 |
| | cal I _{CO O} based on measurement data | |
| Added require | ment when enabling the boost converter and disabling the photo input amplifier | 33 |
| Changes from F | evision * (October 2019) to Revision A (March 2020) | Page |
| Changed doc | ument status from Advanced Information to Production Data | 1 |
| Added typical | value to V _{PDIN,OFS} | 6 |
| | value to V _{OFFS,CO} | |
| | value to V _{MUX,OFFS} | |
| | | |

Product Folder Links: TPS8802

ibmit Document Feedback



5 Pin Configuration and Functions

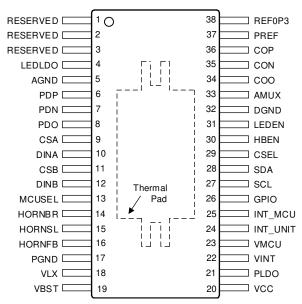


Figure 5-1. DCP Package 38-Pin TSSOP Top View

Pin Functions

| F | PIN | | 250207504 |
|----------|-----|-------|--|
| NAME | NO. | - I/O | DESCRIPTION |
| AGND | 5 | I | Analog ground. Connect to ground plane. |
| AMUX | 33 | 0 | Analog multiplexer output. |
| CON | 35 | 1 | Negative terminal of CO operational amplifier. Connect to GND if unused. |
| coo | 34 | 0 | Output of CO operational amplifier. Connect to GND if unused. |
| СОР | 36 | I | Positive terminal of CO operational amplifier. Connect to GND if unused. |
| CSA | 9 | I | LED driver A current sense. |
| CSB | 11 | I | LED driver B current sense. Connect to GND if unused. |
| CSEL | 29 | I | Device address select pin for I ² C serial interface. Pull to GND for I ² C address 0x3F. Pull to VMCU for I ² C address 0x2A. Do not leave floating. |
| DGND | 32 | I | Digital ground. Connect to AGND. |
| DINA | 10 | I | LED driver A current sink. Connect to cathode of LED. |
| DINB | 12 | I | LED driver B current sink. Connect to cathode of LED. Connect to GND if unused. |
| GPIO | 26 | I/O | Multi-purpose digital input and output. |
| HBEN | 30 | I | Horn block enable. Do not leave floating while device is powered. |
| HORNBR | 14 | 0 | Brass terminal of piezo horn. |
| HORNFB | 16 | I | Feedback terminal of a three-terminal piezo horn. Do not leave floating while device is powered. |
| HORNSL | 15 | 0 | Silver terminal of piezo horn. |
| INT_MCU | 25 | I/O | Interconnect and interrupt signal to microcontroller. |
| INT_UNIT | 24 | I/O | Interconnect bus to connect other smoke alarms. |
| LEDEN | 31 | I | LED driver enable. Do not leave floating while device is powered. |
| LEDLDO | 4 | 0 | LDO output for charging LED supply capacitor. Connect to GND if unused. |
| MCUSEL | 13 | I | Default MCULDO and VBST voltage selection input. Leave floating for VMCU = 3.3 V , VBST = 4.7 V . Tie to VINT for VMCU = 2.5 V , VBST = 3.8 V . Tie to GND for VMCU = 1.8 V , VBST = 2.7 V . Connect to GND with a $620-\Omega$ resistor for VMCU = 1.5 V , VBST = 2.7 V . |
| PDN | 7 | I | Photo input amplifier negative input. Connect to cathode of photodiode. |



| P | IN | I/O | DESCRIPTION |
|-------------|---------|-----|--|
| NAME | NO. | 1/0 | DESCRIPTION |
| PDO | 8 | 0 | Photo input amplifier output pin. |
| PDP | 6 | I | Photo input amplifier positive Input. Connect to anode of photodiode. |
| PGND | 17 | I | Power ground connection to boost converter and horn driver. Connect to AGND. |
| PLDO | 21 | 0 | Capacitor connection to PLDO regulator. |
| PREF | 37 | 0 | Photo reference voltage and output for testing CO sensor connectivity. |
| REF0P3 | 38 | 0 | 300mV reference. Connect to GND if unused. |
| RESERVED | 1, 2, 3 | N/A | Connect to GND. |
| SCL | 27 | I | Clock input for I ² C serial interface. |
| SDA | 28 | I/O | Data line for I ² C serial interface. |
| VBST | 19 | I | Boost converter feedback and power input. |
| VCC | 20 | I | Input supply pin. |
| VINT | 22 | 0 | Capacitor connection to internal supply LDO. |
| VLX | 18 | I | Boost converter switch node. |
| VMCU | 23 | I/O | LDO supply for external microcontroller and internal IO buffers. |
| Thermal Pad | 39 | N/A | Metal connection for thermal dissipation. Connect to ground plane. |



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

| | PARAMETER | MIN | MAX | UNIT |
|------------------------------------|--|------|---|------|
| Power IO | HORNSL, HORNBR, VBST, VCC | -0.3 | 16.5 | V |
| Analog IO | DINA, DINB, LEDLDO | -0.3 | 12 | V |
| Horn feedback | HORNFB | -3 | 6.5 | V |
| Boost switch | VLX | -0.3 | 16.5 | V |
| Analog connections | AMUX, CON, COO, COP, PREF, MCUSEL, PDO, REF0P3 | -0.3 | VINT + 0.3 or 3.6, whichever is lower | V |
| LDO outputs | VINT, VMCU | -0.3 | PLDO + 0.3 or 3.6, whichever is lower | V |
| LED current sense | CSA | -0.3 | DINA + 0.3 or 3.6, whichever is lower | V |
| LED current sense | CSB | -0.3 | DINB + 0.3 or 3.6, whichever is lower | V |
| Photo amplifier inputs | PDN, PDP | -0.3 | 3.6 | V |
| PLDO voltage | PLDO | -0.3 | 7.0 | V |
| Interconnect bus | INT_UNIT | -0.3 | 18 | V |
| Digital IO | CSEL, GPIO, HBEN, INT_MCU, LEDEN, SCL, SDA | -0.3 | VMCU + 0.3 or 3.6, whichever is lower | V |
| Max operating ambient temperature | T _A | -40 | 125 | °C |
| Max operating junction temperature | TJ | -40 | 125 | °C |

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Rating may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Condition. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

over operating free-air temperature range (unless otherwise noted)

| | | | Value | UNIT |
|--------------------|-------------------------|--|-------|------|
| | | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ¹ | ±3000 | |
| V _(ESD) | Electrostatic discharge | Charged-device model (CDM), per JEDEC specification JESD22-C101 ² | ±1500 | V |

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | PARAMETER | MIN | MAX | UNIT |
|---------------------|-----------|-----|-----|------|
| 3 V battery voltage | VBAT | 2.0 | 3.3 | V |

JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

Copyright © 2021 Texas Instruments Incorporated

² JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



| 1 0 | PARAMETER | MIN | MAX | UNIT |
|----------------------|--|--------------------|------|------|
| 9 V battery voltage | VBAT | 6.0 | 10 | V |
| Power supply | VCC, VBST | 2.6 ⁽¹⁾ | 15.6 | V |
| LED driver | DINA, DINB | 0 | 11.5 | V |
| Horn feedback | HORNFB | -2 | 6 | V |
| Interconnect bus | INT_UNIT | 0 | 17 | V |
| Digital IO | INT_MCU, SCL, SDA, CSEL, LEDEN, HBEN, GPIO | 0 | VMCU | V |
| Digital IO supply | VMCU | 1.425 | 3.6 | V |
| Ambient temperature | T _A | -40 | 85 | °C |
| Junction temperature | T _J | -40 | 85 | °C |

⁽¹⁾ Device powers up with V_{CC} < 2.6 V but is not parametrically guaranteed

6.4 Thermal Information

| | | TPS8802 | |
|------------------------|--|---------|------|
| | THERMAL METRIC ⁽¹⁾ | DCP | UNIT |
| | | 38 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 29.3 | °C/W |
| R ₀ JC(top) | Junction-to-case (top) thermal resistance | 20.0 | °C/W |
| R _{θJB} | Junction-to-board thermal resistance | 10.1 | °C/W |
| Ψ_{JT} | Junction-to-top characterization parameter | 0.3 | °C/W |
| Ψ_{JB} | Junction-to-board characterization parameter | 10.0 | °C/W |
| R _{0JC(bot)} | Junction-to-case (bottom) thermal resistance | 2.2 | °C/W |

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

6.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------|---|---|-------|------|-----|------|
| INPUT VOLTA | GE AND CURRENTS | | | | | |
| V _{PWRUP} | Power up threshold. Note: Device enters active state when MCU_PG=1. | VCC rising | 1.2 | 1.55 | 2.0 | V |
| V _{PWRDOWN} | Power down threshold | VCC falling | 0.932 | 1.15 | 2.0 | V |
| V _{PWR, HYS} | VCC power up to power down hysteresis | | 6.4 | 400 | 580 | mV |
| V _{VCCLOW, RISE} | VCC low warning reset threshold | PLDO voltage rising | 2.35 | 2.54 | 2.7 | V |
| VCCLOW, RISE | | Deglitch time | 110 | 141 | 172 | μs |
| ., | VCC low warning assert | PLDO voltage falling | 2.15 | 2.42 | 2.6 | V |
| V _{VCCLOW} , FALL | threshold | Deglitch time | 110 | 141 | 172 | μs |
| 1 | Standby Supply Current | All blocks that can be disabled are off, T _J =27C, VCC=3V, VMCU=1.8V | | 3.8 | 4.4 | μΑ |
| ^I STANDBY | Standby Supply Current | All blocks that can be disabled are off, T _J =27C, VCC=9V, VMCU=3.3V | | 7.7 | 9.1 | μΑ |

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------|---------------------------------------|---|------|------|------|------|
| POWER LDO | | | | | - | |
| | | VCC = 2.0 V, I _{PLDO} = 10 mA | 1.93 | 1.96 | 1.99 | V |
| | | VCC = 2.0 V, I _{PLDO} = 30 mA | 1.8 | 1.89 | 1.95 | V |
| V _{PLDO} | Output Voltage | VCC = 3.3 V, I _{PLDO} = 30 mA | 3.1 | 3.22 | 3.3 | V |
| | | VCC = 9 V, I _{PLDO} = 30 mA | 4.1 | 4.9 | 6.7 | V |
| | | VCC = 11.5 V, I _{PLDO} = 30 mA | 4.1 | 5 | 6.7 | V |
| C _{PLDO} | PLDO capacitor required for stability | | 0.7 | 1 | 1.3 | μF |
| INTERNAL L | DO | | | | | |
| | Output Voltage | I _{VINT} < 10 mA | 2.25 | 2.3 | 2.35 | V |
| | Output voltage | I _{VINT} < 10 uA, T>80C | 2.25 | 2.3 | 2.40 | V |
| | DC Output Voltage Accuacy | No external/internal load, VCC = 2.6 V - 11.5 V | -2 | | 2 | % |
| | Line Regulation | VCC = 2.6 V-11.5 V, IOUT = 10 mA | -2 | | 2 | % |
| V _{INTLDO} | Load Regulation | I _{VINT} = 0 mA - 10 mA, VCC = 3 V | -2 | | 2 | % |
| | Transient regulation | I _{VINT} stepped from 0 mA to 10 mA in 1us | -8 | | 8 | % |
| | | I _{VINT} stepped from 10 mA to 0 mA in 1us | -5 | | 5 | % |
| | PSRR | V _{IN} = 3.0 V, I _{OUT} = 10 mA, f = 60 Hz (200 mVpp) | 50 | | | dB |
| INTLDO, OUT | Output current range | | 0 | | 10 | mA |
| I _{INTLDO, SC} | Short Circuit Current Limit | | 30 | 280 | 500 | mA |
| V _{INTLDO, DO} | Dropout Voltage | From PLDO to VINT, I _{VINT} = 10 mA, PLDO = 2.2 V | | 52 | 66 | mV |
| ^ | Output Capacitor | Caramia | 0.7 | 1 | 1.3 | μF |
| C _{INTLDO, OUT} | ESR of Output Capacitor | Ceramic | | | 100 | mΩ |
| MCU LDO | 1 | | | | 1 | |



| over operatin | g free-air temperature range | · | | | | |
|------------------------------|---|---|-------|------|-------|------|
| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
| | | I _{MCULDO} < 30 mA, V _{CC} > 2.2 V, VMCUSET = 00 (T < 80°C for no load) | 1.425 | 1.5 | 1.575 | V |
| | | I _{MCULDO} < 10 uA, V _{CC} > 2.2 V, VMCUSET = 00, T > 80°C | 1.425 | 1.5 | 1.65 | V |
| | | $\label{eq:local_local_local} \begin{bmatrix} I_{\text{MCULDO}} < 30 \text{ mA}, V_{\text{CC}} > 2.6 \\ V, \text{VMCUSET} = 01 \text{ (T < }80^{\circ}\text{C)} \\ \text{for no load)} \end{bmatrix}$ | 1.71 | 1.8 | 1.89 | V |
| | | I _{MCULDO} < 10 uA, V _{CC} > 2.6 V, VMCUSET = 01, T > 80°C | 1.71 | 1.8 | 1.98 | V |
| V _{MCULDO} | Output Voltage ⁽¹⁾ | I_{MCULDO} < 30 mA, V_{CC} > 3.65 V, VMCUSET = 10 (T < 80°C for no load) | 2.38 | 2.5 | 2.63 | V |
| | | I _{MCULDO} < 10 uA, V _{CC} > 3.65 V, VMCUSET = 10, T > 80°C | 2.38 | 2.5 | 2.75 | V |
| | | I_{MCULDO} < 10 mA, V_{CC} > 3.65 V, VMCUSET = 11 (T < 80°C for no load) | 3.13 | 3.3 | 3.47 | V |
| | | I _{MCULDO} < 10 uA, V _{CC} > 4.5 V, VMCUSET = 11, T > 80°C | 3.13 | 3.3 | 3.60 | V |
| | | I _{MCULDO} < 50 mA, VCC > 5.5 V, VMCUSET = 11 | 3.13 | 3.3 | 3.47 | V |
| | DC Output Voltage Accuracy | T < 80°C | -5 | | 5 | % |
| MCULDO power of threshold | MCULDO power good | VMCU rising | 75 | 82 | 95 | % |
| | threshold | VMCU falling | 65 | 78 | 85 | % |
| | | V _{CC} > 2.2 V, VMCUSET = 00 | 0 | | 30 | mA |
| | Output Current Range | V _{CC} > 2.6 V, VMCUSET = 01 | 0 | | 30 | mA |
| I _{MCULDO} | | V _{CC} > 3.65 V, VMCUSET = 10 | 0 | | 30 | mA |
| | | V _{CC} > 4.5 V, VMCUSET = 11 | 0 | | 50 | mA |
| | | I _{MCULDO} stepped from 0 mA to 10 mA in 1us, T < 80°C | -7 | | 7 | % |
| V _{MCULDO, TR} | MCULDO load transient | I _{MCULDO} stepped from 0 mA to 10 mA in 1us, T > 80°C | -8 | | 8 | % |
| ▼MCULDO, TR | regulation | I _{MCULDO} stepped from 10 mA to 0 mA in 1us, T < 80°C | -5 | | 5 | % |
| | | I _{MCULDO} stepped from 10 mA to 0 mA in 1us, T > 80°C | -8 | | 8 | % |
| I _{MCULDO} , sc | Short Circuit current limit | | 72 | 162 | 253 | mA |
| t _{MCULDO, PWR} | Power Up Time | C _{MCULDO} = 1µF, time from VMCU=0V to 90% of target voltage | | 600 | 1100 | μs |
| T _{MCULDO, PG} | MCULDO power good deglitch time | | 92 | 125 | 158 | μs |
| T _{MCULDO,} MASK | MCULDO low voltage error mask time. MCULDO_ERR is masked for T_MCULDO,MASK after VMCUSET or MCU_DIS is changed. | | | 10 | | ms |
| I _{MCULDO, Q} | Quiescent Current | I _{MCULDO} = 0μA | | 2.04 | 3 | μA |
| <u> </u> | Output Capacitor | Coramic | 0.7 | 1 | 10 | μF |
| C _{MCULDO} | ESR of Output Capacitor | - Ceramic | | | 100 | mΩ |

| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------|---|--|-------|-------|-------|------|
| | | Pull-down resistance to set VMCUSET[1:0]=00 on powerup | 558 | 620 | 682 | Ω |
| R _{MCUSEL} | MCUSEL component requirements. Not tested in | Pull-down resistance to set VMCUSET[1:0]=01 on powerup | 0 | | 10 | Ω |
| MCUSEL | production | Pull-up resistance to VINT to set VMCUSET[1:0]=10 on powerup | 0 | | 10 | Ω |
| | Capacitance to set VMCUSET[1:0]=11 on powerup | 300 | | 1000 | pF | |
| OCDC BOOS | T REGULATOR | | | | | |
| | | I _{BST} < 50 mA, 2.0 V < VBAT < 2.5 V, VBST = 0000, BST_CLIM[3:0] = 1111 | 2.45 | 2.7 | 2.808 | V |
| | I _{BST} < 50 mA, 2.0 V < VBAT < 3.5 V, VBST = 0001, BST_CLIM[3:0] = 1111 | 3.55 | 3.8 | 3.952 | V | |
| | | I _{BST} < 50 mA, 2.0 V < VBAT < 4.0 V, VBST = 0010, BST_CLIM[3:0] = 1111 | 4.40 | 4.7 | 4.888 | V |
| | Boost minimum output | I _{BST} < 50 mA, 2.0 V < VBAT < 5.2 V, VBST = 0011, BST_CLIM[3:0] = 1111 | 5.60 | 6 | 6.24 | V |
| V_{BST} | voltage. Load applied after voltage settles. Note: average output voltage depends on | I _{BST} < 30 mA, 2.0 V < VBAT < 8.0 V, VBST = 0100, BST_CLIM[3:0] = 1111 | 8.64 | 9 | 9.36 | V |
| | ripple. | I _{BST} < 30 mA, 2.0 V < VBAT < 9.0 V, VBST = 0101, BST_CLIM[3:0] = 1111 | 9.6 | 10 | 10.4 | V |
| | | I _{BST} < 30 mA, 2.0 V < VBAT < 9.5 V, VBST = 0110, BST_CLIM[3:0] = 1111 | 10.08 | 10.5 | 10.92 | V |
| | | I _{BST} < 30 mA, 2.0 V < VBAT < 10.0 V, VBST = 0111, BST_CLIM[3:0] = 1111 | 10.56 | 11 | 11.44 | V |
| | | I _{BST} < 30 mA, 2.0 V < VBAT < 10.5 V, VBST = 1000, BST_CLIM[3:0] = 1111 | 10.96 | 11.5 | 11.96 | V |
| V_{BST} | Boost minimum output voltage. Load applied after voltage settles. Note: average output voltage depends on ripple. | I _{BST} < 20 mA, 2.0 V < VBAT < 13.5 V, VBST = 1001, BST_CLIM[3:0] = 1111 | 14.4 | 15 | 15.6 | V |
| V _{BST, PG} | Power good threshold | V _{BST} rising | | 96 | | % |
| ▼ BS1, PG | 1 Swel good tillesiloid | V _{BST} falling | | 85 | | 70 |
| BST, PWRUP | Output current when boost is powering up. The boost output current is limited when | VBST = 0000, VCC = VBST < 2.7 V | | | 5 | mA |
| ·DOI, PWKUP | VBST is below the specified voltage. | VBST = 0001:1000, VCC = VBST < 3.0 V | | | 5 | mA |



| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------|---|--|------|-------|------|------|
| | | BST_CLIM[3:0] = 0000, VCC=2.6 V | 4 | 30 | 70 | mA |
| | | BST_CLIM[3:0] = 0001, VCC=2.6 V | 18 | 40 | 75 | mA |
| | | BST_CLIM[3:0] = 0010, 2.6 V < VCC < 3.65 V | 18 | 50 | 90 | mA |
| | | BST_CLIM[3:0] = 0011 | 18 | 60 | 105 | mA |
| | | BST_CLIM[3:0] = 0100 | 43 | 80 | 130 | mA |
| | | BST_CLIM[3:0] = 0101 | 69 | 100 | 150 | mA |
| | Inductor peak current setting | BST_CLIM[3:0] = 0110 | 102 | 130 | 190 | mA |
| BST, PEAK | modelin peak earliers setting | BST_CLIM[3:0] = 0111 | 133 | 160 | 220 | mA |
| | | BST_CLIM[3:0] = 1000 | 168 | 200 | 275 | mA |
| | | BST_CLIM[3:0] = 1001 | 198 | 240 | 324 | mA |
| | | BST_CLIM[3:0] = 1010 | 230 | 280 | 384 | mA |
| | | BST_CLIM[3:0] = 1011 | 262 | 320 | 444 | mA |
| | | BST_CLIM[3:0] = 1100 | 291 | 360 | 504 | mA |
| | | BST_CLIM[3:0] = 1101 | 324 | 400 | 566 | mA |
| | | BST_CLIM[3:0] = 1110 | 360 | 450 | 640 | mA |
| | | BST_CLIM[3:0] = 1111 | 398 | 500 | 720 | mA |
| R _{DS, BST} | Low-side MOSFET on resistance | VCC = 3.3 V | 0 | 0.9 | 1.18 | Ω |
| BST,STANDBY | Standby current. Current does not include bias block or 8 MHz oscillator. | I _{BST} = 0, BST_EN=1. | | 100 | 150 | μΑ |
| C _{BST} | Recommended external capacitance | | | 4.7 | | μF |
| L _{BST} | Recommended external inductance | | | 33 | | μH |
| R _{IND, BST} | Recommended inductor DC resistance | | | 0.5 | 0.8 | Ω |
| T _{BST, PG} | Boost power good deglitch time | | 110 | 141 | 172 | μs |
| | Boost activity monitor delay | T_BSTACT[1:0] = 00 | 0.1 | 0.156 | 0.2 | |
| - | time—BST_nACT is set to 1 when the boost converter has | T_BSTACT[1:0] = 01 | 0.9 | 1 | 1.1 | |
| T _{BST, ACT} | not switched for T_BST,ACT | T_BSTACT[1:0] = 10 | 9.4 | 10 | 10.6 | ms |
| | while BST_EN=1. Not tested in production. | T_BSTACT[1:0] = 11 | 94 | 100 | 106 | |
| T _{BST, MASK} | Boost converter BST_ERR mask time. BST_ERR is masked for T _{BST,MASK} after VBST or BST_EN is changed. | | | 10 | | ms |
| PHOTO CHAI | MBER INPUT STAGE AMPLIFI | ER | | | | |
| V_{PDO} | Output voltage range | PAMP_EN=1, Feedback network: 1.5M Ω, 10pF | 0 | | 0.5 | V |
| f _{PDIN, BW} | Unity Gain Bandwidth | | 1 | | 5 | MHz |
| V _{PDIN, OFS} | Input Offset Voltage | | -530 | -195 | 240 | μV |
| V _{PDO, OFS} | Output Offset Voltage | 50 mV applied to PDP with 1.5 M Ω series resistor. 1.5 M Ω resistor connects PDN to PDO. Voltage measured between 50 mV and PDO. | -10 | | 10 | mV |



| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|--|--|-------|-------|-------|------|
| PDIN, CHOP | Chop Frequency | | | 2 | | MHz |
| | Input amplifier settling time. Time between stepping the | Feedback network: 1.5M Ω, 10pF. 1 nA to 10 nA applied from PDN to PDP. 0V reference | 0 | 30 | 40 | μs |
| PDIN, SET | current and measuring 90% of the final value + 10% of the initial value at PDO | Feedback network: $1.5M\Omega$, 5pF. $1.5M\Omega$ connected from PDP to PREF. 1 nA to 10 nA applied from PDN to PDP. PREF_SEL=1 | 0 | 20 | 40 | μs |
| PDIN, ACT | Active current. Current does not include bias block or 8 MHz oscillator. | | | 175 | 210 | μΑ |
| PHOTO CHAI | MBER GAIN STAGE AMPLIFIE | R | | | | |
| | Closed Loop Gain Slope (VACUIT PH2- | V _{PDO1} =10mV, V _{PDO2} =20mV, PREF_SEL=0, PGAIN[1:0] = 00 | 4.75 | 4.9 | 5.05 | V/V |
| | | V _{PDO1} =10mV, V _{PDO2} =20mV, PREF_SEL=0, PGAIN[1:0] = 01 | 10.67 | 11 | 11.33 | V/V |
| to PDO and measure AOUT_PH. Apply V _{SIG2} from COTEST to PDO and measure AOUT_PH | V _{PDO1} =10mV, V _{PDO2} =20mV, PREF_SEL=0, PGAIN[1:0] = 10 | 19.4 | 20 | 20.6 | V/V | |
| | | V _{PDO1} =10mV, V _{PDO2} =20mV, PREF_SEL=0, PGAIN[1:0] = 11 | 33.95 | 35 | 36.05 | V/V |
| G _{PGAIN} | Closed Loop | V _{SIG1} =10mV, V _{SIG2} =20mV, PREF_SEL=1, PGAIN[1:0] = 00 | 4.61 | 4.75 | 4.89 | V/V |
| | Closed Loop Gain Slope (V _{AOUT_PH2} - V _{AOUT_PH1})/(V _{SIG2} -V _{SIG1}). Apply V _{SIG1} from PREF | V_{SIG1} =10mV, V_{SIG2} =20mV, PREF_SEL=1, PGAIN[1:0] = 01 | 10.09 | 10.4 | 10.71 | V/V |
| | to PDO and measure AOUT_PH. Apply V _{SIG2} from PREF to PDO and measure | V_{SIG1} =10mV, V_{SIG2} =20mV, PREF_SEL=1, PGAIN[1:0] = 10 | 17.94 | 18.5 | 19.06 | V/V |
| | AOUT_PH | V _{SIG1} =10mV, V _{SIG2} =20mV, PREF_SEL=1, PGAIN[1:0] = 11 | 31.28 | 32.25 | 33.22 | V/V |
| PGAIN, BW | Unity Gain Bandwidth | | 1 | 5 | 8 | MHz |
| PGAIN, OFS | Input offset Voltage | | -6 | | 5 | mV |
| PGAIN, SET | Gain amplifier settling time. Time between stepping the voltage and measuring 90% of the final value + 10% of the initial value at AOUT_PH | PGAIN[1:0]=00. PDO stepped from 3mV to 30mV. PREF_SEL=0 | | 1.8 | 2.522 | μs |
| PGAIN, ACT | Active current. Current does not include bias block. | 1.0 V input voltage, PGAIN[1:0] = 00, PGAIN_EN = 1 | | 40 | 70 | μA |
| ED LDO | | | | | I | |
| V _{LEDLDO} | LEDLDO output voltage range | | 7.5 | | 10 | V |
| / _{LEDLDO,ACC} | LDO output accuracy | I_LEDLDO = 0uA to 100uA | -5 | | 5 | % |
| V _{LEDLDO, RES} | LED LDO output step size | | | 0.5 | | V |
| LEDLDO, OUT | LDO output current limit | | 11 | 3 | 6 | mA |
| LEDLDO, Q | Quiescent current. Current does not include bias block. | | | 31 | 60 | μΑ |
| | • | | | | | |



| | PARAMETER | TEST CO | NDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------------|---|---|--|-------|-------|-------|-------|
| V _{LEDLDO, DROP} | LED LDO dropout voltage | VBST=7V, I _{LEDLDO} =100u A | VBST=7V, I _{LEDLDO} =100u A | | 565 | 1000 | mV |
| LED DRIVER A | 4 | | | | | | |
| N _{PDACA, RES} | Resolution | | | | 8 | | Bits |
| | | $T_J = 27^{\circ}C TEM$ 00, PDAC_A = kOhms, V_{DINA} = | 00, R _{CSA} =1 | 274 | 299 | 323 | mV |
| | | $T_J = 27^{\circ}C TEM$ 00, PDAC_A = kOhms, V_{DINA} = | FF, R _{CSA} =1 | 567 | 593 | 619 | mV |
| V _{CSA} CSA output voltage | T _J = 27°C TEM 01, PDAC_A = kOhms, V _{DINA} = | 00, R _{CSA} =1 | 252 | 277 | 301 | mV | |
| | CSA output voltage | T _J = 27°C TEM 01, PDAC_A = kOhms, V _{DINA} = | FF, R _{CSA} =1 | 546 | 572 | 597 | mV |
| | CSA output voltage | T _J = 27°C TEM 10, PDAC_A = kOhms, V _{DINA} = | 00, R _{CSA} =1 | 164 | 188 | 213 | mV |
| | | $T_J = 27^{\circ}C TEM$ 10, PDAC_A = kOhms, V_{DINA} = | FF, R _{CSA} =1 | 458 | 484 | 510 | mV |
| | | $T_J = 27^{\circ}C TEM$ 11, PDAC_A = kOhms, V_{DINA} = | 00, R _{CSA} =1 | 54 | 79 | 104 | mV |
| | | T _J = 27°C TEM 11, PDAC_A = kOhms, V _{DINA} = | FF, R _{CSA} =1 | 350 | 376 | 403 | mV |
| | DAC step size | | | | 1.18 | | mV |
| V _{PDACA, STEP} | INL | | | -10 | | 10 | LSB |
| | DNL | | | -1.5 | | 1.5 | LSB |
| PDACA, SET | Settling Time | | | | 1 | 5 | μs |
| | | TEMPCOA[1:0] PDAC_A[7:0] = kOhms, V _{DINA} = 50°C | 0x00, R _{CSA} =1 | 0.174 | 0.347 | 0.521 | mV/°C |
| | CSA temperature | TEMPCOA[1:0] PDAC_A[7:0] = kOhms, V _{DINA} = 50°C | 0x00, R _{CSA} =1 | 0.208 | 0.416 | 0.624 | mV/°C |
| | compensation coefficient | TEMPCOA[1:0] PDAC_A[7:0] = kOhms, V _{DINA} = 50°C | 0x00, R _{CSA} =1 | 0.346 | 0.693 | 1.039 | mV/°C |
| | | TEMPCOA[1:0] PDAC_A[7:0] = kOhms, V _{DINA} = 50°C | 0x00, R _{CSA} =1 | 0.520 | 1.040 | 1.560 | mV/°C |



| over operatin | | e (unless otherwise noted) | | | | |
|---------------------------|--|--|-------|-------|-------|-------|
| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
| V _{DINA, DROP} | Dropout voltage. Voltage required between DINA and | PLDO=3.6V, R _{CSA} =820mΩ, TEMPCOA[1:0]=11, PDAC_A[7:0]=0x28, T _J =27°C (I_LED≈158mA, 0.8% temp coefficient) | | | 300 | mV |
| V DINA, DROP | CSA for current regulation. | PLDO=3.6V, R _{CSA} =820mΩ, TEMPCOA[1:0]=01, PDAC_A[7:0]=0x79, T _J =27°C (I_LED≈507mA, 0.1% temp coefficient) | | | 500 | mV |
| I _{DINA} | LED current | | 0 | | 550 | mA |
| LED DRIVER | В | | | | | |
| N _{PDACB, RES} | Resolution | | | 8 | | Bits |
| | | T _J = 27°C TEMPCOB[1:0] = 00, PDAC_B = 00, R _{CSB} =1 kOhms, V _{DINB} =3V | 271 | 299 | 327 | mV |
| | | T _J = 27°C TEMPCOB[1:0] = 00, PDAC_B = FF, R _{CSB} =1 kOhms, V _{DINB} =3V | 562 | 594 | 626 | mV |
| | | T _J = 27°C TEMPCOB[1:0] = 01, PDAC_B = 00, R _{CSB} =1 kOhms, V _{DINB} =3V | 250 | 277 | 305 | mV |
| | CSB output voltage | T _J = 27°C TEMPCOB[1:0] = 01, PDAC_B = FF, R _{CSB} =1 kOhms, V _{DINB} =3V | 541 | 572 | 604 | mV |
| V_{CSB} | | T _J = 27°C TEMPCOB[1:0] = 10, PDAC_B = 00, R _{CSB} =1 kOhms, V _{DINB} =3V | 163 | 189 | 216 | mV |
| | | T _J = 27°C TEMPCOB[1:0] = 10, PDAC_B = FF, R _{CSB} =1 kOhms, V _{DINB} =3V | 456 | 486 | 516 | mV |
| | | T _J = 27°C TEMPCOB[1:0] = 11, PDAC_B = 00, R _{CSB} =1 kOhms, V _{DINB} =3V | 55 | 81 | 108 | mV |
| | | T _J = 27°C TEMPCOB[1:0] = 11, PDAC_B = FF, R _{CSB} =1 kOhms, V _{DINB} =3V | 350 | 379 | 408 | mV |
| | DAC step size | | | 1.18 | | mV |
| $V_{PDACB, STEP}$ | INL | | -10 | | 10 | LSB |
| | DNL | | -1.5 | | 1.5 | LSB |
| t _{PDACB,} SET | Settling time | | | 1 | 5 | μs |
| | | TEMPCOB[1:0] = 00, PDAC[7:0] = 0x00, R _{CSB} =1 kOhms, V _{DINB} =3V, T _J =0°C, 50°C | 0.174 | 0.347 | 0.521 | mV/°C |
| K _{PDACB} , COMP | CSB temperature compensation coefficient | TEMPCOB[1:0] = 01, PDAC[7:0] = 0x00, R _{CSB} =1 kOhms, V _{DINB} =3V, T _J =0°C, 50°C | 0.208 | 0.416 | 0.624 | mV/°C |
| | | TEMPCOB[1:0] = 10, PDAC[7:0] = 0x00, R _{CSB} =1 kOhms, V _{DINB} =3V, T _J =0°C, 50°C | 0.346 | 0.693 | 1.039 | mV/°C |
| | | TEMPCOB[1:0] = 11, PDAC[7:0] = 0x00, R _{CSB} =1 kOhms, V _{DINB} =3V, T _J =0°C, 50°C | 0.520 | 1.040 | 1.560 | mV/°C |



| oron operation | g free-air temperature range PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|---|--------|------|----------|-------|
| | PARAMETER | | IVIIIN | ITP | IVIAX | UNII |
| V _{DINB,} DROP | Dropout voltage. Voltage required between DINB and | PLDO=3.6V, R _{CSA} =820mΩ, TEMPCOB[1:0]=11, PDAC[7:0]=0x28, TJ=27°C (I_LED≈158mA, 0.8% temp coefficient) | | | 300 | mV |
| V DINB, DROP | CSB for current regulation. | PLDO=3.6V, R _{CSA} =820mΩ, TEMPCOB[1:0]=01, PDAC[7:0]=0x79, TJ=27°C (I_LED≈507mA, 0.1% temp coefficient) | | | 500 | mV |
| I _{DINB} | LED current | | 0 | | 550 | mA |
| CO TRANSIM | IPEDANCE AMPLIFIER | | | | <u> </u> | |
| R _{I, CO} | CO input resistance | COSWRI = 1 | 0.7 | 1 | 1.5 | kΩ |
| | | COGAIN[1:0] = 00, COSWRG = 1 | 770 | 1100 | 1430 | kΩ |
| R _{F, CO} CO feedback resistance | CO for all and an airtem | COGAIN[1:0] = 01, COSWRG = 1 | 210 | 300 | 390 | kΩ |
| | CO reeupack resistance | COGAIN[1:0] = 10, COSWRG = 1 | 350 | 500 | 650 | kΩ |
| | | COGAIN[1:0] = 11, COSWRG = 1 | 560 | 800 | 1040 | kΩ |
| V _{IN, COP} | CO amplifier input voltage (COP pin) | | 0 | | 0.6 | V |
| V _{IN, CON} | CO amplifier input voltage (CON pin) | | 0 | | 0.6 | V |
| V _{OFFS, CO} | CO amplifier input offset voltage | | -130 | 94 | 300 | μV |
| V _{OUT, COO} | CO amplifier output voltage (COO pin) | | 0.1 | | 2 | V |
| I _{CO, Q} | CO amplifier quiescent current | | | 0.63 | 2.1 | μΑ |
| f _{CO, BW} | CO amplifier unity gain bandwidth | | 5 | 12 | 20 | kHz |
| f _{CO, CHOP} | CO amplifier chop frequency | | 3.8 | 4 | 4.2 | kHz |
| R _{COO} | CO amplifier output resistance | COSWRO = 1 | 70 | 95 | 130 | kΩ |
| | | COSWREF=1, COREF[1:0] = 00, T _J = 27°C | 0.89 | 1.14 | 1.47 | |
| | | COSWREF=1, COREF[1:0] = 00, T _J = -40°C to 85°C | 0.86 | 1.14 | 1.66 | |
| | | COSWREF=1, COREF[1:0] = 01, T _J = 27°C | 1.75 | 2.23 | 2.7 | |
| V_{COPREF} | CO amplifier reference | COSWREF=1, COREF[1:0] = 01, T _J = -40°C to 85°C | 1.7 | 2.23 | 2.95 | mV |
| V COPREF \ | voltage | COSWREF=1, COREF[1:0] = 10, T _J = 27°C | 2.6 | 3.23 | 4 | 111 V |
| | | COSWREF=1, COREF[1:0] = 10, T _J = -40°C to 85°C | 2.55 | 3.23 | 4.24 | |
| | | COSWREF=1, COREF[1:0] = 11, T _J = 27°C | 3.45 | 4.43 | 5.38 | |
| | | COSWREF=1, COREF[1:0] = 11, T _J = -40°C to 85°C | 3.4 | 4.43 | 5.48 | |
| R _{COTEST, PU} | COTEST pull up FET resistance | | 0.36 | 0.76 | 1.1 | kΩ |



| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|--|--|-------|-------|-------|------|
| R _{COTEST, PD} | COTEST pull-down FET resistance | | 0.25 | 0.37 | 0.82 | kΩ |
| NTERCONNE | СТ | | | | | |
| | | INT_DIR = 1, INT_MCU = 0 V, VBST = 11.5 V, INT_UNIT = 0.8 V | 4 | 7.35 | 15 | mA |
| l | Interconnect sink current | INT_DIR = 1, INT_MCU = 0 V, VBST = 11.5 V, INT_UNIT = 2.0 V | 5 | 14.7 | 30 | mA |
| SNK, INT_UNIT | interconnect sink current | INT_DIR = 1, INT_MCU = 0 V, VBST = 11.5 V, INT_UNIT = 6.0 V | 9 | 19.4 | 30 | mA |
| | | INT_DIR = 1, INT_MCU = 0 V, VBST = 11.5 V, INT_UNIT = 10 V | 9 | 19.0 | 30 | mA |
| | | INT_DIR = 1, INT_MCU = VMCU, VBST = 11.5 V, INT_UNIT = 0.8 V | 4 | 7.6 | 15 | mA |
| I _{SRC, INT_UNIT} Interconnect soul | Interconnect source current | INT_DIR = 1, INT_MCU = VMCU, VBST = 11.5 V, INT_UNIT = 2.0 V | 4 | 7.6 | 15 | mA |
| | | INT_DIR = 1, INT_MCU = VMCU, VBST = 11.5 V, INT_UNIT = 6.0 V | 4 | 7.0 | 13 | mA |
| | | INT_DIR = 1, INT_MCU = VMCU, VBST = 11.5 V, INT_UNIT = 10 V | 1 | 1.6 | 4 | mA |
| | | INT_DIR = 0, INT_DEG[1:0] = 00 | 0 | 0 | 0.065 | |
| | | INT_DIR = 0, INT_DEG[1:0] = 01 | 0.090 | 0.125 | 0.160 | |
| INT, DEG | Interconnect deglitch time | INT_DIR = 0, INT_DEG[1:0] = 10 | 0.9 | 1 | 1.1 | ms |
| | | INT_DIR = 0, INT_DEG[1:0] = 11 | 19.4 | 20 | 20.6 | |
| INT, Q | Interconnect standby current | INT_DIR = 0 | | 0.25 | 0.5 | uA |
| V _{INT_UNIT, IHI} | Interconnect input high threshold voltage | INT_HYS = 0 | 1.3 | 2.0 | 2.7 | ٧ |
| I _{INT_UNIT, IHI} | Interconnect input high threshold voltage | INT_HYS = 1 | 1.3 | 2.0 | 2.7 | V |
| INT_UNIT, ILO | Interconnect low threshold voltage | INT_HYS = 0 | 0.5 | 0.8 | 1.1 | V |
| INT_UNIT, ILO | Interconnect low threshold voltage | INT_HYS = 1 | 1.2 | 1.8 | 2.7 | ٧ |
| , | International Control of the Control | INT_HYS = 0 | 0.7 | 1.2 | 1.7 | V |
| /INT_UNIT, HYS | Interconnect input hysteresis | INT_HYS = 1 | 0.01 | 0.2 | 0.3 | V |
| | Interconnect input pulldown | INT_PD=1 | 65 | 107 | 165 | kΩ |
| RINT_UNIT, PD | resistance | INT_PD=0 | 3.5 | 41 | 56 | ΜΩ |
| HORN DRIVE | R | | | | | |
| OH, HORNSL | HORNSL output high voltage | VBST = 11.5 V, I _{HORNSL} = -16 mA | 11 | 11.3 | | V |
| OL, HORNSL | HORNSL output low voltage | VBST = 11.5 V, I _{HORNSL} = 16 mA | | 0.1 | 0.5 | V |



| • | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------|--|---|-----------|------|-----------|------|
| V _{OH, HORNBR} | HORNBR output high voltage | VBST = 11.5 V, I _{HORNBR} = – 16 mA | 11 | 11.3 | | V |
| $V_{OL, HORNBR}$ | HORNBR output low voltage | VBST = 11.5 V, I _{HORNBR} = 16 mA | | 0.1 | 0.5 | V |
| t _{R, HORNSL2} | HORNSL rise time, 2 terminal | VBST=11.5V, no load, HORNSEL=0, HORNFB from 0 to VMCU. Time from V _{HORNSL} =1.15V to V _{HORNSL} =10.35V | | 10 | 20 | ns |
| t _{F, HORNSL2} | HORNSL fall time, 2 terminal | VBST=11.5V, no load, HORNSEL=0, HORNFB from VMCU to 0. Time from V _{HORNSL} =10.35V to V _{HORNSL} =1.15V | | 10 | 20 | ns |
| t _{R, HORNBR2} | HORNBR rise time, 2 terminal | VBST=11.5V, no load, HORNSEL=0, HBEN from 0 to VMCU. Time from V _{HORNBR} =1.15V to V _{HORNBR} =10.35V | | 10 | 20 | ns |
| t _{F, HORNBR2} | HORNBR fall time, 2 terminal | VBST=11.5V, no load, HORNSEL=0, HBEN from VMCU to 0. Time from V _{HORNBR} =10.35V to V _{HORNBR} =1.15V | | 10 | 20 | ns |
| t _{R, HORNSL3} | HORNSL rise time, 3 terminal | VBST=11.5V, C _{HORNSL} =82nF to GND, HORNSEL=1, HORN_THR=00, HORNFB from 0V to 3V. Time from V _{HORNSL} =1.15V to V _{HORNSL} =10.35V | | 2.9 | 5 | μs |
| t _{F, HORNSL3} | HORNSL fall time, 3 terminal | VBST=11.5V, C _{HORNSL} =82nF to GND, HORNSEL=1, HORN_THR=00, HORNFB from 3V to 0V. Time from V _{HORNSL} =10.35V to V _{HORNSL} =1.15V | | 2.3 | 5 | μs |
| t _{R,} hornbr3 | HORNBR rise time, 3 terminal | VBST=11.5V, C _{HORNSL} =82nF to GND, HORNSEL=1, HORN_THR=00, HORNFB from 3V to 0V. Time from V _{HORNBR} =1.15V to V _{HORNBR} =10.35V | | 3.1 | 5 | μs |
| t _{F, HORNBR3} | HORNBR fall time, 3 terminal | VBST=11.5V, C _{HORNSL} =82nF to GND, HORNSEL=1, HORN_THR=00, HORNFB from 0V to 3V. Time from V _{HORNBR} =10.35V to V _{HORNBR} =1.15V | | 2.5 | 5 | μs |
| V _{IH2, HORNFB} | Horn driver input high voltage. HBEN and HORNFB | VBST = 11.5 V, HORNSEL = 0 | 0.35×VMCU | | 0.7× VMCU | V |
| V _{IL2, HORNFB} | Horn driver input low voltage. HBEN and HORNFB | VBST = 11.5 V, HORNSEL = 0 | 0.25×VMCU | | 0.65×VMCU | V |
| t _{SKEW,HIGH} | Horn driver output high delay mismatch. Difference in output delay between HORNFB to HORNSL and HBEN to HORNBR | HORNSEL=0, VBST=11.5V, HORNFB and HBEN switch from 0 to VMCU. | 0 | 1 | 10 | ns |

| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------|---|---|-------|------|----------|------|
| t _{skew,low} | Horn driver output low delay mismatch. Difference in output delay between HORNFB to HORNSL and HBEN to HORNBR | HORNSEL=0, VBST=11.5V, HORNFB and HBEN switch from VMCU to 0. | 0 | 2 | 10 | ns |
| ı | Horn driver quiescent current. Current does not | HORNSEL=0, VBST=11.5V, HORNFB, HBEN=0, HORN_EN=1. Current from VBST, VCC pins measured | 0 | 80.1 | 150 | uA |
| I _{HORN,Q} | include bias block. | HORNSEL=1, VBST=11.5V, HORNFB=0, HBEN=1, HORN_EN=1. Current from VBST, VCC pins measured | 0 | 65 | 150 | uA |
| ANALOG MU | ILTIPLEXER | | | | <u>'</u> | |
| V _{MUX} | Multiplexer buffer input signal voltage range | AMUX_BYP=0 | 0.05 | | 2 | V |
| G _{MUX, GAIN} | Multiplexer bufffer output gain | AMUX_BYP=0 | 0.99 | 1 | 1.01 | V/V |
| V _{MUX, OFFS} | Multiplexer buffer offset voltage | AMUX_BYP=0 | -8 | -0.5 | 8 | mV |
| t _{MUX, EN} | Multiplexer buffer enable settling time | AMUX_BYP=0, AMUX_SEL stepped from 000 to 011 with PDO=2V, PAMP_EN=0. Time until AMUX reaches 99% of its final value | 0 | 10 | 15 | us |
| t _{MUX,} STEP | Multiplexer buffer input step settling time | AMUX_BYP=0, AMUX_SEL=011, PDO stepped from 50mV to 2V, PAMP_EN=0. Time until AMUX reaches 99% of its final value | 0 | 10 | 15 | us |
| f _{MUX, BW} | Multiplexer bandwidth | AMUX_BYP=0 | 0.5 | 1 | 25 | MHz |
| I _{MUX, OUT} | Multiplexer output current | AMUX_BYP=0 | -10 | | 10 | uA |
| I _{MUX, Q} | Multiplexer quiescent current. Current does not include bias block. | AMUX_BYP=0 | | 8.3 | 50 | uA |
| C _{MUX} | Multiplexer buffer output capacitor required for stability | AMUX_BYP=0 | 150 | | 1000 | pF |
| BATTERY TE | ST | | | | 1 | |
| | | VBST = 4.5 V to 11.5 V, IBATTEST = 000 | 9.15 | 10 | 10.76 | mA |
| | | VBST = 4.5 V to 11.5 V, IBATTEST = 001 | 11.13 | 12 | 12.64 | mA |
| | Battery test load current. | VBST = 4.5 V to 11.5 V, IBATTEST = 010 | 12.94 | 14 | 14.89 | mA |
| Battery test load o | Dattery test load current. | VBST = 4.5 V to 11.5 V, IBATTEST = 011 | 14.65 | 16 | 17.29 | mA |
| | | VBST = 4.5 V to 11.5 V, IBATTEST = 100 | 16.3 | 18 | 19.63 | mA |
| | | VBST = 4.5 V to 11.5 V, IBATTEST = 101 | 17.96 | 20 | 22.06 | mA |
| t _{BATTEST,} RISE | Battery test rise time. Time from enabling battery test until 90% of target current is reached | VBST=10V, IBATTEST=101 | | | 10 | us |



| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------|---|---|----------|------|-----------|------|
| t _{BATTEST,} FALL | Battery test fall time. Time from disabling battery test until 10% of initial current is reached | VBST=10V, IBATTEST=101 | | | 10 | us |
| OSCILLATOR | , REFERENCE SYSTEM | | | | | |
| f | Oscillator frequency | | | 8 | | MHz |
| f _{OSC8} | Frequency accuracy | T _A = -10°C to 70°C | -3 | | 3 | % |
| f _{OSC32} | Low-power Oscillator frequency | | | 32 | | kHz |
| | Frequency accuracy | T _A = -10°C to 70°C | -3 | | 3 | % |
| T _{TIMEOUT} | Error timeout time | | 0.9 | 1 | 1.1 | s |
| I _{REF0P3, Q} | REF0P3 buffer quiescent current | VCC current difference between REF0P3_EN=0 and REF0P3=1. I _{REF0P3} =0 μA | | 0.38 | 0.76 | μА |
| C _{REF0P3} | REF0P3 output capacitor required for stability | | 0.7 | 1 | 1.5 | nF |
| T _{REF0P3, SET} | REF0P3 settling time | From REF0P3 enabled to 99% of final output voltage. C _{REF0P3} =1nF, I _{REF0P3} =0 µA | | 1 | 1.8 | ms |
| V _{REF0P3, OUT} | REF0P3 output voltage | I _{REF0P3} = 10 μA | 270 | 300 | 330 | mV |
| * REFUP3, OUT | The or o output voltage | I _{REF0P3} = -25 μA | 270 | 300 | 330 | mV |
| I _{VCCLOW,Q} | VCC_LOW monitor quiescent current | | | 0.9 | 2 | uA |
| IO BUFFERS | | | | | | |
| V _{IO, ILO} | IO buffer input low threshold | LEDEN, CSEL, INT_MCU, GPIO | 0.3×VMCU | | 0.7× VMCU | V |
| $V_{IO,\;IHI}$ | IO buffer input high threshold | LEDEN, CSEL, INT_MCU, GPIO | 0.3×VMCU | | 0.7× VMCU | V |
| | IO buffer input leakage current | LEDEN | | | 100 | nA |
| I _{IO, LEAK} | | HBEN | | | 100 | nA |
| | | CSEL | | | 100 | nA |
| V | IO buffer output low-level | INT_MCU, GPIO. IIO = 3 mA, VMCU = 1.8 V | 0 | 0.19 | 0.6 | V |
| $V_{IO, OL}$ | To bullet output low-level | INT_MCU, GPIO. IIO = 1 mA, VMCU = 1.5 V | 0 | 0.20 | 0.6 | V |
| V | IO buffer output high-level. Spec is the voltage drop from | INT_MCU, GPIO. I _{IO} = -3 mA, VMCU = 1.8 V | 0 | 0.30 | 0.6 | V |
| $V_{IO, OH}$ | VMCU (i.e. VMCU - VOH) | INT_MCU, GPIO. I _{IO} = -1 mA, VMCU = 1.5 V | 0 | 0.37 | 0.6 | V |
| | | LEDEN, CSEL | | 2 | 10 | pF |
| C _{IN, IO} | Input capacitance | HBEN | | 2 | 10 | pF |
| | | INT_MCU, GPIO | | 2 | 10 | pF |
| R _{IO,PD} | IO buffer input pulldown resistor | INT_MCU, GPIO | 0.8 | 10 | 50 | МΩ |
| THERMAL WA | ARNING | | | | | |
| T _{WARNING} | Thermal trip point | | | 110 | | С |
| THERMAL SH | IUTDOWN | | | | | |
| Tourna | Thermal trip point | | | 125 | | С |
| T _{SHTDWN} | Thermal hysteresis | | 5 | 15 | 20 | O |



| | PARAMETER | TEST CONDITIONS | MIN | TYP MAX | UNIT |
|--------------------------------------|--|--|-------------------------|------------------------|------|
| t _{ots,mask} | Thermal error mask time. OTS_ERR is masked for t _{OTS,MASK} after device fully powers up or OTS_EN set to 1 | | | 300 350 | us |
| I2C IO | | | | <u> </u> | |
| V _{I2C,IL} | Low-level input voltage | | -0.5 | 0.3 × V _{MCU} | V |
| V _{I2C,IH} | High-level input voltage | | 0.7 × V _{MCU} | | V |
| V _{I2C,HYS} | Hysteresis of Schmitt trigger inputs | | 0.05 × V _{MCU} | | V |
| V | Low-level output voltage | 3 mA sink current; VMCU >2V | 0 | 0.4 | V |
| V _{I2C,OL} | Low-level output voltage | 2 mA sink current; VMCU < 2V | 0 | 0.2 × V _{MCU} | V |
| lian ai | Low-level output current | V _{OL} = 0.4 V | 2.5 | | mA |
| I _{I2C,OL} | LOW-10 VOI Output cult cill | V _{OL} = 0.6 V | 4 | | mA |
| I _{I2C,IN} | Input current to each I/O pin | $0.1V_{MCU} < V_{I} < 0.9V_{MCUmax}$ | -10 | 10 | μΑ |
| C _{I2C,IN} | Capacitance for each I/O pin | | | 10 | pF |
| t _{l2C,OF} Output fall time | Output fall time | From V _{IHmin} to V _{ILmax} , Standard-Mode | | 250 | ns |
| | Sulput ian unic | From V _{IHmin} to V _{ILmax} , Fast- Mode | | 250 | ns |
| t _{I2C,SP} | Pulse width of spikes that must be suppressed by the input filter | | 0 | 50 | ns |
| I2C BUS LIN | NES | | | | |
| £ | SCL clock frequency, Standard-Mode | | 0 | 100 | kHz |
| f _{SCL} | SCL clock frequency Fast- Mode | | 0 | 400 | kHz |
| 4 | hold time (repeated) START condition, Standard-Mode | After this period, the first clock pulse is generated. | 4 | | μs |
| t _{HD;STA} | hold time (repeated) START condition, Fast-Mode | After this period, the first clock pulse is generated. | 0.6 | | μs |
| t | LOW period of the SCL clock, Standard-Mode | | 4.7 | | μs |
| t _{SCL ,LOW} | LOW period of the SCL clock, Fast-Mode | | 1.3 | | μs |
| toorus | HIGH period of the SCL clock, Standard-Mode | | 4 | | μs |
| t _{SCL,HIGH} | HIGH period of the SCL clock, Fast-Mode | | 0.6 | | μs |
| t _{su;sta} | set-up time for a repeated START condition, Standard- Mode | | 4.7 | | μs |
| | set-up time for a repeated START condition, Fast-Mode | | 0.6 | | μs |
| t _{HD;DAT} | data hold time, Standard- | CBUS compatible masters | 5 | | μs |
| t _{HD;DAT} | Mode | I2C-bus devices | 0 | | μs |
| | | CBUS compatible masters | 0 | | μs |
| t _{HD;DAT} | data hold time, Fast-Mode | OBOC companion mactors | | | |




| | PARAMETER | TEST CONDITIONS | MIN | TYP MAX | UNIT |
|-----------------------|---|--|------------------------|---------|------|
| t _{SU;DAT} | data set-up time, Standard- Mode | | 250 | | ns |
| | data set-up time, Fast-Mode | | 100 | | ns |
| t _{I2C,RISE} | rise time of both SDA and SCL signals, Standard-Mode | | | 1000 | ns |
| | rise time of both SDA and SCL signals, Fast-Mode | | 20 | 300 | ns |
| t _{I2C,FALL} | fall time of both SDA and SCL signals, Standard-Mode | | | 300 | ns |
| | fall time of both SDA and SCL signals, Fast-Mode | | 20 × (VMCU / 5.5 V) | 300 | ns |
| t _{SU;STO} | set-up time for STOP condition, Standard-Mode | | 4 | | μs |
| | set-up time for STOP condition, Fast-Mode | | 0.6 | | μs |
| t _{BUF} | bus free time between a STOP and START condition, Standard-Mode | | 4.7 | | μs |
| | bus free time between a STOP and START condition, Fast-Mode | | 1.3 | | μs |
| t _{VD;DAT} | data valid time, Standard- Mode | | | 3.45 | μs |
| | data valid time, Fast-Mode | | | 0.9 | μs |
| t _{VD;ACK} | data valid acknowledge time, Standard-Mode | | | 3.45 | μs |
| | data valid acknowledge time, Fast-Mode | | | 0.9 | μs |
| C _{BUS} | capacitive load for each bus line, Standard-Mode | | | 400 | pF |
| | capacitive load for each bus line, Fast-Mode | | | 250 | pF |
| / _{NL} | noise margin at the LOW level | for each connected device (including hysteresis) | 0.1 × V _{MCU} | | V |
| V _{NH} | noise margin at the HIGH level | for each connected device (including hysteresis) | 0.2 × V _{MCU} | | V |

⁽¹⁾ MCU LDO output voltage on power-up is determined by the MCUSEL pin state.

6.6 Typical Characteristics

 $T_A = 27$ °C, VCC = 3.65 V


www.ti.com

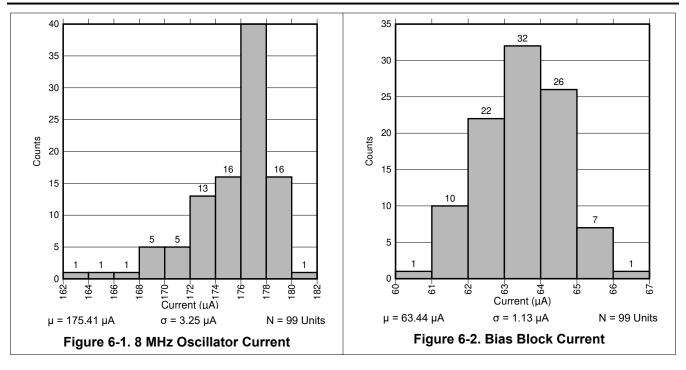



7 Typical Characteristics

 $T_A = 27^{\circ}C$, VCC = 3.65 V

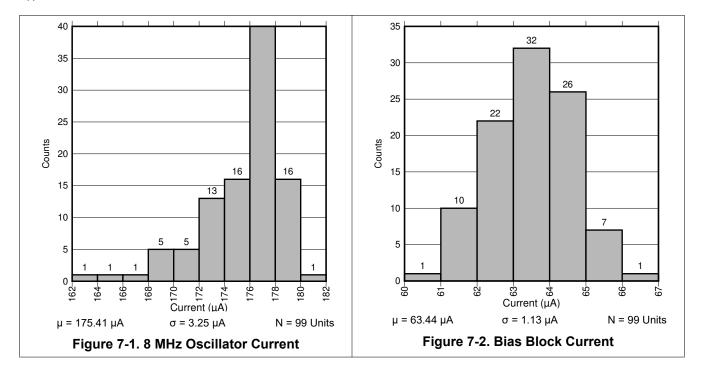



8 Detailed Description

8.1 Overview

The TPS8802 integrates a boost converter, analog supply LDO, microcontroller supply LDO, photoelectric chamber analog front end (AFE), carbon monoxide sensor AFE, interconnect driver, piezo horn driver, analog multiplexer, and digital core. The high integration greatly reduces component count in smoke alarms and carbon monoxide alarms. The TPS8802 can be powered from a variety of sources:

- 9-V battery
- 3-V battery
- 2-V to 15-V DC supply
- DC supply with battery backup


The two LED drivers have highly configurable temperature compensation to support IR and blue LEDs over a wide range of currents. The wide bandwidth of the photo-amplifier saves power due to reduced LED on-time. The CO amplifier has integrated gain resistors. The horn driver is compatible with two-terminal or three-terminal piezo horns, and the three-terminal self-resonant mode is tunable to maximize piezo loudness. The wired interconnection driver allows multiple smoke alarm units to communicate alarm conditions. Each block is highly configurable with the digital core I²C interface, supporting on-the-fly adjustment of amplifier gains, regulator voltages, and driver currents. Digital features such as sleep mode, under-voltage boost enabling, and one-time boost charging are designed to reduce power consumption for the 10-year battery alarms. Configurable status and interrupt signal registers alert the MCU of fault conditions such as under-voltage, over-temperature, and interconnection alerts.

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback



8.2 Functional Block Diagram

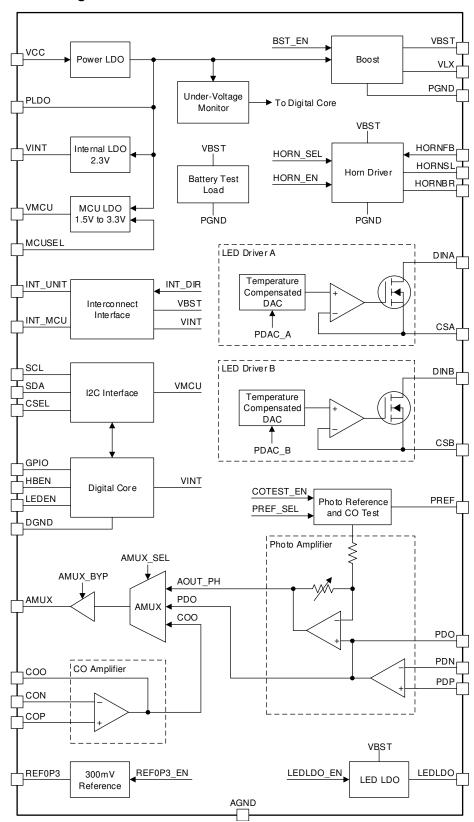

8.3 Feature Description

8.3.1 System Power-up

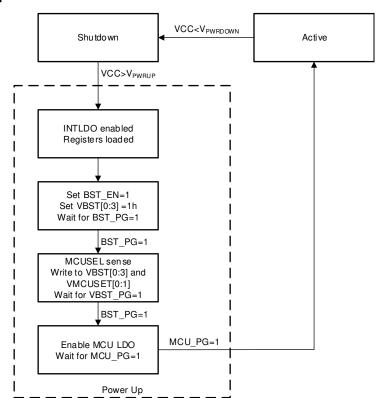


Figure 8-1. Power-up State Diagram

The TPS8802 can power-up from a battery above 2V connected to the input of the boost converter. This is achieved with an automatic power-up sequence. When the VCC voltage exceeds the V_{PWRUP} threshold, the device initializes for 6 ms. After the initialization, the boost converter is enabled and set to 3.8V. In a 3V battery powered system where VCC is connected to VBST, this raises the VCC and VBST voltage to provide power to the internal digital and analog blocks. The VBST voltage must exceed the power-good threshold for the 3.8V setting (typically 95% of its target voltage) for the power-up sequence to proceed. The MCUSEL pin is then sensed for 2 ms to determine the MCULDO voltage and program the VMCUSET and VBST register accordingly. Table 8-1 indicates the VMCU and VBST setting for each MCUSEL configuration. After VBST reaches its power-good threshold again, the MCULDO is enabled and the system waits for VMCU to reach its power-good threshold (typically 85% of its target voltage). The device enters its active state after VMCU reaches its power-good threshold. This sequence of events is outlined in Figure 8-1 and Figure 8-2.

If the boost converter is not being used, the same power-up sequence occurs, but the boost converter is not able to raise the voltage higher than what is supplied. The minimum VCC and VBST voltage depends on the VMCU voltage. If the MCUSEL pin sets VMCU to 1.5 V, 1.8 V, or 2.5 V, supply over 3.8V on VBST. If the MCUSEL pin sets VMCU to 3.3 V, supply over 4.7 V on VBST. If VMCU is set to 1.5 V, 1.8 V, or 2.5 V, provide over 2.6 V to VCC for power-up. If VMCU is set to 3.3 V, provide over 3.6 V to VCC for power-up. Higher VCC voltage may required depending on the VMCU load current.

Table 8-1, VMCU and VBST Power-up Voltage

| rabio o 11 timo o ana 1201 i onoi ap tonago | | | | | |
|---|----------|----------|--|--|--|
| MCUSEL Connection | VMCU (V) | VBST (V) | | | |
| 620-Ω to GND | 1.5 | 2.7 | | | |
| Short to GND | 1.8 | 2.7 | | | |
| Short to VINT | 2.5 | 3.8 | | | |

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback



Table 8-1. VMCU and VBST Power-up Voltage (continued)

| MCUSEL Connection | VMCU (V) | VBST (V) | |
|----------------------|----------|----------|--|
| 330-pF to GND | 3.3 | 4.7 | |

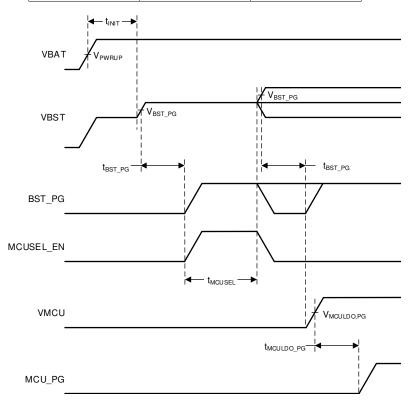


Figure 8-2. Power-up Timing Diagram

8.3.2 LDO Regulators

8.3.2.1 Power LDO Regulator

The power LDO is a voltage clamp that supplies many of the internal blocks in the TPS8802, including the internal LDO and MCU LDO. Because the power LDO is designed to clamp the VCC voltage, it is not precise and varies with VCC voltage and load. The power LDO shorts VCC and PLDO when the VCC voltage is below approximately 5 V, and regulates VCC when VCC is above approximately 5 V. The power LDO has a dropout voltage of approximately 1 V when it is regulating VCC. When the power LDO transitions from shorting to regulating, the PLDO voltage drops by approximately 1 V. Connect a 1-µF capacitor to PLDO to stabilize the PLDO voltage.

The power LDO is designed for use by the device and can be used to supply external circuitry that has a voltage limit of 7 V. The power LDO can also be used to supply the IR or blue LED anode through a diode.

8.3.2.2 Internal LDO Regulator

The internal LDO (INT LDO) regulator powers the TPS8802 amplifiers and digital core with a stable 2.3 V supply. Connect a 1-µF capacitor to VINT to stabilize the output. The INT LDO is always enabled when the device is powered. The INT LDO can be used to supply external circuitry. It is not recommended to power noisy or switching loads with INT LDO, as any noise on VINT couples to the internal amplifiers and can generate noise. The INT LDO can be used in the CO connectivity test circuitry and the photo reference circuitry.

8.3.2.3 Microcontroller LDO Regulator

The microcontroller LDO (MCU LDO) powers the internal digital input and output buffers (IO buffers) and external MCU that controls and programs the TPS8802. Connect a 1-µF capacitor to VMCU to stabilize the

output. The MCU LDO can be programmed to output 1.5 V, 1.8 V, 2.5 V, and 3.3 V. The default MCU LDO setting is determined by the configuration on the MCUSEL pin (see Table 8-1). After the device is powered, the MCU LDO voltage can be changed using the VMCUSET register. The MCU LDO can also be disabled using the MCU DIS register.

The MCU LDO output VMCU powers the IO buffers on SCL, SDA, CSEL, INT_MCU, GPIO, LEDEN, HBEN, and HORNFB. The IO buffers level shift signals from the digital core to a level suitable for the microcontroller and signals from the microcontroller to a level suitable for the digital core. In general, connect VMCU to the microcontroller supply voltage to guarantee logic level compatibility. If the MCU LDO is disabled, connect an external supply to VMCU. This external supply can be a 3-V battery. Connecting a 3-V battery directly to VMCU allows the MCU LDO to be disabled, saving some power in the system. When a 3-V battery is connected to VMCU, set the MCU LDO to 1.5 V or 1.8 V on power-up. The battery voltage overrides the MCU LDO without excess power draw.

The MCU LDO has a power good signal MCU_PG that indicates whether the MCU LDO is above 85% the regulation voltage. A 125-µs deglitch filter prevents noise from affecting the MCU_PG signal. If MCU_PG is low after 10 ms of changing the MCU LDO voltage or enabling the MCU LDO, the MCU_ERR flag is set high. If the MCU_ERR flag is high and MCUERR_DIS is low, the MCU LDO fault state is entered. See Section 8.4.2.1 section for more information.

8.3.3 Photo Chamber AFE

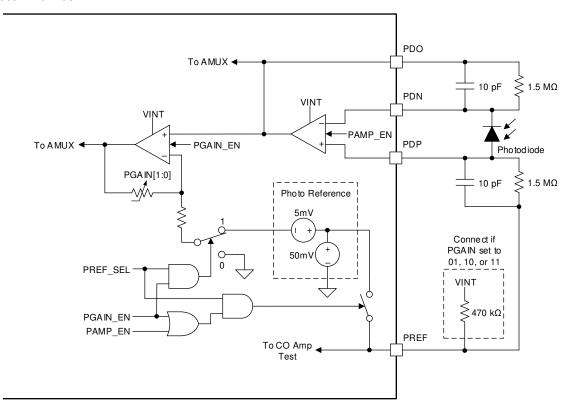


Figure 8-3. Photo Amplifier Circuit

The TPS8802 photo amplifier connects to a photoelectric chamber photodiode and has two stages—an input stage and gain stage. When the photoelectric chamber LED is enabled, light scatters off smoke particles in the chamber into the photodiode, producing a signal proportional to the smoke concentration. The output of each photo amplifier stage is connected to the AMUX for ADC reading. This configuration provides high bandwidth and dynamic range for the photodiode signal chain as the gain stage is on-the-fly adjustable.

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback

8.3.3.1 Photo Input Amplifier

The input stage is a wide-bandwidth, low-offset op-amp designed for amplifying photodiode currents. In Figure 8-3, negative feedback causes the photodiode to conduct with zero voltage bias. The photo-current flows through resistors connected from PDP to a reference (GND or PREF) and PDN to PDO. These two resistors determine the gain of the input stage. The same value must be used for these two resistors because PDP and PDN leakage is amplified by these resistors. Capacitors installed in parallel with the resistors compensate the op-amp feedback loop for optimal response. The optimal compensation capacitance depends on the photodiode's capacitance. The compensation capacitance should be adjusted to minimize settling time without having overshoot on the output of the amplifier. Overshoot adds unnecessary noise in the output. The input stage outputs through the PDO pin, which is internally connected to the integrated photo gain stage and AMUX. When measuring the photo amplifier output, disable the boost converter to reduce the noise on the photo amplifier's output.

The input stage has the option of being referenced to GND or PREF. PREF is a reference that is normally pulled to VINT and is set to 50 mV when PREF_SEL = 1 and either PAMP_EN = 1 or PGAIN_EN = 1. The 50 mV reference keeps the input amplifier in a linear operating region when no signal is applied, improving the speed and zero-current sensitivity of the amplifier. It is generally recommended to set PREF_SEL=1 and connect the external gain resistor and compensation capacitor to PREF. Connect a 100-pF filtering capacitor from PREF to GND to reduce high frequency noise on PREF.

When measuring the photo amplifier output, it is recommended to take multiple ADC samples. Averaging ADC samples approximately reduces the noise by the square root of the amount of samples. The power consumed in a photoelectric smoke measurement is dominated by the LED power consumption, which is proportional to the LED on-time multiplied by the LED current. To maximize the signal-to-noise ratio for a given power level, set the LED pulse length to approximately twice the photo amplifier rise time and take multiple ADC samples while the output is stabilized.

In systems where the compensation capacitor is selected for a slower rise time and lower noise, take multiple ADC samples around the peak of the photo amplifier output.

8.3.3.2 Photo Gain Amplifier

The high-bandwidth, low noise photo gain amplifier connects to the output of the photo input stage to further amplify the photodiode signal. The gain amplifier is adjustable on-the-fly using the I²C interface. The gain amplifier has four settings:

- 5x (4.75x if PREF SEL=1)
- 11x (10.4x if PREF SEL=1)
- 20x (18.5x if PREF_SEL=1)
- 35x (32.3x if PREF_SEL=1)

The gain stage has the option of being referenced to GND or PREF with the PREF_SEL bit. When PREF_SEL=1, a 5 mV reference offset counteracts the gain stage's input offset voltage to keep the gain stage output above 50 mV. The 5 mV reference offset is amplified by the gain stage, causing the output to change when the gain is changed, even when there is zero photo-current. It is recommended to connect a 470 k Ω resistor from PREF to VINT if the gain is set to 11x, 20x, or 35x. This resistor changes the PREF voltage to 70 mV and prevents the output from dropping below 50 mV in worst-case conditions. Referencing the gain stage to PREF causes the 50 mV reference to change with signal level due to the finite impedance of the reference. Because the reference is changing with the signal level, the gain is slightly less with PREF SEL=1.

Product Folder Links: TPS8802

8.3.4 LED Driver

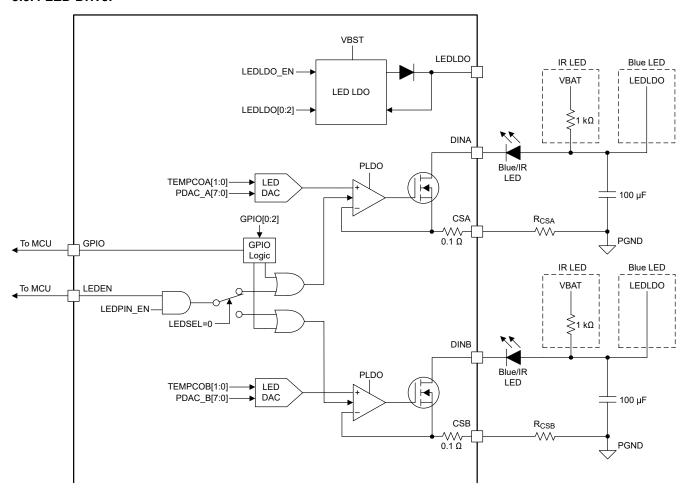


Figure 8-4. LED Driver Circuit

8.3.4.1 LED Current Sink

The two LED drivers are current regulated, temperature compensated, and adjustable with an 8-bit DAC. When the LED driver is enabled, the CSA voltage is regulated, and the current through the CSA resistor also flows through the LED and the DINA pin. A current sense resistor connects to the CSA pin. The LED driver is enabled with the LEDEN pin and LEDPIN_EN bit. Both the pin and bit must be high for the LED driver to operate. The LEDSEL bit switches which driver the LEDEN signal connects to. The GPIO pin can be configured to enable either LED driver.

The LED driver is temperature compensated to account for reduced LED intensity with increasing temperature. Four temperature compensation settings are available to support a variety of IR and blue LEDs. Temperature compensation is implemented by varying the CSA regulated voltage with temperature, thus the temperature compensation also depends on the CSA resistor. Each temperature compensation setting has a different DAC output at room temperature. To achieve a specific temperature compensation and current, the PDAC, TEMPCO, and CSA resistor must all be adjusted according to the Section 9.2.2.2 procedure.

The two LED drivers are interchangeable and support both IR and blue LEDs. The only difference between the two LED drivers is a code CSA_BIN available to improve the LED A driver current accuracy for IR LEDs. CSA_BIN in register 0x00 categorizes CSA voltage for each unit as close to the minimum, below average, above average, or close to the maximum (see Section 8.6). Use CSA_BIN to adjust the DAC and compensate for the variation on the LED A driver's current. After adjusting the DAC, the effective variation is reduced by a factor of 4 for the TEMPCOA = 11, PDAC_A = 00 setting. IR LEDs typically require the TEMPCOA = 11 temperature compensation setting. Therefore, use the LED driver A for powering IR LEDs. If better accuracy is required,



calibrate the LED driver current by connecting the CSA or CSB pin to the microcontroller ADC port, measuring the CSA or CSB voltage, and adjusting PDAC A or PDAC B until the required current is achieved.

Ensure that the LED current remains below 550 mA, the pulse width remains below 1 ms, and the duty cycle remains below 1%. There is no protection to prevent operation outside these conditions. Ensure the PDAC and TEMPCO registers are programmed before enabling the LED driver.

8.3.4.2 LED Voltage Supply

Enough voltage must be provided to the LED such that the DINA voltage is at least the dropout voltage ($V_{\text{DINA},\text{DROP}}$) above the CSA voltage while the LED driver is enabled. Ensure the DINA voltage does not exceed 11.5 V. Because of the high LED drive currents, a large capacitor connected to the LED anode is required to provide pulsed power to the LED. Any of the internal regulators (PLDO, LEDLDO) or external supply (VBAT, VDC) meeting the voltage requirements can be used to charge the LED capacitor. Depending on the LED forward voltage, the LED anode can be connected to the battery or to the LEDLDO. Do not connect the LED anode directly to VBST in low-power applications, because the boost converter output voltage can exceed the DINA absolute maximum.

The LED LDO clamps the VBST voltage and blocks reverse current with an integrated diode. It is current limited to prevent inrush current caused by charging the large capacitor. The regulation voltage is adjustable in the LEDLDO register. The LED LDO may be operated with VBST below the regulation voltage. In this case, the LEDLDO voltage stabilizes to VBST minus a diode voltage drop.

The LED driver current and rise time can vary by a few millivolts and microseconds across the LED anode supply and VCC voltages. It is recommended to use a consistent LED anode voltage whenever the LED driver is enabled. If the LEDLDO is used to supply the LED anode, ensure the boost converter is enabled to the same voltage whenever the LEDLDO is enabled.

Product Folder Links: TPS8802

Connect a capacitor with a value between 1 µF and 100 µF to the LEDLDO.



8.3.5 Carbon Monoxide Sensor AFE

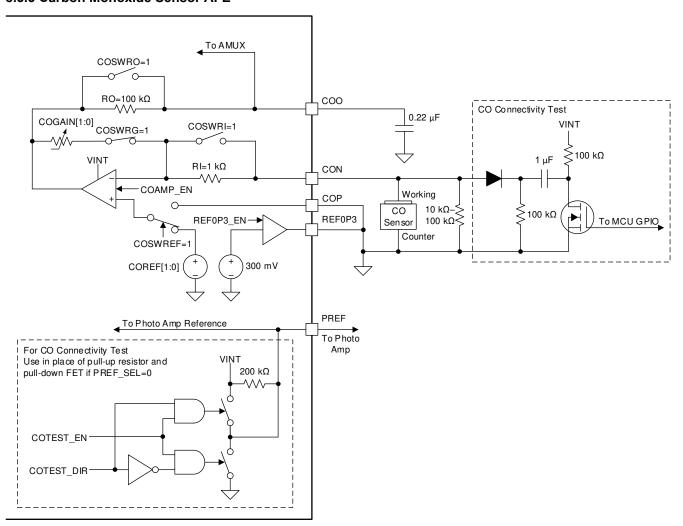


Figure 8-5. Carbon Monoxide Detection Circuit Referenced to GND



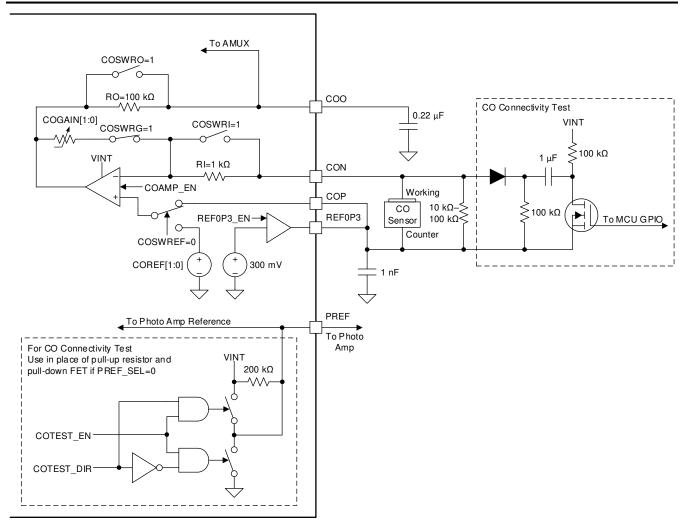


Figure 8-6. Carbon Monoxide Detection Circuit Referenced to 300mV

The TPS8802 CO AFE connects to an electrochemical CO sensor. The amplifier converts the microamps of sensor current into a voltage readable by an ADC. This is achieved with a low-offset, low-power op-amp with configurable input, gain, and output resistors.

8.3.5.1 CO Transimpedance Amplifier

The CO transimpedance amplifier is a low-offset, low-power op-amp with integrated input, gain, and output resistors. Each of these resistors can be disconnected using the COSW register bits if using external resistors. The input resistor limits amplifier current during a CO sensor connectivity test. The gain resistor amplifies the CO sensor signal. Adjust the gain resistor by changing the COGAIN register bits. Use the output resistor with an external capacitor to filter the CO amplifier output signal.

The CO amplifier has two integrated references. A programmable 1.25-mV to 5-mV reference COREF is internally connected to the op-amp positive terminal. A 300-mV reference is connected to the REF0P3 pin. When the millivolt reference is used, the CO sensor must be connected to GND. The millivolt reference is amplified to offset the amplifier output above GND. When the 300 mV reference is used, the reference offsets the CO amplifier output by 300 mV. In general, either reference can be used. The 300-mV reference offers better DC accuracy at the cost of extra power consumption. The 300 mV reference is generated with a reference and op-amp buffer for high precision. The REF0P3 pin must connect to a 1 nF capacitor for stability if it is enabled. The buffer is designed to source and sink small currents as required by the CO amplifier. The 300 mV reference and the 1.25 mV to 5mV reference cannot be enabled simultaneously.

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

A resistor connected in parallel with the CO sensor prevents charge from accumulating across its terminals. The output of the CO amplifier is connected to the COO pin for continuous monitoring and the AMUX for periodic sampling.

8.3.5.2 CO Connectivity Test

The built-in CO connectivity test function connects to the PREF pin and is available when the photo amplifier is not referenced to PREF. The COTEST_EN and COTEST_DIR register bits program a pull-up and pull-down switch on PREF. A 200 k Ω pull-up resistor charges the 1 μ F capacitor when the CO test is not in use. When PREF is pulled low, charge is injected into the amplifier and the output pulse shape can be used to determine if the sensor is connected. An external MOSFET and pull-up resistor achieves the same function as the internal COTEST circuitry.

8.3.6 Boost Converter

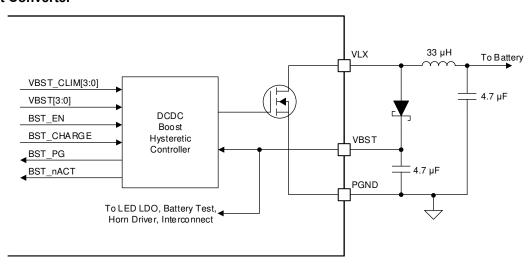


Figure 8-7. DC to DC Hysteretic Boost Circuit

The boost converter operates with a wide range of input and output voltages to support multiple battery configurations and driver voltages. The boost converter output VBST is internally connected to the LED LDO, interconnect driver, horn driver, and battery test load, and may be externally connected to VCC. The boost converter has a power-good register bit BST_PG to notify the MCU when the boost converter is above 95% of the target voltage. The BST_PG signal is deglitched for 200 µs to prevent load transients from causing a false indication. If the BST_PG signal is low after 10 ms of enabling the boost or changing the VBST setting, the BST_ERR signal latches high. The BST_PG signal reads low if the boost converter is disabled.

The boost converter is enabled if any of the following conditions are met:

- BST EN = 1 or BST CHARGE=1, except if SLP BST = 1 and SLP EN = 1
- VCCLOW_BST = 1 and the deglitched VCCLOW comparator trips
- Device is in MCULDO_ERR state

The SLP_BST signal disables the boost while the device is in sleep mode if the boost is enabled with BST_EN. The BST_CHARGE register bit enables the boost converter until the BST_PG signal is high, at which point BST_CHARGE resets to 0 and the boost converter is disabled. VCCLOW_BST enables the boost if the deglitched VCCLOW comparator trips. MCULDO ERR state also enables the boost converter.

A specific I²C command sequence must be used when enabling the boost converter and disabling the photo amplifier. Do not enable the boost converter (changing BST_EN from 0 to 1) and disable the photo input amplifier (changing PAMP_EN from 1 to 0) in the same I²C command. Use either of the following I²C command sequences to enable the boost converter and disable the photo input amplifier:

- Write BST_EN=1 and PAMP_EN=1, then write BST_EN=1 and PAMP_EN=0
- Write BST EN=0 and PAMP EN=0, then write BST EN=1 and PAMP EN=0

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback

8.3.6.1 Boost Hysteretic Control

The hysteretic control guarantees stability across input and output voltages and has a fast transient response. When the VBST voltage is below its target (as programmed in the VBOOST register), a charging cycle initiates by enabling the VLX switch until the current through the inductor exceeds the programmable inductor peak current setting. After the peak current is reached, the VLX switch is disabled and the inductor charges the VBST output capacitor. The charging cycle completes when the inductor current reaches zero, and a new cycle initiates when VBST drops again. Because of the hysteretic control scheme, the average output voltage varies depending on the input voltage, inductor peak current, inductance, output capacitor, output voltage, and output load.

When the VBST voltage is above the boost regulation voltage, the boost does not switch. In a battery backup system, the battery draws no power if the DC supply is providing a VBST voltage above the boost regulation voltage. The boost starts switching if the DC supply drops, drawing power from the battery to regulate VBST. A timer, BST_nACT, monitors the time that the boost is not switching to notify the MCU if the boost is inactive. This timer is programmable from 100 µs to 100 ms. This timer can be used to determine if the battery voltage is higher than the regulation voltage or if an DC supply is connected.

The default inductor peak current is 500 mA. This sets the boost converter to provide maximum output current. After the TPS8802 is powered, the peak current can be adjusted using the I²C interface to change the boost switching frequency or to limit the battery current. The switching frequency is inversely proportional to the square of the current limit. For example, changing the current limit from 500 mA to 50 mA causes the frequency to increase by a factor of 100. The peak current determines how much current the boost converter can output. Equation 1 calculates the maximum boost output current.

$$I_{OUT (max)} = \frac{\eta \times V_{BAT} \times I_{PEAK}}{2 \times V_{BST}}$$
(1)

Typical boost efficiency is shown in Figure 9-5. If the boost output current draw exceeds the maximum, the boost voltage drops until the converter can supply the output current draw.

8.3.6.2 Boost Soft Start

When the boost converter is enabled and the VBST voltage is below 3 V, the peak inductor current is automatically lowered to reduce inrush current. As a result, the boost converter cannot deliver full output current while the VBST voltage is low. For the 2.7-V boost setting, the inductor current is released to the register value when BST_PG = 1. Maintain the VBST load current below 5 mA during the soft-start period.

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

8.3.7 Interconnect Driver

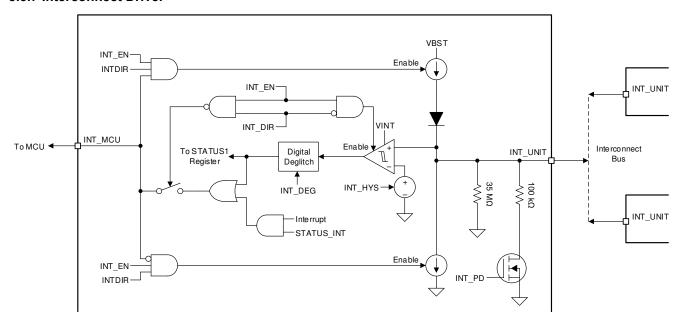


Figure 8-8. Interconnect Driver and Receiver

In mains-wired smoke alarm systems, the alarms can alert each other of smoke conditions with a wired interconnect bus. The TPS8802 has a driver and comparator to interface with the interconnect bus. The driver pulls the bus high when smoke is detected and low when smoke is cleared. The driver is current limited to handle short circuit conditions, and has a diode on the high side driver to prevent the bus from driving VBST. The hysteretic comparator senses when the bus is pulled high, filters the signal with a digital deglitch, and outputs the result to the INT_MCU pin and STATUS1 register. The comparator output is synchronized with the 32 kHz clock. The hysteresis has two settings and the deglitch is programmable from 0 ms to 20 ms. A 35-M Ω resistor prevents the INT_UNIT pin from floating, and a switchable 100-k Ω resistor pulls down the bus to prevent leakage from causing a false alarm. When the comparator outputs a high signal through the deglitch filter, the INT_UNIT register bit is latched high in the STATUS1 register.

The INT_MCU pin has the additional function to output status interrupt signals. The STATUS_INT bit in the MASK register enables interrupt signals to output through the INT_MCU pin. When the interconnect driver is enabled, the interrupt signal output is disconnected to allow the microcontroller to drive the INT_MCU pin.

8.3.8 Piezoelectric Horn Driver

The horn driver is designed to drive two types of piezo horns: three-terminal self-resonant piezos and two-terminal piezos. The HORN_SEL bit configures the horn driver for the three-terminal or two-terminal operation. During operation, $120\text{-k}\Omega$ pulldown resistors discharge any residual charge on the piezo element. Because VBST powers the horn driver, the loudness of the horn can be adjusted by changing the VBST voltage with the VBST register bits.

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback



8.3.8.1 Three-Terminal Piezo

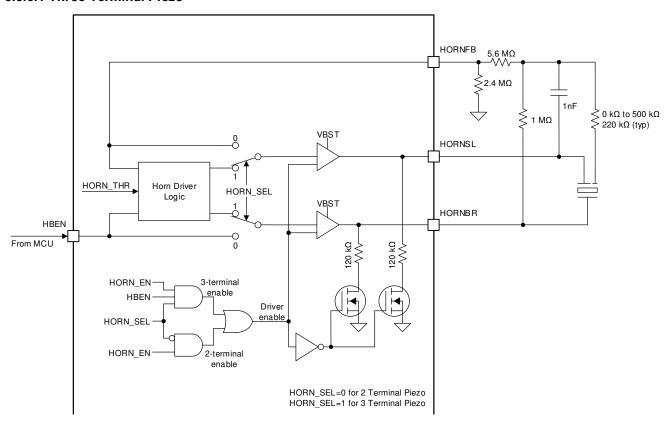


Figure 8-9. Three-Terminal Piezoelectric Horn Driver Circuit

In the three-terminal mode, the piezo silver and brass terminals connect directly to the HORNSL and HORNBR pins, and the feedback terminal connects through a resistor-capacitor network to the HORNFB pin. The driver is enabled and begins oscillating when the HORN_EN register bit and HBEN pin are set high. Adjust the value of the resistor connected to the piezo feedback terminal to tune the oscillation frequency. Trial and error is required to select this resistance. After the driver achieves resonant oscillation, the duty cycle of the HORNSL and HORNBR outputs can be adjusted using the HORN_THR bits to maximize the loudness. It is recommended to try each HORN_THR value and select the one that operates the horn closest to 50% duty cycle.

8.3.8.2 Two-Terminal Piezo

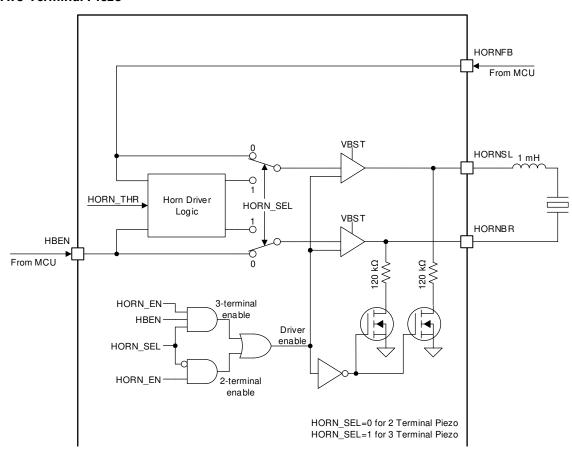


Figure 8-10. Two-Terminal Piezoelectric Horn Driver Circuit

In the two-terminal mode, the piezo connects to the HORNSL and HORNBR terminals through an inductor. The HORNFB pin directly controls the HORNSL pin, and the HBEN pin directly controls the HORNBR pin. The two drivers are matched to minimize skew between the two outputs. The MCU sends a digital signal to control the driving voltage across the piezo. The signal can be a square wave of the oscillation frequency, a pulse width modulation (PWM) sine wave of the oscillation frequency, or a PWM arbitrary shape for voice applications. The inductor improves the rise time and fall time of the output and reduces power dissipation.

8.3.9 Battery Test

The battery test load is used to check the integrity of the battery connected to the TPS8802 device. When enabled, a load is connected to VBST. The load is programmable from 10 mA to 20 mA with the I_BATTEST register bits. This load emulates the horn driver current draw during an alarm condition. The boost input voltage, output voltage, and efficiency affect the current drawn from the battery because the battery test load is connected to VBST. Therefore, the battery current is programmable with the VBST register as well. Ensure VBST is greater than 4.5 V when enabling the battery test load. The load is enabled with the BATTEST_EN register bit or with the GPIO register bit and pin.



8.3.10 AMUX

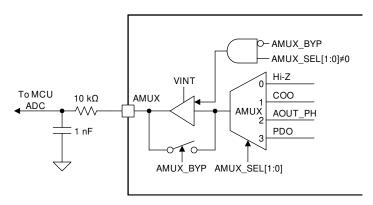


Figure 8-11. Analog Multiplexer Circuit

The AMUX switch and buffer are used to connect the various TPS8802 amplifier outputs to a single ADC. The unity-gain amplifier improves the drive strength and fidelity of the analog signals when connected to an ADC. A 330 pF to 1 nF capacitor must be connected to the AMUX pin to stabilize its output. The 10-k Ω resistor filters high-frequency noise in the analog signal. Using a 10-k Ω resistor and 1-nF capacitor reduces noise levels in the photo amplifier signal. The buffer has the option of being bypassed to remove the added offset introduced by the unity-gain amplifier. Because the AMUX requires the bias block (see Section 8.3.11), bypassing the buffer does not eliminate the AMUX current consumption.

8.3.11 Analog Bias Block and 8 MHz Oscillator

A central analog bias block connects to many of the amplifiers, drivers, and regulators. This block is enabled when any of its connected blocks are enabled. Similarly, an internal 8-MHz oscillator is enabled when the boost converter or photo input amplifier is enabled. Table 8-2 lists the conditions when the bias block and 8-MHz oscillator are enabled. The bias block and 8-MHz oscillator consume current in addition to the connecting blocks whenever they are enabled. Because the specified current consumption of each block does not include the bias block or the 8-MHz oscillator, add the bias block and 8-MHz oscillator currents when calculating system power consumption. Typical values of the bias block and 8-MHz oscillator current are shown in Section 6.6.

Table 8-2. Conditions for Enabling the Bias Block and 8 MHz Oscillator

| BLOCK | CONDITION | BIAS ENABLED? | 8-MHZ OSC ENABLED? |
|-----------------------|-----------------------------------|---------------|--------------------|
| Photo input amplifier | PAMP_EN = 1 | Yes | Yes |
| Boost converter | BST_EN = 1 | Yes | Yes |
| AMUX buffer | AMUX_SEL[0:2] ≠ 000 | Yes | No |
| Horn driver | HORN_EN = 1 | Yes | No |
| LED LDO | LEDLDO_EN = 1 | Yes | No |
| Photo gain amplifier | PGAIN_EN = 1 | Yes | No |
| Battery test load | BATTEST_EN = 1 | Yes | No |
| LED driver | LEDEN = VMCU and LEDPIN_EN = 1 | Yes | No |
| Temperature monitor | OTS_EN = 1 | Yes | No |



8.3.12 Interrupt Signal Alerts

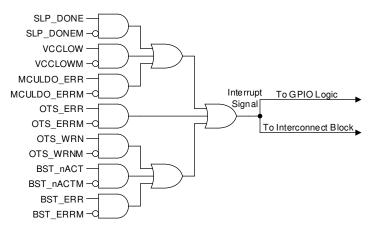


Figure 8-12. Interrupt Signal Alert Logic

Configurable interrupt signals notify the MCU when a system anomaly occurs. The interrupt signal indicates the STATUS1 register, which has bits that latch high when reaching various condition limits such as temperature or voltage. Each of the bits in the STATUS1 register can be independently configured to send an interrupt signal by setting the MASK register bit corresponding to each STATUS1 bit. The GPIO bits must be set to 0x2 to output interrupt signals through the GPIO pin, and the STATUS_INT bit must be set to 1 to output interrupt signals through the INT_MCU pin. By connecting the GPIO or INT_MCU pin to the microcontroller, the MCU can be immediately notified when a STATUS1 bit changes instead of having to repeatedly read the STATUS1 register. After the device sends the interrupt signal, the signal remains high until the STATUS1 register is read, at which point the fault clears if the error condition is removed.

Under some conditions the INT_MCU pin has other functions. If INT_EN = 1 and INT_DIR = 0, the INT_MCU pin also outputs the INT_UNIT pin status. If INT_EN = 1 and INT_DIR = 1, the INT_MCU pin becomes an input to control the INT_UNIT driver. See Section 8.3.7 for more information.

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback



8.4 Device Functional Modes

8.4.1 Sleep Mode

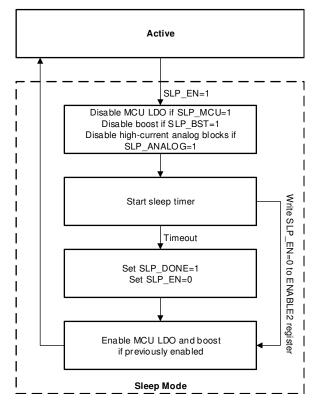


Figure 8-13. Sleep Mode State Diagram

The device integrates a sleep timer to manage critical analog and regulator blocks independent of the external microcontroller. When sleep mode is enabled, the timer starts and various blocks (MCU LDO, boost, or drivers and amplifiers) are disabled depending on the CONFIG1 register configuration. After the sleep timer finishes, SLP_EN is reset and the SLP_DONE bit in STATUS1 register is latched high and can be configured to output through the GPIO or INT_MCU pins. This notifies the microcontroller that the sleep timer is finished and sleep mode is exited. Alternatively, sleep mode is exited by writing zero to the SLP_EN bit. Writing zero to SLP_EN does not trigger the SLP_DONE bit in the STATUS1 register. Figure 8-14 shows the sleep mode state diagram.

Sleep mode reduces power consumption in three ways:

- · by quickly disabling analog blocks
- by powering off the boost and MCU LDO during sleep mode
- by allowing the MCU to enter its lowest power idle state

Every I²C transaction takes time and consumes a small amount of power. The SLP_ANALOG bit configures sleep mode to disable high-power amplifiers and drivers simultaneously when entering sleep mode. This functionality can save several I²C transactions and reduces time that the amplifiers and drivers are idly enabled.

The device may require the boost converter and MCU LDO while the microcontroller is performing sensing and testing operations, but may not require the boost and MCU LDO while the microcontroller is in its idle state. SLP_BST and SLP_MCU disable the boost converter and MCU LDO during sleep mode. If the boost converter and MCU LDO were previously enabled, they are re-enabled when sleep mode is exited. This process reduces system current consumption caused by the MCU LDO and boost converter while preventing a system brown-out if the MCU loses power, because the exit of sleep mode returns power to the MCU.

During sleep mode operation, the MCU can enter its lowest power idle state and monitor a GPIO pin for the SLP_DONE interrupt signal. This monitoring allows the MCU clocks to be disabled as the sleep timer signals the

Submit Document Feedback

Instruments www.ti.com

MCU to wake up after a precise programmed time. The amount of time is programmable from 1 ms to 65535 ms in 1 ms intervals in the SLPTMR1 and SLPTMR2 registers.

The device is nearly fully functional in sleep mode. The microcontroller can access all registers and configure all blocks. Only three functions are disabled in sleep mode:

- boost converter inactivity timer
- the MCULDO fault state
- over-temperature shutdown fault state

The MCULDO undervoltage and system over-temperature monitors remain enabled if the MCU LDO and OTS monitors are enabled, so as soon as the device exits sleep mode, the system enters the fault state that corresponds to any detected fault.

8.4.2 Fault States

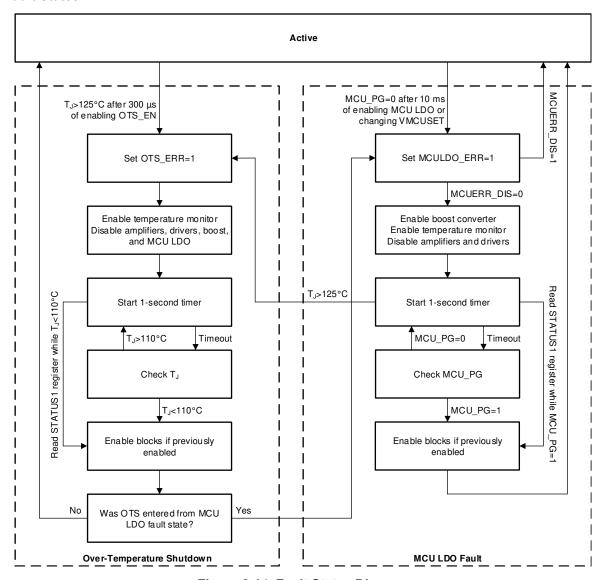


Figure 8-14. Fault States Diagram

The TPS8802 device uses several monitors to alert the MCU when system irregularities occur. In addition to alerting the MCU, two monitors cause the device to enter protective fault states:

- MCULDO under-voltage
- system over-temperature

The fault states reduce risk of damage and brown-outs to the system in the event of short circuits or other power errors.

8.4.2.1 MCU LDO Fault

The MCU LDO has an undervoltage monitor to notify the MCU if the LDO falls out of regulation. This monitor is enabled any time the MCU LDO is enabled and its status is in the MCU_PG register bit. A 125-µs deglitch time rejects load and line transient spikes that may briefly drop the MCU LDO voltage below the under-voltage threshold. If MCU_PG is low while the MCU LDO is enabled and it has been more than 10 ms since the LDO was enabled or changed voltage, the MCU_ERR register bit latches high. When the MCU_ERR bit is set high and the MCUERR DIS bit is low, the MCU LDO fault state is entered.

Two scenarios can cause the LDO to drop voltage:

- input voltage (PLDO) drops
- · load current exceeds the LDO current limit

If the input voltage drops, it can be because the boost converter is disabled. If the load current exceeds the LDO current limit, the die temperature could exceed safe limits. The MCU fault state automatically enables the boost converter and temperature monitor (OTS_EN) to handle both of these cases. The device disables all analog blocks to prevent further issues caused by an underpowered MCU.

There are two methods to exit the fault state. Every second in the fault state, the MCU_PG register bit is automatically read. If high, the fault state is exited. The MCU_ERR bit remains high until the STATUS1 register is read. Alternatively, if the STATUS1 register is read and MCU_PG is high, the fault state is exited. When the device exits the MCU_ERR fault state, the device re-enables all blocks that were enabled before the fault state occurred.

If an over-temperature fault occurs while in the MCU LDO fault state, the device enters the over-temperature fault state. The over-temperature fault state disables the MCU LDO and boost converter in addition to the blocks that are disabled by the MCU LDO fault state. After the device exits the over-temperature fault state, it immediately re-enters the MCU LDO fault state to confirm the MCU LDO status.

8.4.2.2 Over-Temperature Fault

An over-temperature shutdown (OTS) fault occurs if OTS_EN = 1 and the die temperature exceeds 125° C. The fault is masked for 300 µs after setting OTS_EN = 1. OTS_EN must be enabled for at least 300 µs in order to determine if the die has overheated. After the device detects an over-temperature condition, it disables all drivers, amplifiers, and regulators and sets OTS_ERR to 1. This action prevents additional temperature stress caused by a short circuit.

Similar to the MCU LDO fault, the device exits the OTS fault state with two methods:

- The device checks the die temperature once every second. If the temperature is below 110°C, the device exits the fault state.
- Reading the STATUS1 register with the die temperature below 110°C exits the fault state.

When the device exits the OTS fault state, it re-enables all blocks that were enabled before the OTS fault occurred.

8.5 Programming

The TPS8802 serial interface follows the I^2C industry standard. The device supports both standard and fast mode, and it supports auto-increment for fast reading and writing of sequential registers. A 33-k Ω pullup resistor connecting the SDA and SCL pins to VMCU is recommended for fast mode operation. The VMCU voltage determines the logic level for I^2C communication. The CSEL pin selects the device address. When CSEL is pulled to GND, the device address is 0x2A.

8.6 Register Maps

Table 8-3 lists the memory-mapped registers for the Device registers. All register offset addresses not listed in Table 8-3 should be considered as reserved locations and the register contents should not be modified.

Table 8-3. Device Registers

| | | Register Name | Section |
|-----|------------|---------------------|---------|
| 0h | REVID | Device Information | Go |
| 1h | STATUS1 | Status 1 | Go |
| 2h | STATUS2 | Status 2 | Go |
| 3h | MASK | Interrupt Mask | Go |
| 4h | CONFIG1 | Config 1 | Go |
| 5h | CONFIG2 | Config 2 | Go |
| 6h | ENABLE1 | Enable 1 | Go |
| 7h | ENABLE2 | Enable 2 | Go |
| 8h | CONTROL | Control | Go |
| 9h | SLPTMR1 | Sleep Timer 1 | Go |
| Ah | SLPTMR2 | Sleep Timer 2 | Go |
| Bh | GPIO_AMUX | GPIO and AMUX | Go |
| Ch | CO_BATTEST | CO and Battery Test | Go |
| Dh | CO | CO Amplifier | Go |
| Eh | VBOOST | Boost Converter | Go |
| Fh | LEDLDO | LED LDO | Go |
| 10h | PH_CTRL | Photo Amplifier | Go |
| 11h | LED_DAC_A | LED DAC A | Go |
| 12h | LED_DAC_B | LED DAC B | Go |

Complex bit access types are encoded to fit into small table cells. Table 8-4 shows the codes that are used for access types in this section.

Table 8-4. Device Access Type Codes

| Tubic o ii Dorioo Acoust Type Coust | | | | |
|-------------------------------------|------|--|--|--|
| Access Type | Code | Description | | |
| Read Type | | | | |
| R | R | Read | | |
| RC | R | Read | | |
| | С | to Clear | | |
| Write Type | | | | |
| W | W | Write | | |
| Reset or Default Value | | | | |
| -n | | Value after reset or the default value | | |

8.6.1 REVID Register (Offset = 0h) [reset = 0h]

REVID is shown in Table 8-5.

Return to Summary Table.



Table 8-5. REVID Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|----------|------|-------|---|
| 7-6 | CSA_BIN | R | 0h | CSA voltage bin for TEMPCOA=11, PDAC_A=00 setting |
| | | | | 0h = CSA voltage between specified minimum and typical, closer to |
| | | | | minimum |
| | | | | 1h = CSA voltage between specified minimum and typical, closer to |
| | | | | typical |
| | | | | 2h = CSA voltage between specified maximum and typical, closer to |
| | | | | typical |
| | | | | 3h = CSA voltage between specified maximum and typical, closer to |
| | | | | maximum |
| 5-0 | RESERVED | R | 0h | Reserved |

8.6.2 STATUS1 Register (Offset = 1h) [reset = 0h]

STATUS1 is shown in Table 8-6.

Return to Summary Table.

Table 8-6. STATUS1 Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|------------|------|-------|---|
| 7 | SLP_DONE | RC | Oh | Sleep timer wakeup flag 0h = device has not transitioned from sleep to active state via timer 1h = device transitioned from sleep to active state via timer |
| 6 | VCCLOW | RC | Oh | VCC low warning 0h = no VCCLOW error has occurred 1h = VCC below V_VCCLOW,FALL threshold and VCCLOW_DIS=1 for VCCLOW deglitch time. VCCLOW is masked for 1 ms after VCCLOW_DIS is set to 0. |
| 5 | MCULDO_ERR | RC | Oh | MCU LDO power good error 0h = no MCULDO error has occurred 1h = MCU_PG=0 and MCU_EN=1 for TMCULDO,PG. MCULDO_ERR is masked for TMCULDO,MASK after VMCUSET or MCU_DIS has changed |
| 4 | OTS_ERR | RC | Oh | Thermal shutdown error 0h = no thermal shutdown error has occurred 1h = junction temperature has exceeded T_SHUTDOWN |
| 3 | OTS_WRN | RC | Oh | Thermal warning flag 0h = no thermal warning has occurred 1h = junction temperature has exceeded T_WARNING |
| 2 | BST_nACT | RC | Oh | Boost activity monitor 0h = boost converter is actively switching or BST_EN=0 or SLP_EN=1 1h = boost converter has not switched for T_BST,ACT, BST_EN=1 and SLP_EN=0 |
| 1 | BST_ERR | RC | 0h | Boost converter power good error 0h = no boost converter error has occurred 1h = BST_PG=0 and BST_EN=1 for T_BST,PG. BST_ERR is masked for T_BST,MASK after VBST or BST_EN has changed |
| 0 | INT_UNIT | RC | 0h | INT_UNIT pin value 0h = INT_UNIT is below VINT_UNIT,ILO or INT_DIR=1 1h = INT_UNIT is high and INT_DIR=0 |

8.6.3 STATUS2 Register (Offset = 2h) [reset = 0h]

STATUS2 is shown in Table 8-7.

Return to Summary Table.

Table 8-7. STATUS2 Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|----------|------|-------|---|
| 7-2 | RESERVED | R | 0h | Reserved |
| 1 | MCU_PG | R | Oh | MCU LDO power good indicator 0h = MCU LDO is below power good threshold or MCU_DIS=1 1h = MCU LDO is above power good threshold and MCU_DIS=0 |
| 0 | BST_PG | R | 0h | Boost power good indicator 0h = VBST is below power good threshold or BST_EN=0 1h = VBST is above power good threshold and BST_EN=1 |

8.6.4 MASK Register (Offset = 3h) [reset = 0h]

MASK is shown in Table 8-8.

Return to Summary Table.

Table 8-8. MASK Register Field Descriptions

| | Table 0-0. MASK Register Fleid Descriptions | | | | | | |
|-----|---|------|-------|--|--|--|--|
| Bit | Field | Type | Reset | Description | | | |
| 7 | SLP_DONEM | R/W | Oh | Sleep timer wakeup interrupt mask 0h = interrupt on device transition from sleep to active state 1h = no interrupt on device transition from sleep to active state | | | |
| 6 | VCCLOWM | R/W | Oh | V _{CC} low warning interrupt mask 0h = interrupt on VCC low 1h = no interrupt on VCC low | | | |
| 5 | MCULDO_ERRM | R/W | Oh | MCU LDO power good error interrupt mask 0h = interrupt on MCULDO power good error 1h = no interrupt on MCULDO power good error | | | |
| 4 | OTS_ERRM | R/W | 0h | Thermal shutdown error interrupt mask 0h = interrupt on thermal shutdown error 1h = no interrupt on thermal shutdown error | | | |
| 3 | OTS_WRNM | R/W | Oh | Thermal warning flag interrupt mask 0h = interrupt on thermal warning 1h = no interrupt on thermal warning | | | |
| 2 | BST_nACTM | R/W | Oh | Boost activity monitor interrupt mask 0h = interrupt if boost has not switched for T_BSTACT 1h = no interrupt if boost has not switched for T_BSTACT | | | |
| 1 | BST_ERRM | R/W | Oh | Boost converter power good error interrupt mask 0h = interrupt on BST_PG transition from 1 to 0 while BST_EN=1 1h = no interrupt on BST_PG transition from 1 to 0 while BST_EN=1 | | | |
| 0 | STATUS_INT | R/W | 0h | Status interrupt on the INT_MCU pin 0h = disable 1h = INT_MCU outputs high if any unmasked STATUS1 flags | | | |

8.6.5 CONFIG1 Register (Offset = 4h) [reset = 20h]

CONFIG1 is shown in Table 8-9.

Return to Summary Table.



Table 8-9. CONFIG1 Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|------------|------|-------|--|
| 7-6 | INT_DEG | R/W | Oh | INT_UNIT deglitch control 0h = none 1h = 125us 2h = 1ms 3h = 20ms |
| 5 | INT_PD | R/W | 1h | INT_UNIT pulldown resistor enable 0h = >1MOhm pulldown resistor on INT_UNIT 1h = 100k pulldown resistor on INT_UNIT |
| 4-3 | VMCUSET | R/W | Oh | MCU LDO voltage. Default value is set by MCUSEL on power-up. 0h = 1.5V 1h = 1.8V 2h = 2.5V 3h = 3.3V |
| 2 | SLP_BST | R/W | Oh | Disable boost converter in sleep mode 0h = boost converter unchanged in sleep mode 1h = boost converter disabled when SLP_EN is set to 1. Boost reenabled upon exiting sleep mode if previously enabled |
| 1 | SLP_ANALOG | R/W | Oh | Disable analog blocks in sleep mode. Set AMUX_SEL=000, BATTEST_EN=0, HORN_EN=0, INT_EN=0, LEDLDO_EN=0, PAMP_EN=0, PGAIN_EN=0 when SLP_EN is set to 1. 0h = analog blocks unchanged in sleep mode 1h = analog blocks shut off in sleep mode |
| 0 | SLP_MCU | R/W | Oh | Disable MCULDO in sleep mode 0h = MCULDO unchanged in sleep mode 1h = MCULDO disabled in sleep mode. MCULDO re-enabled upon exiting sleep mode if previously enabled |

8.6.6 CONFIG2 Register (Offset = 5h) [reset = 2h]

CONFIG2 is shown in Table 8-10.

Return to Summary Table.

Table 8-10. CONFIG2 Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|----------|------|-------|--|
| 7 | RESERVED | R | 0h | Reserved |
| 6 | RESERVED | R | 0h | Reserved |
| 5 | INT_HYS | R/W | Oh | Interconnect comparator hysteresis 0h = 1.2V hysteresis 1h = 0.1V hysteresis |
| 4 | HORN_SEL | R/W | 0h | Horn block piezo select 0h = 2-terminal piezo 1h = 3-terminal piezo |
| 3-2 | HORN_THR | R/W | 0h | Horn driver setting for three-terminal piezo duty cycle tuning 0h = -6% 1h = -3% 2h = Nominal 3h = +3% |

Table 8-10. CONFIG2 Register Field Descriptions (continued)

| Bit | Field | Туре | Reset | Description |
|-----|----------|------|-------|--|
| 1-0 | T_BSTACT | R/W | | Boost activity monitor alert time. BST_nACT flag goes high if the boost converter has not switched for the set amount of time 0h = 100us 1h = 1ms 2h = 10ms 3h = 100ms |

8.6.7 ENABLE1 Register (Offset = 6h) [reset = 10h]

ENABLE1 is shown in Table 8-11.

Return to Summary Table.

Table 8-11. ENABLE1 Register Field Descriptions

| | Table 0-11. LINABLE I Register Field Descriptions | | | | | |
|-----|---|------|-------|--|--|--|
| Bit | Field | Туре | Reset | Description | | |
| 7 | RESERVED | R | 0h | Reserved | | |
| 6 | BATTEST_EN | R/W | Oh | Battery test enable 0h = disabled 1h = enabled | | |
| 5 | INT_EN | R/W | Oh | Control of interconnect interface 0h = disable 1h = enable | | |
| 4 | BST_EN | R/W | 1h | Boost converter control. See Section 8.3.6 for the required I ² C command sequence when enabling the boost converter and disabling the photo input amplifier. 0h = disabled 1h = boost converter enabled | | |
| 3 | PAMP_EN | R/W | Oh | Photo input amplifier control 0h = amplifier disabled 1h = amplifier enabled | | |
| 2 | PGAIN_EN | R/W | Oh | Photo gain amplifier control 0h = amplifier disabled 1h = amplifier enabled | | |
| 1 | RESERVED | R | 0h | Reserved | | |
| 0 | LEDLDO_EN | R/W | Oh | LED LDO control 0h = disabled 1h = enabled | | |

8.6.8 ENABLE2 Register (Offset = 7h) [reset = 0h]

ENABLE2 is shown in Table 8-12.

Return to Summary Table.

Table 8-12. ENABLE2 Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|------------|------|-------|--|
| 7 | LEDSEL | R/W | 0h | LED input select 0h = LEDENA |
| | | | | 1h = LEDENB |
| 6 | BST_CHARGE | R/W | 0h | Enable boost while BST_CHARGE=1. When BST_PG=1, set BST_CHARGE=0. |
| | | | | 0h = boost controlled by BST_EN |
| | | | | 1h = Boost is enabled until BST_PG=1. Boost remains enabled if BST_EN=1. |

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback



Table 8-12. ENABLE2 Register Field Descriptions (continued)

| Bit | Field | Туре | Reset | Description |
|-----|-----------|------|-------|---|
| 5-4 | RESERVED | R | 0h | Reserved |
| 3 | INT_DIR | R/W | Oh | Interconnect direction control 0h = from INT_UNIT to INT_MCU 1h = from INT_MCU to INT_UNIT |
| 2 | LEDPIN_EN | R/W | Oh | LEDEN pin enable 0h = LEDEN pin does not enable LED block 1h = LEDEN pin enables LED block |
| 1 | HORN_EN | R/W | Oh | Horn block enable 0h = Horn block disabled 1h = HBEN enables horn block |
| 0 | SLP_EN | R/W | 0h | Sleep timer enable 0h = sleep timer disabled, sleep mode is exited 1h = sleep timer initialized - SLP_DONE is set to 1 and SLP_EN is set to 0 after sleep timer expires |

8.6.9 CONTROL Register (Offset = 8h) [reset = 0h]

CONTROL is shown in Table 8-13.

Return to Summary Table.

Table 8-13. CONTROL Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|------------|------|-------|---|
| 7-6 | RESERVED | R | 0h | Reserved |
| 5 | MCU_DIS | R/W | 0h | MCU LDO disable 0h = MCU LDO enabled 1h = MCU LDO disabled |
| 4 | VCCLOW_DIS | R/W | 0h | VCCLOW brown-out monitor disable 0h = VCCLOW monitor is enabled 1h = VCCLOW monitor is disabled |
| 3 | MCUERR_DIS | R/W | 0h | MCULDO error mode disable 0h = in case of MCULDO error, FAULT mode is entered 1h = disable entering FAULT mode in case of MCULDO error |
| 2 | OTS_EN | R/W | Oh | Over-temperature shutdown mode disable 0h = disable entering over-temperature FAULT mode. 1h = in case of over-temperature, FAULT mode is entered and OTS_ERR flag is raised. |
| 1 | SOFTRESET | R/W | 0h | Set registers to the default value 0h = do not reset registers 1h = reset all registers. SOFTRESET is reset. BST_EN, BST_CHARGE, VBST, VMCUSET bits and STATUS1 register is unchanged. |
| 0 | VCCLOW_BST | R/W | 0h | VCCLOW boost control 0h = boost controlled by BST_EN 1h = boost enabled if VCCLOW=1 or BST_EN=1 |

8.6.10 SLPTMR1 Register (Offset = 9h) [reset = 0h]

SLPTMR1 is shown in Table 8-14.

Return to Summary Table.

Table 8-14. SLPTMR1 Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|--------|------|-------|---|
| 7-0 | SLPTMR | R/W | 0h | Sleep timer most significant bits. See SLPTMR2 register for details |

8.6.11 SLPTMR2 Register (Offset = Ah) [reset = 0h]

SLPTMR2 is shown in Table 8-15.

Return to Summary Table.

Table 8-15. SLPTMR2 Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|--------|------|-------|--|
| 7-0 | SLPTMR | R/W | Oh | Sleep timer duration. If SLPTMR is changed while SLP_EN=1, the new sleep timer setting will apply the next time SLP_EN is enabled. Sleep timer can be exited early if SLP_EN is written 0. 0000h = Sleep timer is disabled. If SLP_EN=1, then the sleep timer is enabled when SLPTMR is changed. 0001h to FFFFh = 1 ms to 65535 ms |

8.6.12 GPIO_AMUX Register (Offset = Bh) [reset = 0h]

GPIO_AMUX is shown in Table 8-16.

Return to Summary Table.

Table 8-16. GPIO AMUX Register Field Descriptions

| | | | | Tegister Fleid Descriptions |
|-----|----------|------|-------|---|
| Bit | Field | Туре | Reset | Description |
| 7 | AMUX_BYP | R/W | Oh | Analog multiplexer bypass 0h = analog multiplexer buffer is enabled when AMUX_SEL[1:0] != 000 1h = analog multiplexer buffer is bypassed with a low-resistance switch |
| 6 | RESERVED | R | 0h | Reserved |
| 5-4 | AMUX_SEL | R/W | Oh | Analog multiplexer input select 0h = AMUX off 1h = COO 2h = AOUT_PH 3h = PDO |
| 3 | RESERVED | R | 0h | Reserved |
| 2-0 | GPIO | R/W | Oh | Multi-purpose digital input and output 0h = Hi-Z 1h = TI Reserved 2h = output low if no status errors, high if any unmasked errors 3h = TI Reserved 4h = GPIO or LEDENA enables LED A 5h = GPIO or LEDENB enables LED B 6h = TI Reserved 7h = GPIO or BATTEST_EN enables battery test |

8.6.13 CO_BATTEST Register (Offset = Ch) [reset = 0h]

CO_BATTEST is shown in Table 8-17.

Return to Summary Table.



Table 8-17. CO_BATTEST Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|-----------|------|-------|---|
| 7 | COSWRO | R/W | 0h | CO amplifier output resistor (output of amplifier to COO pin) enable 0h = 0 Ohms 1h = 100 kOhms |
| 6 | COSWRG | R/W | 0h | CO gain resistor (output of amplifier to inverting input of amplifier) enable 0h = Hi-Z 1h = Resistance set by COGAIN register |
| 5 | COSWRI | R/W | 0h | CO input resistor (inverting input of amplifier to CON pin) enable 0h = 0 Ohms 1h = 1 kOhms |
| 4 | COSWREF | R/W | 0h | CO reference switch enable 0h = positive input of amplifier connected to COP 1h = positive input of amplifier connected to 1mV to 5mV COREF |
| 3 | RESERVED | R | 0h | Reserved |
| 2-0 | I_BATTEST | R/W | Oh | Battery test current 0h = 10mA 1h = 12mA 2h = 14mA 3h = 16mA 4h = 18mA 5h = 20mA 6h = Reserved 7h = Reserved |

8.6.14 CO Register (Offset = Dh) [reset = 0h]

CO is shown in Table 8-18.

Return to Summary Table.

Table 8-18. CO Register Field Descriptions

| rable of the optical field becompliant | | | | | | |
|--|------------|------|-------|---|--|--|
| Bit | Field | Туре | Reset | Description | | |
| 7 | REF0P3_EN | R/W | 0h | 300mV reference enable 0h = Buffer disabled 1h = Buffer enabled | | |
| 6-5 | COREF | R/W | 0h | Reference voltage for CO amplifier 0h = 1.25mV 1h = 2.5mV 2h = 3.75mV 3h = 5mV | | |
| 4-3 | COGAIN | R/W | 0h | CO amplifier feedback resistance 0h = 1100 kOhm 1h = 300 kOhm 2h = 500 kOhm 3h = 800 kOhm | | |
| 2 | COTEST_DIR | R/W | 0h | CO test output direction 0h = pull-down 1h = pull-up | | |
| 1 | COTEST_EN | R/W | 0h | Enable COTEST output on PREF 0h = disabled 1h = enabled | | |

Table 8-18. CO Register Field Descriptions (continued)

| Bit | Field | Туре | Reset | Description |
|-----|----------|------|-------|----------------------|
| 0 | COAMP_EN | R/W | 0h | CO amplifier control |
| | | | | 0h = disabled |
| | | | | 1h = enabled |

8.6.15 VBOOST Register (Offset = Eh) [reset = F2h]

VBOOST is shown in Table 8-19.

Return to Summary Table.

Table 8-19. VBOOST Register Field Descriptions

| D:/ | | | | gister Fleid Descriptions |
|-----|----------|------|-------|---|
| Bit | Field | Туре | Reset | Description |
| 7-4 | BST_CLIM | R/W | Fh | Boost converter inductor peak current setting |
| | | | | 0h = 30mA |
| | | | | 1h = 40mA |
| | | | | 2h = 50mA |
| | | | | 3h = 60mA |
| | | | | 4h = 80mA |
| | | | | 5h = 100mA |
| | | | | 6h = 130mA |
| | | | | 7h = 160mA |
| | | | | 8h = 200mA |
| | | | | 9h = 240mA |
| | | | | Ah = 280mA |
| | | | | Bh = 320mA |
| | | | | Ch = 360mA |
| | | | | Dh = 400mA |
| | | | | Eh = 450mA |
| | | | | Fh = 500mA |
| 3-0 | VBST | R/W | 2h | Boost converter output voltage setting. Default value is set during power-up based on MCUSEL pin. 0h = 2.7V 1h = 3.8V 2h = 4.7V 3h = 6V 4h = 9V 5h = 10V 6h = 10.5V 7h = 11V 8h = 11.5V 9h = 15V Ah = Reserved Bh = Reserved Ch = Reserved Eh = Reserved Fh = Reserved Fh = Reserved |

8.6.16 LEDLDO Register (Offset = Fh) [reset = 0h]

LEDLDO is shown in Table 8-20.

Return to Summary Table.



Table 8-20. LEDLDO Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|----------|------|-------|---|
| 7-4 | RESERVED | R | 0h | Reserved |
| 3-1 | LEDLDO | R/W | Oh | LED LDO settings 0h = 7.5V 1h = 8.0V 2h = 8.5V 3h = 9.0V 4h = 9.5V 5h = 10V 6h = Reserved 7h = Reserved |
| 0 | RESERVED | R | 0h | Reserved |

8.6.17 PH_CTRL Register (Offset = 10h) [reset = 0h]

PH_CTRL is shown in Table 8-21.

Return to Summary Table.

Table 9 21 DU CTDI Pagistor Field Descriptions

| | Table 8-21. PH_CTRL Register Field Descriptions | | | | | | | |
|-----|---|------|-------|---|--|--|--|--|
| Bit | Field | Туре | Reset | Description | | | | |
| 7 | RESERVED | R | 0h | Reserved | | | | |
| 6-5 | TEMPCOB | R/W | 0h | LED B Temperature Coefficient Setting | | | | |
| | | | | 0h = 0.347 mV/C | | | | |
| | | | | 1h = 0.416 mV/C | | | | |
| | | | | 2h = 0.693 mV/C | | | | |
| | | | | 3h = 1.040 mV/C | | | | |
| 4-3 | TEMPCOA | R/W | 0h | LED A Temperature Coefficient Setting | | | | |
| | | | | 0h = 0.347 mV/C | | | | |
| | | | | 1h = 0.416 mV/C | | | | |
| | | | | 2h = 0.693 mV/C | | | | |
| | | | | 3h = 1.040 mV/C | | | | |
| 2 | PREF_SEL | R/W | 0h | Photo Reference setting | | | | |
| | | | | 0h = Photo gain amplifier referenced to 0mV | | | | |
| | | | | 1h = Photo gain amplifier and PREF pin connected to 50mV internal | | | | |
| | | | | reference | | | | |
| 1-0 | PGAIN | R/W | 0h | Photo Gain setting | | | | |
| | | | | 0h = 5 | | | | |
| | | | | 1h = 11 | | | | |
| | | | | 2h = 20 | | | | |
| | | | | 3h = 35 | | | | |
| | | - | - | | | | | |

8.6.18 LED_DAC_A Register (Offset = 11h) [reset = 0h]

LED_DAC_A is shown in Table 8-22.

Return to Summary Table.

Table 8-22. LED_DAC_A Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|--------|------|-------|--|
| 7-0 | PDAC_A | R/W | | LED DAC A setting 00h to FFh = 0mV to 300mV |

8.6.19 LED_DAC_B Register (Offset = 12h) [reset = 0h]

LED_DAC_B is shown in Table 8-23.



Return to Summary Table.

Table 8-23. LED_DAC_B Register Field Descriptions

| Bit | Field | Туре | Reset | Description |
|-----|--------|------|-------|--|
| 7-0 | PDAC_B | R/W | 0h | LED DAC B setting 00h to FFh = 0mV to 300mV |

Product Folder Links: TPS8802

Copyright © 2021 Texas Instruments Incorporated



9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The TPS8802 supports a variety of smoke alarm platforms:

- single-wave or dual-wave photoelectric smoke and CO detection
- 3-V battery, 9-V battery, or AC/DC supply with battery backup
- · tone or voice alarm



9.2 Typical Application

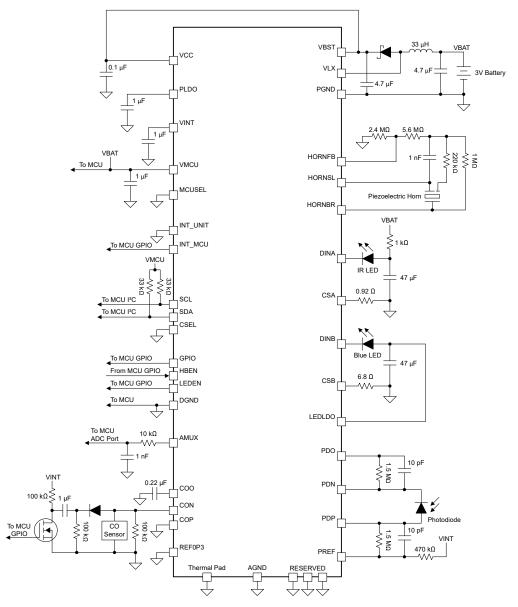


Figure 9-1. Dual-Wave Photoelectric Smoke and CO Alarm with Backup Battery

9.2.1 Design Requirements

In this example, a smoke alarm requires the following:

- 100 MΩ photoamplifier transconductance with sub-nanoamp detection
- 100 mA IR LED current with 1-mA/°C temperature compensation
- 50mA blue LED current with 0.1mA/°C temperature compensation

9.2.2 Detailed Design Procedure

9.2.2.1 Photo Amplifier Component Selection

To meet the 100-M Ω photoamplifier transconductance requirement, set the gain stage to 35x with PGAIN = 11. Because the application requires sub-nanoamp current detection, reference the photo amplifier to PREF and set PREF_SEL = 1. This reference offsets the input stage output by 50 mV and offsets the gain stage output by 225 mV. Because the application uses PREF, the gain stage amplification reduces to 32.25x. Divide 100 M Ω by 32.25x to get 3.1 M Ω . The gain is distributed across two resistors, therefore use a resistor with a value of

approximately 1.55 M Ω . A 1.5-M Ω resistor is selected. The achieved transconductance is 96.8 M Ω . Use 10-pF of compensation capacitance in parallel with the 1.5-M Ω resistors. Use an oscilloscope with averaging to verify the photo amplifier is quickly settling but not overshooting. If the photo amplifier has overshoot, increase the compensation capacitance. If the photo amplifier is settling slowly, decrease the compensation capacitance.

9.2.2.2 LED Driver Component Selection

The LED current depends on the TEMPCO bits, PDAC register and CSA and CSB resistors. Changing any of these values affects the LED current and temperature compensation. The following method selects the TEMPCO, PDAC, and CSA resistor value based on the required LED current and temperature compensation. The 100-mA LED current and 1 mA/°C temperature compensation is used as an example for LED A. Repeat the process for LED B.

- 1. Determine the room temperature current and temperature compensation required by the application.
 - 100mA and 1mA/°C is required by the design.
- 2. Calculate the compensation in percentage per degree by dividing the compensation coefficient by the current and multiplying by 100.
 - 1 mA/°C divided by 100 mA is 1%/°C.
- 3. Use Table 9-1 or Table 9-2 to select a TEMPCO setting which contains the required compensation. If the required compensation is in two ranges, use the range with a higher TEMPCO setting. If the required temperature coefficient is not in any of the ranges, choose the TEMPCO and PDAC setting closest to the required temperature coefficient, then go to step 5.
 - 1%/°C is between the mimumum and maximum for TEMPCO = 11.
- 4. Calculate the target CSA voltage. Divide the driver temperature coefficient [mV/°C] by the desired temperature coefficient [%/°C] and multiply by 100.
 - 1.040 mV/°C divided by 1 %/°C is 104 mV.
- 5. Calculate the CSA resistor by dividing the target CSA voltage by the required current and subtracting 0.1 Ω for internal resistance.
 - 104 mV divided by 100 mA is 1.04 Ω . Subtract 0.1 Ω to get 0.94 Ω .
- 6. Select the closest available resistor and calculate the final CSA voltage by multiplying the required current by the total resistance (external and internal).
 - Use a 0.92 Ω resistor. Multiply 100 mA and 1.02 Ω to get 102mV CSA voltage.
- 7. Calculate the PDAC value by subtracting the final CSA voltage by the specified CSA voltage at PDAC = 0x00 and dividing the result by 1.176 mV (the DAC LSB, equal to 300 mV divided by 255).
 - 102 mV minus 79 mV is 23 mV, divided by 1.176 mV is 20. Write 0x14 to the PDAC register.
- 8. Calibrate the PDAC value. If using the LED A driver, read the CSA_BIN register bits and add 0x11 if CSA_BIN=00b, add 0x06 if CSA_BIN=01b, subtract 0x06 if CSA_BIN=10b, or subtract 0x11 if CSA_BIN=11b. The CSA_BIN value varies from unit to unit and must be read on each unit calibrated using this method. Alternatively, measure the CSA or CSB voltage using the MCU ADC and adjust PDAC accordingly.
 - The microcontroller reads that a unit has CSA BIN=01b. 0x20 is written to PDAC A.

Table 9-1. Temperature Coefficients for Each TEMPCOA and DAC A Setting

| Register Setting | CSA Voltage [mV], T = 27°C | Temperature Coefficient [mV/°C] | Temperature Coefficient [%/°C] | Coefficient Information | |
|-------------------------------------|-------------------------------|---------------------------------|--------------------------------|-------------------------|--|
| TEMPCOA[1:0] = 11, PDAC_A = 0x00 | 79 1.040 | | 1.316% | Max for TEMPCO = 11b | |
| TEMPCOA[1:0] = 11, PDAC_A = 0xFF | 376 | 376 1.040 | | Min for TEMPCO = 11b | |
| TEMPCOA[1:0] = 10, PDAC_A = 0x00 | 188 | 0.693 | 0.369% | Max for TEMPCO = 10b | |
| TEMPCOA[1:0] = 10, PDAC_A = 0xFF | 484 | 0.693 | 0.143% | Min for TEMPCO = 10b | |
| TEMPCOA[1:0] = 01, PDAC_A = 0x00 | 277 | 0.416 | 0.150% | Max for TEMPCO = 01b | |

| Register Setting | CSA Voltage [mV], T = 27°C | · | | Coefficient Information | |
|-------------------------------------|-------------------------------|-------|--------|-------------------------|--|
| TEMPCOA[1:0] = 01, PDAC_A = 0xFF | 572 | 0.416 | 0.073% | Min for TEMPCO = 01b | |
| TEMPCOA[1:0] = 00, PDAC_A = 0x00 | 299 | 0.347 | 0.116% | Max for TEMPCO = 00b | |
| TEMPCOA[1:0] = 00, PDAC_A = 0xFF | 593 | 0.347 | 0.059% | Min for TEMPCO = 00b | |

Table 9-2. Temperature Coefficients for Each TEMPCOB and DAC_B Setting

| Register Setting | CSB Voltage [mV], T = 27°C | Temperature Coefficient [mV/°C] | Temperature Coefficient [%/°C] | Coefficient Information |
|-------------------------------------|----------------------------|---------------------------------|--------------------------------|-------------------------|
| TEMPCOB[1:0] = 11, PDAC_B = 0x00 | 81 | 1.040 | 1.284% | Max for TEMPCO = 11b |
| TEMPCOB[1:0] = 11, PDAC_B = 0xFF | 379 | 1.040 | 0.272% | Min for TEMPCO = 11b |
| TEMPCOB[1:0] = 10, PDAC_B = 0x00 | 189 | 0.693 | 0.369% | Max for TEMPCO = 10b |
| TEMPCOB[1:0] = 10, PDAC_B = 0xFF | 486 | 0.693 | 0.143% | Min for TEMPCO = 10b |
| TEMPCOB[1:0] = 01, PDAC_B = 0x00 | 277 | 0.416 0.150% | | Max for TEMPCO = 01b |
| TEMPCOB[1:0] = 01, PDAC_B = 0xFF | 572 0.416 0.073% | | 0.073% | Min for TEMPCO = 01b |
| TEMPCOB[1:0] = 00, PDAC_B = 0x00 | 299 | 0.347 0.116% | | Max for TEMPCO = 00b |
| TEMPCOB[1:0] = 00, PDAC_B = 0xFF | 594 | 0.347 | 0.059% | Min for TEMPCO = 00b |

Use the same procedure for the blue LED, requiring 50 mA and 0.1 mA/°C, to calculate TEMPCOB = 10, RCSB = 6.8Ω , VCSB = 345 mV, PDAC B = 0x85 (before calibration).

The two drivers are identical, except for the CSA_BIN code to improve the accuracy of the LED_A driver for IR LEDs. Connect the IR LED to the LED A driver and the blue LED to the LED B driver in multi-wave systems.

9.2.2.3 LED Voltage Supply Selection

Each of the LED anodes must have enough voltage to forward bias the LED, regulate the CSA and CSB voltage, and exceed the driver dropout voltage requirement from DINA to CSA and DINB to CSB. A typical IR LED at 100 mA has 1.5-V forward voltage. The LED driver dropout voltage at 100 mA is 300 mV. With the CSA voltage set to 100 mV, the dropout voltage of 300 mV, and forward voltage of 1.5 V, at least 1.9 V must be applied to the IR LED anode for current regulation. Connect the IR LED anode to the LEDLDO. Enable the boost converter set to 2.7 V and enable the LED LDO to charge the IR LED anode capacitor. Alternatively, the IR LED anode can be connected to PLDO through a diode.

A typical blue LED at 50 mA has 4 V forward voltage. For the blue LED, the CSB voltage is 340 mV, the dropout voltage is 300 mV, and the forward voltage is 4 V. Supply over 4.64 V to the anode for the duration of the LED pulse. With a 47 μF capacitor derated to 30 μF, 100 μs LED pulse, the anode voltage drops by 170 mV. Thus, the capacitor must be charged to 4.81 V. Enable the boost converter set to 6 V and enable the LED LDO to charge the blue LED anode capacitor. The LED LDO has a diode voltage drop between the VBST voltage and LEDLDO voltage. The LEDLDO prevents the DINA pin from exceeding its recommended operating limit of 11.5

9.2.2.4 Boost Converter Component Selection

A 4.7-µF, 16-V or 25-V, X5R or X7R capacitor is recommended on VBST. This value provides the best tradeoff between boost ripple and power loss (from charging and discharging VBST).

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback

A 4.7-µF X5R or X7R capacitor rated for the battery voltage is recommended to be connected to the battery. This capacitor provides a low-impedance supply for the inductor when the boost converter is rapidly switching.

A 33- μ H inductor rated for 700 mA of saturation current with less than 800 m Ω of DC resistance (DCR) is recommended. Smaller DCR improves the efficiency of the boost converter. Comparing 800 m Ω to 400 m Ω , approximately 3% efficiency improvement is expected.

Table 9-3. Recommended Inductors for Boost Converter

| PART NUMBER | SUPPLIER VALUE | | DCR (Ω) | I _{SAT} (A) | DIMENSIONS | |
|------------------|----------------|-------|---------|----------------------|-----------------------|--|
| SDR0503-330KL | Bourns | 33 µH | 0.38 | 0.85 | 5.0mm × 4.8mm x 3.0mm | |
| NRS4018T330MDGJV | Taiyo Yuden | 33 µH | 0.552 | 0.70 | 4.0mm x 4.0mm x 1.8mm | |

A Schottky diode with low forward voltage and low leakage current is recommended. Ensure the leakage is low enough to prevent battery recharging issues.

Table 9-4. Recommended Diode for Boost Converter


| PART NUMBER | SUPPLIER | SIZE | | |
|-------------|------------------------|---------|--|--|
| MBR0520LT1 | ON Semiconductor Corp. | SOD-123 | | |

9.2.2.5 Regulator Component Selection

To stabilize the output voltage on each regulator, install 1- μ F capacitors on VINT, VMCU, and PLDO. Connect the MCUSEL pin to GND to set the MCU LDO voltage to 1.8V. The MCU LDO can be set to other voltages by changing the MCUSEL pin connection. Connect the MCUSEL pin to GND through a 1 nF capacitor to set the MCU LDO voltage to 3.3 V. Connect MCUSEL to VINT to set the MCU LDO to 2.5 V. Connect MCUSEL to GND with a 620- Ω resistor to set the MCU LDO to 1.5 V.


9.2.3 Application Curves

All curves use the schematics shown in Figure 9-1. The photo amplifier curves do not have the 470 k Ω PREF resistor installed.

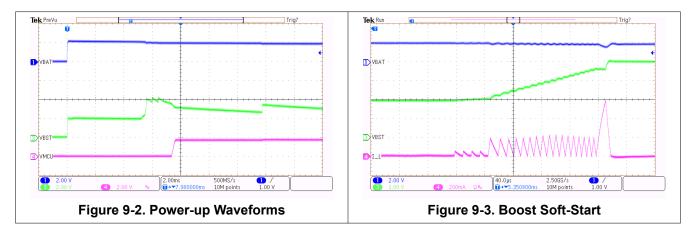

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

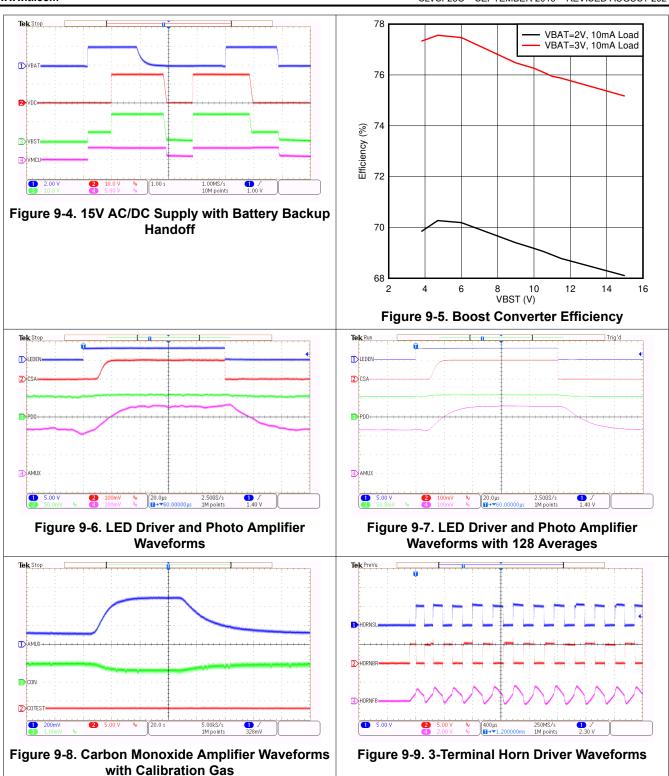

9.2.4 3V Battery Smoke and CO Alarm



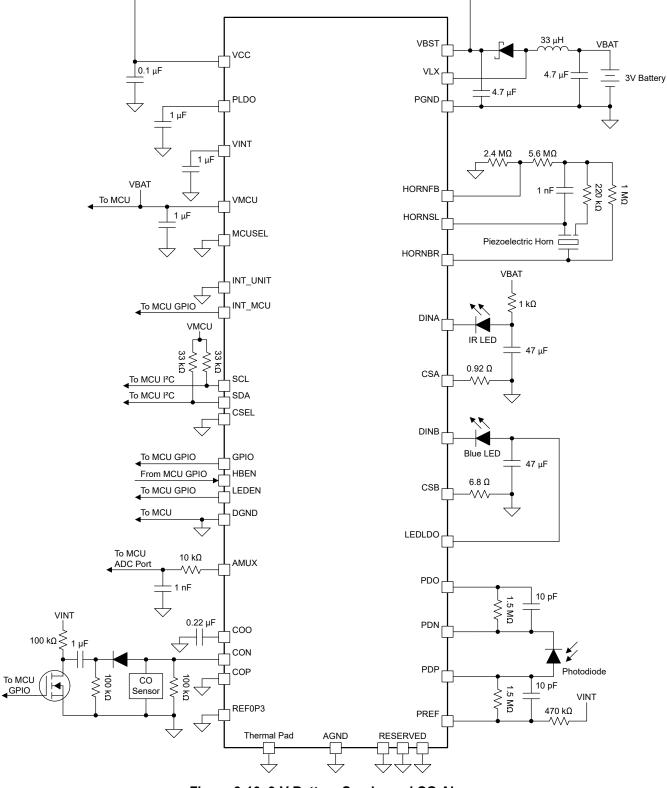


Figure 9-10. 3-V Battery Smoke and CO Alarm

9.2.4.1 Design Requirements

In this example, a smoke alarm requires the following:

100 MΩ photoamplifier transconductance with sub-nanoamp detection

www.ti.com

- 100mA IR LED current with 1mA/°C temperature compensation
- 50mA blue LED current with 0.1mA/°C temperature compensation
- 10-year battery life with 3V lithium primary battery

9.2.4.2 Detailed Design Procedure

In this application, a 3V battery is the only power source. The 3V battery is used to directly power the IR LED and the MCU, saving power. The MCU LDO can be disabled after power-up. Ensure the MCU and IR LED can operate over the range of voltages supplied by the battery.

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback



10 Power Supply Recommendations

These power sources, among others, can power the TPS8802 device:

- 3-V lithium battery
- 9-V battery
- two 1.5-V batteries
- an AC/DC supply

When the boost converter is used, the power supply must be able to supply 650-mA peak current to the boost converter. Ensure that the power supply voltage does not drop below 2 V during the initial powerup sequence. A rise time less than 1 ms may cause VBST to overshoot due to LC ringing. Ensure the power supply's rise time is less than 100ms.

If the boost converter is not used, ensure the power supply can tolerate transient currents caused by the LED driver or horn driver. A supply capable of 50 mA average current is generally sufficient. The supply voltage must be high enough to power the horn driver, LED driver and interconnect. Ensure the power supply's rise time is less than 100ms.



11 Layout

11.1 Layout Guidelines

These blocks require careful layout placement:

- Boost converter
- Photo amplifier
- CO amplifier
- · Ground plane and traces

11.1.1 Photo Amplifier Layout

The photo amplifier is a very sensitive analog block in the TPS8802 device. Minimal trace lengths must be used to connect the photodiode and relevant external components to PDP, PDN, PDO, PREF and AGND. It is recommended to shield the PDP, PDN, PDO, and PREF traces with the AGND plane.

11.1.2 CO Amplifier Layout

Similar to the photo amplifier, the CO amplifier is very sensitive to noise. Connect the CO electrochemical sensor close to the TPS8802 device and shield the COP, CON, and COO traces with the AGND plane.

11.1.3 Boost Converter Layout

The boost converter components must be positioned close to the VLX, VBST, and PGND pins. To minimize switching noise, ensure that the VLX trace is as short as possible. A PGND plane can assist with connecting the PGND connections together, but may not be necessary if the PGND routing is short enough without the PGND plane. All PGND routing must remain separated from the AGND plane. Connect PGND to AGND at a single point near the AGND pin.

11.1.4 Ground Plane Layout

Connect AGND and DGND to the ground plane. Ensure there is a short path from AGND to DGND. Route PGND and its associated blocks (LED driver, boost converter) separately from the ground plane. Connect PGND to AGND at a single point near the IC.

Copyright © 2021 Texas Instruments Incorporated



11.2 Layout Example

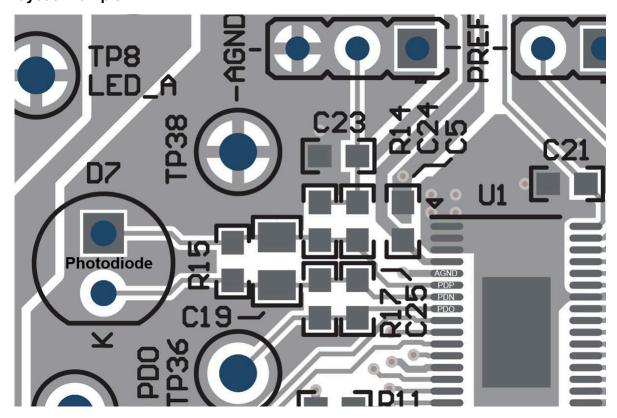


Figure 11-1. Photo Amplifier Layout

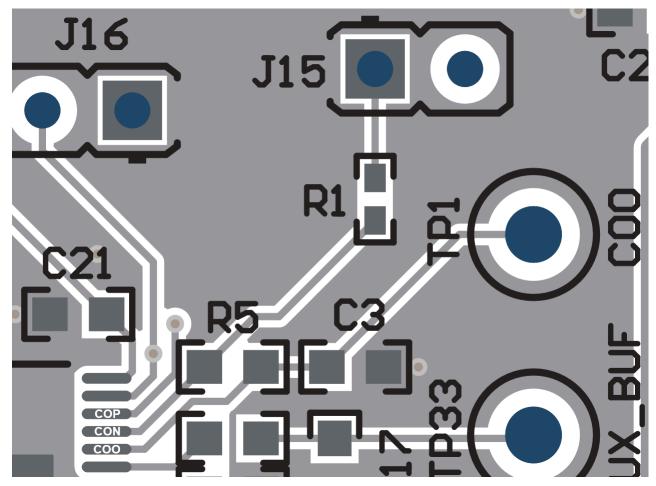


Figure 11-2. CO Amplifier Layout



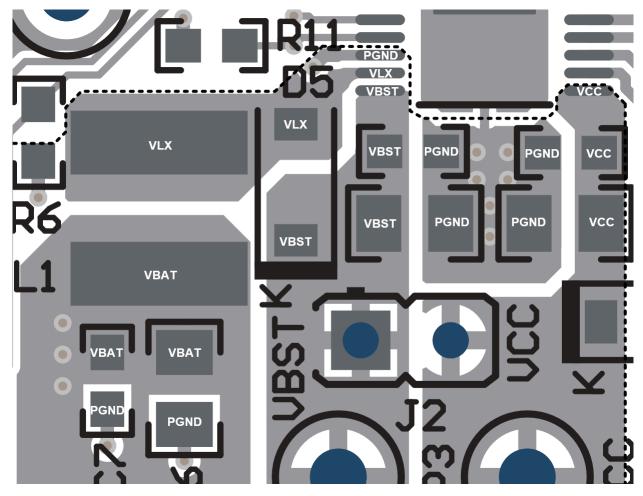


Figure 11-3. Boost Converter Layout with PGND Plane



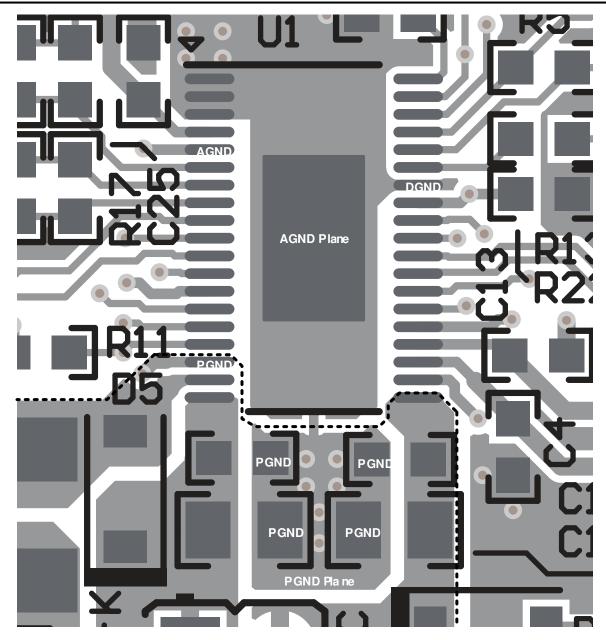


Figure 11-4. Ground Layout



12 Device and Documentation Support

12.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.2 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

12.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.5 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

Submit Document Feedback



13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

| Orderable part number | Status | Material type | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material | MSL rating/ Peak reflow | Op temp (°C) | Part marking (6) |
|-----------------------|--------|---------------|-------------------|-----------------------|-----------------|-------------------------------|----------------------------|--------------|------------------|
| TPS8802DCPR | Active | Production | HTSSOP (DCP) 38 | 2000 LARGE T&R | Yes | NIPDAU | Level-3-260C-168 HR | -40 to 85 | TPS8802DCP |
| TPS8802DCPR.A | Active | Production | HTSSOP (DCP) 38 | 2000 LARGE T&R | Yes | NIPDAU | Level-3-260C-168 HR | -40 to 85 | TPS8802DCP |

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE MATERIALS INFORMATION

www.ti.com 5-Dec-2023

TAPE AND REEL INFORMATION





| A0 | Dimension designed to accommodate the component width |
|----|---|
| В0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|-----------------|--------------------|----|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| TPS8802DCPR | HTSSOP | DCP | 38 | 2000 | 330.0 | 16.4 | 6.9 | 10.2 | 1.8 | 12.0 | 16.0 | Q1 |

PACKAGE MATERIALS INFORMATION

www.ti.com 5-Dec-2023




*All dimensions are nominal

| | Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) | |
|---|-------------|--------------|-----------------|------|------|-------------|------------|-------------|--|
| ı | TPS8802DCPR | HTSSOP | DCP | 38 | 2000 | 367.0 | 367.0 | 38.0 | |

4.4 x 9.7, 0.5 mm pitch

SMALL OUTLINE PACKAGE


This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

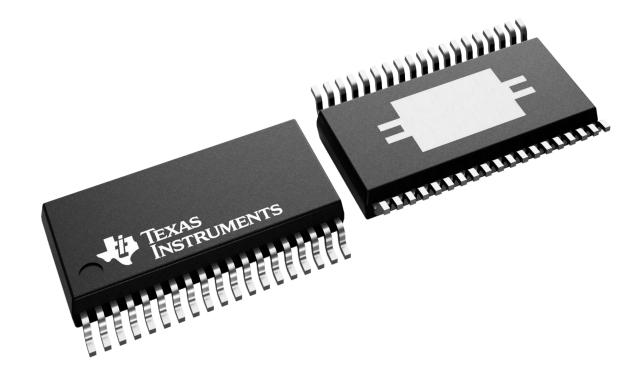

www.ti.com

PowerPAD[™] TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

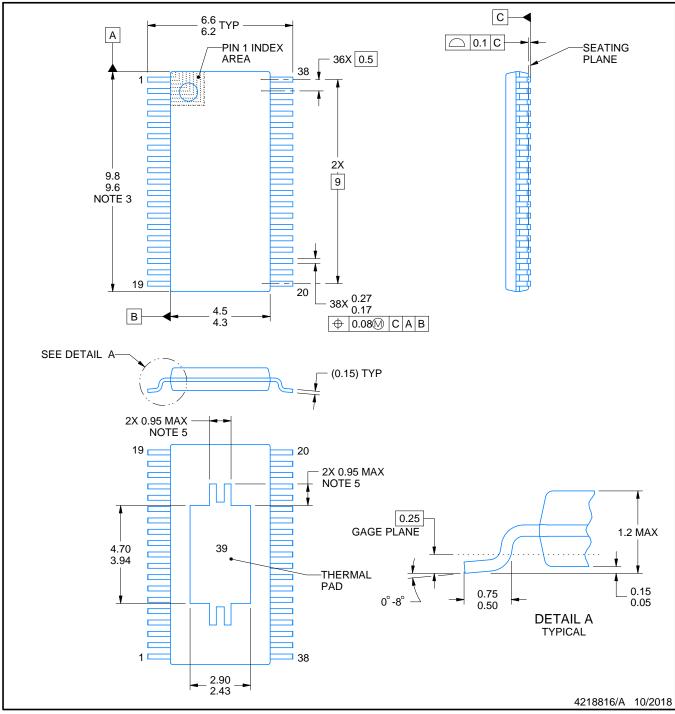

NOTES:

PowerPAD is a trademark of Texas Instruments.


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
 4. Reference JEDEC registration MO-153.
- 5. Features may differ or may not be present.



SMALL OUTLINE PACKAGE

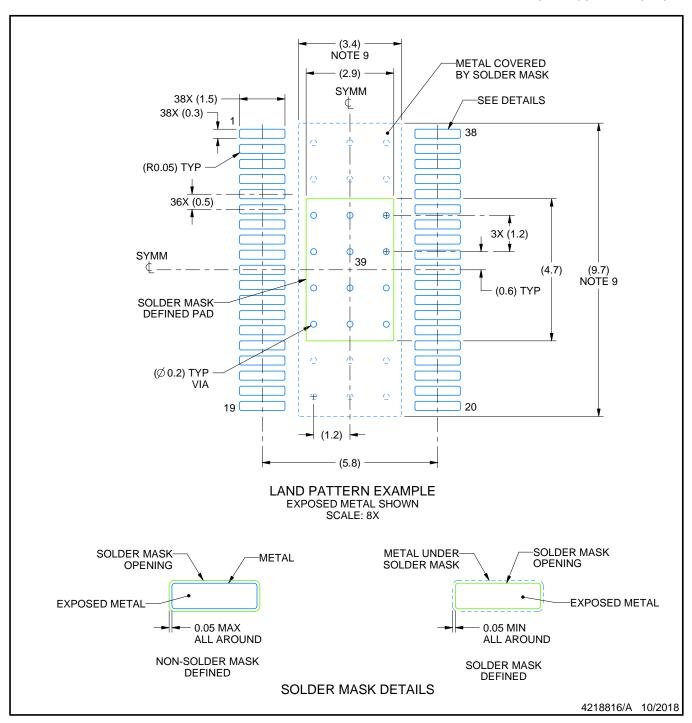


NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
- 9. Size of metal pad may vary due to creepage requirement.
- 10. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.



SMALL OUTLINE PACKAGE

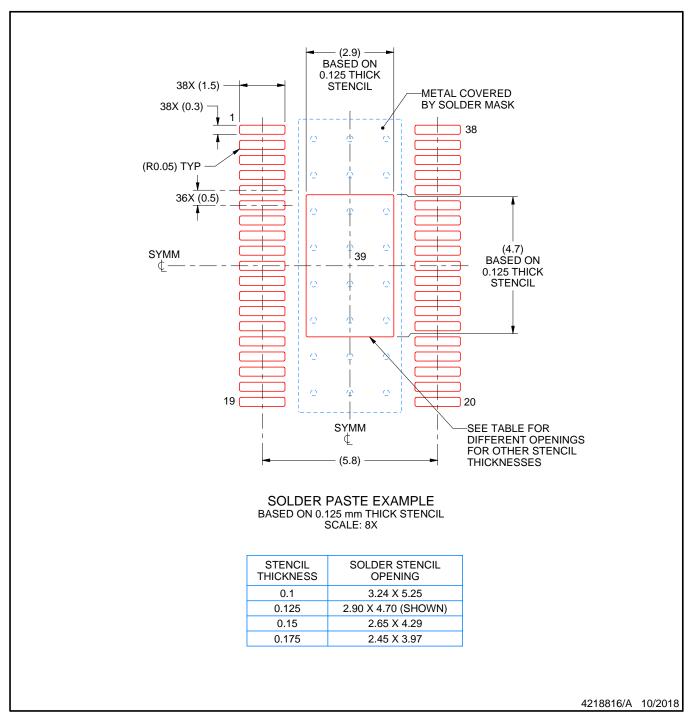

NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025