

ISO723xx High-Speed, Triple-Channel Digital Isolators

1 Features

- 25 and 150Mbps signaling rate options
 - Low channel-to-channel output skew; 1ns maximum
 - Low pulse-width distortion (PWD); 2ns maximum
 - Low jitter content; 1ns typical at 150Mbps
- Typical 25-Year Life at Rated Working Voltage (see [Isolation Lifetime Projection](#))
- 4kV ESD protection
- Operate with 3.3V or 5V supplies
- 3.3V and 5V level translation
- High electromagnetic immunity
- –40°C to 125°C operating range
- [Safety Related Certifications](#)
 - [DIN EN IEC 60747-17 \(VDE 0884-17\) conformity per VDE](#)
 - [UL 1577 component recognition program](#)
 - [IEC 61010-1, IEC 62368-1 certifications](#)

2 Applications

- [Factory Automation](#)
 - [Modbus](#)
 - [Profibus™](#)
 - [DeviceNet™ Data Buses](#)
- [Computer Peripheral Interface](#)
- [Servo Control Interface](#)
- [Data Acquisition](#)


3 Description

The ISO7230 and ISO7231 are triple-channel digital isolators each with multiple channel configurations and output enable functions. These devices have logic input and output buffers separated by TI's silicon dioxide (SiO₂) isolation barrier. Used in conjunction with isolated power supplies, these devices block high voltage, isolate grounds, and prevent noise currents on a data bus or other circuits from entering the local ground and interfering with or damaging sensitive circuitry.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	BODY SIZE (NOM)	PACKAGE SIZE ⁽²⁾
ISO7230C ISO7231C ISO7231M	DW (SOIC, 16)	10.30mm × 7.50mm	10.30mm × 10.30mm

- (1) For all available packages, see the orderable addendum at the end of the data sheet.
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.

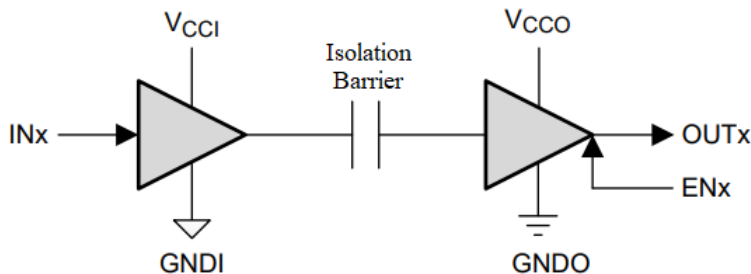

- A. V_{CCI} and GNDI are supply and ground connections respectively for the input channels.
- B. V_{CCO} and GNDO are supply and ground connections respectively for the output channels.

Simplified Schematic



Table of Contents

1 Features	1	6.16 Switching Characteristics: V_{CC1} at 5-V, V_{CC2} at 3.3-V.....	13
2 Applications	1	6.17 Typical Characteristics.....	14
3 Description	1	7 Parameter Measurement Information	16
4 Device Comparison Table	3	8 Detailed Description	18
5 Pin Configuration and Functions	3	8.1 Overview.....	18
6 Specifications	4	8.2 Functional Block Diagram.....	18
6.1 Absolute Maximum Ratings.....	4	8.3 Feature Description.....	19
6.2 ESD Ratings.....	4	8.4 Device Functional Modes.....	19
6.3 Thermal Information.....	4	9 Application and Implementation	20
6.4 Recommended Operating Conditions.....	5	9.1 Application Information.....	20
6.5 Power Ratings.....	5	9.2 Typical Application.....	20
6.6 Insulation Specifications.....	6	9.3 Power Supply Recommendations.....	21
6.7 Safety-Related Certifications.....	7	9.4 Layout.....	22
6.8 Safety Limiting Values.....	7	10 Device and Documentation Support	23
6.9 Electrical Characteristics: V_{CC1} and V_{CC2} at 3.3 V.....	7	10.1 Documentation Support.....	23
6.10 Electrical Characteristics: V_{CC1} and V_{CC2} at 5-V.....	8	10.2 Receiving Notification of Documentation Updates.....	23
6.11 Electrical Characteristics: V_{CC1} at 3.3-V, V_{CC2} at 5-V.....	8	10.3 Support Resources.....	23
6.12 Electrical Characteristics: V_{CC1} at 5-V, V_{CC2} at 3.3-V.....	10	10.4 Trademarks.....	23
6.13 Switching Characteristics: V_{CC1} and V_{CC2} at 3.3-V.....	10	10.5 Electrostatic Discharge Caution.....	23
6.14 Switching Characteristics: V_{CC1} and V_{CC2} at 5-V.....	12	10.6 Glossary.....	23
6.15 Switching Characteristics: V_{CC1} at 3.3-V and V_{CC2} at 5-V.....	12	11 Revision History	23
		12 Mechanical, Packaging, and Orderable Information	24

4 Device Comparison Table

PRODUCT	SIGNALING RATE	INPUT THRESHOLD	CHANNEL CONFIGURATION	ISOLATION RATING
ISO7230C	25 Mbps	≈ 1.5 V (TTL) (CMOS compatible)	3/0	4000 V _{PK} , 2500 V _{RMS}
ISO7231C	25 Mbps	≈ 1.5 V (TTL) (CMOS compatible)	2/1	
ISO7231M	150 Mbps	V _{CC} /2 (CMOS)		

5 Pin Configuration and Functions

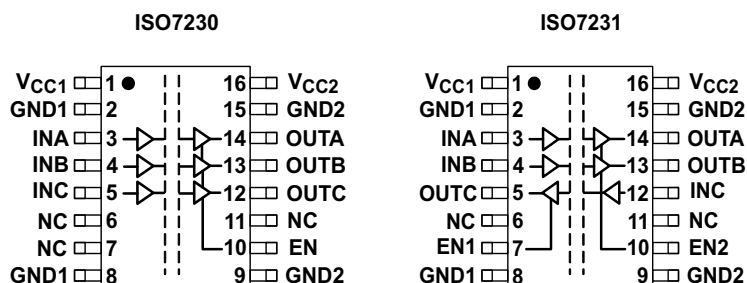


Figure 5-1. DW Package 16-Pin SOIC Top View

Table 5-1. Pin Functions

NAME	PIN		TYPE ⁽¹⁾	DESCRIPTION
	ISO7230	ISO7231		
EN	10	—	I	Enable, channel A, B, and C
EN1	—	7	I	Enable, channel C
EN2	—	10	I	Enable, channel A and B
GND1	2, 8	2, 8	—	Ground connection for V _{CC1}
GND2	9, 15	9, 15	—	Ground connection for V _{CC2}
INA	3	3	I	Input, channel A
INB	4	4	I	Input, channel B
INC	5	12	I	Input, channel C
NC	6, 7, 11	6, 11	—	Not connected
OUTA	14	14	O	Output, channel A
OUTB	13	13	O	Output, channel B
OUTC	12	5	O	Output, channel C
V _{CC1}	1	1	—	Power supply, V _{CC1}
V _{CC2}	16	16	—	Power supply, V _{CC2}

(1) I = Input; O = Output

6 Specifications

6.1 Absolute Maximum Ratings

See⁽¹⁾

		MIN	MAX	UNIT
V _{CC}	Supply voltage ⁽²⁾ , V _{CC1} , V _{CC2}	–0.5	6	V
V _I	Voltage at INx, OUTx, ENx	–0.5	V _{CC} + 0.5 ⁽³⁾	V
I _O	Output current	–15	15	mA
T _J	Maximum junction temperature		170	°C
T _{stg}	Storage temperature	–65	150	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) All voltage values are with respect to network ground terminal and are peak voltage values.
- (3) Maximum voltage must not exceed 6 V.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±4000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±1000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Thermal Information

THERMAL METRIC ⁽¹⁾		ISO7230C, ISO7231C, ISO7231M	UNIT
		DW (SOIC)	
		16 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	168	°C/W
		68.6	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	33.9	°C/W
R _{θJB}	Junction-to-board thermal resistance	33.5	°C/W
ψ _{JT}	Junction-to-top characterization parameter	14.8	°C/W
ψ _{JB}	Junction-to-board characterization parameter	32.9	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	n/a	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application note.

6.4 Recommended Operating Conditions

			MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage ⁽²⁾ , V _{CC1} , V _{CC2}		3.15		5.5	V
I _{OH}	High-level output current		–4			mA
I _{OL}	Low-level output current				4	mA
t _{ui}	Input pulse width ⁽¹⁾	ISO723xC	40			ns
t _{ui}	Input pulse width ⁽¹⁾	ISO723xM	6.67	5		ns
1/t _{ui}	Signaling rate ⁽¹⁾	ISO723xC	0	30	25	Mbps
1/t _{ui}	Signaling rate ⁽¹⁾	ISO723xM	0	200	150	Mbps
V _{IH}	High-level input voltage	ISO723xM	0.7 x V _{CC}		V _{CC}	V
V _{IL}	Low-level input voltage	ISO723xM	0		0.3 x V _{CC}	V
V _{IH}	High-level input voltage	ISO723xC	2		5.5	V
V _{IL}	Low-level input voltage	ISO723xC	0		0.8	V
T _A	Ambient temperature		–40	25	125	
T _J	Junction temperature				150	°C
H	External magnetic field-strength immunity per IEC 61000-4-8 and IEC 61000-4-9 certification				1000	A/m

(1) Typical signaling rate and Input pulse width are measured at ideal conditions at 25°C.

(2) For the 5-V operation, V_{CC1} or V_{CC2} is specified from 4.5 V to 5.5 V.

For the 3.3-V operation, V_{CC1} or V_{CC2} is specified from 3 V to 3.6 V.

For the 2.8-V operation, V_{CC1} or V_{CC2} is specified at 2.8 V.

6.5 Power Ratings

over operating free-air temperature range (unless otherwise noted)

PARAMETER		ISO7230C, ISO7231C, ISO7231M	UNIT
		DW (SOIC)	
		16 PINS	
P _D	Device power dissipation, V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, D Input a 50% duty cycle, 25-Mbps square wave	220	mW

6.6 Insulation Specifications

PARAMETER		TEST CONDITIONS	VALUE	UNIT
GENERAL				
CLR	External clearance ⁽¹⁾	Shortest terminal-to-terminal distance through air	8	mm
CPG	External creepage ⁽¹⁾	Shortest terminal-to-terminal distance across the package surface	8	mm
DTI	Distance through the insulation	Minimum internal gap (internal clearance)	0.008	mm
CTI	Comparative tracking index	DIN EN 60112 (VDE 0303-11); IEC 60112	≥400	V
	Material group		II	
	Overvoltage category	Rated mains voltage ≤150 V _{RMS}	I-IV	
		Rated mains voltage ≤300 V _{RMS}	I-III	
		Rated mains voltage ≤400 V _{RMS}	I-II	
DIN EN IEC 60747-17 (VDE 0884-17): ²				
V _{IORM}	Maximum repetitive peak isolation voltage	AC voltage (bipolar)	560	V _{PK}
V _{IOTM}	Maximum transient isolation voltage	V _{TEST} = V _{IOTM} , t = 60 s (qualification); V _{TEST} = 1.2 x V _{IOTM} , t = 1 s (100% production)	4000	V _{PK}
q _{pd}	Apparent charge ⁽³⁾	Method a: After I/O safety test subgroup 2/3 V _{ini} = V _{IOTM} , t _{ini} = 60 s; V _{pd(m)} = 1.2 x V _{IORM} , t _m = 10 s	≤5	pC
		Method a: After environmental tests subgroup 1 V _{ini} = V _{IOTM} , t _{ini} = 60 s; V _{pd(m)} = 1.3 x V _{IORM} , t _m = 10 s	≤5	
		Method b: At routine test (100% production); V _{ini} = 1.2 x V _{IOTM} , t _{ini} = 1s; V _{pd(m)} = 1.5 x V _{IORM} , t _m = 1s (method b1) or V _{pd(m)} = V _{ini} , t _m = t _{ini} (method b2)	≤5	
C _{IO}	Barrier capacitance, input to output ⁽⁴⁾	V _{IO} = 0.4 x sin (2πft), f = 1 MHz	1	pF
R _{IO}	Isolation resistance, input to output ⁽⁴⁾	V _{IO} = 500 V, T _A = 25°C	>10 ¹²	Ω
		V _{IO} = 500 V, 100°C ≤ T _A ≤ 125°C	>10 ¹¹	
		V _{IO} = 500 V at T _S = 150°C	>10 ⁹	
	Pollution degree		2	
	Climatic category		40/125/21	
UL 1577				
V _{ISO}	Withstand isolation voltage	V _{TEST} = V _{ISO} = 2500 V _{RMS} , t = 60 s (qualification); V _{TEST} = 1.2 x V _{ISO} = 3000 V _{RMS} , t = 1 s (100% production)	2500	V _{RMS}

- (1) Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves and/or ribs on a printed circuit board are used to help increase these specifications.
- (2) This coupler is suitable for *basic electrical insulation* only within the maximum operating ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.
- (3) Apparent charge is electrical discharge caused by a partial discharge (pd).
- (4) All pins on each side of the barrier tied together creating a two-terminal device

6.7 Safety-Related Certifications

VDE	CSA	UL
Certified according to DIN EN IEC 60747-17 (VDE 0884-17)	Certified according to IEC 62368-1	Certified according to UL 1577 Component Recognition Program
Basic certificate: 40047657	Master contract number: 220991	File number: E181974

6.8 Safety Limiting Values

Safety limiting⁽¹⁾ intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry. A failure of the I/O can allow low resistance to ground or the supply and, without current limiting, dissipate sufficient power to overheat the die and damage the isolation barrier, potentially leading to secondary system failures.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I _S	Safety input, output, or supply current	R _{θJA} = 212°C/W, V _I = 5.5 V, T _J = 170°C, T _A = 25°C, see Section 6.3			124	mA
		R _{θJA} = 212°C/W, V _I = 3.6 V, T _J = 170°C, T _A = 25°C, see Section 6.3			190	
T _S	Safety temperature				150	°C

- (1) The safety-limiting constraint is the maximum junction temperature specified in the data sheet. The power dissipation and junction-to-air thermal impedance of the device installed in the application hardware determines the junction temperature. The assumed junction-to-air [thermal resistance](#) in the table is that of a device installed on a high-K test board for leaded surface-mount packages. The power is the recommended maximum input voltage times the current. The junction temperature is then the ambient temperature plus the power times the junction-to-air thermal resistance.

6.9 Electrical Characteristics: V_{CC1} and V_{CC2} at 3.3 V

over recommended operating conditions (unless otherwise noted)⁽¹⁾

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
SUPPLY CURRENT								
I _{CC1}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V	0.5	1.2	mA		
		25 Mbps		3	5			
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V	4.5	7	mA		
		25 Mbps		6.5	11			
I _{CC2}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V	9	15	mA		
		25 Mbps		10	17			
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V	8	12	mA		
		25 Mbps		10.5	16			
ELECTRICAL CHARACTERISTICS								
I _{OFF}	Sleep mode output current	ENx at 0 V, single channel			0		μA	
V _{OH}	High-level output voltage	I _{OH} = -4 mA, See Figure 7-1			V _{CC0} - 0.4		V	
		I _{OH} = -20 μA, See Figure 7-1			V _{CC0} - 0.1			
V _{OL}	Low-level output voltage	I _{OL} = 4 mA, See Figure 7-1			0.4		V	
		I _{OL} = 20 μA, See Figure 7-1			0.1			
V _{I(HYS)}	Input voltage hysteresis				150		mV	
I _{IH}	High-level input current	INx at V _{CC1}			10		μA	
I _{IL}	Low-level input current	INx at 0 V			-10			
C _I	Input capacitance to ground	IN at V _{CC} , V _I = 0.4 sin (2πft), f=2MHz			2		pF	
CMTI	Common-mode transient immunity	V _I = V _{CC1} or 0 V, See Figure 7-4			25	50	kV/μs	

- (1) For the 5-V operation, V_{CC1} or V_{CC2} is specified from 4.5 V to 5.5 V.
For the 3.3-V operation, V_{CC1} or V_{CC2} is specified from 3.15 V to 3.6 V.

6.10 Electrical Characteristics: V_{CC1} and V_{CC2} at 5-V

over recommended operating conditions (unless otherwise noted)⁽¹⁾

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY CURRENT							
I _{CC1}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V		1	3	mA
		25 Mbps			7	9.5	
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V		6.5	11	mA
		25 Mbps			11	17	
I _{CC2}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V		15	22	mA
		25 Mbps			17	24	
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V		13	20	mA
		25 Mbps			17.5	27	
ELECTRICAL CHARACTERISTICS							
I _{OFF}	Sleep mode output current		ENx at 0 V, single channel		0		μA
V _{OH}	High-level output voltage		I _{OH} = −4 mA, See Figure 7-1	V _{CCO} − 0.8			V
			I _{OH} = −20 μA, See Figure 7-1	V _{CCO} − 0.1			
V _{OL}	Low-level output voltage		I _{OL} = 4 mA, See Figure 7-1			0.4	V
			I _{OL} = 20 μA, See Figure 7-1			0.1	
V _{I(HYS)}	Input voltage hysteresis			150			mV
I _{IH}	High-level input current		INx at V _{CC1}			10	μA
I _{IL}	Low-level input current		INx at 0 V	−10			
C _I	Input capacitance to ground		IN at V _{CC} , V _I = 0.4 sin (2πft), f=2MHz	2			pF
CMTI	Common-mode transient immunity		V _I = V _{CC1} or 0 V, See Figure 7-4	25	50		kV/μs

- (1) For the 5-V operation, V_{CC1} or V_{CC2} is specified from 4.5 V to 5.5 V.
For the 3.3-V operation, V_{CC1} or V_{CC2} is specified from 3.15 V to 3.6 V.

6.11 Electrical Characteristics: V_{CC1} at 3.3-V, V_{CC2} at 5-V

over recommended operating conditions (unless otherwise noted)⁽¹⁾

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
SUPPLY CURRENT								
I _{CC1}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V			0.5	1.2	mA
		25 Mbps				3	5	
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V			4.5	7	mA
		25 Mbps				6.5	11	
I _{CC2}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V			15	22	mA
		25 Mbps				17	24	
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V			13	20	mA
		25 Mbps				17.5	27	
ELECTRICAL CHARACTERISTICS								
I _{OFF}	Sleep mode output current		ENx at 0 V, Single channel			0		μA
V _{OH}	High-level output voltage		I _{OH} = −4 mA, See Figure 7-1		ISO7230	V _{CCO} − 0.4		V
					ISO7231 (5-V side)	V _{CCO} − 0.8		
			I _{OH} = −20 μA, See Figure 7-1			V _{CCO} − 0.1		
V _{OL}	Low-level output voltage		I _{OL} = 4 mA, See Figure 7-1			0.4		V
			I _{OL} = 20 μA, See Figure 7-1			0.1		
V _{I(HYS)}	Input voltage hysteresis					150		mV
I _{IH}	High-level input current		INx at V _{CC1}			10		μA
I _{IL}	Low-level input current		INx at 0 V			−10		
C _I	Input capacitance to ground		IN at V _{CC} , V _I = 0.4 sin (2πft), f=2MHz			2		pF

over recommended operating conditions (unless otherwise noted)⁽¹⁾

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
CMTI	Common-mode transient immunity	$V_I = V_{CC1}$ or 0 V, See Figure 7-4	25	50		kV/ μ s

- (1) For the 5-V operation, V_{CC1} or V_{CC2} is specified from 4.5 V to 5.5 V.
For the 3.3-V operation, V_{CC1} or V_{CC2} is specified from 3.15 V to 3.6 V.

6.12 Electrical Characteristics: V_{CC1} at 5-V, V_{CC2} at 3.3-V

over recommended operating conditions (unless otherwise noted)⁽¹⁾

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
SUPPLY CURRENT								
I _{CC1}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V			1	3	mA
		25 Mbps				7	9.5	
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V			6.5	11	mA
		25 Mbps				11	17	
I _{CC2}	ISO7230C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN at 3 V			9	15	mA
		25 Mbps				10	17	
	ISO7231C/M	Quiescent	V _I = V _{CC1} or 0 V, all channels, no load, EN1 at 3 V, EN2 at 3 V			8	12	mA
		25 Mbps				10.5	16	
ELECTRICAL CHARACTERISTICS								
I _{OFF}	Sleep mode output current	ENx at 0 V, Single channel			0		μA	
V _{OH}	High-level output voltage	I _{OH} = −4 mA, See Figure 7-1	ISO7230	V _{CCO} − 0.4		V		
			ISO7231 (5-V side)	V _{CCO} − 0.8				
		I _{OH} = −20 μA, See Figure 7-1		V _{CCO} − 0.1				
V _{OL}	Low-level output voltage	I _{OL} = 4 mA, See Figure 7-1			0.4		V	
		I _{OL} = 20 μA, See Figure 7-1			0.1			
V _{I(HYS)}	Input voltage hysteresis				150		mV	
I _{IH}	High-level input current	INx at V _{CC1}					10	μA
I _{IL}	Low-level input current	INx at 0 V			−10			
C _I	Input capacitance to ground	IN at V _{CC} , V _I = 0.4 sin (2πft), f=2MHz			2		pF	
CMTI	Common-mode transient immunity	V _I = V _{CC1} or 0 V, See Figure 7-4			25	50	kV/μs	

- (1) For the 5-V operation, V_{CC1} or V_{CC2} is specified from 4.5 V to 5.5 V.
For the 3.3-V operation, V_{CC1} or V_{CC2} is specified from 3.15 V to 3.6 V.

6.13 Switching Characteristics: V_{CC1} and V_{CC2} at 3.3-V

over recommended operating conditions (unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH} , t _{PHL}	Propagation delay	ISO723xC	See Figure 7-1	25		56	ns
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}				4		
t _{PLH} , t _{PHL}	Propagation delay	ISO723xM		8		34	ns
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}			1	2		
t _{sk(pp)}	Part-to-part skew ⁽²⁾	ISO723xC				10	ns
		ISO723xM		0	5		
t _{sk(o)}	Channel-to-channel output skew ⁽³⁾	ISO723xC			0	3	ns
		ISO723xM		0	1		
t _r	Output signal rise time		See Figure 7-1		2.4		ns
t _f	Output signal fall time			2.3			
t _{PHZ}	Propagation delay, high-level-to-high-impedance output		See Figure 7-2		15	25	ns
t _{PZH}	Propagation delay, high-impedance-to-high-level output				15	25	
t _{PLZ}	Propagation delay, low-level-to-high-impedance output				15	25	
t _{PZL}	Propagation delay, high-impedance-to-low-level output				15	25	
t _{fs}	Failsafe output delay time from input power loss		See Figure 7-3		18		μs
t _{jit(pp)}	Peak-to-peak eye-pattern jitter	ISO723xM	150 Mbps PRBS NRZ data input, same polarity input on all channels, See Figure 7-5		1		ns

- (1) Also referred to as pulse skew.
(2) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

- (3) $t_{sk(o)}$ is the skew between specified outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical specified loads.

6.14 Switching Characteristics: V_{CC1} and V_{CC2} at 5-V

over recommended operating conditions (unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH} , t _{PHL}	Propagation delay	ISO723xC	See Figure 7-1	18		42	ns
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}				2.5		
t _{PLH} , t _{PHL}	Propagation delay	ISO723xM		8		23	ns
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}			1	2		
t _{sk(pp)}	Part-to-part skew ⁽²⁾	ISO723xC				8	ns
		ISO723xM		0	3		
t _{sk(o)}	Channel-to-channel output skew ⁽³⁾	ISO723xC		0		2	ns
		ISO723xM		0	1		
t _r	Output signal rise time		See Figure 7-1	2.4			ns
t _f	Output signal fall time			2.3			
t _{PHZ}	Propagation delay, high-level-to-high-impedance output		See Figure 7-2	15		25	ns
t _{PZH}	Propagation delay, high-impedance-to-high-level output			15		25	
t _{PLZ}	Propagation delay, low-level-to-high-impedance output			15		25	
t _{PZL}	Propagation delay, high-impedance-to-low-level output			15		25	
t _{fs}	Failsafe output delay time from input power loss		See Figure 7-3		12		μs
t _{jitt(pp)}	Peak-to-peak eye-pattern jitter	ISO723xM	150 Mbps PRBS NRZ data input, Same polarity input on all channels, See Figure 7-5		1		ns

(1) Also referred to as pulse skew.

(2) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

(3) $t_{sk(o)}$ is the skew between specified outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical specified loads.

6.15 Switching Characteristics: V_{CC1} at 3.3-V and V_{CC2} at 5-V

, over recommended operating conditions (unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH} , t _{PHL}	Propagation delay	ISO723xC	See Figure 7-1	22		51	ns
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}					3	
t _{PLH} , t _{PHL}	Propagation delay	ISO723xM		8		30	
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}				1	2	
t _{sk(pp)}	Part-to-part skew ⁽²⁾	ISO723xC				10	ns
		ISO723xM			0	5	
t _{sk(o)}	Channel-to-channel output skew ⁽³⁾	ISO723xC			0	2.5	ns
		ISO723xM			0	1	
t _r	Output signal rise time		See Figure 7-1		2.4		ns
t _f	Output signal fall time				2.3		
t _{PHZ}	Propagation delay, high-level-to-high-impedance output		See Figure 7-2		15	25	ns
t _{PZH}	Propagation delay, high-impedance-to-high-level output				15	25	
t _{PLZ}	Propagation delay, low-level-to-high-impedance output				15	25	
t _{PZL}	Propagation delay, high-impedance-to-low-level output				15	25	
t _{fs}	Failsafe output delay time from input power loss				12		μs
t _{jit(pp)}	Peak-to-peak eye-pattern jitter	ISO723xM	150 Mbps PRBS NRZ data input, Same polarity input on all channels, See Figure 7-5		1		ns

(1) Also known as pulse skew

(2) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

- (3) $t_{sk(o)}$ is the skew between specified outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical specified loads.

6.16 Switching Characteristics: V_{CC1} at 5-V, V_{CC2} at 3.3-V

over recommended operating conditions (unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH} , t _{PHL}	Propagation delay, low-to-high-level output	ISO723xC	See Figure 7-1	20		50	ns
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}					3	
t _{PLH} , t _{PHL}	Propagation delay, low-to-high-level output	ISO723xM		8		29	ns
PWD	Pulse-width distortion ⁽¹⁾ t _{PHL} – t _{PLH}				1	2	
t _{sk(pp)}	Part-to-part skew ⁽²⁾	ISO723xC				10	ns
		ISO723xM			0	5	
t _{sk(o)}	Channel-to-channel output skew ⁽³⁾	ISO723xC			0	2.5	ns
		ISO723xM			0	1	
t _r	Output signal rise time		See Figure 7-1		2.4		ns
t _f	Output signal fall time				2.3		
t _{PHZ}	Propagation delay, high-level-to-high-impedance output		See Figure 7-2		15	25	ns
t _{PZH}	Propagation delay, high-impedance-to-high-level output				15	25	
t _{PLZ}	Propagation delay, low-level-to-high-impedance output				15	25	
t _{PZL}	Propagation delay, high-impedance-to-low-level output				15	25	
t _{fs}	Failsafe output delay time from input power loss		See Figure 7-3		18		μs
t _{jit(pp)}	Peak-to-peak eye-pattern jitter	ISO723xM	150 Mbps PRBS NRZ data input, Same polarity input on all channels, See Figure 7-5			1	ns

- (1) Also known as pulse skew
 (2) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.
 (3) $t_{sk(o)}$ is the skew between specified outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical specified loads.

6.17 Typical Characteristics

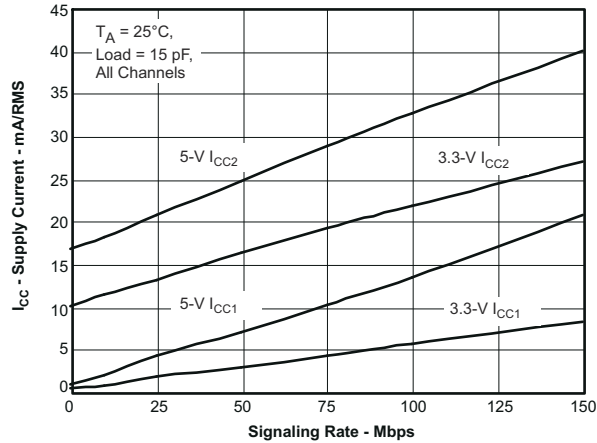


Figure 6-1. ISO7230C/M RMS Supply Current vs Signaling Rate

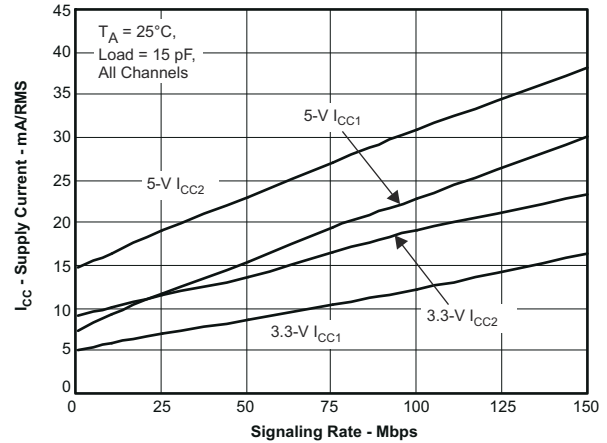


Figure 6-2. ISO7231C/M RMS Supply Current vs Signaling Rate

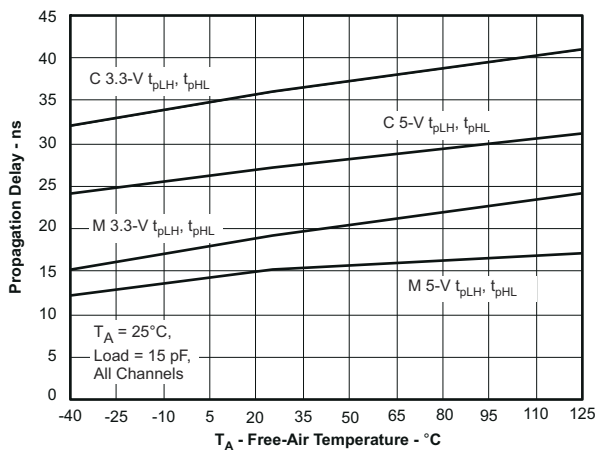


Figure 6-3. Propagation Delay vs Free-Air Temperature

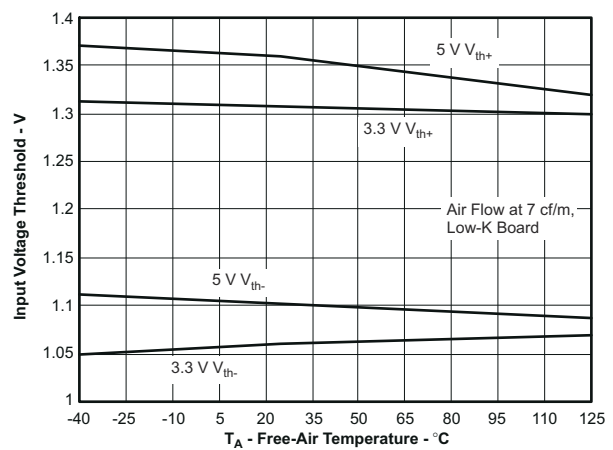


Figure 6-4. Input Threshold Voltage vs Free-Air Temperature

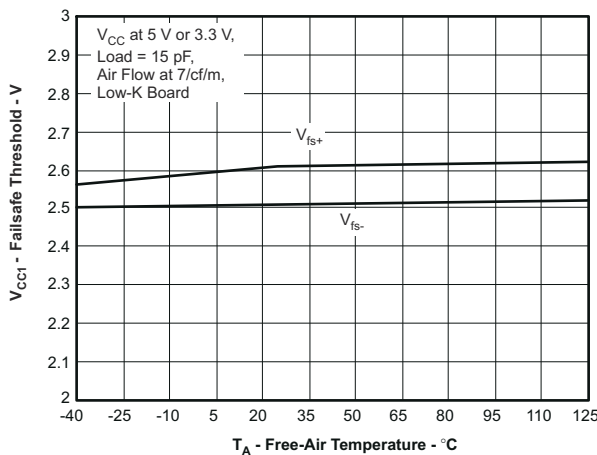


Figure 6-5. VCC1 Fail-Safe Threshold vs Free-Air Temperature

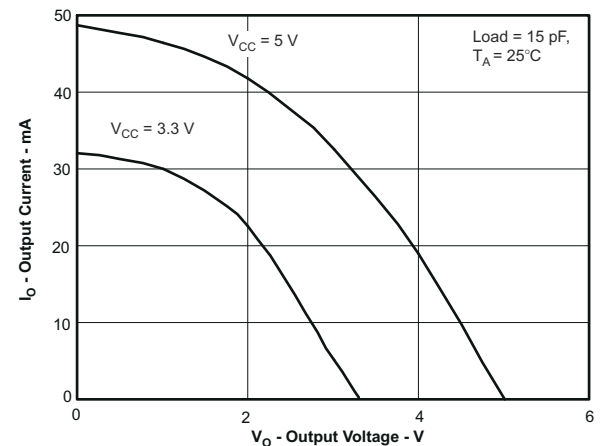


Figure 6-6. High-Level Output Current vs High-Level Output Voltage

6.17 Typical Characteristics (continued)


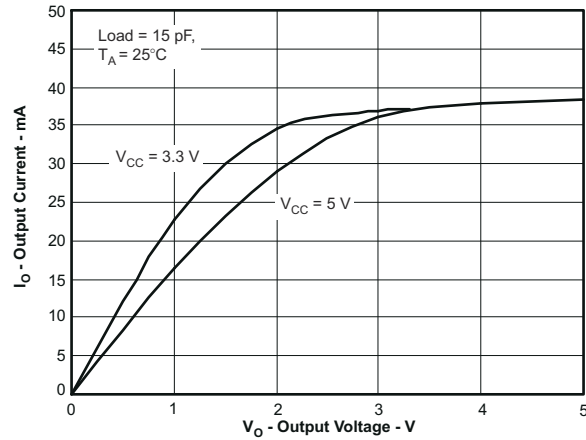



Figure 6-7. Low-Level Output Current vs Low-Level Output Voltage

7 Parameter Measurement Information

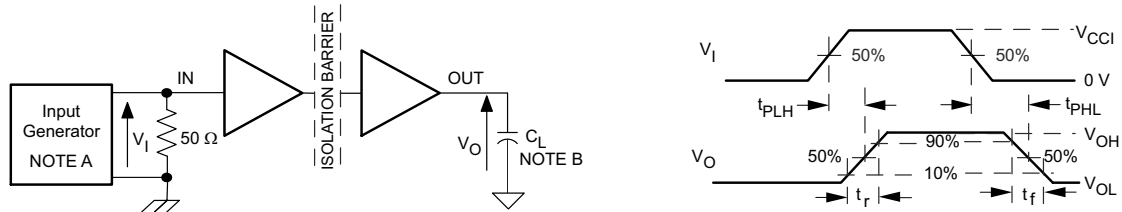


- A. The input pulse is supplied by a generator having the following characteristics: PRR $\leq$ 50 kHz, 50% duty cycle, $t_r \leq$ 3 ns, $t_f \leq$ 3 ns, $Z_O = 50 \Omega$. At the input, a 50- Ω resistor is required to terminate the Input Generator signal. The 50- Ω is not needed in actual application.
- B. $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 7-1. Switching Characteristic Test Circuit and Voltage Waveforms

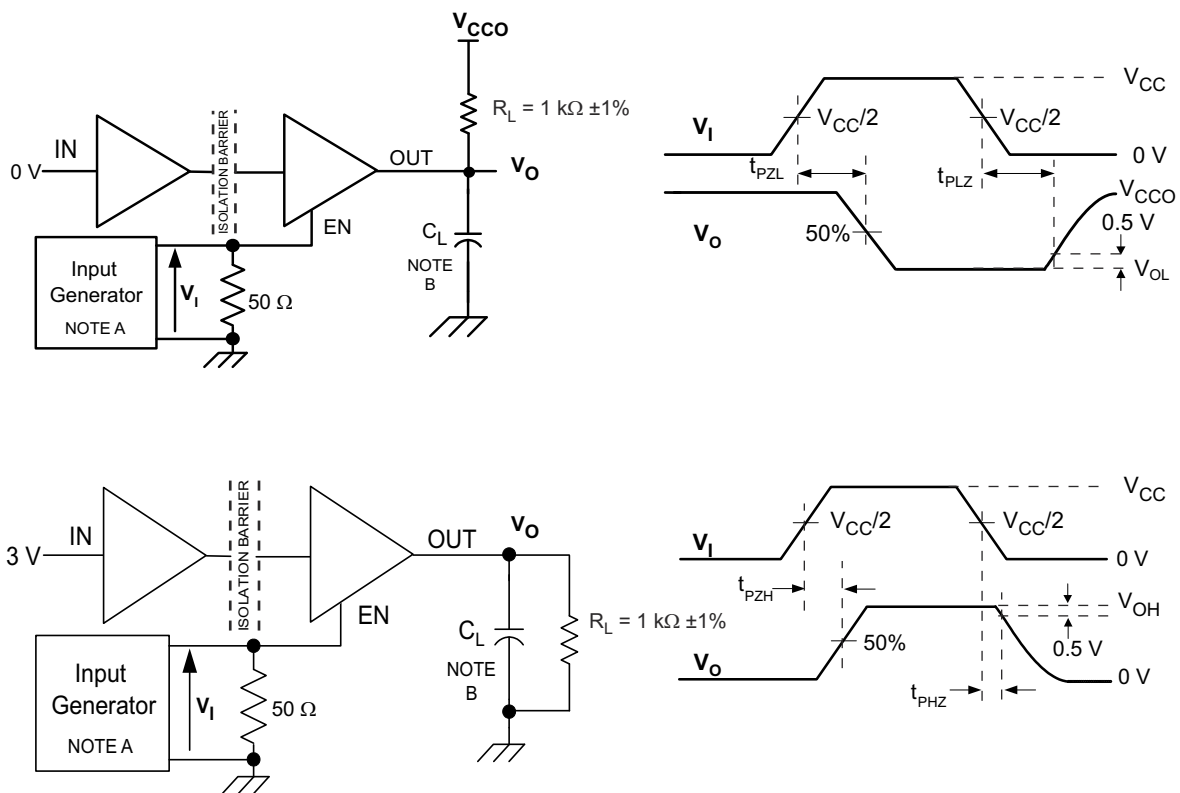


- A. The input pulse is supplied by a generator having the following characteristics: PRR $\leq$ 50 kHz, 50% duty cycle, $t_r \leq$ 3 ns, $t_f \leq$ 3 ns, $Z_O = 50 \Omega$.
- B. $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 7-2. Enable/Disable Propagation Delay Time Test Circuit and Waveform

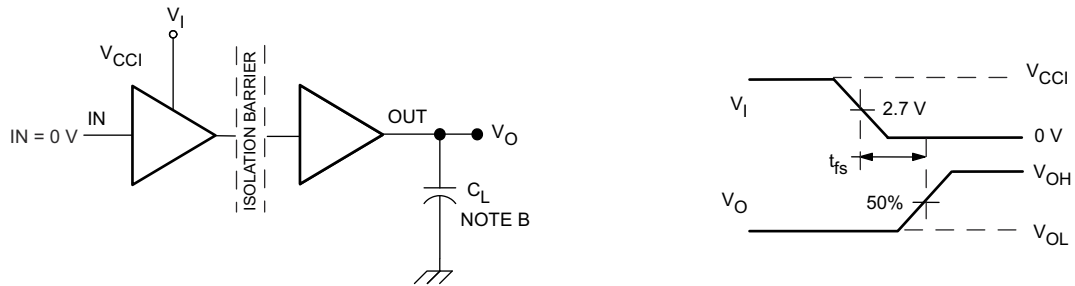


- A. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 50 \text{ kHz}$, 50% duty cycle, $t_r \leq 3 \text{ ns}$, $t_f \leq 3 \text{ ns}$, $Z_O = 50 \Omega$.
- B. $C_L = 15 \text{ pF}$ and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 7-3. Failsafe Delay Time Test Circuit and Voltage Waveforms

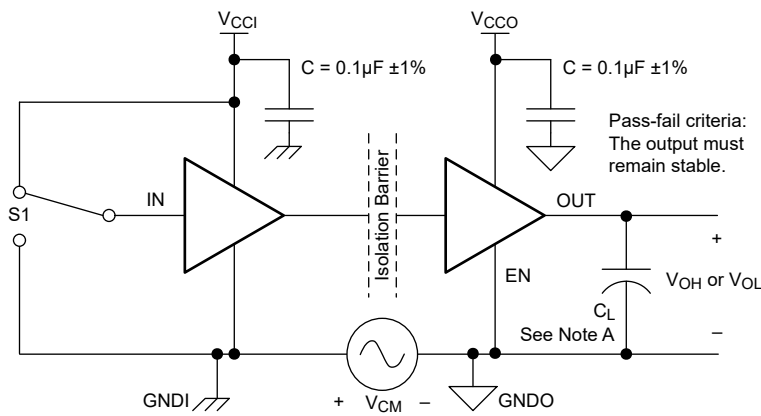

- A. $C_L = 15 \text{ pF}$ and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 7-4. Common-Mode Transient Immunity Test Circuit

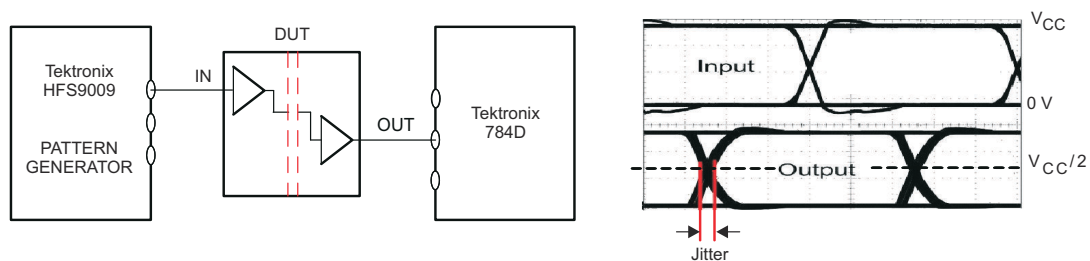

PRBS bit pattern run length is $2^{16} - 1$. Transition time is 800 ps. NRZ data input has no more than five consecutive 1s or 0s.

Figure 7-5. Peak-to-Peak Eye-Pattern Jitter Test Circuit and Voltage Waveform

8 Detailed Description

8.1 Overview

The ISO723x family of devices transmit digital data across a silicon dioxide based isolation barrier. The digital input signal (IN) of the device is sampled by a transmitter and at every data edge the transmitter sends a corresponding differential signal across the isolation barrier. When the input signal is static, the refresh logic periodically sends the necessary differential signal from the transmitter. On the other side of the isolation barrier, the receiver converts the differential signal into a single-ended signal which is output on the OUT pin through a buffer. If the receiver does not receive a data or refresh signal, the timeout logic detects the loss of signal or power from the input side and drives the output to the default level.

8.2 Functional Block Diagram

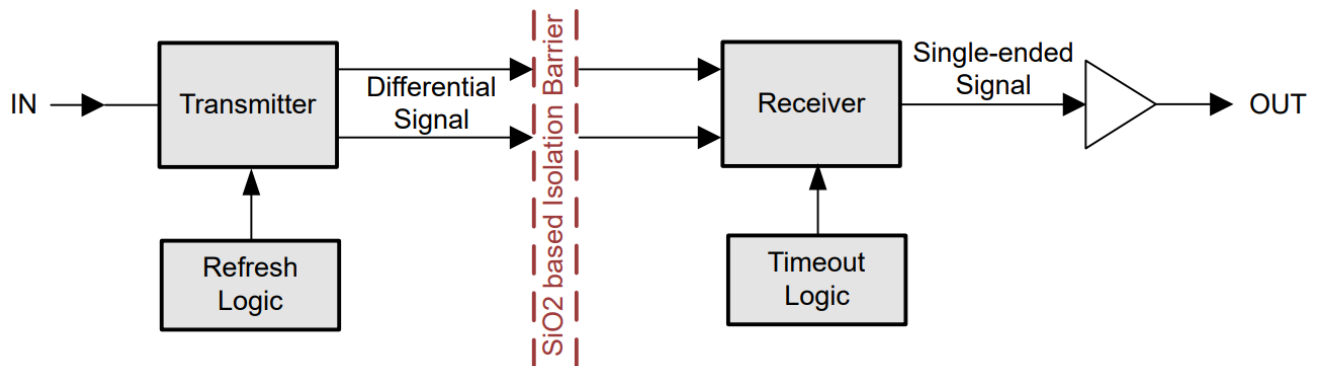


Figure 8-1. Conceptual Block Diagram of a Digital Isolator

8.3 Feature Description

The ISO724x-Q1 family of devices is available in multiple channel configurations and default output-state options to enable wide variety of application uses. [Table 8-1](#) lists these device features.

Table 8-1. Device Features

PRODUCT ⁽¹⁾	SIGNALING RATE	INPUT THRESHOLD	CHANNEL CONFIGURATION
ISO7240CF	25 Mbps	≈1.5 V (TTL)	4/0
ISO7241C	25 Mbps	≈1.5 V (TTL)	3/1
ISO7242C	25 Mbps	≈1.5 V (TTL)	2/2

8.4 Device Functional Modes

List of ISO7231C-Q1 functional modes.

Table 8-2. Device Function Table ISO7231C-Q1

INPUT V _{CC}	OUTPUT V _{CC}	INPUT (IN)	OUTPUT ENABLE (EN)	OUTPUT (OUT)
PU	PU	H	H or Open	H
		L	H or Open	L
		X	L	Z
		Open	H or Open	H
PD	PU	X	H or Open	H
PD	PU	X	L	Z
X	PD	X	X	Undetermined

8.4.1 Device I/O Schematics

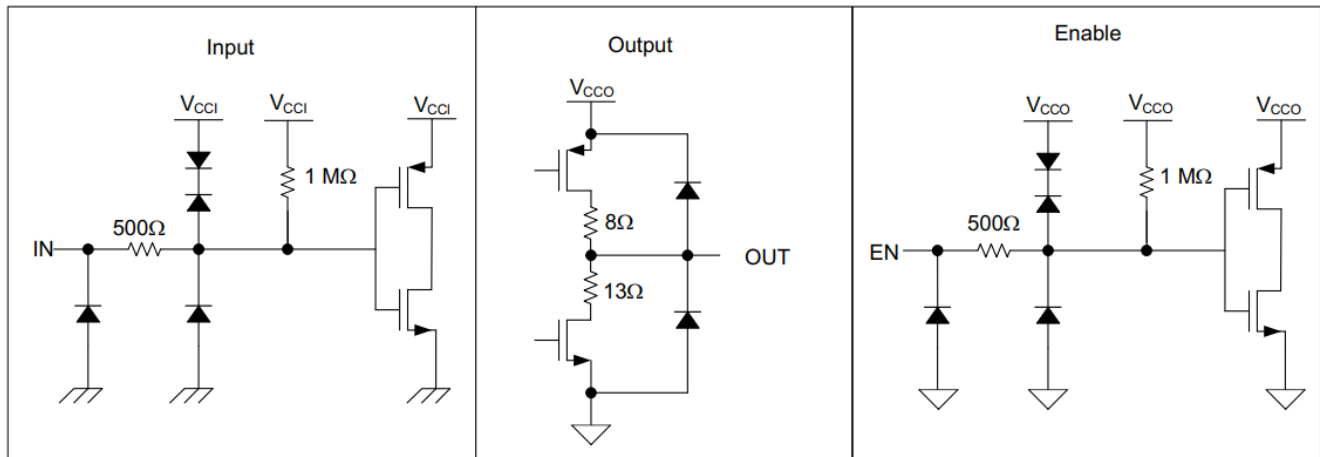


Figure 8-2. Device I/O Schematics

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

ISO723x utilize single-ended TTL or CMOS-logic switching technologies. The supply voltage range is from 3.15 V to 5.5 V for both supplies, V_{CC1} and V_{CC2} . When designing with digital isolators keep in mind that due to the single-ended design structure, digital isolators do not conform to any specific interface standard and are only intended for isolating single-ended CMOS or TTL digital signal lines. The isolator is typically placed between the data controller (that is, μC or UART), and a data converter or a line transceiver, regardless of the interface type or standard.

9.2 Typical Application

ISO7231 combined with Texas Instruments' mixed signal micro-controller, RS-485 transceiver, transformer driver, and voltage regulator can create an isolated RS-485 system as shown in [Figure 9-1](#).

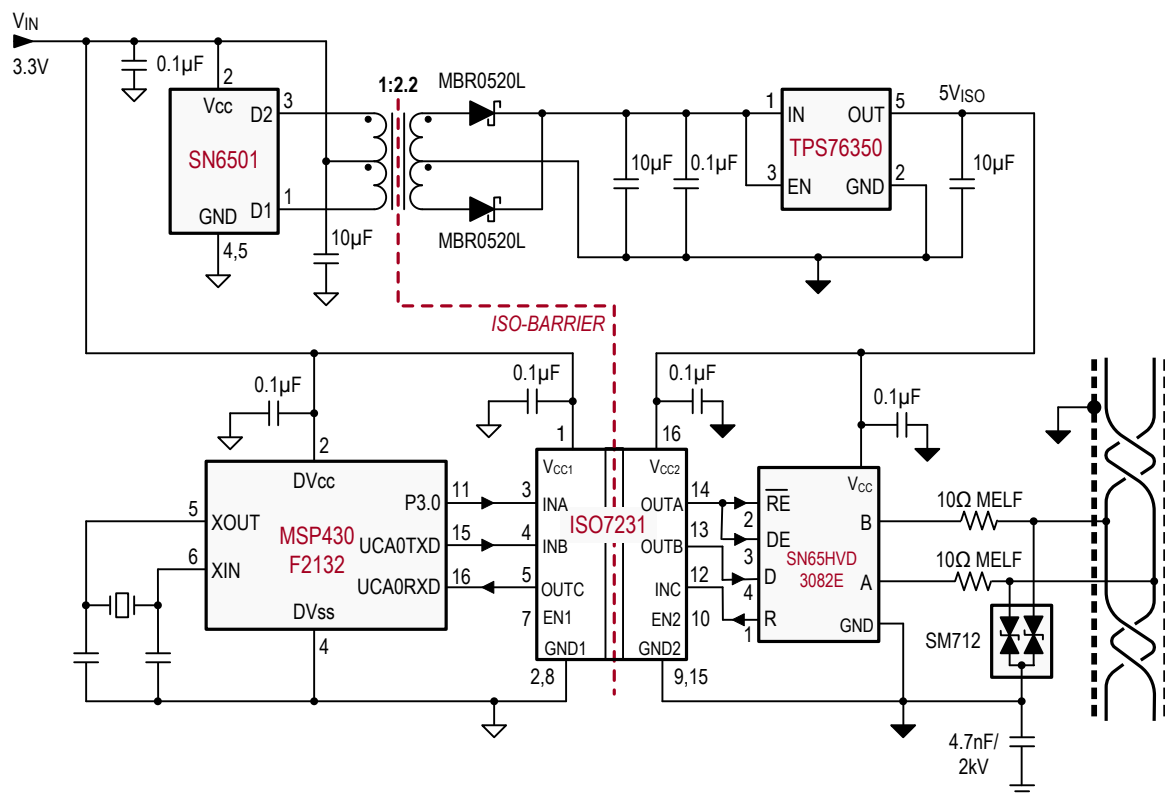


Figure 9-1. Isolated RS-485 Application Circuit

9.2.1 Design Requirements

Unlike optocouplers, which need external components to improve performance, provide bias, or limit current, ISO723x only needs two external bypass capacitors to operate.

9.2.2 Detailed Design Procedure

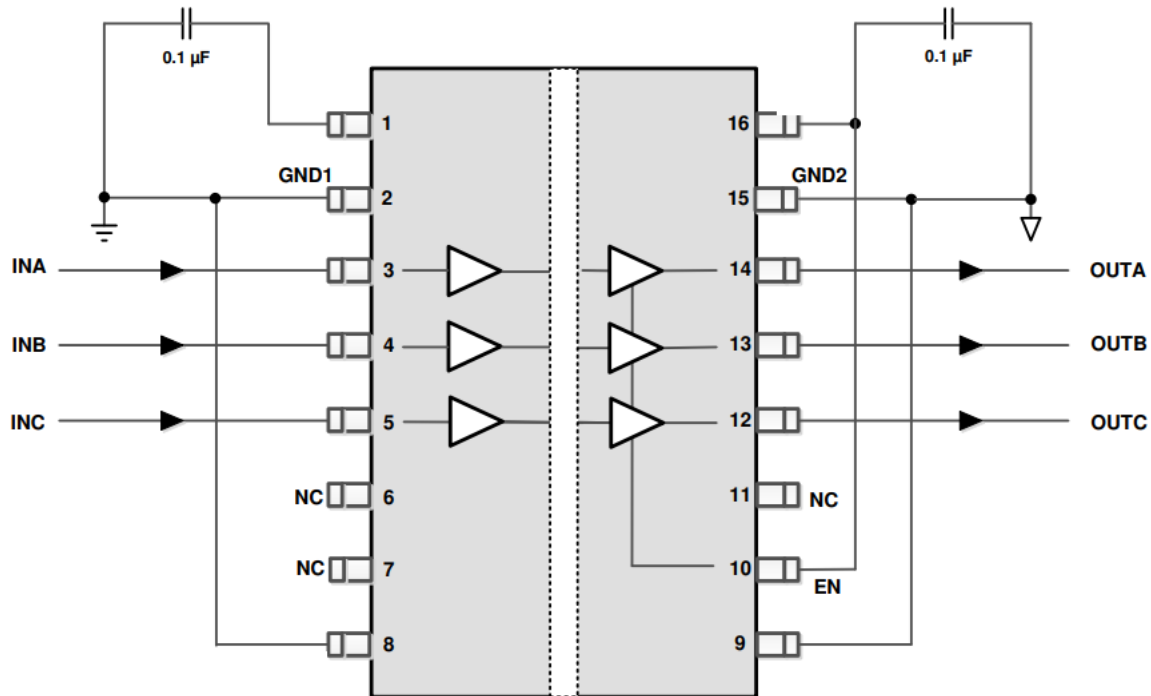


Figure 9-2. Typical ISO7231-Q1 Circuit Hook-up

9.2.3 Application Performance Plots

9.2.3.1 Insulation Characteristics Curves

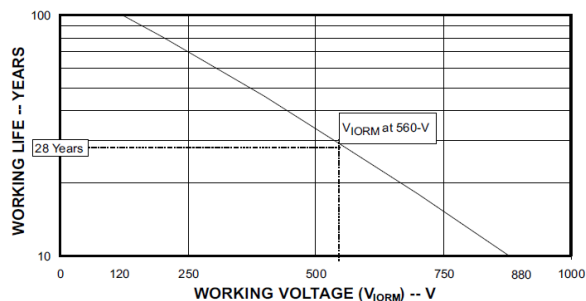


Figure 9-3. Isolation Lifetime Projection

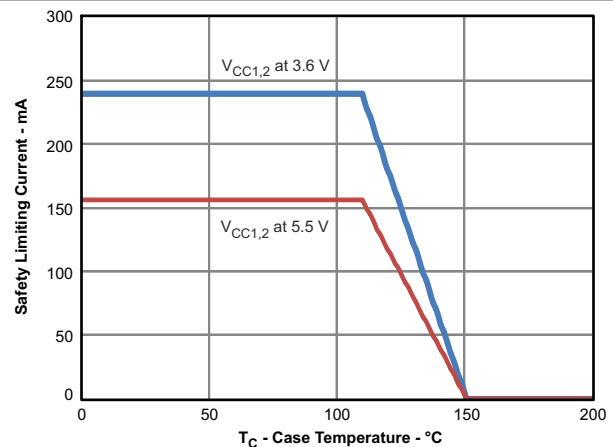


Figure 9-4. Thermal Derating Curve for Limiting Current per VDE

9.3 Power Supply Recommendations

To provide reliable operation at all data rates and supply voltages, a 0.1 µF bypass capacitor is recommended at input and output supply pins (V_{CC1} and V_{CC2}). The capacitors must be placed as close to the supply pins as possible. If only a single primary-side power supply is available in an application, isolated power can be generated for the secondary-side with the help of a transformer driver such as Texas Instruments SN6501 data

sheet. For such applications, detailed power supply design and transformer selection recommendations are available in the [SN6501 data sheet](#).

9.4 Layout

9.4.1 Layout Guidelines

A minimum of four layers is required to accomplish a low EMI PCB design (see [Figure 9-5](#)). Layer stacking must be in the following order (top-to-bottom): high-speed signal layer, ground plane, power plane and low-frequency signal layer.

- Routing the high-speed traces on the top layer avoids the use of vias (and the introduction of the inductances) and allows for clean interconnects between the isolator and the transmitter and receiver circuits of the data link.
- Placing a solid ground plane next to the high-speed signal layer establishes controlled impedance for transmission line interconnects and provides an excellent low-inductance path for the return current flow.
- Placing the power plane next to the ground plane creates additional high-frequency bypass capacitance of approximately 100pF/in².
- Routing the slower speed control signals on the bottom layer allows for greater flexibility as these signal links typically have margin to tolerate discontinuities such as vias.

If an additional supply voltage plane or signal layer is needed, add a second power/ground plane system to the stack to keep the planes symmetrical. This makes the stack mechanically stable and prevents warping. Also the power and ground plane of each power system can be placed closer together, thus increasing the high-frequency bypass capacitance significantly. For detailed layout recommendations, see Application Note [SLLA284](#), *Digital Isolator Design Guide*.

9.4.1.1 PCB Material

For digital circuit boards operating below 150 Mbps, (or rise and fall times higher than 1 ns), and trace lengths of up to 10 inches, use standard FR-4 epoxy-glass as PCB material. FR-4 (Flame Retardant 4) meets the requirements of Underwriters Laboratories UL94-V0, and is preferred over cheaper alternatives due to the lower dielectric losses at high frequencies, less moisture absorption, greater strength and stiffness, and the self-extinguishing flammability-characteristics.

9.4.2 Layout Example

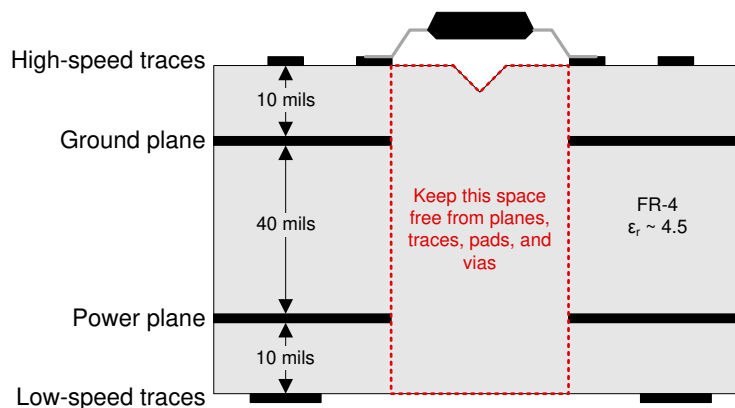


Figure 9-5. Recommended Layer Stack

10 Device and Documentation Support

10.1 Documentation Support

10.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [Isolation Glossary](#), application note
- Texas Instruments, [How to use isolation to improve ESD, EFT, and Surge immunity in industrial systems](#), application note
- Texas Instruments, [Digital Isolator Design Guide](#) application note

10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

10.4 Trademarks

Profibus™ is a trademark of Profibus.

DeviceNet™ is a trademark of Open DeviceNet Vendors Association.

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

10.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

11 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision M (February 2025) to Revision N (October 2025)	Page
• Fixed typos and errors in <i>Insulation Specifications</i> table.....	4
• Changed 'Plan to certify' with 'Certified' in all 3 places in the 2nd row in the <i>Safety-Related Certifications</i> section.....	4
• Changed 'Certificate planned' with 'Basic certificate: 40047657' in VDE column, 'Master contract number: 220991' in CSA column, and 'File number: E181974' in UL column in the <i>Safety-Related Certifications</i> section.....	4

Changes from Revision L (October 2024) to Revision M (February 2025)	Page
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1

- Added links to safety-related certifications to the *Features* section..... 1

Changes from Revision K (October 2015) to Revision L (October 2024)	Page
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1
• Updated VDE V 0884-11 to DIN VDE 0884-17 throughout the document.....	1
• Updated references from capacitive isolation to isolation barrier throughout the document.....	1
• Updated Thermal Characteristics, Safety Limiting Values, and Thermal Derating Curves to provide more accurate system-level thermal calculations.....	4
• Updated the <i>Regulatory Information</i> table.....	7
• Updated electrical and switching characteristics to match device performance.....	7
• Moved the <i>Insulation Characteristics Curves</i> to the <i>Application Curves</i> section.....	21

Changes from Revision J (May 2015) to Revision K (October 2015)	Page
• Changed The ground symbols on the Enable circuit in the Device I/O Schematics images.....	19

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
ISO7230CDW	Obsolete	Production	SOIC (DW) 16	-	-	Call TI	Call TI	-40 to 125	ISO7230C
ISO7230CDWR	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7230C
ISO7230CDWR.A	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7230C
ISO7230CDWR.B	Active	Production	SOIC (DW) 16	2000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
ISO7230MDW	Obsolete	Production	SOIC (DW) 16	-	-	Call TI	Call TI	-40 to 125	ISO7230M
ISO7230MDWR	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7230M
ISO7230MDWR.A	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7230M
ISO7230MDWR.B	Active	Production	SOIC (DW) 16	2000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
ISO7231CDW	Obsolete	Production	SOIC (DW) 16	-	-	Call TI	Call TI	-40 to 125	ISO7231C
ISO7231CDWR	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7231C
ISO7231CDWR.A	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7231C
ISO7231CDWR.B	Active	Production	SOIC (DW) 16	2000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
ISO7231CDWRG4	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7231C
ISO7231MDW	Obsolete	Production	SOIC (DW) 16	-	-	Call TI	Call TI	-40 to 125	ISO7231M
ISO7231MDWR	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7231M
ISO7231MDWR.A	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7231M
ISO7231MDWR.B	Active	Production	SOIC (DW) 16	2000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
ISO7231MDWRG4	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ISO7231M

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF ISO7231C :

- Automotive : [ISO7231C-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ISO7230CDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
ISO7230MDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
ISO7231CDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
ISO7231MDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ISO7230CDWR	SOIC	DW	16	2000	350.0	350.0	43.0
ISO7230MDWR	SOIC	DW	16	2000	350.0	350.0	43.0
ISO7231CDWR	SOIC	DW	16	2000	350.0	350.0	43.0
ISO7231MDWR	SOIC	DW	16	2000	350.0	350.0	43.0

GENERIC PACKAGE VIEW


DW 16

SOIC - 2.65 mm max height

7.5 x 10.3, 1.27 mm pitch

SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

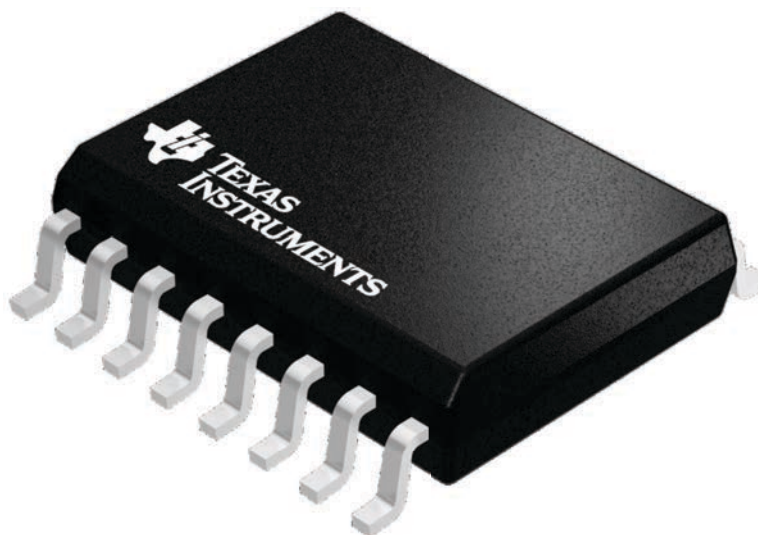

4224780/A

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025