











LDC1041

SNOSCY1 - MARCH 2014

LDC1041: 8-bit Rp, 24-bit L Inductance-to-Digital Converter with SPI

Features

- Remote sensor placement (decoupling the LDC from harsh environments)
- High durability (by virtue of contactless operation)
- Higher flexibility for system design (using coils or springs as sensors)
- Insensitive to non-conductive environmental interferers (such as dirt, dust, oil etc.)
- Magnet-free operation
- Sub-micron precision
- Supply Voltage: 5 V, typ
- Supply voltage, IO: 1.8V to 5.5V Stand-by current: 250uA, typ
- Rp resolution: 8-bit L resolution: 24-bit
- LC frequency range: 5kHz to 5MHz

Applications

- Level sensing
- Proximity sensing
- Spring motion sensing
- Lateral and angular position sensing
- Metal composition detection

3 Description

Inductive sensing is a contactless, short-range sensing technology enabling high-resolution and lowcost position sensing of conductive targets, even in harsh environments. Using a coil or spring as a sensor, the LDC1041 inductance-to-digital converter provides system designers a way to achieve high performance and reliability at a lower system cost than other competing solutions.


The LDC1041 is pin compatible with the LDC1000 (16-bit Rp/24-bit L) and the LDC1051 (8-bit Rp). This family of devices offers system designers different resolution options based on their application and system requirements.

The LDC1041 is available in a 5mm x 4mm WSON-16 package. Device programming via SPI allows for easy configuration using a microcontroller.


Device Information

ORDER NUMBER	PACKAGE	BODY SIZE
LDC1041NHRT	WSON (16)	5 mm × 4 mm
LDC1041NHRR	WSON (16)	5 mm × 4 mm
LDC1041NHRJ	WSON (16)	5 mm × 4 mm


Axial Distance Sensing Application



Application Schematic

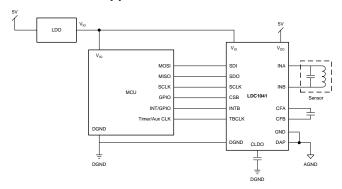

Rp vs Distance With 14mm PCB Coil

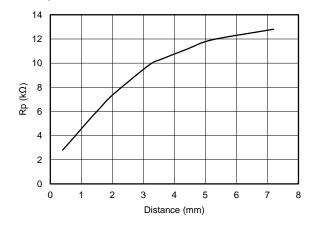

SNOSCY1 - MARCH 2014 www.ti.com



Table of Contents


1	Features 1	7.3 Feature Description
2	Applications 1	7.4 Device Functional Modes1
3	Description 1	7.5 Programming1
4	Revision History	7.6 Register Map and Description1
5	Terminal Configuration and Functions	8 Applications and Implementation 2
6	Specifications	8.1 Application Information2
U	6.1 Absolute Maximum Ratings	8.2 Typical Applications
	6.2 Handling Ratings	9 Power Supply Recommendations 26
	6.3 Recommended Operating Conditions ⁽¹⁾	10 Layout
	6.4 Thermal Information	10.1 Layout Guidelines20
	6.5 Electrical Characteristics 5	10.2 Layout Example2
	6.6 Timing Requirements	11 Device and Documentation Support 28
	6.7 Typical Characteristics	11.1 Trademarks2
7	Detailed Description 8	11.2 Electrostatic Discharge Caution2
•	7.1 Overview	11.3 Glossary2
	7.2 Functional Block Diagram	12 Mechanical, Packaging, and Orderable Information29

4 Revision History

DATE	REVISION	NOTES
March 2014	*	Initial release.



5 Terminal Configuration and Functions

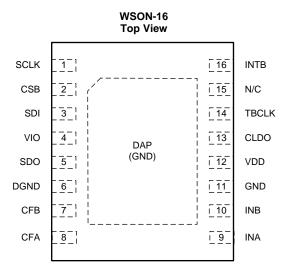

Terminal Description

TERMINAL NAME	TERMINAL NO.	TERMINAL TYPE ⁽¹⁾	FUNCTION			
SCLK	1	DO	SPI clock input. SCLK is used to clock-out/clock-in the data from/into the chip			
CSB	2	DI	SPI CSB(Chip Select Bar). Multiple devices can be connected on the same SPI bus and CSB can be used to select the device to be communicated with			
SDI	3	DI	SPI Slave Data In (Master Out Slave In). This should be connected to the Master Out Slave n of the master			
VIO	4	Р	igital IO Supply			
SDO	5	DO	SPI Slave Data Out (Master In Slave Out). It is high impedance when CSB is high			
DGND	6	Р	Digital ground			
CFB	7	Α	LDC filter capacitor			
CFA	8	Α	LDC filter capacitor			
INA	9	Α	External LC Tank. Connect to external LC tank			
INB	10	Α	External LC Tank. Connect to external LC tank			
GND	11	Р	Analog ground			
VDD	12	Р	Analog supply			
CLDO	13	Α	LDO bypass capacitor. A 56nF capacitor should be connected from this Terminal to GND			
TBCLK	14	DI	External time-base clock			
N/C	15	N/C	No Connection			
INTB	16	DO	Configurable interrupt. This Terminal can be configured to behave in 3 different ways by programing the INT Terminal mode register. Either threshold detect, wakeup, or DRDYB			
DAP	17	Р	Connect to GND			

⁽¹⁾ DO: Digital Output, DI: Digital Input, P: Power, A: Analog

SNOSCY1 – MARCH 2014 www.ti.com

6 Specifications

6.1 Absolute Maximum Ratings⁽¹⁾

	MIN	MAX	UNIT
Analog Supply Voltage (V _{DD} – GND)		6	V
IO Supply Voltage (V _{IO} – GND)		6	V
Voltage on any Analog Terminal	-0.3	$V_{DD} + 0.3$	V
Voltage on any Digital Terminal	-0.3	V _{IO} + 0.3	V
Input Current on INA and INB		8	mA
Junction Temperature, T _J ⁽²⁾		150	°C

- (1) Absolute Maximum Ratings are limits beyond which damage to the device may occur. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. Operating Ratings are conditions under which operation of the device is intended to be functional. For ensured specifications and test conditions, see the Electrical Characteristics.
- (2) The maximum power dissipation is a function of TJ(MAX), θJA, and the ambient temperature, TA. The maximum allowable power dissipation at any ambient temperature is PDMAX = (TJ(MAX) TA)/ θJA. All numbers apply for packages soldered directly onto a PC board. The package thermal impedance is calculated in accordance with JESD 51-7.

6.2 Handling Ratings

		MIN	MAX	UNIT
T _{stg}	Storage Temperature Range	-65	150	°C
V _{ESD} ⁽¹⁾	Human Body Model (HBM) ESD stress voltage (2)	1k	1k	V
	Charge Device Model (CDM) ESD stress voltage (3)	250	250	V

- (1) Electrostatic discharge (ESD) to measure device sensitivity and immunity to damage caused by assembly line electrostatic discharges in to the device.
- (2) Level listed above is the passing level per ANSI, ESDA, and JEDEC JS-001. JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (3) Level listed above is the passing level per EIA-JEDEC JESD22-C101. JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

	М	MIN MAX		
Analog Supply Voltage (V _{DD} – GND)	4.75	5.25	V	
IO Supply Voltage (V _{IO} – GND)	1.8	5.25	V	
V_{DD} - V_{IO}	0		V	
Operating Temperature, T _A	-40	125	°C	

⁽¹⁾ Absolute Maximum Ratings are limits beyond which damage to the device may occur. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. Operating Ratings are conditions under which operation of the device is intended to be functional. For ensured specifications and test conditions, see the Electrical Characteristics.

6.4 Thermal Information

	THERMAL METRIC (1)	NHR (16-TERMINALS)	UNIT
θ_{JA}	Junction-to-ambient thermal resistance	28	°C/W

(1) For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.

Product Folder Links: LDC1041

RUMENTS



6.5 Electrical Characteristics⁽¹⁾

Unless otherwise specified, all limits ensured for $T_A = T_J = 25$ °C, $V_{DD} = 5$ V, $V_{IO} = 3.3$ V⁽²⁾

	PARAMETER	TEST CONDITIONS	MIN ⁽³⁾	TYP ⁽⁴⁾	MAX ⁽³⁾	UNIT
POWER					<u>'</u>	
V_{DD}	Analog supply voltage		4.75	5	5.25	V
V _{IO}	IO supply voltage	V _{IO} ≤V _{DD}	1.8	3.3	5.25	V
I _{DD}	Supply current, V _{DD}	Does not include sensor current. (5)		1.7	2.3	mA
I _{VIO}	IO supply current	Static current			14	μΑ
I _{DD_LP}	Stand-by mode supply current			250		μΑ
t _{START}	Start-Up Time	From POR to ready-to-convert.		2		ms
LDC						
f_{sensor_MIN}	Minimum sensor frequency			5		kHz
f_{sensor_MAX}	Maximum sensor frequency			5		MHz
A _{sensor_MIN}	Minimum sensor amplitude			1		V_{PP}
A _{sensor_MAX}	Maximum sensor amplitude			4		V_{PP}
t _{REC}	Recovery time	Oscillation start-up time after Rp under- range condition		10		1/f _{sensor}
Rp Min	Minimum sensor Rp range			798		Ω
Rp Max	Maximum Sensor Rp range			3.93		МΩ
Rp Res	Rp measurement resolution			8		Bits
L Res	Inductance measurement resolution			24		Bits
t _{S_MIN}	Minimum response time	Minimum programmable settling time of digital filter	19	$92 \times 1 / f_{\text{sensor}}$		s
t _{S_MAX}	Maximum response time	Maximum programmable settling time of digital filter		$6144 \times 1 / f_{sensor}$		S
EXTERNAL	. CLOCK					
f	External clock frequency				8	MHz
DIGITAL I/O	CHARACTERISTICS				·	
V _{IH}	Logic 1 input voltage		$0.8 \times V_{IO}$			V
V _{IL}	Logic 0 input voltage				0.2 × V _{IO}	V
V _{OH}	Logic 1 output voltage	I _{SOURCE} = 400 μA		V _{IO} - 0.3		V
V _{OL}	Logic 0 output voltage	I _{SINK} = 400 μA			0.3	V
I _{IOHL}	Digital IO leakage current		-500		500	nA

- (1) Electrical Characteristics Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that TJ = TA. No specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where T_J > T_A. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) The maximum power dissipation is a function of TJ(MAX), θJA, and the ambient temperature, TA. The maximum allowable power dissipation at any ambient temperature is PDMAX = (TJ(MAX) TA)/ θJA. All numbers apply for packages soldered directly onto a PC board. The package thermal impedance is calculated in accordance with JESD 51-7.
- (3) Limits are specified by testing, design, or statistical analysis at 25°C. Limits over the operating temperature range are specified through correlations using statistical quality control (SQC) method.
- (4) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not specified on shipped production material.
- (5) LC tank current depends on the Q-factor of the tank, distance and material of the target.



6.6 Timing Requirements

Unless otherwise noted, all limits specified at T_A = 25°C, V_{DD} = 5, V_{IO} = 3.3, 10 pF capacitive load in parallel with a 10 k Ω load on the SDO terminal. Specified by design; not production tested.

PARAMETER			MIN	TYP	MAX	UNIT
$f_{\sf SCLK}$	Serial Clock Frequency				4	MHz
t _{PH}	SCLK Pulse Width High	$f_{\rm SCLK}$ = 4 MHz	0.4 / f _{SCLK}			S
t _{PL}	SCLK Pulse Width Low	$f_{\rm SCLK} = 4 \text{ MHz}$	0.4 / f _{SCLK}			S
t _{SU}	SDI Setup Time		10			ns
t _H	SDI Hold Time		10			ns
t _{ODZ}	SDO Driven-to-Tristate Time	Measured at 10% / 90% point			20	ns
t _{OZD}	SDO Tristate-to-Driven Time	Measured at 10% / 90% point			20	ns
t _{OD}	SDO Output Delay Time				20	ns
t _{CSS}	CSB Setup Time		20			ns
t _{CSH}	CSB Hold Time		20			ns
t _{IAG}	Inter-Access Gap		100			ns
t _{DRDYB}	Data ready pulse width	Data ready pulse at every 1 / ODR if no data is read	1	/ f _{sensor}		S

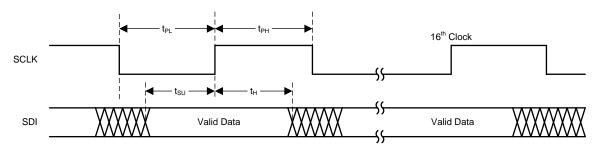


Figure 1. Write Timing Diagram


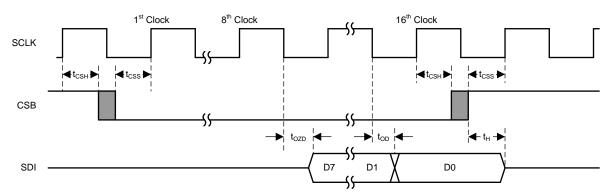


Figure 2. Read Timing Diagram



6.7 Typical Characteristics

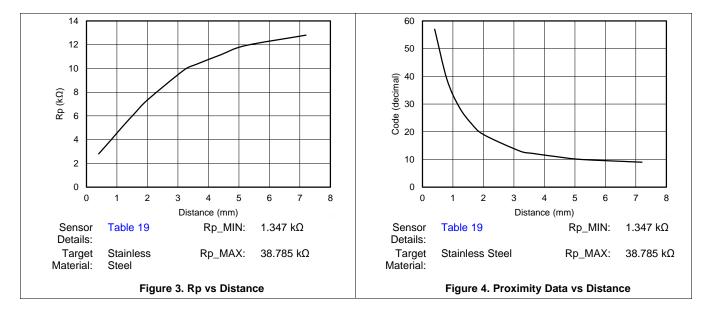

SNOSCY1 – MARCH 2014 www.ti.com

TEXAS INSTRUMENTS

7 Detailed Description

7.1 Overview


The LDC1041 is an Inductance-to-Digital Converter that simultaneously measures the impedance and resonant frequency of an LC resonator. It accomplishes this task by regulating the oscillation amplitude in a closed loop configuration to a constant level, while monitoring the energy dissipated by the resonator. By monitoring the amount of power injected into the resonator, the LDC1041 can determine the value of Rp; it returns this as a digital value which is inversely proportional to Rp. In addition, the LDC1041 also measure the oscillation frequency of the LC circuit; this frequency is used to determine the inductance of the LC circuit. The device outputs a digital value that is inversely proportional to frequency.

The threshold detector block provides a comparator with hysteresis, with the threshold registers programed and comparator enabled, proximity data register is compared with threshold registers and INTB pin indicates the output.

The device has a simple 4-wire SPI interface. The INTB pin provides multiple functions which are programmable with SPI.

The device has separate supplies for Analog and I/O, with analog operating at 5V and I/O at 1.8-5V. The integrated LDO needs a 56nF capacitor connected from CLDO pin to GND.

7.2 Functional Block Diagram

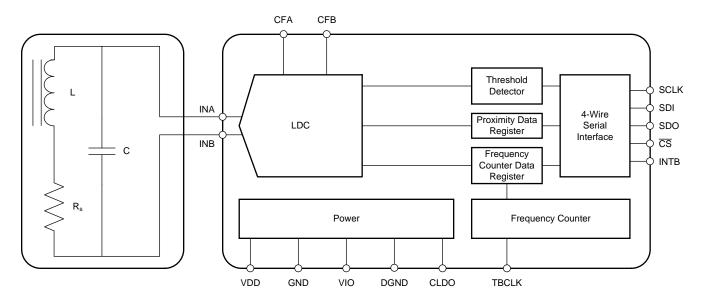

7.3 Feature Description

7.3.1 Inductive Sensing

An AC current flowing through a coil will generate an AC magnetic field. If a conductive material, such as a metal target, is brought into the vicinity of the coil, this magnetic field will induce circulating currents (eddy currents) on the surface of the target. These eddy currents are a function of the distance, size, and composition of the target. The eddy currents then generate their own magnetic field, which opposes the original field generated by the coil. This mechanism is best compared to a transformer, where the coil is the primary core and the eddy current is the secondary core. The inductive coupling between both cores depends on distance and shape. Hence the resistance and inductance of the secondary core (eddy current), shows up as a distant dependent resistive and inductive component on the primary side (coil). Figure 5 to Figure 8 show a simplified circuit model.



Feature Description (continued)

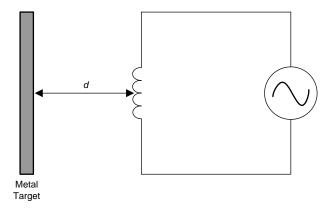


Figure 5. Inductor With A Metal Target

Eddy currents generated on the surface of the target can be modeled as a transformer as shown in Figure 6. The coupling between the primary and secondary coils is a function of the distance and the conductor's characteristics. In Figure 6, the inductance Ls is the coil's inductance, and Rs is the coil's parasitic series resistance. The inductance L(d), which is a function of distance d, is the coupled inductance of the metal target. Likewise, R(d) is the parasitic resistance of the eddy currents and is also a function of distance.

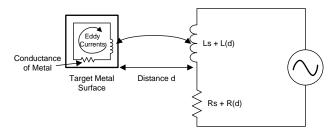


Figure 6. Metal Target Modeled As L And R With Circulating Eddy Currents

Generating an alternating magnetic field with just an inductor will consume a large amount of power. This power consumption can be reduced by adding a parallel capacitor, turning it into a resonator as shown in Figure 7. In this manner the power consumption is reduced to the eddy and inductor losses Rs+R(d) only.

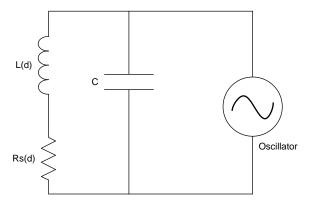


Figure 7. LC Tank Connected To Oscillator

The LDC1041 doesn't measure the series resistance directly; instead it measures the equivalent parallel resonance impedance Rp (see Figure 8). This representation is equivalent to the one shown in Figure 8, where the parallel resonance impedance Rp(d) is given by:

SNOSCY1 – MARCH 2014 www.ti.com

Feature Description (continued)

$$Rp(d) = \frac{Ls + L(d)}{[Rs + R(d)] \times C}$$
(1)

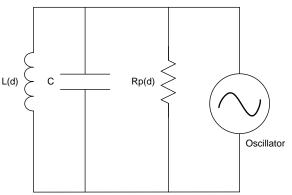


Figure 8. Equivalent Resistance Of Rs in Parallel With LC Tank

Figure 9 below shows the variation in Rp as a function of distance for a 14mm diameter PCB coil (Sensor Details: Table 19). The target in this example is a section of a 2mm thick stainless steel disk.



Figure 9. Typical Rp vs Distance With 14mm PCB Coil

Product Folder Links: LDC1041

STRUMENTS

Feature Description (continued)

7.3.2 Measuring Rp with LDC1041

The LDC1041 supports a wide range of LC combinations, with oscillation frequencies ranging from 5kHz to 5MHz and Rp ranging from 798Ω to $3.93M\Omega$. This range of Rp can be viewed as the maximum input range of an ADC. As illustrated in Figure 9, the range of Rp is typically much smaller than the maximum input range supported by the LDC1041. To get better resolution in the desired sensing range, the LDC1041 offers a programmable input range through the Rp_MIN and Rp_MAX registers. Refer to Calculation of Rp_MIN and Rp_MAX below for how to set these registers.

When the sensor's resonance impedance Rp drops below the programed Rp_MIN, the LDC's Rp output will clip at its full scale output. This situation could, for example, happen when a target comes too close to the coil.

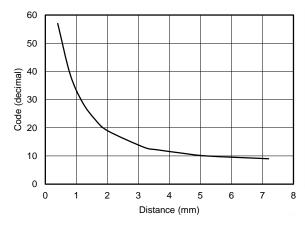


Figure 10. Transfer Characteristics Of LDC1041 With Rp_MIN= 1.347 k Ω And Rp_MAX= 38.785 k Ω

The resonance impedance can be calculated from the digital output code as follows:

$$Rp = \frac{Rp_MAX \times Rp_MIN}{Rp_MIN \times (1-Y) + Rp_MAX \times Y}$$

Where:

- Y=Proximity Data/2⁷
- · Rp_MAX and Rp_MIN are the maximum and minimum Rp values selected in the respective registers
- Proximity data is the LDC output, register address 0x22.

(2)

Example: If Proximity data (address 0x22) is 50, Rp_MIN is 2.394 k Ω , and Rp_MAX is 38.785 k Ω , the resonance impedance is given by:

 $Y=50/2^7=0.3906$

Rp = (38785*2394)/(2394*(1-0.3906) + 38785*0.3906) = (92851290)/(15149.421 + 1458.9036)

 $Rp = 5.59 k\Omega$

7.3.3 Measuring Inductance with LDC1041

LDC1041 measures the sensor's frequency of oscillation using a frequency counter. The frequency counter timing is set by an external clock applied on TBCLK terminal. The sensor frequency can be calculated from the frequency counter register value (see registers 0x23 through 0x25) as follows:

$$Sensor\ frequency, f_{sensor} = \frac{1}{3} \times \frac{Fext}{Fcount} \times Response\ time$$

where

- · Fext is the frequency of the external clock
- Fcount is the value obtained from the Frequency Counter Data register(address 0x23,0x24,0x25)
- Response Time is the programmed response time (see LDC configuration register, address 0x04)

(3)

SNOSCY1 – MARCH 2014 www.ti.com

Feature Description (continued)

The sensor inductance can be determined by:

$$L = \frac{1}{C \times (2\pi \times f_{sensor})^2}$$

where

C is the parallel capacitance of the resonator

(4)

ISTRUMENTS

Example: If Fext=6MHz, Response time=6144, C=100pF and measured Fcount= 3000 (dec) (address 0x23 through 0x25)

 $f_{sensor} = (1/3)*(6000000/3000)*(6144) = 4.096MHz$

Now using,
$$L = \frac{1}{C \times (2\pi \times f_{sensor})^2}$$

Inductance, L = $15.098 \mu H$

The accuracy of measurement largely depends upon the choice of the external time-base clock (TBCLK). A higher frequency will provide better measurement accuracy.

7.4 Device Functional Modes

7.4.1 Power Modes

The LDC1041 has two power modes:

- 1. Active Mode: In this mode the Proximity data and frequency data conversion is enabled.
- 2. Stand-by Mode: This is the default mode on device power-up. In this mode conversion is disabled.

7.4.2 INTB Pin Modes

The INTB terminal is a configurable output terminal which can be used to drive an interrupt on an MCU. The LDC1041 provides three different modes on INTB terminal:

- 1. Comparator Mode
- 2. Wake-Up Mode
- 3. DRDY Mode

LDC1041 has built-in High and Low trigger threshold registers which can be used as a comparator with programmable hysteresis or in a special mode which can be used to wake-up an MCU. These modes are explained in detail below.

7.4.2.1 Comparator Mode

In the Comparator mode, the INTB terminal is asserted or deasserted when the proximity register value increases above Threshold High or decreases below Threshold Low registers respectively. In this mode, the LDC1041 essentially behaves as a proximity switch with programmable hysteresis.

Device Functional Modes (continued)

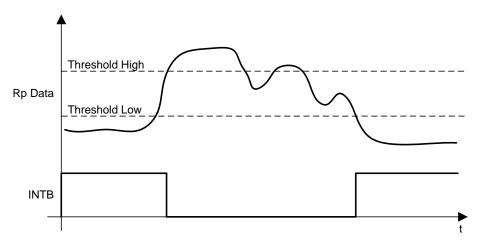


Figure 11. Behavior Of INTB Terminal In Comparator Mode

7.4.2.2 Wake-Up Mode

In Wake-Up mode, the INTB terminal is asserted when proximity register value increases above Threshold High and de-asserted when wake-up mode is disabled in INTB terminal mode register.

This mode can be used to wake-up an MCU from sleep, to conserve power.

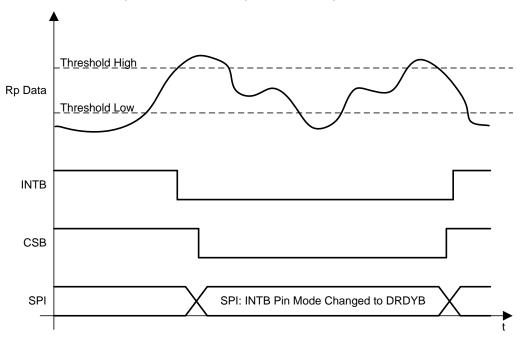


Figure 12. Behavior Of INTB Terminal In Wake-Up Mode

7.4.2.3 DRDYB Mode

In DRDY(Data Ready) mode, the INTB terminal is asserted every time the conversion data is available and deasserted once the read command on register 0x22 is registered internally; if the read is in progress, the terminal is pulsed instead. The valid condition for new data availability is CSB high and DRDYB falling edge.

TEXAS INSTRUMENTS

Device Functional Modes (continued)

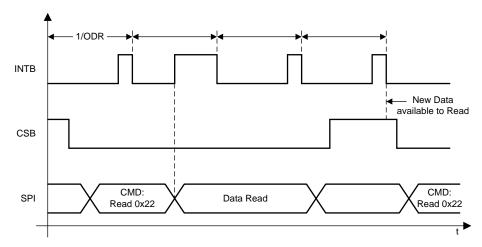


Figure 13. Behavior of INTB Terminal in DRDYB Mode with SPI Extending Beyond Subsequent Conversions

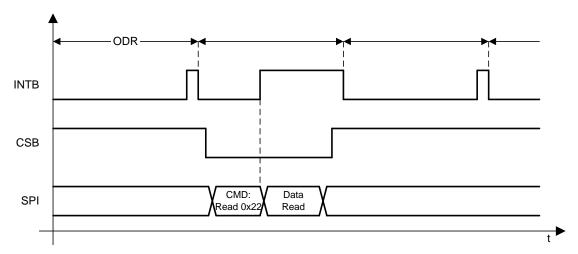


Figure 14. Behavior Of INTB Terminal In DRDYB Mode with SPI Reading The Data Within Subsequent Conversion

Submit Documentation Feedback



7.5 Programming

The LDC1041 utilizes a 4-wire SPI to access control and data registers. The LDC1041 is an SPI slave device and does not initiate any transactions.

7.5.1 SPI Description

A typical serial interface transaction begins with an 8-bit instruction, which is comprised of a read/write bit (MSB, R=1) and a 7 bit address of the register, followed by a data field which is typically 8 bits. However, the data field can be extended to a multiple of 8 bits by providing sufficient SPI clocks. Refer to the Extended SPI Transactions section below.

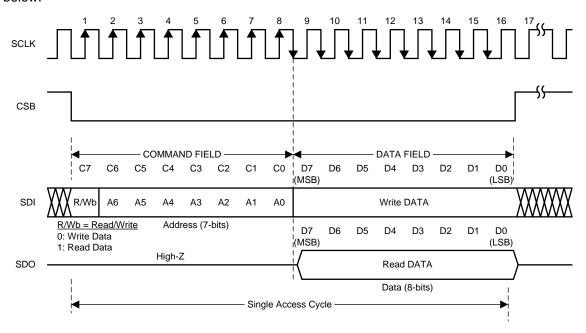


Figure 15. Serial Interface Protocol

Each assertion of CSB starts a new register access. The R/Wb bit in the command field configures the direction of the access; a value of 0 indicates a write operation and a value of 1 indicates a read operation. All output data is driven on the falling edge of the serial clock (SCLK), and all input data is sampled on the rising edge of the serial clock (SCLK). Data is written into the register on the rising edge of the 16th clock. It is required to deassert CSB after the 16th clock; if CSB is deasserted before the 16th clock, no data write will occur.

7.5.1.1 Extended SPI Transactions

A transaction may be extended to multiple registers by keeping the CSB asserted beyond the initial 16 clocks. In this mode, the register addresses increment automatically. CSB must be asserted during 8*(1+N) clock cycles of SCLK, where N is the amount of bytes to write or read during the transaction.

During an extended read access, SDO outputs the register contents every 8 clock cycles after the initial 8 clocks of the command field. During an extended write access, the data is written to the registers every 8 clock cycles after the initial 8 clocks of the command field.

Extended transactions can be used to read 8-bits of Proximity data and 24-bits of frequency data in a single SPI transaction by initiating a read from the register 0x22.



7.6 Register Map and Description

Table 1. Register Map⁽¹⁾⁽²⁾⁽³⁾

Register Name	Address	Direction	Default	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Device ID	0x00	RO	0x84				Devid	e ID			
Rp_MAX	0x01	R/W	0x0E				Rp Ma:	ximum			
Rp_MIN	0x02	R/W	0x14				Rp Mir	nimum			
Watchdog Timer Frequency	0x03	R/W	0x45				Min Sensor	Frequency			
LDC Configuration	0x04	R/W	0x1B	F	Reserved(00	0)	Ampl	itude	R	esponse Ti	me
Reserved	0x05	RO	0x01				Reserved(0000001)			
Reserved	0x06	R/W	0xFF				Rese	rved			
Comparator Threshold High MSB	0x07	R/W	0xFF	Threshold High MSB							
Reserved	0x08	R/W	0x00	Reserved							
Comparator Threshold Low MSB	0x09	R/W	0x00	Threshold Low MSB							
INTB Terminal Configuration	0x0A	R/W	0x00		Re	eserved(000	00)		!	INTB_MOD	E
Power Configuration	0x0B	R/W	0x00			Res	erved(00000	000)			PWR_M ODE
Status	0x20	RO		OSC Dead	DRDYB	Wake-up	Compara tor		Do No	ot Care	
Reserved	0x21	RO					Reserved(00000000)			
Proximity Data	0x22	RO					Proximi	ty Data			
Frequency Counter Data LSB	0x23	RO		FCOUNT LSB							
Frequency Counter Data Mid-Byte	0x24	RO		FCOUNT Mid Byte							
Frequency Counter Data MSB	0x25	RO					FCOUN	IT MSB			

- Values of register fields which are unused should be set to default values only. Registers 0x01 through 0x05 are Read Only when the part is awake (PWR_MODE bit is SET) R/W: Read/Write. RO: Read Only. WO: Write Only.

Table 2. Revision ID

Address = 0x00, Default=0x84, Direction=RO					
Bit Field Field Name Description					
7:0	Revision ID	Revision ID of Silicon.			

Table 3. Rp_MAX

Address = 0x01, Default=0x0E, Direction=R/W		
Bit Field	Field Name	Description
7:0	Rp Maximum	Maximum Rp that LDC1041 needs to measure. Configures the input dynamic range of LDC1041. See Table 4 for register settings.



Table 4. Register Settings for Rp_MAX

Register setting	Rp (kΩ)
0x00	3926.991
0x01	3141.593
0x02	2243.995
0x03	1745.329
0x04	1308.997
0x05	981.748
0x06	747.998
0x07	581.776
0x08	436.332
0x09	349.066
0x0A	249.333
0x0B	193.926
0x0C	145.444
0x0D	109.083
0x0E	83.111
0x0F	64.642
0x10	48.481
0x11	38.785
0x12	27.704
0x13	21.547
0x14	16.160
0x15	12.120
0x16	9.235
0x17	7.182
0x18	5.387
0x19	4.309
0x1A	3.078
0x1B	2.394
0x1C	1.796
0x1D	1.347
0x1E	1.026
0x1F	0.798

Table 5. Rp_MIN

Address = 0x02, Default=0x14, Direction=R/W		
Bit Field	Field Name	Description
7:0	Rp Minimum	Minimum Rp that LDC1041 needs to measure. Configures the input dynamic range of LDC1041. See Table 6 for register settings. (1)

(1) This Register needs a mandatory write as it defaults to 0x14.

Table 6. Register Settings for Rp_MIN

Table 6. Register Settings for RP_wind	
Register setting	Rp (kΩ)
0x20	3926.991
0x21	3141.593
0x22	2243.995
0x23	1745.329
0x24	1308.997
0x25	981.748
0x26	747.998
0x27	581.776
0x28	436.332
0x29	349.066
0x2A	249.333
0x2B	193.926
0x2C	145.444
0x2D	109.083
0x2E	83.111
0x2F	64.642
0x30	48.481
0x31	38.785
0x32	27.704
0x33	21.547
0x34	16.160
0x35	12.120
0x36	9.235
0x37	7.182
0x38	5.387
0x39	4.309
0x3A	3.078
0x3B	2.394
0x3C	1.796
0x3D	1.347
0x3E	1.026
0x3F	0.798

Table 7. Watchdog Timer Frequency

	Address = 0x03, Default=0x45, Direction=R/W		
Bit Field	Field Name	Description	
7:0	Min Sensor Frequency	Sets the watchdog timer. The Watchdog timer is set based on the low sensor frequency. $N = 68.94 \times log_{10} \left(\frac{F}{2500}\right)$ where • F is the sensor frequency Example: If Sensor frequency is 1Mhz Min Sensor Frequency=68.94*log10(1M/2500)=Round to nearest	west

Submit Documentation Feedback



Table 8. LDC Configuration

	Address = 0x04, Default=0x1B, Direction=R/W		
Bit Field	Field Name	Description	
7:5	Reserved	Reserved to 0	
4:3	Amplitude	Sets the oscillation amplitude	
		00:1V	
		01:2V	
		10:4V	
		11:Reserved	
2:0	Response Time	000: Reserved	
		001: Reserved	
		010: 192	
		011: 384	
		100: 768	
		101: 1536	
		110: 3072	
		111: 6144	

Table 9. Comparator Threshold High MSB

Address = 0x07, Default=0xFF, Direction=R/W		
Bit Field	Field Name	Description
7:0	Threshold High	Threshold High Register.

Table 10. Comparator Threshold Low MSB

Address = 0x09, Default=0x00, Direction=R/W		
Bit Field	Field Name	Description
7:0	Threshold Low	Threshold Low Register.

Table 11. INTB Terminal Configuration

Address = 0x0A, Default=0x00, Direction=R/W		
Bit Field	Field Name	Description
7:3	Reserved	Reserved to 0
2:0	Mode	000: All modes disabled
		001: Wake-up Enabled on INTB terminal
		010: INTB terminal indicates the status of Comparator output
		100: DRDYB Enabled on INTB terminal
		All other combinations are Reserved

Table 12. Power Configuration

Address = 0x0B, Default=0x00, Direction=R/W		
Bit Field	Field Name	Description
7:1	Reserved	Reserved to 0
0	PWR_MODE	0:Stand-By mode 1:Active Mode. Conversion is Enabled Refer to Power Modes for more details.

Table 13. Status

Address = 0x20, Default=NA, Direction=RO		
Bit Field	Field Name	Description
7	OSC status	1:Indicates oscillator overloaded and stopped
		0:Oscillator working
6	Data Ready	1:No new data available
		0:Data is ready to be read
5	Wake-up	1:Wake-up disabled
		0:Wake-up triggered. Proximity data is more than Threshold High value.
4	Comparator	1:Proximity data is less than Threshold Low value
		0:Proximity data is more than Threshold High value
3:0	Do not Care	

Table 14. Proximity Data

Address = 0x22, Default=NA, Direction=RO		
Bit Field	Field Name	Description
7:0	Proximity data	Proximity data

Table 15. Frequency Counter LSB

Address = 0x23, Default=NA, Direction=RO								
Bit Field Field Name Description								
7:0	FCOUNT LSB (FCOUNT[7:0])	LSB of Frequency Counter. Sensor frequency can be calculated using the output data rate. Please refer to the Measuring Inductance with LDC1041.						

Table 16. Frequency Counter Mid-Byte

Address = 0x24, Default=NA, Direction=RO								
Bit Field	Bit Field Field Name Description							
7:0	FCOUNT Mid byte (FCOUNT[15:8])	Middle Byte of Output data rate						

Table 17. Frequency Counter MSB

Address = 0x25, Default=NA, Direction=RO								
Bit Field	Bit Field Field Name Description							
7:0	FCOUNT MSB (FCOUNT[23:16])	MSB of Output data rate						

Conversion data is updated to these registers only when a read is initiated on 0x22 register. If the read is delayed between subsequent conversions, these registers are not updated until another read is initiated on 0x22.

SNOSCY1 - MARCH 2014 www.ti.com

8 Applications and Implementation

8.1 Application Information

8.1.1 Calculation of Rp_MIN and Rp_MAX

Different sensing applications may have a different range of the resonance impedance Rp to measure. The LDC1041 measurement range of Rp is controlled by setting 2 registers - Rp_MIN and Rp_MAX. For a given application, Rp must never be outside the range set by these register values, otherwise the measured value will be clipped. For optimal sensor resolution, the range of Rp_MIN to Rp_MAX should not be unnecessarily large. The following procedure is recommended to determine the Rp MIN and Rp MAX register values.

8.1.1.1 Setting Rp MAX

Rp_MAX sets the upper limit of the LDC1041 resonant impedance input range.

- Configure the sensor such that the eddy current losses are minimized. As an example, for a proximity sensing application, set the distance between the sensor and the target to the maximum sensing distance.
- Measure the resonant impedance Rp using an impedance analyzer.
- Multiply Rp by 2 and use the next higher value from Table 4.

Note that setting Rp_MAX to a value not listed in Table 4 can result in indeterminate behavior.

8.1.1.2 Setting Rp MIN

Rp_MIN sets the lower limit of the LDC1041 resonant impedance input range.

- Configure the sensor such that the eddy current losses are maximized. As an example, for a proximity sensing application, set the distance between the sensor and the metal target to the minimum sensing distance.
- Measure the resonant impedance Rp using an impedance analyzer.
- Divide the Rp value by 2 and then select the next lower Rp value from Table 6.

Note that setting Rp MIN to a value not listed on Table 6 can result in indeterminate behavior. In addition, Rp_MIN powers on with a default value of 0x14 which must be set to a value from Table 6 prior to powering on the LDC.

8.1.2 Output Data Rate

Output data rate of LDC1041 depends on the sensor frequency, f_{sensor} and 'Response Time' field in LDC Configuration register(Address:0x04).

Output Data Rate =
$$\frac{t_{sensor}}{\left(\frac{Response\ time}{3}\right)}$$
 (6)

8.1.3 Choosing Filter Capacitor (CFA and CFB Terminals)

The Filter capacitor is critical to the operation of the LDC1041. The capacitor should be low leakage, temperature stable, and it must not generate any piezoelectric noise (the dielectrics of many capacitors exhibit piezoelectric characteristics and any such noise is coupled directly through Rp into the converter). The optimal capacitance values range from 20pF to 100nF. The value of the capacitor is based on the time constant and resonating frequency of the LC tank.

If a ceramic capacitor is used, then a C0G (or NP0) grade dielectric is recommended; the voltage rating should be ≥10V. The traces connecting CFA and CFB to the capacitor should be as short as possible to minimize any parasitics.

For optimal performance, the chosen filter capacitor, connected between terminals CFA and CFB, needs to be as small as possible, but large enough such that the active filter does not saturate. The size of this capacitor depends on the time constant of the sense coil, which is given by L/Rs, (L=inductance, Rs=series resistance of the inductor at oscillation frequency). The larger this time constant, the larger filter capacitor is required. Hence, this time constant reaches its maximum when there is no target present in front of the sensing coil.

Product Folder Links: LDC1041

Copyright © 2014, Texas Instruments Incorporated

SNOSCY1 – MARCH 2014 www.ti.com

TEXAS INSTRUMENTS

Application Information (continued)

The following procedure can be used to find the optimal filter capacitance:

- 1. Start with a large filter capacitor. For a ferrite core coil, 10nF is usually large enough. For an air coil or PCB coil, 100pF is usually large enough.
- Power on the LDC and set the desired register values. Minimize the eddy currents losses. This is done by minimizing the amount of conductive target covering the sensor. For an axial sensing application, the target should be at farthest distance from coil. For a lateral or angular position application, the target coverage of the coil should be minimized.
- 3. Observe the signal on the CFB terminal using a scope. Since this node is very sensitive to capacitive loading, it is recommended to use an active probe. As an alternative, a passive probe with a $1k\Omega$ series resistance between the tip and the CFB terminal can be used.
- 4. Vary the values of the filter capacitor until that the signal observed on the CFB terminal has an amplitude of approximate 1V peak-to-peak. This signal scales linearly with the reciprocal of the filter capacitance. For example, if a 100pF filter capacitor is applied and the signal observed on the CFB terminal has a peak-to-peak value of 200mV, the desired 1V peak-to-peak value is obtained using a 200mV / 1V * 100pF = 20pF filter capacitor.

8.2 Typical Applications

8.2.1 Axial Distance Sensing Using a PCB Sensor with LDC1041

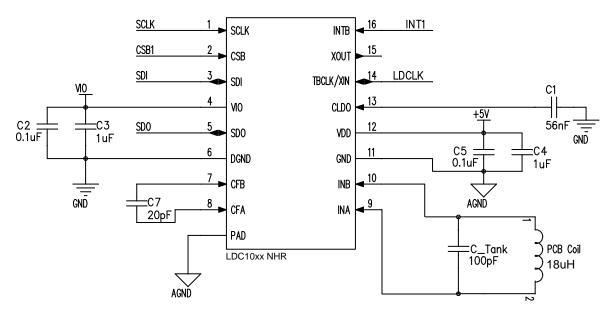


Figure 16. Typical Application Schematic, LDC10xx

8.2.1.1 Design Requirements

For this design example, use the following as the input parameters.

Table 18. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Minimum sensing distance	1 mm
Maximum sensing distance	8 mm
Output data rate	78 KSPS (Max data rate with LDC10xx series)
Number of PCB layers for sensor	2 layers



8.2.1.2 Detailed Design Procedure

8.2.1.2.1 Sensor and Target

In this example, consider a sensor with the below characteristics.

Table 19. Sensor Characteristics

PARAMETER	VALUE
Layers	2
Thickness of copper	1 Oz
Coil shape	Circular
Number of turns	23
Trace thickness	4 mil
Trace spacing	4 mil
PCB core material	FR4
Rp @ 1 mm	5 kΩ
Rp @ 8 mm	12.5 kΩ
Nominal Inductance	18 µH

Target material used is stainless steel

8.2.1.2.2 Calculating Sensor Capacitor

Sensor frequency depends on various factors in the application. In this example since one of the design parameter is to achieve output data rate of 78 KSPS, sensor frequency can be calculated as below.

Output Data Rate =
$$\frac{f_{sensor}}{\left(\frac{Response time}{3}\right)}$$
(7)


With the lowest Response time of 192 and output data rate of 78 KSPS, sensor frequency calculated using the above formula is 4.99 MHz.

Now, using the below formula sensor capacitor is calculated to be 55 pF with a sensor inductance of 18 µH

$$L = \frac{1}{C \times (2\pi \times f_{sensor})^2}$$
 (8)

8.2.1.2.3 Choosing Filter Capacitor

Using the steps given in Choosing Filter Capacitor (CFA and CFB Terminals) filter capacitor for the example sensor is 20 pF. Below waveform shows the pattern on CFB pin with 100 pF and 20 pF filter capacitor.

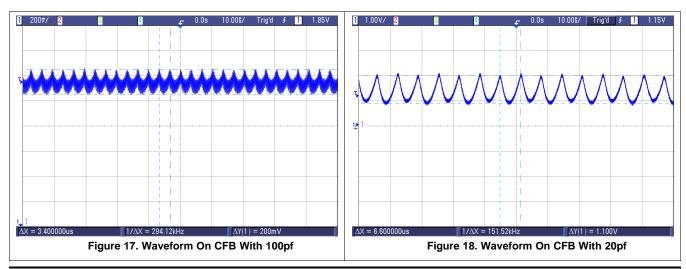

Copyright © 2014, Texas Instruments Incorporated

Submit Documentation Feedback

SNOSCY1 - MARCH 2014 www.ti.com

ISTRUMENTS

8.2.1.2.4 Setting Rp_MIN and Rp_MAX

Calculating value for Rp_MAX Register : Rp at 8mm is $12.5k\Omega$, $12500\times2 = 25000$. In Table 4, then $27.704 k\Omega$ is the nearest value larger than $25k\Omega$; this corresponds to Rp MAX value of 0x12

Calculating value for Rp_MIN Register : Rp at 1mm is $5k\Omega$, 5000/2 = 2500. In Table 6, $2.394k\Omega$ is the nearest value lower than 2.5kΩ; this corresponds to Rp_MIN value of 0x3B

8.2.1.2.5 Calculating Minimum Sensor Frequency

Using,


$$N = 68.94 \times \log_{10} \left(\frac{F}{2500} \right)$$
 (9)

N is 227.51, round off to 228 decimal. This value has to be written into Watchdog Timer Register, which is used to wake up the internal circuit when the sensor is saturated.

25

20

8.2.1.3 Application Curves

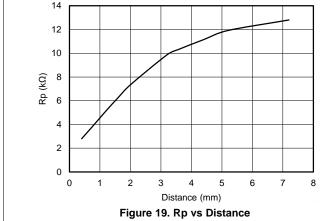

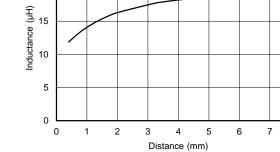


Figure 20. Inductance vs Distance

24



8.2.2 Linear Position Sensing Application Diagram

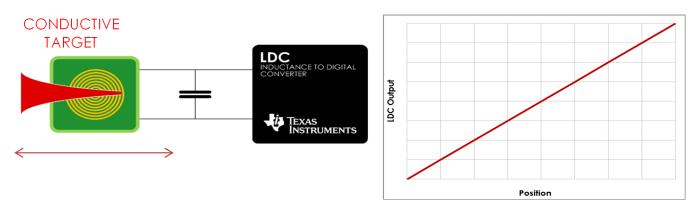


Figure 21. Linear Position Sensing

8.2.3 Angular Position Sensing Application Diagram

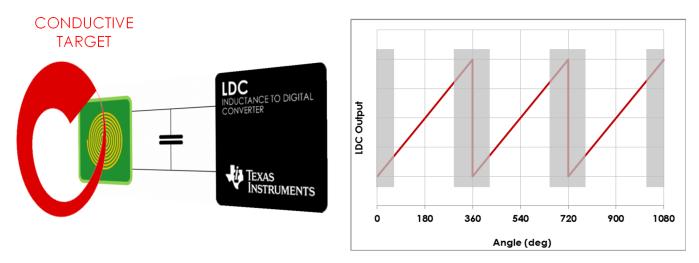


Figure 22. Angular Position Sensing

SNOSCY1 – MARCH 2014 www.ti.com



9 Power Supply Recommendations


The LDC1041 is designed to operate from an analog supply range of 4.75 V to 5.25 V and digital I/O supply range of 1.8V to 5.25V. The analog supply voltage should be greater than or equal to the digital supply voltage for proper operation of the device. The supply voltage should be well regulated. If the supply is located more than a few inches from the LDC1041 additional bulk capacitance may be required in addition to the ceramic bypass capacitors. An electrolytic capacitor with a value of 10uF is a typical choice.

10 Layout


10.1 Layout Guidelines

- The VDD and VIO terminal should be bypassed to ground with a low ESR ceramic bypass capacitor. The typical recommended bypass capacitance is 0.1uF ceramic with a X5R or X7R dielectric.
- The optimum placement is closest to the VDD/VIO and GND/DGND terminals of the device. Care should be taken to minimize the loop area formed by the bypass capacitor connection, the VDD/VIO terminal, and the GND/DGND terminal of the IC. See Figure 23 for a PCB layout example.
- The CLDO terminal should be bypassed to digital ground (DGND) with a 56nF ceramic bypass capacitor.
- The filter capacitor selected for the application using the procedure described in section Choosing Filter Capacitor (CFA and CFB Terminals) is connected between CFA and CFB terminals. Place the filter capacitor close to the CFA and CFB terminals. Do not use any ground/power plane below the capacitor and the trace connecting the capacitor and the CFA /CFB terminals.
- Use of two separate ground plane for GND and DGND is recommended with a start connection. See Figure 23 for a PCB layout example.

10.2 Layout Example

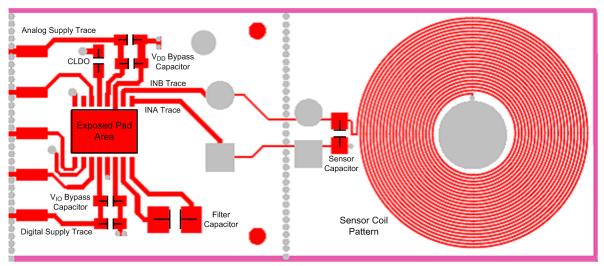

Top Layer

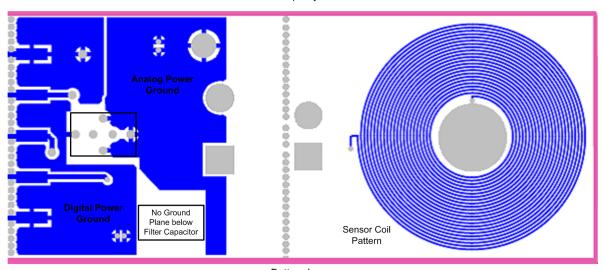

Bottom Layer

Figure 23. LDC10xx Board Layout

SNOSCY1 – MARCH 2014 www.ti.com

Instruments

11 Device and Documentation Support

11.1 Trademarks

All trademarks are the property of their respective owners.

11.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

11.3 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms and definitions.



SNOSCY1 - MARCH 2014



www.ti.com

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
LDC1041NHRJ	Active	Production	WSON (NHR) 16	4500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LDC1041
LDC1041NHRJ.A	Active	Production	WSON (NHR) 16	4500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LDC1041
LDC1041NHRJ.B	Active	Production	WSON (NHR) 16	4500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LDC1041
LDC1041NHRR	Active	Production	WSON (NHR) 16	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LDC1041
LDC1041NHRR.A	Active	Production	WSON (NHR) 16	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LDC1041
LDC1041NHRR.B	Active	Production	WSON (NHR) 16	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LDC1041

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

PACKAGE MATERIALS INFORMATION

www.ti.com 1-Aug-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LDC1041NHRJ	WSON	NHR	16	4500	330.0	12.4	4.3	5.3	1.3	8.0	12.0	Q1
LDC1041NHRR	WSON	NHR	16	1000	177.8	12.4	4.3	5.3	1.3	8.0	12.0	Q1

PACKAGE MATERIALS INFORMATION

www.ti.com 1-Aug-2025




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LDC1041NHRJ	WSON	NHR	16	4500	367.0	367.0	35.0
LDC1041NHRR	WSON	NHR	16	1000	210.0	185.0	35.0



PLASTIC SMALL OUTLINE - NO LEAD

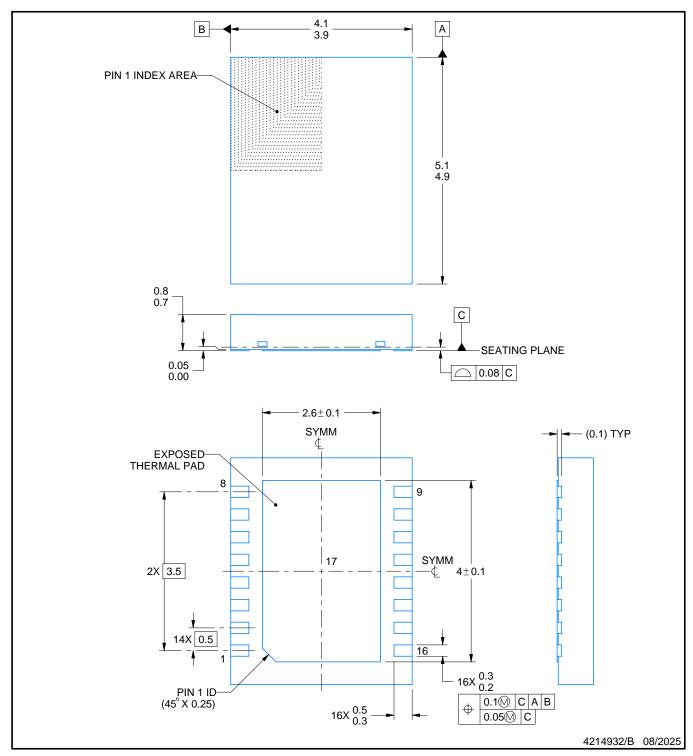


NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC SMALL OUTLINE - NO LEAD

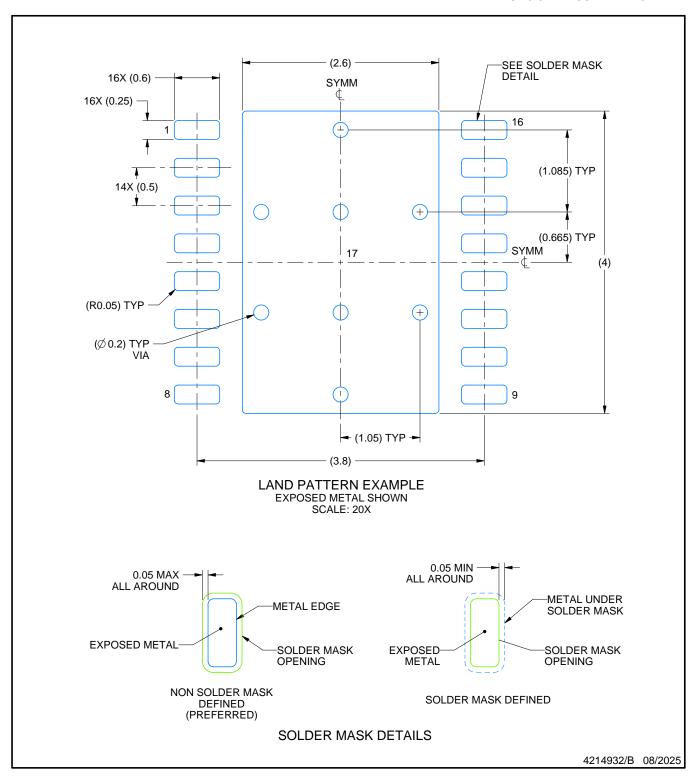


NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC SMALL OUTLINE - NO LEAD

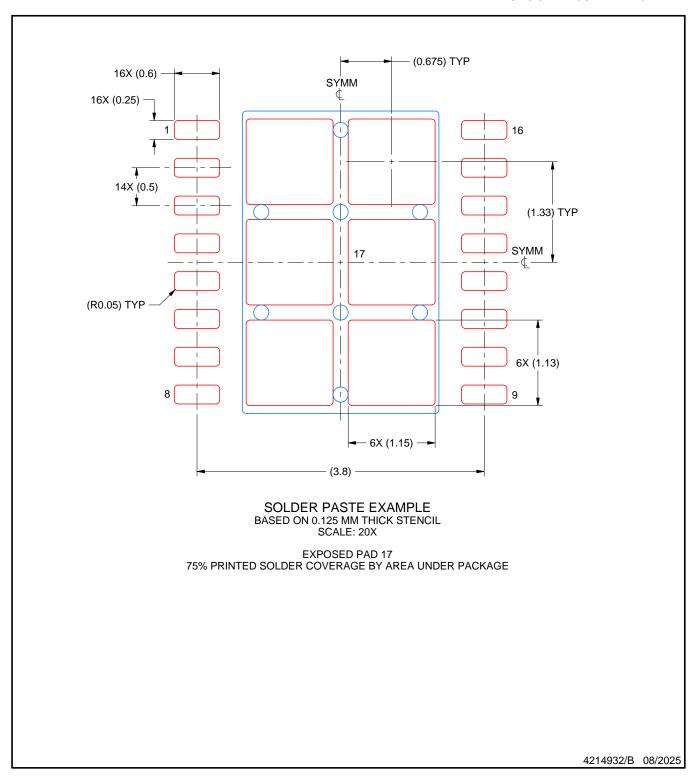

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025