

LM137JAN 3-Terminal Adjustable Negative Regulators

Check for Samples: LM137JAN

FEATURES


- Output Voltage Adjustable from -37V to -1.2V
- 1.5A Output Current Specified, -55°C to +150°C
- Line Regulation Typically 0.01%/V
- Load Regulation Typically 0.3%
- **Excellent Thermal Regulation, 0.002%/W**
- 77 dB Ripple Rejection
- **Excellent Rejection of Thermal Transients**
- 50 ppm/°C Temperature Coefficient
- **Temperature-independent Current Limit**
- **Internal Thermal Overload Protection**
- Standard 3-lead Transistor Package
- **Output is Short Circuit Protected**

DESCRIPTION

The LM137 are adjustable 3-terminal negative voltage regulators capable of supplying in excess of -1.5A over an output voltage range of -37V to -1.2V. These regulators are exceptionally easy to apply, requiring only 2 external resistors to set the output voltage and 1 output capacitor for frequency compensation. The circuit design has been optimized for excellent regulation and low thermal transients. Further, the LM137 series features internal current thermal shutdown and compensation, making them virtually blowout-proof against overloads.


The LM137 serves a wide variety of applications including local on-card regulation, programmableoutput voltage regulation or precision current regulation. The LM137 are ideal complements to the LM117 adjustable positive regulators.

Connection Diagram



Case is Input

Figure 1. TO-3 Metal Can Package **Bottom View** See Package Number K0002C



Case Is Input

Figure 2. TO Metal Can Package **Bottom View** See Package Number NDT0003A


Table 1. LM137 Series Packages and Power Capability

Device	Package	Rated Power Dissipation	Design Load Current
LM427	TO-3 (K)	20W	1.5A
LM137	TO (NDT)	2W	0.5A

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet. All trademarks are the property of their respective owners.



Typical Applications

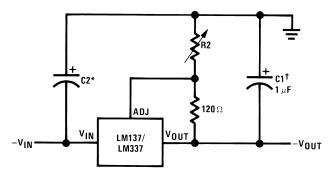

Full output current not available at high input-output voltages

$$-V_{\text{OUT}} = -1.25V \left(1 + \frac{\text{R2}}{120}\right) + \left(-I_{\text{ADJ}} \times \text{R2}\right)$$

†C1 = 1 μ F solid tantalum or 10 μ F aluminum electrolytic required for stability

*C2 = 1 μ F solid tantalum is required only if regulator is more than 4" from power-supply filter capacitor Output capacitors in the range of 1 μ F to 1000 μ F of aluminum or tantalum electrolytic are commonly used to provide improved output impedance and rejection of transients

Figure 3. Adjustable Negative Voltage Regulator





These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings(1)

Absolute Maximum Natings		
Power Dissipation (2)		Internally Limited
Input-Output Voltage Differential		40V
Operating Ambient Temperature Range		-55°C ≤ T _A ≤ +125°C
Operating Junction Temperature Range		-55°C ≤ T _J ≤ $+150$ °C
Maximum Junction Temperature		+150°C
Storage Temperature		-65°C ≤ T _A ≤ +150°C
Lead Temperature (Soldering, 10 sec.)		300°C
Minimum Input Voltage		−41.25V
Maximum Power Dissipation (@25°C)	TO-3	28 Watts
	ТО	2.5Watts
Thermal Resistance		
θ _{JA}	TO-3 Metal Can (Still Air)	40°C/W
	TO-3 Metal Can (500LF/Min Air Flow)	14°C/W
	TO Metal Can (Still Air @ 0.5W)	174°C/W
	TO Metal Can (500LF/Min Air Flow @ 0.5W)	64°C/W
θ_{JC}	TO-3	4°C/W
	TO Metal Can (@ 1.0W)	15°C/W
Package Weight (typical)	TO-3	12,750mg
	TO Metal Can	955mg
ESD Rating (3)		4K Volts

- Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. For ensured specifications and test conditions, see the Electrical Characteristics. The ensured specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.
- The maximum power dissipation must be derated at elevated temperatures and is dictated by T_{Jmax} (maximum junction temperature), θ_{JA} (package junction to ambient thermal resistance), and T_A (ambient temperature). The maximum allowable power dissipation at any temperature is $P_{Dmax} = (T_{Jmax} - T_A)/\theta_{JA}$ or the number given in the Absolute Maximum Ratings, whichever is lower. Human body model, 100pF discharged through 1.5K Ω

Table 2. Recommended Operating Conditions

T _A	-55°C ≤ T _A ≤ +125°C
Input Voltage Range	−41.25V to −4.25V



Quality Conformance Inspection

Mil-Std-883, Method 5005 — Group A

Subgroup	Description	Temp (°C)
1	Static tests at	+25
2	Static tests at	+125
3	Static tests at	-55
4	Dynamic tests at	+25
5	Dynamic tests at	+125
6	Dynamic tests at	-55
7	Functional tests at	+25
8A	Functional tests at	+125
8B	Functional tests at	-55
9	Switching tests at	+25
10	Switching tests at	+125
11	Switching tests at	-55

LM137H Electrical Characteristics DC Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub- groups
		V 4.05V I 5 A		-1.275	-1.225	V	1
		$V_{IN} = -4.25V, I_{L} = 5mA$		-1.3	-1.2	V	2, 3
		V 4.05V I 500mA		-1.275	-1.225	V	1
\ <i>I</i>	Output Voltage	$V_{IN} = -4.25V, I_L = 500mA$		-1.3	-1.2	V	2, 3
V_{OUT}	Output Voltage	V 44.25V I 5mA		-1.275	-1.225	٧	1
		$V_{IN} = -41.25V, I_{L} = 5mA$		-1.3	-1.2	٧	2, 3
		V 44.05V L 50A		-1.275	-1.225	V	1
		$V_{IN} = -41.25V, I_L = 50mA$		-1.3	-1.2	V	2, 3
\	Line Deculation	$V_{IN} = -41.25V$ to $-4.25V$,		-9.0	9.0	mV	1
$V_{R \text{ Line}}$	Line Regulation	$I_L = 5mA$		-23	23	mV	2, 3
		$V_{IN} = -6.25V$, $I_L = 5mA$ to 500mA		-12	12	mV	1
				-24	24	mV	2, 3
		V _{IN} = -41.25V, I _L = 5mA to 50mA		-6.0	6.0	mV	1
V _{R Load}	Load Regulation			-12	12	mV	2, 3
		$V_{IN} = -6.25V$, $I_L = 5mA$ to 200mA		-6.0	6.0	mV	1
				-12	12	mV	2, 3
V_{Rth}	Thermal Regulation	V _{IN} = -14.6V, I _L = 500mA		-5.0	5.0	mV	1
	Adicat Dia Compant	V _{IN} = -4.25V, I _L = 5mA		25	100	μΑ	1, 2, 3
l _{Adj}	Adjust Pin Current	$V_{IN} = -41.25V, I_L = 5mA$		25	100	μΑ	1, 2, 3
ΔI _{Adj} / V _{Line}	Adjust Pin Current Change vs. Line Voltage	$V_{IN} = -41.25V \text{ to } -4.25V,$ $I_L = 5\text{mA}$		-5.0	5.0	μΑ	1, 2, 3
ΔI _{Adj} / I _{Load}	Adjust Pin Current Change vs. Load Current	$V_{IN} = -6.25V$, $I_L = 5mA$ to 500mA		-5.0	5.0	μΑ	1, 2, 3
	Output Short Circuit Current	V _{IN} = -4.25V		0.5	1.8	Α	1, 2, 3
los	Output Short Circuit Current	V _{IN} = -40V		0.05	0.5	Α	1, 2, 3
		V = 4.25V		-1.275	-1.225	٧	1
V _{OUT}	Output Voltage Recovery After	$V_{IN} = -4.25V$		-1.3	-1.2	V	2, 3
Recovery	Output Short Circuit Current	V 40V		-1.275	-1.225	V	1
		$V_{IN} = -40V$		-1.3	-1.2	V	2, 3

www.ti.com

LM137H Electrical Characteristics DC Parameters (continued)

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub- groups
		V _{IN} = -4.25V		0.2	3.0	mA	1, 2, 3
IQ	Minimum Load Current	V _{IN} = -14.25V		0.2	3.0	mA	1, 2, 3
		V _{IN} = -41.25V		1.0	5.0	mA	1, 2, 3
M	Valta da Chart un	V 4.05V L 500m A		-1.275	-1.225	V	1
V _{Start}	Voltage Start-up	$V_{IN} = -4.25V, I_L = 500mA$		-1.3	-1.2	V	2, 3
V _{OUT}	Output Voltage	V_{IN} = -6.25V, I_L = 5mA (No Subgroup)	(1)	-1.3	-1.2	V	

⁽¹⁾ Tested at +125°C; correlated to +150°C

LM137H Electrical Characteristics A Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub- groups
ΔV_{IN} / ΔV_{OUT}	Ripple Rejection	$V_{IN} = -6.25V$, $I_L = 125mA$, $e_I = 1V_{RMS}$ at 2400Hz		48		dB	4
V _{NO}	Output Noise Voltage	$V_{IN} = -6.25V, I_L = 50mA$			120	μV_{RMS}	
ΔV _{OUT} / ΔV _{IN}	Line Transient Response	$V_{IN} = -6.25V, V_{Pulse} = -1V, I_{L} = 50mA$			80	mV/V	7
$\Delta V_{OUT} / \Delta I_{L}$	Load Transient Response	$V_{IN} = -6.25V, I_{L} = 50mA,$ $\Delta I_{L} = 200mA$	(1)		60	mV	7

⁽¹⁾ Slash sheet limit of 0.3mV/mA is equivalent to 60mV



LM137H Electrical Characteristics DC Parameters: Drift Values

Delta calculations performed on JAN S devices at group B, subgroup 5 only.

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub- groups
		$V_{IN} = -4.25V, I_{L} = 5mA$		-0.01	0.01	٧	1
M	Output Valtage	$V_{IN} = -4.25V, I_L = 500mA$		-0.01	0.01	٧	1
V _{OUT}	Output Voltage	V _{IN} = -41.25V, I _L = 5mA		-0.01	0.01	V	1
		V _{IN} = -41.25V, I _L = 50mA		-0.01	0.01	V	1
V _{R Line}	Line Regulation	$V_{IN} = 41.25V \text{ to } -4.25V, I_L = 5\text{mA}$		-4.0	4.0	mV	1
	Adiata Bia Camana	V _{IN} = -4.25V, I _L = 5mA		-10	10	μΑ	1
^I Adj	Adjust Pin Current	V _{IN} = -41.25V, I _L = 5mA		-10	10	μΑ	1

LM137K Electrical Characteristics DC Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub- groups
		V 4.05V 1 5 A		-1.275	-1.225	V	1
		$V_{IN} = -4.25V, I_{L} = 5mA$		-1.3	-1.2	V	2, 3
		V 4.05V L 4.5A		-1.275	-1.225	V	1
V	Outrot Valta as	$V_{IN} = -4.25V, I_L = 1.5A$		-1.3	-1.2	V	2, 3
V _{OUT}	Output Voltage	V 44.05V 1 5 A		-1.275	-1.225	V	1
		$V_{IN} = -41.25V, I_L = 5mA$		-1.3	-1.2	V	2, 3
		V 44.05V 1 000 v 4		-1.275	-1.225	V	1
		$V_{IN} = -41.25V, I_L = 200mA$		-1.3	-1.2	V	2, 3
V _{R Line}	Line Regulation	$-41.25V \le V_{IN} \le -4.25V, I_L = 5mA$		-9.0	9.0	mV	1
				-23	23	mV	2, 3
		V 0.05V 1 5 - A 5 A		-6.0	6.0	mV	1
	Lead Bendaffer	$V_{IN} = -6.25V$, $I_L = 5mA$ to 1.5A		-12	12	mV	2, 3
$V_{R Load}$	Load Regulation	V _{IN} = -41.25V,		-6.0	6.0	mV	1
		$I_L = 5mA$ to 200mA		-12	12	mV	2, 3
V_{Rth}	Thermal Regulation	V _{IN} = -14.6V, I _L = 1.5A		-5.0	5.0	mV	1
	Additional Disc Operand	V _{IN} = -4.25V, I _L = 5mA		25	100	μΑ	1, 2, 3
I_{Adj}	Adjust Pin Current	$V_{IN} = -41.25V, I_{L} = 5mA$		25	100	μΑ	1, 2, 3
ΔI _{Adj} / V _{Line}	Adjust Pin Current Change vs. Line Voltage	-41.25V ≤ V _{IN} ≤ -4.25, I _L = 5mA		-5.0	5.0	μΑ	1, 2, 3
ΔI_{Adj} / I_{Load}	Adjust Pin Current Change vs. Load Current	V_{IN} = -6.25V, I_L = 5mA to 1.5A		-5.0	5.0	μΑ	1, 2, 3
	0.1	V _{IN} = -4.25V		1.5	3.5	Α	1, 2, 3
los	Output Short Circuit Current	V _{IN} = -40V		0.2	1.0	Α	1, 2, 3
		V 4.05V		-1.275	-1.225	V	1
V_{OUT}	Outrot Valta as Dassour	V _{IN} = -4.25V		-1.3	-1.2	٧	2, 3
Recovery	Output Voltage Recovery	V 40V		-1.275	-1.225	V	1
		$V_{IN} = -40V$		-1.3	-1.2	V	2, 3
		V _{IN} = -4.25V		0.2	3.0	mA	1, 2, 3
I_Q	Minimum Load Current	V _{IN} = -14.25V		0.2	3.0	mA	1, 2, 3
		V _{IN} = -41.25V		1.0	5.0	mA	1, 2, 3
M	Valtage Otant	V _{IN} = 4.25V, I _L = 1.5A		-1.275	-1.225	٧	1
V _{Start}	Voltage Start-up	V _{IN} = 4.25V, I _L = 1.5A		-1.3	-1.2	V	2, 3
V _{OUT}	Output Voltage	V _{IN} = -6.25V, I _L = 5mA No Subgroup	(1)	-1.3	-1.2	٧	

(1) Tested at +125°C; correlated to +150°C



LM137K Electrical Characteristics AC Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub- groups
$\Delta V_{IN} / \Delta V_{OUT}$	Ripple Rejection	$V_{IN} = -6.25V$, $I_L = 500mA$, $e_I = 1V_{RMS}$ at 2400Hz		50		dB	4
V _{NO}	Output Noise Voltage	V _{IN} = -6.25V, I _L = 100mA			120	μV_{RMS}	
ΔV_{OUT} / ΔV_{IN}	Line Transient Response	$V_{IN} = -6.25V, I_L = 100mA, V_{Pulse} = -1V$			80	mV/V	7
$\Delta V_{OUT} / \Delta I_{L}$	Load Transient Response	$V_{IN} = -6.25V, I_{L} = 100mA,$ $\Delta I_{L} = 400mA$	(1)		60	mV	7


⁽¹⁾ Slash sheet limit of 0.15mV/mA is equivalent to 60mV

LM137K Electrical Characteristics DC Parameters: Drift Values

Delta calculations performed on JAN S devices at group B, subgroup 5 only.

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub- groups
V_{OUT}	Output Voltage	$V_{IN} = -4.25V, I_{L} = 5mA$		-0.01	0.01	V	1
$V_{R line}$	Line Regulation	$V_{IN} = -41.25V \text{ to } -4.25, I_L = 5\text{mA}$		-4.0	4.0	mV	1
I _{Adj}	Adjust Pin Current	V _{IN} = -41.25V, I _L = 5mA		-10	10	μΑ	1


Schematic Diagram

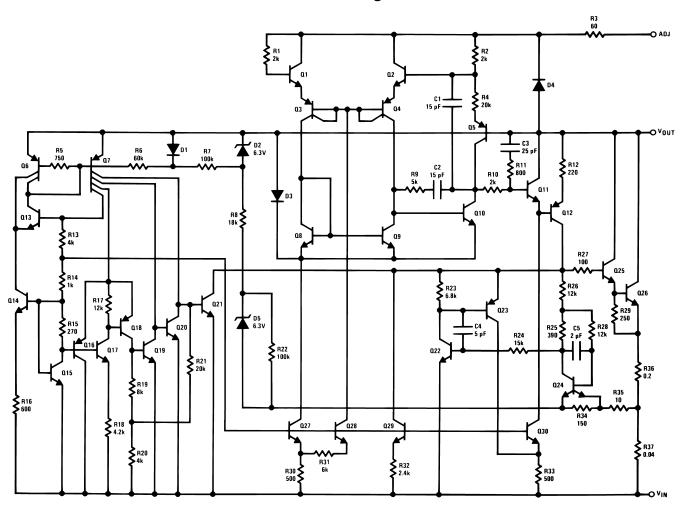



Thermal Regulation


When power is dissipated in an IC, a temperature gradient occurs across the IC chip affecting the individual IC circuit components. With an IC regulator, this gradient can be especially severe since power dissipation is large. Thermal regulation is the effect of these temperature gradients on output voltage (in percentage output change) per Watt of power change in a specified time. Thermal regulation error is independent of electrical regulation or temperature coefficient, and occurs within 5 ms to 50 ms after a change in power dissipation. Thermal regulation depends on IC layout as well as electrical design. The thermal regulation of a voltage regulator is defined as the percentage change of V_{OUT} , per Watt, within the first 10 ms after a step of power is applied. The LM137's specification is 0.02%/W, max.

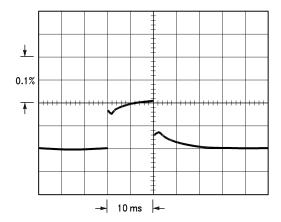

LM137, $V_{OUT} = -10V$ $V_{IN} - V_{OUT} = -40V$ $I_{IL} = 0A \rightarrow 0.25A \rightarrow 0A$ Vertical sensitivity, 5 mV/div

Figure 4.

In Figure 4, a typical LM137's output drifts only 3 mV (or 0.03% of $V_{OUT} = -10V$) when a 10W pulse is applied for 10 ms. This performance is thus well inside the specification limit of $0.02\%/W \times 10W = 0.2\%$ max. When the 10W pulse is ended, the thermal regulation again shows a 3 mV step as the LM137 chip cools off. Note that the load regulation error of about 8 mV (0.08%) is additional to the thermal regulation error. In Figure 5, when the 10W pulse is applied for 100 ms, the output drifts only slightly beyond the drift in the first 10 ms, and the thermal error stays well within 0.1% (10 mV).

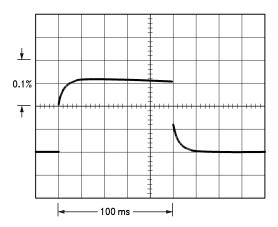


$$\begin{split} LM137, \ V_{OUT} &= -10V \\ V_{IN} &= V_{OUT} = -40V \\ I_{L} &= 0A \rightarrow 0.25A \rightarrow 0A \\ Horizontal \ sensitivity, \ 20 \ ms/div \end{split}$$

Figure 5.




Typical Applications

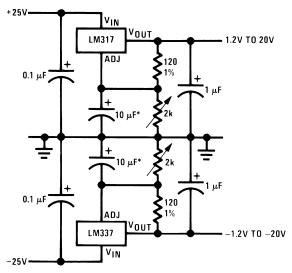

Full output current not available at high input-output voltages


*The 10 µF capacitors are optional to improve ripple rejection

Figure 6. Adjustable Lab Voltage Regulator



 $I_{OUT} = \frac{1.250V}{R1}$ $^{*}0.8\Omega \leq R1 \leq 120\Omega$

Figure 7. Current Regulator




*When C_L is larger than 20 μF , D1 protects the LM137 in case the input supply is shorted

Figure 8. Negative Regulator with Protection Diodes


^{**}When C2 is larger than 10 μF and -V_{OUT} is larger than -25V, D2 protects the LM137 in case the output is shorted



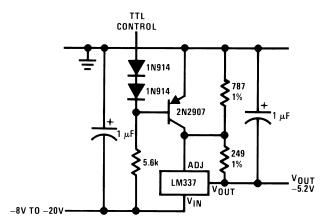

*Minimum output ~ -1.3V when control input is low

Figure 9. -5.2V Regulator with Electronic Shutdown*



 $I_{OUT} = \left(\frac{1.5V}{R1}\right) \pm 15\%$ adjustable

Figure 10. Adjustable Current Regulator

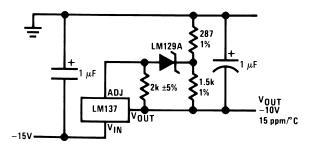


Figure 11. High Stability -10V Regulator



Typical Performance Characteristics

(H & K Packages)





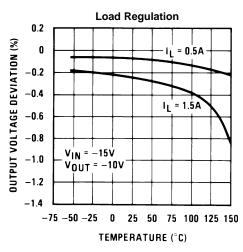



Figure 12.

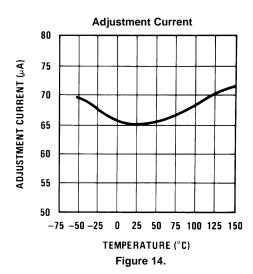

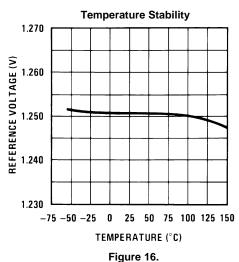

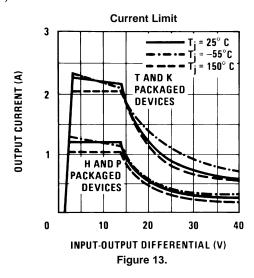

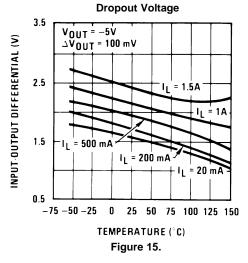


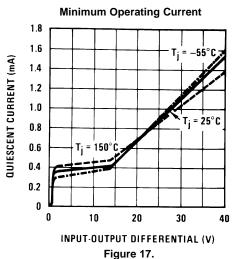



Copyright © 2010–2013, Texas Instruments Incorporated





Typical Performance Characteristics (continued)




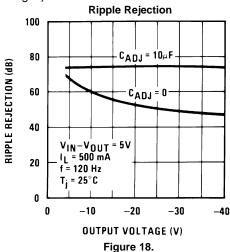


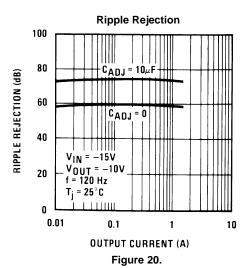

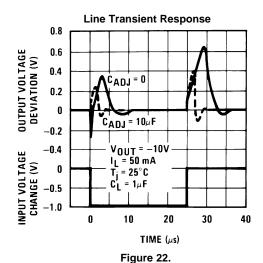

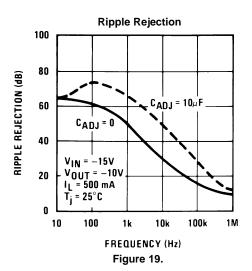

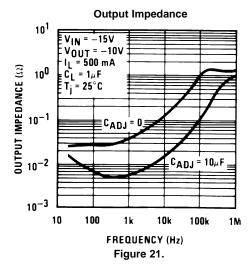

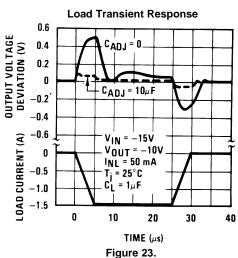



REVISION HISTORY

Date Released	Revision	Section	Changes
12/08/2010	А	New Release, Corporate format	2 MDS data sheets converted into one Corp. data sheet format. MJLM137-H Rev. 0A0, MJLM137-K Rev. 0A0. MDS data sheets will be archived.
03/20/2013	Α	All	Changed layout of National Data Sheet to TI format

www.ti.com

11-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
JL137BXA	Active	Production	TO (NDT) 3	20 TRAY NON-STD	No	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137BXA JM38510/11803BXA Q ACO JM38510/11803BXA Q >T
JL137SXA	Active	Production	TO (NDT) 3	20 JEDEC TRAY (5+1)	No	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137SXA JM38510/11803SXA Q ACO JM38510/11803SXA Q >T
JL137SYA	Active	Production	TO (K) 2	50 JEDEC TRAY (5+1)	No	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137SYA Q JM38510/ 11804SYA ACO 11804SYA >T
JM38510/11803BXA	Active	Production	TO (NDT) 3	20 TRAY NON-STD	No	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137BXA JM38510/11803BXA Q ACO JM38510/11803BXA Q >T
JM38510/11804SYA	Active	Production	TO (K) 2	50 JEDEC TRAY (5+1)	Yes	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137SYA Q JM38510/ 11804SYA ACO 11804SYA >T
M38510/11803BXA	Active	Production	TO (NDT) 3	20 TRAY NON-STD	No	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137BXA JM38510/11803BXA Q ACO JM38510/11803BXA Q >T
M38510/11803BXX	Active	Production	TO (NDT) 3	20 TRAY NON-STD	No	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137BXA JM38510/11803BXA Q ACO JM38510/11803BXA Q >T
M38510/11804SYA	Active	Production	TO (K) 2	50 JEDEC TRAY (5+1)	Yes	Call TI	Level-1-NA-UNLIM	-55 to 150	JL137SYA Q JM38510/ 11804SYA ACO 11804SYA >T

11-Nov-2025

www.ti.com

- (1) Status: For more details on status, see our product life cycle.
- (2) Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LM137JAN, LM137JAN-SP:

Military: LM137JAN

Space : LM137JAN-SP


NOTE: Qualified Version Definitions:

- Military QML certified for Military and Defense Applications
- Space Radiation tolerant, ceramic packaging and qualified for use in Space-based application



www.ti.com 21-May-2025

TRAY

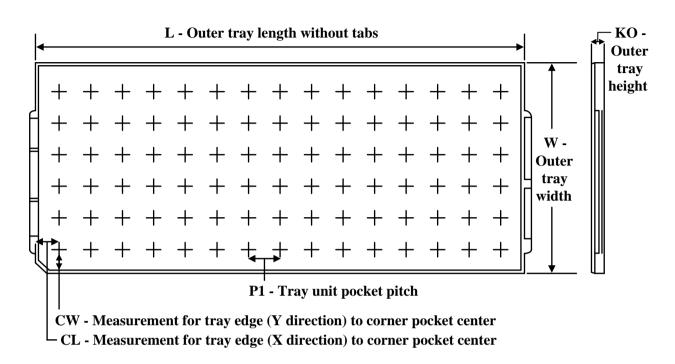


Chamfer on Tray corner indicates Pin 1 orientation of packed units.

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	Κ0 (μm)	P1 (mm)	CL (mm)	CW (mm)
JL137BXA	NDT	TO-CAN	3	20	2 X 10	150	126.49	61.98	8890	11.18	12.95	18.54
JL137SXA	NDT	TO-CAN	3	20	2 X 10	150	126.49	61.98	8890	11.18	12.95	18.54
JL137SYA	K	TO-CAN	2	50	9 X 6	NA	292.1	215.9	25654	3.87	22.3	25.4
JM38510/11803BXA	NDT	TO-CAN	3	20	2 X 10	150	126.49	61.98	8890	11.18	12.95	18.54
JM38510/11804SYA	K	TO-CAN	2	50	9 X 6	NA	292.1	215.9	25654	3.87	22.3	25.4
M38510/11803BXA	NDT	TO-CAN	3	20	2 X 10	150	126.49	61.98	8890	11.18	12.95	18.54
M38510/11803BXX	NDT	TO-CAN	3	20	2 X 10	150	126.49	61.98	8890	11.18	12.95	18.54
M38510/11804SYA	K	TO-CAN	2	50	9 X 6	NA	292.1	215.9	25654	3.87	22.3	25.4

TO-CAN - 7.747 mm max height


TRANSISTOR OUTLINE

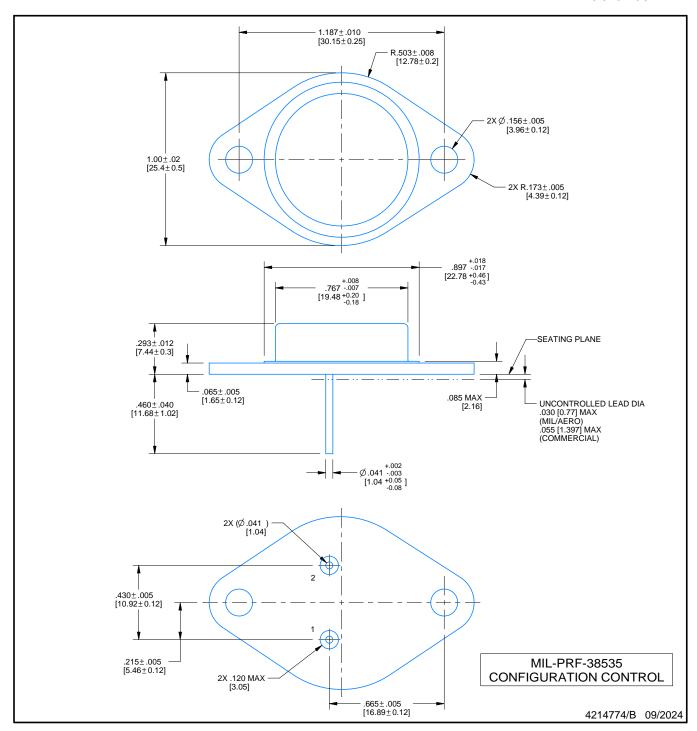

NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
 3. Leads not to be bent greater than 15°.



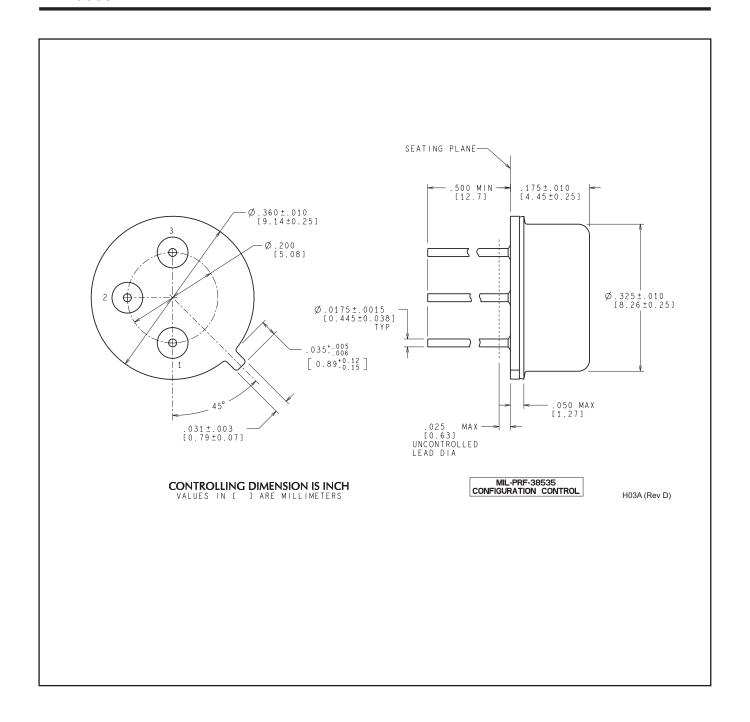

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025