











LMK60E2-150M, LMK60E0-156257 LMK60A0-148351, LMK60A0-148M

SNAS687C -JUNE 2016-REVISED NOVEMBER 2017

LMK60XX High-Performance Low Jitter Oscillator

Features

- Low Noise, High Performance
 - Jitter: 150 fs RMS typical Fout > 100 MHz
 - PSRR: -60 dBc, Robust Supply Noise **Immunity**
- Supported Output Format
 - LVPECL and LVDS up to 800 MHz
 - HCSL up to 400 MHz
- Total Frequency Tolerance of ±50 ppm (LMK60X2) and ± 25 ppm (LMK60X0)
- 3.3-V Operating Voltage
- Industrial Temperature Range (-40°C to +85°C)
- 7-mm × 5-mm 6-pin Package That is Pin-Compatible With Industry Standard 7050 XO Package

2 Applications

- High-Performance Replacement for Crystal-, SAW-, or Silicon-based Oscillators
- Switches, Routers, Network Line Cards, Base Band Units (BBU), Servers, Storage/SAN
- Test and Measurement
- Medical Imaging
- FPGA. Processor Attach

3 Description

The LMK60XX device is a low jitter oscillator that generates a commonly used reference clock. The device is pre-programmed in factory to support any reference clock frequency; supported output formats are LVPECL, and LVDS up to 800 MHz, and HCSL up to 400 MHz. Internal power conditioning provide excellent power supply ripple rejection (PSRR), reducing the cost and complexity of the power delivery network. The device operates from a single $3.3-V \pm 5\%$ supply.

Device Information⁽¹⁾

PART NUMBER	OUTPUT FREQ (MHz) AND FORMAT	TOTAL FREQ STABILITY (ppm)	PACKAGE / SIZE
LMK60E2- 150M	150 LVPECL	±50	
LMK60E0- 156257	156.257 LVPECL	±25	6-pin QFM,
LMK60A0- 148351	148 + 32/91 LVDS	±25	7 mm × 5 mm
LMK60A0- 148M	148.5 LVDS	±25	

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Pinout








Table of Contents


1	Features 1	6.12 PSRR Characteristics	6
2	Applications 1	6.13 PLL Clock Output Jitter Characteristics	6
3	Description 1	6.14 Additional Reliability and Qualification	6
4	Revision History2	6.15 Typical Characteristics	7
5	Pin Configuration and Functions	7 Parameter Measurement Information	8
6	Specifications	7.1 Device Output Configurations	8
U	6.1 Absolute Maximum Ratings	8 Power Supply Recommendations	10
	6.2 ESD Ratings	9 Layout	10
	6.3 Recommended Operating Conditions	9.1 Layout Guidelines	10
	6.4 Thermal Information	10 Device and Documentation Support	12
	6.5 Electrical Characteristics - Power Supply	10.1 Related Links	12
	6.6 LVPECL Output Characteristics	10.2 Receiving Notification of Documentation Updat	ies 12
	6.7 LVDS Output Characteristics	10.3 Community Resources	12
	6.8 HCSL Output Characteristics5	10.4 Trademarks	12
	6.9 OE Input Characteristics 5	10.5 Electrostatic Discharge Caution	12
	6.10 Frequency Tolerance Characteristics 5	10.6 Glossary	12
	6.11 Power-On/Reset Characteristics (VDD)6	11 Mechanical, Packaging, and Orderable Information	12

4 Revision History

Changes from Revision B (December 2016) to Revision C	Page
New release of LMK60A0-148351	1
New release of LMK60A0-148M	1
Changes from Revision A (August 2016) to Revision B	Page
Changed LMK60E2-150M00 to LMK60E2-150M	1
Removed LMK60E2-156M and moved to separate datasheet	1
Changes from Original (June 2016) to Revision A	Page
New release of LMK60E0-156257	1



5 Pin Configuration and Functions



Pin Functions

P	PIN		DESCRIPTION
NAME	NO.	I/O	DESCRIPTION
POWER			
GND	3	Ground	Device ground
VDD	6	Analog	3.3-V power supply
OUTPUT BLO	СК		
OUTP, OUTN	4, 5	Universal	Differential output pair (LVPECL, LVDS or HCSL).
DIGITAL CON	TROL / INTERI	ACES	
NC	2	N/A	No connect
OE	1	LVCMOS	Output enable (internal pullup). When set to low, output pair is disabled and set at high impedance.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
VDD	Device supply voltage	-0.3	3.6	V
V_{IN}	Output voltage for logic inputs	-0.3	VDD + 0.3	V
V_{OUT}	Output voltage for clock outputs	-0.3	VDD + 0.3	V
T_{J}	Junction temperature		150	°C
T _{STG}	Storage temperature	-40	125	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

				VALUE	UNIT
V Electronic d'este de cons	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±2000	V		
	V _(ESD) E	Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±500	V

⁽¹⁾ JEDEC document JEP155 states that 500 V HBM allows safe manufacturing with a standard ESD control process.

⁽²⁾ JEDEC document JEP157 states that 250 V CDM allows safe manufacturing with a standard ESD control process.



6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
VDD	Device supply voltage	3.135	3.3	3.465	V
T _A	Ambient temperature	-40	25	85	°C
T_{J}	Junction temperature			120	°C
t _{RAMP}	VDD power-up ramp time	0.1		100	ms

6.4 Thermal Information

			LMK60XX (2) (3) (4)				
THERMAL METRIC ⁽¹⁾			SIA (QFM)				
		6 PINS					
		Airflow (LFM) 0	Airflow (LFM) 200	Airflow (LFM) 400			
$R_{\theta JA}$	Junction-to-ambient thermal resistance	55.2	46.4	43.7	°C/W		
R ₀ JC(top)	Junction-to-case (top) thermal resistance	34.6	n/a	n/a	°C/W		
$R_{\theta JB}$	Junction-to-board thermal resistance	37.7	n/a	n/a	°C/W		
ΨЈТ	Junction-to-top characterization parameter	11.3	17.6	22.5	°C/W		
ΨЈВ	Junction-to-board characterization parameter	37.7	41.5	40.1	°C/W		
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	n/a	n/a	n/a	°C/W		

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

6.5 Electrical Characteristics - Power Supply (1)

 $VDD = 3.3 V \pm 5\%, T_A = -40C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
IDD Device current consumption	Device current consumption	LVPECL ⁽²⁾		162	208	mA
		LVDS		152	196	
		HCSL		155	196	
IDD-PD	Device current consumption when output is disabled	OE = GND		136		mA

⁽¹⁾ Refer to Parameter Measurement Information for relevant test conditions.

6.6 LVPECL Output Characteristics (1)

 $VDD = 3.3 V \pm 5\%, T_A = -40C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f _{OUT}	Output frequency ⁽²⁾		10		800	MHz
V_{OD}	Output voltage swing $(V_{OH} - V_{OL})^{(2)}$		700	800	1200	mV
V _{OUT, DIFF, PP}	Differential output peak-to-peak swing			$2 \times V_{OD} $		٧
V _{OS}	Output common-mode voltage		\	/DD – 1.55		٧
t_R / t_F	Output rise/fall time (20% to 80%) ⁽³⁾			150	250	ps
ODC	Output duty cycle (3)	<u> </u>	45%		55%	

⁽¹⁾ Refer to Parameter Measurement Information for relevant test conditions.

Ensured by characterization.

²⁾ The package thermal resistance is calculated on a 4 layer JEDEC board.

⁽³⁾ Connected to GND with 3 thermal vias (0.3-mm diameter).

⁽⁴⁾ ψJB (junction to board) is used when the main heat flow is from the junction to the GND pad. See the Layout Guidelines section for more information on ensuring good system reliability and quality.

⁽²⁾ On-chip power dissipation should exclude 40 mW, dissipated in the 150 Ω termination resistors, from total power dissipation.

An output frequency over f_{OUT} max spec is possible, but output swing may be less than V_{OD} min spec.



6.7 LVDS Output Characteristics⁽¹⁾

 $VDD = 3.3 V \pm 5\%, T_A = -40^{\circ}C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
f _{OUT}	Output frequency ⁽¹⁾		10		800	MHz
V _{OD}	Output voltage swing (V _{OH} - V _{OL}) ⁽¹⁾		300	390	480	mV
V _{OUT, DIFF, PP}	Differential output peak-to-peak swing			$2 \times V_{OD} $		V
Vos	Output common-mode voltage			1.2		V
t _R / t _F	Output rise/fall time (20% to 80%) (2)			150	250	ps
ODC	Output duty cycle ⁽²⁾		45%		55%	
R _{OUT}	Differential output impedance			125		Ω

⁽¹⁾ An output frequency over f_{OUT} max spec is possible, but output swing may be less than V_{OD} min spec.

6.8 HCSL Output Characteristics(1)

 $VDD = 3.3 V \pm 5\%, T_A = -40^{\circ}C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP MAX	UNIT
f _{OUT}	Output frequency		10	400	MHz
V _{OH}	Output high voltage		600	850	mV
V _{OL}	Output low voltage		-100	100	mV
V _{CROSS}	Absolute crossing voltage (2)(3)		250	475	mV
V _{CROSS-DELTA}	Variation of V _{CROSS} ⁽²⁾⁽³⁾		0	140	mV
dV/dt	Slew rate ⁽⁴⁾		0.8	2	V/ns
ODC	Output duty cycle (4)		45%	55%	

⁽¹⁾ Refer to Parameter Measurement Information for relevant test conditions.

6.9 OE Input Characteristics

 $VDD = 3.3 V \pm 5\%, T_A = -40^{\circ}C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP MAX	UNIT
V_{IH}	Input high voltage		1.4		V
V _{IL}	Input low voltage			0.6	V
I _{IH}	Input high current	V _{IH} = VDD	-40	40	μA
I _{IL}	Input low current	V _{IL} = GND	-40	40	μA
C _{IN}	Input capacitance			2	pF

6.10 Frequency Tolerance Characteristics⁽¹⁾

 $VDD = 3.3 V \pm 5\%, T_A = -40^{\circ}C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP MAX	UNIT
f _T	Tatal for average talescape	LMK60X2: All output formats, frequency bands and device junction temperature up to 125°C; includes initial freq tolerance, temperature & supply voltage variation, solder reflow and aging (10 years)	-50	50	ppm
	Total frequency tolerance	LMK60X0: All output formats, frequency bands and device junction temperature up to 115°C; includes initial freq tolerance, temperature & supply voltage variation, solder reflow and aging (5 years at 40°C)	-25	25	ppm

(1) Ensured by characterization.

⁽²⁾ Ensured by characterization.

⁽²⁾ Measured from -150 mV to +150 mV on the differential waveform with the 300 mVpp measurement window centered on the differential zero crossing.

⁽³⁾ Ensured by design.

⁽⁴⁾ Ensured by characterization.



6.11 Power-On/Reset Characteristics (VDD)

 $VDD = 3.3 V \pm 5\%, T_A = -40^{\circ}C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{THRESH}	Threshold voltage (1)		2.72		2.95	V
V_{DROOP}	Allowable voltage droop (2)				0.1	V
t _{STARTUP}	Start-up time (1)	Time elapsed from VDD at 3.135 V to output enabled			10	ms
t _{OE-EN}	Output enable time ⁽²⁾	Time elapsed from OE at V _{IH} to output enabled			50	μs
t _{OE-DIS}	Output disable time ⁽²⁾	Time elapsed from OE at $V_{\rm IL}$ to output disabled			50	μs

⁽¹⁾ Ensured by characterization.

6.12 PSRR Characteristics⁽¹⁾

 $VDD = 3.3 \text{ V}, T_A = 25^{\circ}\text{C}, FS[1:0] = NC, NC$

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
PSRR	Source induced by FO mV	Sine wave at 50 kHz		-60			
	Spurs induced by 50-mV power supply ripple (2)(3) at	Sine wave at 100 kHz	-60			alD a	
	156.25-MHz output, all	Sine wave at 500 kHz		-60		dBc	
	output types	Sine wave at 1 MHz	-60				

⁽¹⁾ Refer to Parameter Measurement Information for relevant test conditions.

6.13 PLL Clock Output Jitter Characteristics (1)(2)

 $VDD = 3.3 V \pm 5\%, T_A = -40^{\circ}C \text{ to } 85^{\circ}C$

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
RJ	RMS phase jitter ⁽³⁾ (12 kHz – 20 MHz)	f _{OUT} ≥ 100 MHz, All output types		150	250	fs RMS

⁽¹⁾ Refer to Parameter Measurement Information for relevant test conditions.

6.14 Additional Reliability and Qualification

PARAMETER	CONDITION / TEST METHOD
Mechanical Shock	MIL-STD-202, Method 213
Mechanical Vibration	MIL-STD-202, Method 204
Moisture Sensitivity Level	J-STD-020, MSL3

Submit Documentation Feedback

⁽²⁾ Ensured by design.

⁽²⁾ Measured max spur level with 50 mVpp sinusoidal signal between 50 kHz and 1 MHz applied on VDD pin


⁽³⁾ DJ_{SPUR} (ps, pk-pk) = $[2*10(SPUR/20) / (\pi*f_{OUT})]*1e6$, where PSRR or SPUR in dBc and f_{OUT} in MHz.

⁽²⁾ Phase jitter measured with Agilent E5052 signal source analyzer using a differential-to-single ended converter (balun or buffer).

⁽³⁾ Ensured by characterization.



6.15 Typical Characteristics

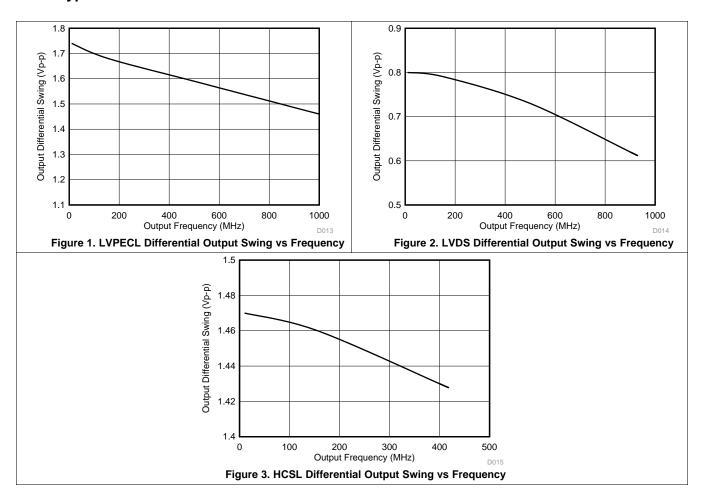

7 Parameter Measurement Information

7.1 Device Output Configurations

Figure 4. LVPECL Output DC Configuration During Device Test

High impedance differential probe

LMK60XX LVDS Oscilloscope

Figure 5. LVDS Output DC Configuration During Device Test

High impedance differential probe

LMK60XX HCSL Oscilloscope

50 Ω \$\frac{1}{2} 50 Ω

Figure 6. HCSL Output DC Configuration During Device Test

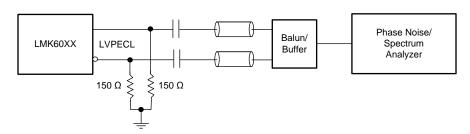


Figure 7. LVPECL Output AC Configuration During Device Test




Figure 8. LVDS Output AC Configuration During Device Test



Device Output Configurations (continued)

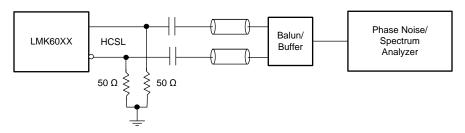


Figure 9. HCSL Output AC Configuration During Device Test

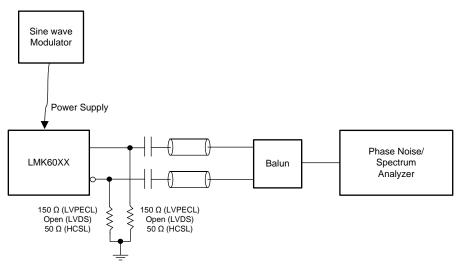


Figure 10. PSRR Test Setup

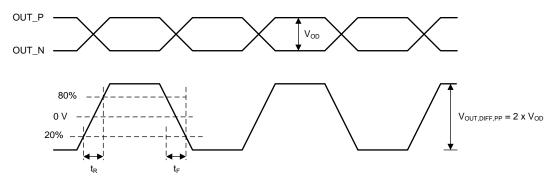


Figure 11. Differential Output Voltage and Rise/Fall Time

8 Power Supply Recommendations

For best electrical performance of LMK60XX, TI recommends using a combination of 10 μ F, 1 μ F and 0.1 μ F on its power supply bypass network. TI also recommends using component side mounting of the power supply bypass capacitors, and it is best to use 0201 or 0402 body size capacitors to facilitate signal routing. Keep the connections between the bypass capacitors and the power supply on the device as short as possible. Ground the other side of the capacitor using a low impedance connection to the ground plane. Figure 12 shows the layout recommendation for power supply decoupling of LMK60XX.

9 Layout

9.1 Layout Guidelines

The following sections provides recommendations for board layout, solder reflow profile and power supply bypassing when using LMK60XX to ensure good thermal / electrical performance and overall signal integrity of entire system.

9.1.1 Ensuring Thermal Reliability

The LMK60XX is a high performance device. Therefore pay careful attention to device configuration and printed-circuit board (PCB) layout with respect to power consumption. The ground pin needs to be connected to the ground plane of the PCB through three vias or more, as shown in Figure 12, to maximize thermal dissipation out of the package.

Equation 1 describes the relationship between the PCB temperature around the LMK60XX and its junction temperature.

$$T_B = T_J - \Psi_{JB} * P$$

where

- T_R: PCB temperature around the LMK60XX
- T_{.I}: Junction temperature of LMK60XX
- Ψ_{IB}: Junction-to-board thermal resistance parameter of LMK60XX (37.7°C/W without airflow)
- P: On-chip power dissipation of LMK60XX

(1)

To ensure that the maximum junction temperature of LMK60XX is below 120°C, it can be calculated that the maximum PCB temperature without airflow should be at 90°C or below when the device is optimized for best performance resulting in maximum on-chip power dissipation of 0.68 W.

9.1.2 Best Practices for Signal Integrity

For best electrical performance and signal integrity of entire system with LMK60XX, TI recommends routing vias into decoupling capacitors and then into the LMK60XX. TI also recommends increasing the via count and width of the traces wherever possible. These steps ensure lowest impedance and shortest path for high-frequency current flow. Figure 12 shows the layout recommendation for LMK60XX.



Layout Guidelines (continued)

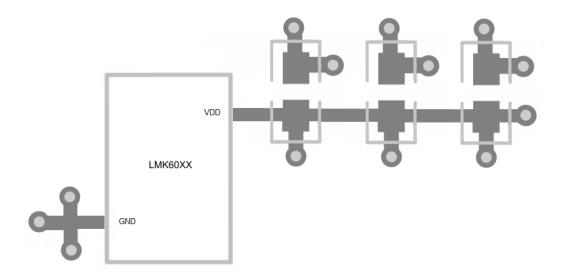


Figure 12. LMK60XX Layout Recommendation for Power Supply and Ground

9.1.3 Recommended Solder Reflow Profile

TI recommends following the solder paste supplier's recommendations to optimize flux activity and to achieve proper melting temperatures of the alloy within the guidelines of J-STD-20. It is preferable for the LMK60XX to be processed with the lowest peak temperature possible while also remaining below the components peak temperature rating as listed on the MSL label. The exact temperature profile would depend on several factors including maximum peak temperature for the component as rated on the MSL label, Board thickness, PCB material type, PCB geometries, component locations, sizes, densities within PCB, as well solder manufactures recommended profile, and capability of the reflow equipment to as confirmed by the SMT assembly operation.



10 Device and Documentation Support

10.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 1. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
LMK60E2-150M	Click here	Click here	Click here	Click here	Click here
LMK60E0-156257	Click here	Click here	Click here	Click here	Click here

10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

10.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

10.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

10.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Submit Documentation Feedback




SIA0006A



PACKAGE OUTLINE

QFM - 1.15 mm max height

QUAD FLAT MODULE

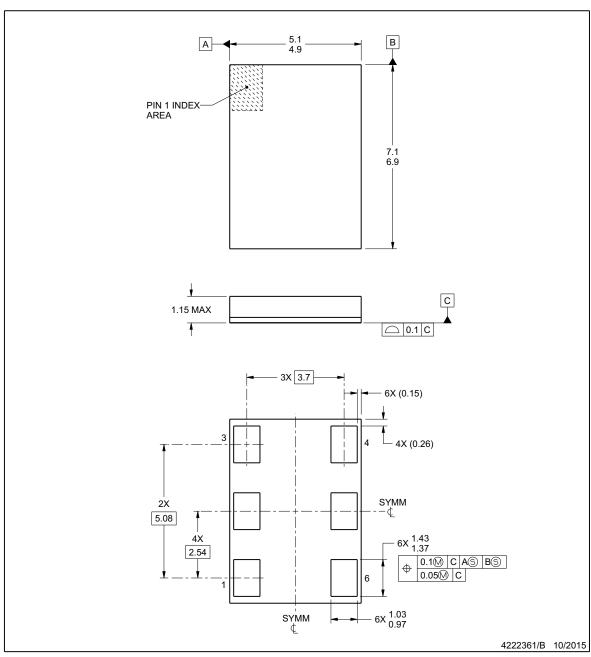

NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

www.ti.com




EXAMPLE BOARD LAYOUT

SIA0006A

QFM - 1.15 mm max height

QUAD FLAT MODULE

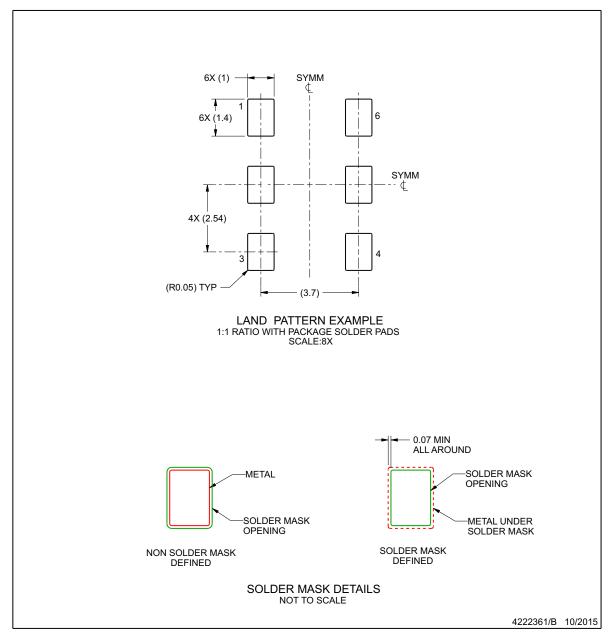

NOTES: (continued)

3. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).




EXAMPLE STENCIL DESIGN

SIA0006A

QFM - 1.15 mm max height

QUAD FLAT MODULE

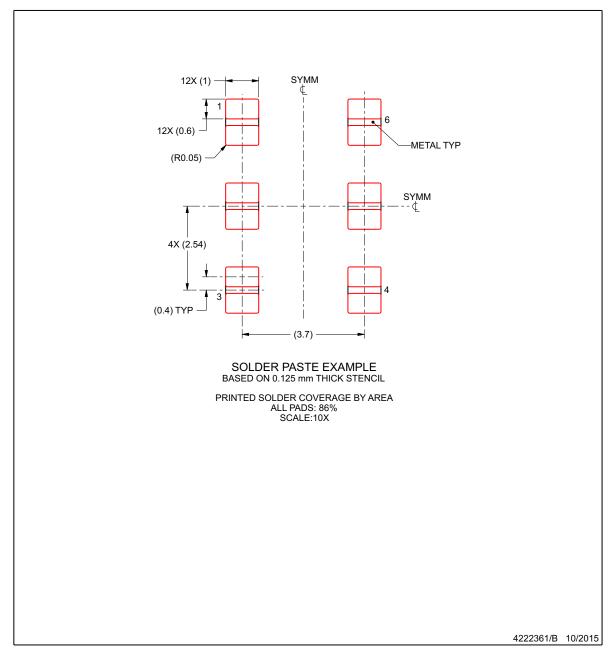

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

www.ti.com

www.ti.com

10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
LMK60A0-148M35SIAR	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M35
LMK60A0-148M35SIAR.A	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M35
LMK60A0-148M35SIAR.B	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	-	Call TI	Call TI	-40 to 85	
LMK60A0-148M35SIAT	NRND	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M35
LMK60A0-148M35SIAT.A	NRND	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M35
LMK60A0-148M35SIAT.B	NRND	Production	QFM (SIA) 6	250 SMALL T&R	-	Call TI	Call TI	-40 to 85	
LMK60A0-148M50SIAR	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M50
LMK60A0-148M50SIAR.A	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M50
LMK60A0-148M50SIAR.B	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	-	Call TI	Call TI	-40 to 85	
LMK60A0-148M50SIAT	NRND	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M50
LMK60A0-148M50SIAT.A	NRND	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60A0 148M50
LMK60A0-148M50SIAT.B	NRND	Production	QFM (SIA) 6	250 SMALL T&R	-	Call TI	Call TI	-40 to 85	
LMK60E0-156257SIAR	Active	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E0 156257
LMK60E0-156257SIAR.A	Active	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E0 156257
LMK60E0-156257SIAR.B	Active	Production	QFM (SIA) 6	2500 LARGE T&R	-	Call TI	Call TI	-40 to 85	
LMK60E0-156257SIAT	Active	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E0 156257
LMK60E0-156257SIAT.A	Active	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E0 156257
LMK60E0-156257SIAT.B	Active	Production	QFM (SIA) 6	250 SMALL T&R	-	Call TI	Call TI	-40 to 85	
LMK60E2-150M00SIAR	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E2 150M00



www.ti.com

10-Nov-2025

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
LMK60E2-150M00SIAR.A	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E2 150M00
LMK60E2-150M00SIAR.B	NRND	Production	QFM (SIA) 6	2500 LARGE T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E2 150M00
LMK60E2-150M00SIAT	NRND	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E2 150M00
LMK60E2-150M00SIAT.A	NRND	Production	QFM (SIA) 6	250 SMALL T&R	Yes	NIAU	Level-3-260C-168 HR	-40 to 85	LMK60E2 150M00
LMK60E2-150M00SIAT.B	NRND	Production	QFM (SIA) 6	250 SMALL T&R	-	Call TI	Call TI	-40 to 85	

⁽¹⁾ Status: For more details on status, see our product life cycle.

- (3) RoHS values: Yes, No. RoHS Exempt, See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.



PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025