











LMV931-N LMV932-N, LMV934-N

SNOS993P - NOVEMBER 2001 - REVISED APRIL 2017

LMV93x-N Single, Dual, Quad 1.8-V, RRIO Operational Amplifiers


Features

- Typical 1.8-V Supply Values; Unless Otherwise
- Specified at 1.8 V, 2.7 V and 5 V
- **Output Swing**
 - With 600-Ω Load 80 mV from Rail
 - With 2-kΩ Load 30 mV from Rail
- V_{CM} 200 mV Beyond Rails
- Supply Current (per Channel) 100 μA
- Gain Bandwidth Product 1.4 MHz
- Maximum V_{OS} 4 mV
- Ultra Tiny Packages
- Temperature Range -40°C to +125°C
- Create a Custom Design Using the LMV93x-N With the WEBENCH® Power Designer

Applications

- **Phones**
- **Tablets**
- Wearables
- Health Monitoring
- Portable and Battery-Powered Electronic Equipment
- **Battery Monitoring**

High-Side Current Sense Amplifier



3 Description

The LMV93x-N family (LMV931-N single, LMV932-N dual and LMV934-N quad) are low-voltage, lowpower operational amplifiers. The LMV93x-N family operates from 1.8-V to 5.5-V supply voltages and have rail-to-rail input and output. The input commonmode voltage extends 200 mV beyond the supplies which enables user enhanced functionality beyond the supply voltage range. The output can swing railto-rail unloaded and within 105 mV from the rail with $600-\Omega$ load at 1.8-V supply. The LMV93x-N devices are optimized to work at 1.8 V, which make them ideal for portable two-cell, battery-powered systems and single-cell Li-lon systems.

LMV93x-N devices exhibit an excellent speed-power ratio, achieving 1.4-MHz gain bandwidth product at 1.8-V supply voltage with very low supply current. The LMV93x-N devices can drive a 600-Ω load and up to 1000-pF capacitive load with minimal ringing. These devices also have a high DC gain of 101 dB, making them suitable for low-frequency applications.

The single LMV93x-N is offered in space-saving 5-pin SC70 and SOT-23 packages. The dual LMV932-N are in 8-pin VSSOP and SOIC packages and the quad LMV934-N are in 14-pin TSSOP and SOIC packages. These small packages are ideal solutions for area constrained PC boards and portable electronics such as mobile phones and tablets.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)					
LMV931-N	SOT-23 (5)	2.90 mm × 1.60 mm					
LIVIV931-IN	SC-70 (5)	2.00 mm x 1.25 mm					
LMV932-N	VSSOP (8)	3.00 mm × 3.00 mm					
LIVIV932-IN	SOIC (8)	4.90 mm × 3.91 mm					
LMV934-N	TSSOP (8)	5.00 mm × 4.40 mm					
LIVIV934-IN	SOIC (14)	8.60 mm × 3.90 mm					

(1) For all available packages, see the orderable addendum at the end of the datasheet.



Table of Contents

			7.0 Factors December	
1	Features 1		7.3 Feature Description	
2	Applications 1		7.4 Device Functional Modes	
3	Description 1	8	Application and Implementation	. 19
4	Revision History2		8.1 Application Information	19
5	Pin Configuration and Functions 3		8.2 Typical Applications	19
6	Specifications4		8.3 Dos and Don'ts	23
•	6.1 Absolute Maximum Ratings	9	Power Supply Recommendations	. 23
	6.2 ESD Ratings (Commercial)	10	Layout	. 24
	6.3 Recommended Operating Ratings4		10.1 Layout Guidelines	24
	6.4 Thermal Information		10.2 Layout Example	24
	6.5 DC Electrical Characteristics 1.8 V	11	Device and Documentation Support	. 25
	6.6 AC Electrical Characteristics 1.8 V		11.1 Device Support	
	6.7 DC Electrical Characteristics 2.7 V		11.2 Documentation Support	
	6.8 AC Electrical Characteristics 2.7 V		11.3 Related Links	25
	6.9 Electrical Characteristics 5 V DC		11.4 Receiving Notification of Documentation Update	s 25
	6.10 AC Electrical Characteristics 5 V		11.5 Community Resources	26
	6.11 Typical Characteristics		11.6 Trademarks	26
7	Detailed Description		11.7 Electrostatic Discharge Caution	26
•	7.1 Overview		11.8 Glossary	26
	7.2 Functional Block Diagram	12	Mechanical, Packaging, and Orderable	
	1.2 Tanodonal blook blagfam		Information	. 26

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

CI	hanges from Revision O (December 2014) to Revision P	Page
•	Deleted information specific to automotive grade - created separate automotive data sheet SNOSD49	1
•	Added links for WEBENCH	1
•	Moved storage temperature to Abs Max table and changed Handling Ratings tables to ESD Ratings tables per n format	
•	Changed values in the Thermal Information table to align with JEDEC standards	4
•	Changed Slew Rate vs Supply Voltage title to reflect LMV931 and LMV934 only	14
•	Added Slew Rate vs Supply graph for LMV932 only	14
•	Added Receiving Notification of Documentation Updates and Community Resources subsections	25
	Functional Modes, Application and Implementation, Power Supply Recommendations, Layout, Device and Documentation Support, and Mechanical, Packaging, and Orderable Information Sections	1
CI	hanges from Revision M (November 2013) to Revision N	Page
•	Complete rewrite for GDS standard.	1
•	Added LMV934-N-Q1. The other Q grades were added in previous revision	1
CI	hanges from Revision L (March 2013) to Revision M	Page
•	Added Automotive Q Grade.	1


Submit Documentation Feedback

Copyright © 2001–2017, Texas Instruments Incorporated




5 Pin Configuration and Functions


DBV and DCK Package 5-Pin SC-70 and SOT-23 LMV931-N Top View



DGK and D Package 8-Pin VSSOP and SOIC LMV932-N Top View



DGK and D Package 14-Pin TSSOP and SOIC LMV934-N Top View



Pin Functions: LMV931

	PIN		PIN		DESCRIPTION	
NAME	LMV931 DBV, DCK	I/O	DESCRIPTION			
+IN	1	I	Noninverting Input			
-IN	3	1	Inverting Input			
OUT	4	0	Output			
V-	2	Р	Negative Supply			
V+	5	Р	Positive Supply			

Pin Functions: LMV932 and LMV934

	1 III 1 dilotions. Linvooz dila Linvooz								
	PIN		1/0	DESCRIPTION					
NAME	LMV932 D, DGK	LMV934 D, PW	1/0	DESCRIPTION					
+IN A	3	3	ı	Noninverting input, channel A					
+IN B	5	5	I	Noninverting input, channel B					
+IN C	_	10	I	Noninverting input, channel C					
+IN D	_	12	I	Noninverting input, channel D					
–IN A	2	2	ı	Inverting input, channel A					
–IN B	6	6	ı	Inverting input, channel B					
-IN C	_	9	I	Inverting input, channel C					
–IN D	_	13	I	Inverting input, channel D					
OUT A	1	1	0	Output, channel A					
OUT B	7	7	0	Output, channel B					
OUT C	_	8	0	Output, channel C					
OUT D	_	14	0	Output, channel D					
V+	8	4	Р	Positive (highest) power supply					
V-	4	11	Р	Negative (lowest) power supply					

Copyright © 2001–2017, Texas Instruments Incorporated



6 Specifications

6.1 Absolute Maximum Ratings

See (1)(2).

	MIN	MAX	UNIT
Supply voltage (V ⁺ – V ⁻)	-0.3	6	٧
Differential input voltage	V-	V ⁺	V
Voltage at input/output pins	(V ⁻) - 0.3	$(V^+) + 0.3$	V
Junction temperature ⁽³⁾	-40	150	°C
Storage temperature, T _{stg}	– 65	150	°C

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Recommended Operating Conditions indicate conditions for which the device is intended to be functional, but specific performance is not specified. For specifications and the test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, contact the TI Sales Office/Distributors for availability and specifications.
- (3) The maximum power dissipation is a function of $T_{J(max)}$, $R_{\theta JA}$, and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(max)} T_A)/R_{\theta JA}$. All numbers apply for packages soldered directly into a PC board.

6.2 ESD Ratings (Commercial)

			VALUE	UNIT
		Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±2000	
V _(ESD)	Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 (2)	±750	V
		Machine model (MM) ⁽³⁾	±200	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.
- (3) Machine model, 200 Ω in series with 100 pF.

6.3 Recommended Operating Ratings

See⁽¹⁾.

	MIN	MAX	UNIT
Supply voltage range (V ⁺ – V ⁻)	1.8	5.5	V
Ambient temperature	-40	125	°C

⁽¹⁾ Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Recommended Operating Conditions indicate conditions for which the device is intended to be functional, but specific performance is not specified. For specifications and the test conditions, see the Electrical Characteristics.

6.4 Thermal Information

		LMV931-N		LMV932-N		LMV934-N		
	THERMAL METRIC(1)		DCK (SC70)	D (SOIC)	DGK (VSSOP)	D (SOIC)	PW (TSSOP)	UNIT
		5 PINS	5 PINS	8 PINS	8 PINS	14 PINS	14 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	197.2	285.9	125.9	184.5	94.4	124.8	°C/W
R _θ JC(top)	Junction-to-case (top) thermal resistance	156.7	115.9	70.2	74.3	52.5	51.4	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	55.6	63.7	66.5	105.1	48.9	67.2	°C/W
ΤιΨ	Junction-to-top characterization parameter	41.4	4.5	19.8	13.1	14.3	6.6	°C/W
ΨЈВ	Junction-to-board characterization parameter	55	62.9	65.9	103.6	48.6	66.6	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	_	_	_	_	_	_	°C/W

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.



6.5 DC Electrical Characteristics 1.8 V

Unless otherwise specified, all limits specified for T_J = 25°C. V^+ = 1.8 V, V^- = 0 V, V_{CM} = $V^+/2$, V_O = $V^+/2$ and R_L > 1 M Ω .

	PARAMETER	TEST CONDIT	IONS	MIN	TYP (1)	MAX	UNIT
		LMV931 (Single)	25°C		1	4	.,
. ,			Full Range			6	mV
Vos	Input Offset Voltage	LMV932 (Dual),	25°C		1	5.5	.,
		LMV934 (Quad)	Full Range			7.5	mV
TCV _{OS}	Input Offset Voltage Average Drift		Full Range		5.5		μV/°C
I _B	Input Bias Current		25°C		15	35	π Λ
			Full Range			50	nA
Ios	Input Offset Current		25°C		13	25	^
			Full Range			40 nA	
I _S	Supply Current (per channel)		25°C		103	185	185 205 μA
			Full Range			205	
CMRR	Common-Mode Rejection Ratio	LMV931, $0 \le V_{CM} \le 0.6 \text{ V}$	25°C	60	78		-ID
		$1.4 \text{ V} \le \text{V}_{\text{CM}} \le 1.8 \text{ V}^{(2)}$	Full Range	55			dB
		LMV932 and LMV934	25°C	55	76		
		$0 \le V_{CM} \le 0.6 \text{ V}$ 1.4 V \le V_{CM} \le 1.8 V ⁽²⁾	Full Range	50			dB
		$-0.2 \text{ V} \le \text{V}_{\text{CM}} \le 0 \text{ V}$ 1.8 V $\le \text{V}_{\text{CM}} \le 2.0 \text{ V}$	25°C	50	72		dB
PSRR	Power Supply Rejection Ratio	$1.8 \text{ V} \le \text{V}^+ \le 5 \text{ V}$	25°C	75	100		dB
			Full Range	70			
CMVR	Input Common-Mode Voltage	For CMRR Range ≥ 50dB	25°C	V ⁻ - 0.2	-0.2	$V^+ + 0.2$	
	Range		-40°C to 85°C	V ⁻	to	V ⁺	V
			125°C	V ⁻ + 0.2	2.1	V ⁺ - 0.2	
		$R_{L} = 600 \Omega \text{ to } 0.9 \text{ V},$	25°C	77	101		
	Large Signal Voltage Gain V _{CM} =	$V_O = 0.2 \text{ V to } 1.6 \text{ V},$ $V_{CM} = 0.5 \text{ V}$	Full Range	73			dB
	LMV931-N (Single)	$R_L = 2 k\Omega \text{ to } 0.9 \text{ V},$	25°C	80	105		-10
Δ		$V_O = 0.2 \text{ V to } 1.6 \text{ V},$ $V_{CM} = 0.5 \text{ V}$	Full Range	75			dB
A_V		$R_L = 600 \Omega \text{ to } 0.9 \text{ V},$	25°C	75	90		
	Large Signal Voltage Gain	$V_O = 0.2 \text{ V to } 1.6 \text{ V},$ $V_{CM} = 0.5 \text{ V}$	Full Range	72			dB
	LMV932-N (Dual) LMV934-N (Quad)	$R_L = 2 k\Omega$ to 0.9 V,	25°C	78	100		
	Linvoo i iv (Quaa)	$V_O = 0.2 \text{ V to } 1.6 \text{ V},$ $V_{CM} = 0.5 \text{ V}$	Full Range	75			dB
		$R_L = 600 \Omega \text{ to } 0.9 \text{ V}$	25°C	1.65	1.72		
		$V_{IN} = \pm 100 \text{ mV}$			0.077	0.105	V
	Outract Outract		Full Range	1.63		0.120	
V _O	Output Swing	$R_L = 2 k\Omega$ to 0.9 V	25°C	1.75	1.77		
		$V_{IN} = \pm 100 \text{ mV}$			0.024	0.035	V
			Full Range	1.74		0.04	

⁽¹⁾ Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.

⁽²⁾ For specified temperature ranges, see the CMVR parameter in *DC Electrical Characteristics 1.8 V* for the input common-mode voltage specifications.



DC Electrical Characteristics 1.8 V (continued)

Unless otherwise specified, all limits specified for T_J = 25°C. V^+ = 1.8 V, V^- = 0 V, V_{CM} = $V^+/2$, V_O = $V^+/2$ and R_L > 1 M Ω .

	PARAMETER	TEST CONDITIONS		MIN	TYP (1)	MAX	UNIT
I _O O	0 0	Sourcing, $V_O = 0 V$ $V_{IN} = 100 \text{ mV}$	25°C	4	8		mA
			Full Range	3.3			
	Output Short Circuit Current (3)	Sinking, $V_O = 1.8 \text{ V}$ $V_{IN} = -100 \text{ mV}$	25°C	7	9		mA
			Full Range	5			

⁽³⁾ Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C. Output currents in excess of 45 mA over long term may adversely affect reliability.

6.6 AC Electrical Characteristics 1.8 V

Unless otherwise specified, all limits specified for T_J = 25°C. V^+ = 1.8 V, V^- = 0 V, V_{CM} = $V^+/2$, V_O = $V^+/2$ and R_L > 1 M Ω .

	PARAMETER	TEST CONDITIONS	MIN TYP (1) MA	X UNIT
SR	Slew Rate	See ⁽²⁾ .	0.35	V/μs
GBW	Gain-Bandwidth Product		1.4	MHz
Φ_{m}	Phase Margin		67	deg
G _m	Gain Margin		7	dB
e _n	Input-Referred Voltage Noise	f = 10 kHz, V _{CM} = 0.5 V	60	nV/√ Hz
i _n	Input-Referred Current Noise	f = 10 kHz	0.08	pA/√ Hz
THD	Total Harmonic Distortion	$ f = 1 \text{ kHz}, A_V = +1 $ $R_L = 600 \Omega, V_{IN} = 1 V_{PP} $	0.023%	
	Amplifier-to-Amplifier Isolation	See ⁽³⁾	123	dB

⁽¹⁾ Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.

6.7 DC Electrical Characteristics 2.7 V

Unless otherwise specified, all limits specified for $T_J = 25$ °C. $V^+ = 2.7$ V, $V^- = 0$ V, $V_{CM} = V^+/2$, $V_O = V^+/2$ and $R_L > 1$ M Ω .

PARAME	ETER	TEST COM	TEST CONDITIONS			MAX	UNIT	
		LMV931 (Single)	25°C		1	4	m\/	
	land Offert Veltage		Full Range			6	mV	
V _{OS} Inp	Input Offset Voltage	LMV932 (Dual)	25°C		1	5.5	\/	
		LMV934 (Quad)	Full Range			7.5	mV	
TCV _{OS}	Input Offset Voltage Average Drift		Full Range		5.5		μV/°C	
I _B	Input Bias Current		25°C		15	35	~ ^	
			Full Range			50	nA	
los	Input Offset Current		25°C		8	25	Λ	
			Full Range			40	nA	
Is	Supply Current (per channel)		25°C		105	190		
			Full Range			210	μΑ	

⁽²⁾ Connected as voltage follower with input step from V⁻ to V⁺. Number specified is the slower of the positive and negative slew rates.

⁽³⁾ Input referred, $R_L = 100 \text{ k}\Omega$ connected to V⁺/2. Each amplifier excited in turn with 1 kHz to produce $V_O = 3 \text{ V}_{PP}$ (For supply voltages < 3 V, $V_O = V^+$).

⁽¹⁾ Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.



DC Electrical Characteristics 2.7 V (continued)

Unless otherwise specified, all limits specified for T_J = 25°C. V^+ = 2.7 V, V^- = 0 V, V_{CM} = $V^+/2$, V_O = $V^+/2$ and R_L > 1 M Ω .

PARAMI	ETER	TEST CONDITI	ONS	MIN	TYP (1)	MAX	UNIT	
		LMV931, $0 \le V_{CM} \le 1.5 \text{ V}$	25°C	60	81		.ID	
		$2.3 \text{ V} \le \text{V}_{\text{CM}} \le 2.7 \text{ V}^{(2)}$	Full Range	55			dB	
OMPR	Occasion Made Brigation Batte	LMV932 and LMV934	25°C	55	80			
CMRR	Common-Mode Rejection Ratio	$0 \le V_{CM} \le 1.5 \text{ V}$ 2.3 V $\le V_{CM} \le 2.7 \text{ V}^{(2)}$	Full Range	50			dB	
		$-0.2 \text{ V} \le \text{V}_{\text{CM}} \le 0 \text{ V}$ 2.7 \text{ V} \le \text{V}_{\text{CM}} \le 2.9 \text{ V}	25°C	50	74		dB	
PSRR	Power Supply Rejection Ratio	1.8 V ≤ V ⁺ ≤ 5 V	25°C	75	100		٩D	
PSKK	Power Supply Rejection Ratio	$V_{CM} = 0.5 \text{ V}$	Full Range	70			dB	
		For CMRR Range ≥ 50 dB	25°C	V ⁻ - 0.2	-	$V^+ + 0.2$		
V_{CM}	Input Common-Mode Voltage Range		-40°C to 85°C	V ⁻	to = 3.0 =	V ⁺	V	
	range		125°C	V ⁻ + 0.2	0.0	V ⁺ - 0.2		
		$R_L = 600 \Omega \text{ to } 1.35 \text{ V},$	25°C	87	104		dB	
	Large Signal Voltage Gain	$V_0 = 0.2 \text{ V to } 2.5 \text{ V}$	Full Range	86			uБ	
۸	LMV931-N (Single)	$R_L = 2 k\Omega$ to 1.35 V,	25°C	92	110		dB	
		$V_0 = 0.2 \text{ V to } 2.5 \text{ V}$	Full Range	91			uБ	
A_V		$R_L = 600 \Omega \text{ to } 1.35 \text{ V},$	25°C	78	90		dB	
	Large Signal Voltage Gain LMV932-N (Dual)	V _O = 0.2 V to 2.5 V	Full Range	75			uБ	
	LMV934-N (Quad)	$R_L = 2 k\Omega$ to 1.35 V,	25°C	81	100		dB	
	, ,	$V_0 = 0.2 \text{ V to } 2.5 \text{ V}$	Full Range	78			uБ	
		$R_L = 600 \Omega \text{ to } 1.35 \text{ V}$	25°C	2.55	2.62			
		$V_{IN} = \pm 100 \text{ mV}$			0.083	0.110	V	
V	Output Swing		Full Range	2.53		0.130		
Vo	Output Swing	$R_L = 2 k\Omega$ to 1.35 V	25°C	2.65	2.675			
		$V_{IN} = \pm 100 \text{ mV}$			0.025	0.04	V	
			Full Range	2.64		0.045		
		Sourcing, $V_0 = 0 \text{ V}$	25°C	20	30		mΛ	
	(2)	$V_{IN} = +100 \text{ mV}$	Full Range	15			mA	
l _O	Output Short Circuit Current (3)	Sinking,	25°C	18	25			
		$V_O = 2.7 \text{ V}$ $V_{IN} = -100 \text{ mV}$	Full Range	12			mA	

⁽²⁾ For specified temperature ranges, see the CMVR parameter in DC Electrical Characteristics 1.8 V for the input common-mode voltage specifications.

6.8 AC Electrical Characteristics 2.7 V

Unless otherwise specified, all limits specified for $T_J = 25^{\circ}C$. $V^+ = 2.7$ V, $V^- = 0$ V, $V_{CM} = 1.0$ V, $V_O = 1.35$ V and $R_L > 1$ M Ω .

PARAMI	ETER	TEST CONDITIONS	MIN	TYP (1)	MAX	UNIT
SR	Slew Rate	See ⁽²⁾		0.4		V/µs
GBW	Gain-Bandwidth Product			1.4		MHz
Φ_{m}	Phase Margin			70		deg
G _m	Gain Margin			7.5		dB
e _n	Input-Referred Voltage Noise	$f = 10 \text{ kHz}, V_{CM} = 0.5 \text{ V}$		57		nV√ Hz
i _n	Input-Referred Current Noise	f = 10 kHz		0.08		pA/√Hz

⁽¹⁾ Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.

⁽³⁾ Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C. Output currents in excess of 45 mA over long term may adversely affect reliability.

⁽²⁾ Connected as voltage follower with input step from V⁻ to V⁺. Number specified is the slower of the positive and negative slew rates.



AC Electrical Characteristics 2.7 V (continued)

Unless otherwise specified, all limits specified for $T_J = 25^{\circ}C$. $V^+ = 2.7$ V, $V^- = 0$ V, $V_{CM} = 1.0$ V, $V_O = 1.35$ V and $R_L > 1$ M Ω .

PARAM	METER	TEST CONDITIONS	MIN	TYP (1)	MAX	UNIT
THD	Total Harmonic Distortion	$ f = 1 \text{ kHz}, A_V = +1 \\ R_L = 600 \ \Omega, V_{IN} = 1 \ V_{PP} $		0.022%		
	Amp-to-Amp Isolation	See ⁽³⁾		123		dB

⁽³⁾ Input referred, $R_L = 100 \text{ k}\Omega$ connected to V⁺/2. Each amplifier excited in turn with 1 kHz to produce $V_O = 3 \text{ V}_{PP}$ (For supply voltages < 3 V, $V_O = V^+$).



6.9 Electrical Characteristics 5 V DC

Unless otherwise specified, all limits specified for $T_J = 25^{\circ}C$. $V^+ = 5$ V, $V^- = 0$ V, $V_{CM} = V^+/2$, $V_O = V^+/2$ and $R_L > 1$ M Ω .

PARAME	TER	TEST CONDIT	TIONS	MIN	TYP (1)	MAX	UNIT
		LMV931 (Single)	25°C		1	4	
\ /	lanut Offeet Vallana		Full Range			6	mV
Vos	Input Offset Voltage	LMV932 (Dual)	25°C		1	5.5	
		LMV934 (Quad)	Full Range			7.5	mV
TCV _{OS}	Input Offset Voltage Average Drift				5.5		μV/°C
I _B	Input Bias Current		25°C		14	35	nA
			Full Range			50	IIA
Ios	Input Offset Current		25°C		9	25	nΛ
			Full Range			40	nA
I _S	Supply Current (per channel)		25°C		116	210	^
			Full Range			230	μΑ
		$0 \le V_{CM} \le 3.8 \text{ V}$	25°C	60	86		٩D
CMRR	Common-Mode Rejection Ratio	$4.6 \text{ V} \le \text{V}_{\text{CM}} \le 5 \text{ V}^{(2)}$	Full Range	55			dB
J.W.I.V.I.V	Common Mode Rejection Ratio	$-0.2 \text{ V} \le \text{V}_{\text{CM}} \le 0 \text{ V}$ 5 \text{V} \le \text{V}_{\text{CM}} \le 5.2 \text{V}	25°C	50	78		dB
DCDD	Power Supply Pointing Potic	1.8 V ≤ V ⁺ ≤ 5 V	25°C	75	100		۸D
PSRR	Power Supply Rejection Ratio	$V_{CM} = 0.5 \text{ V}$	Full Range	70			dB
CMVR		For CMRR Range ≥ 50 dB	25°C	V ⁻ - 0.2	-0.2	V ⁺ + 0.2	
	Input Common-Mode Voltage Range		-40°C to 85°C	V ⁻	to	V ⁺	V
	- Tango		125°C	V ⁻ + 0.3	5.3	V+ - 0.3	
		$R_L = 600 \Omega \text{ to } 2.5 \text{ V},$	25°C	88	102		dB
	Large Signal Voltage Gain	$V_0 = 0.2 \text{ V to } 4.8 \text{ V}$	Full Range	87			UD
	LMV931-N (Single)	$R_L = 2 k\Omega$ to 2.5 V,	25°C	94	113		dB
۸		$V_O = 0.2 \text{ V to } 4.8 \text{ V}$	Full Range	93			UD
A_V		$R_L = 600 \Omega \text{ to } 2.5 \text{ V},$	25°C	81	90		dB
	Large Signal Voltage Gain LMV932-N (Dual)	$V_0 = 0.2 \text{ V to } 4.8 \text{ V}$	Full Range	78			ub
	LMV934-N (Quad)	$R_L = 2 k\Omega \text{ to } 2.5 \text{ V},$	25°C	85	100		dB
	, ,	$V_O = 0.2 \text{ V to } 4.8 \text{ V}$	Full Range	82			иь
		$R_L = 600 \Omega \text{ to } 2.5 \text{ V}$	25°C	4.855	4.890		
		$V_{IN} = \pm 100 \text{ mV}$			0.120	0.160	V
\/ -	Output Swing		Full Range	4.835		0.180	
V_O	Output Swing	$R_L = 2 k\Omega$ to 2.5 V	25°C	4.945	4.967		
		$V_{IN} = \pm 100 \text{ mV}$			0.037	0.065	V
			Full Range	4.935		0.075	
		LMV931, Sourcing, V _O = 0	25°C	80	100		
I _O	Output Short Circuit Current ⁽³⁾	V V _{IN} = +100 mV	Full Range	68			mA
J	Suput Short Circuit Current	Sinking, $V_0 = 5 \text{ V}$ 25	25°C	58	65		mΛ
		$V_{IN} = -100 \text{ mV}$	Full Range	45			mA

⁽¹⁾ Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.

⁽²⁾ For specified temperature ranges, see the CMVR parameter in *DC Electrical Characteristics 1.8* V for the input common-mode voltage specifications.

⁽³⁾ Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C. Output currents in excess of 45 mA over long term may adversely affect reliability.



6.10 AC Electrical Characteristics 5 V

Unless otherwise specified, all limits specified for T_J = 25°C. V^+ = 5 V, V^- = 0 V, V_{CM} = $V^+/2$, V_O = 2.5 V and R $_L$ > 1 M Ω .

	PARAMETER	TEST CONDITIONS	MIN TYP (1)	MAX UNIT
SR	Slew Rate	See . ⁽²⁾	0.42	V/µs
GBW	Gain-Bandwidth Product		1.5	MHz
Φ_{m}	Phase Margin		71	deg
G _m	Gain Margin		8	dB
e _n	Input-Referred Voltage Noise	f = 10 kHz, V _{CM} = 1 V	50	nV/√ Hz
i _n	Input-Referred Current Noise	f = 10 kHz	0.08	pA/√Hz
THD	Total Harmonic Distortion	$f = 1 \text{ kHz}, A_V = 1$ $R_L = 600 \Omega, V_O = 1 V_{PP}$	0.022%	
	Amplifier-to-Amplifier Isolation	See ⁽³⁾	123	dB

⁽¹⁾ Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. Connected as voltage follower with input step from V^- to V^+ . Number specified is the slower of the positive and negative slew rates. Input referred, $R_L = 100 \text{ k}\Omega$ connected to $V^+/2$. Each amplifier excited in turn with 1 kHz to produce $V_O = 3 V_{PP}$ (For supply voltages < 3

 $V, V_{O} = V^{+}$).



6.11 Typical Characteristics

Unless otherwise specified, $V_S = 5 \text{ V}$, single-supply, $T_A = 25 ^{\circ}\text{C}$.




Figure 1. Supply Current vs Supply Voltage (LMV931-N)




Figure 2. Offset Voltage vs Common-Mode Range




Figure 3. Offset Voltage vs Common-Mode Range







Figure 4. Offset Voltage vs Common-Mode Range








Unless otherwise specified, $V_S = 5 \text{ V}$, single-supply, $T_A = 25^{\circ}\text{C}$.

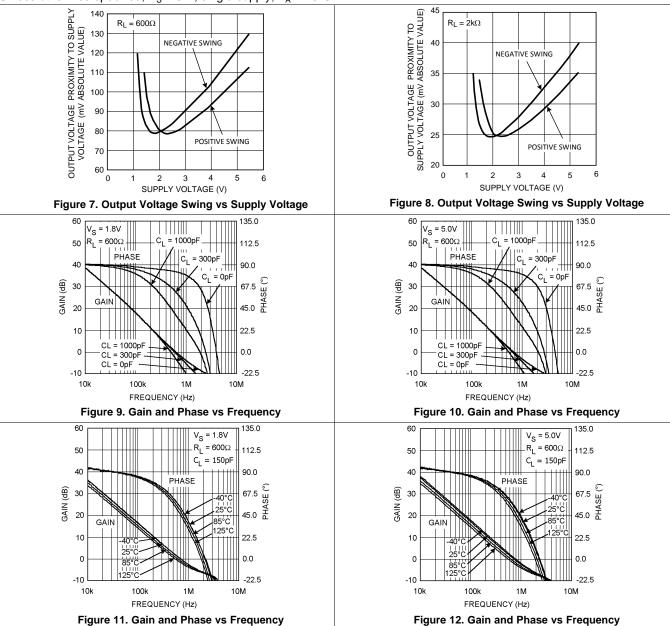




Unless otherwise specified, $V_S = 5 \text{ V}$, single-supply, $T_A = 25$ °C.

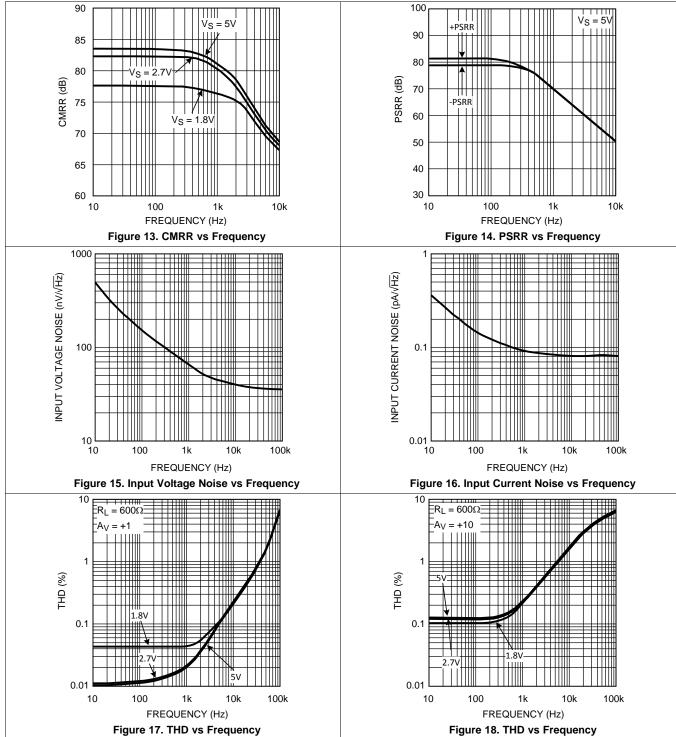



Unless otherwise specified, $V_S = 5 \text{ V}$, single-supply, $T_A = 25^{\circ}\text{C}$.

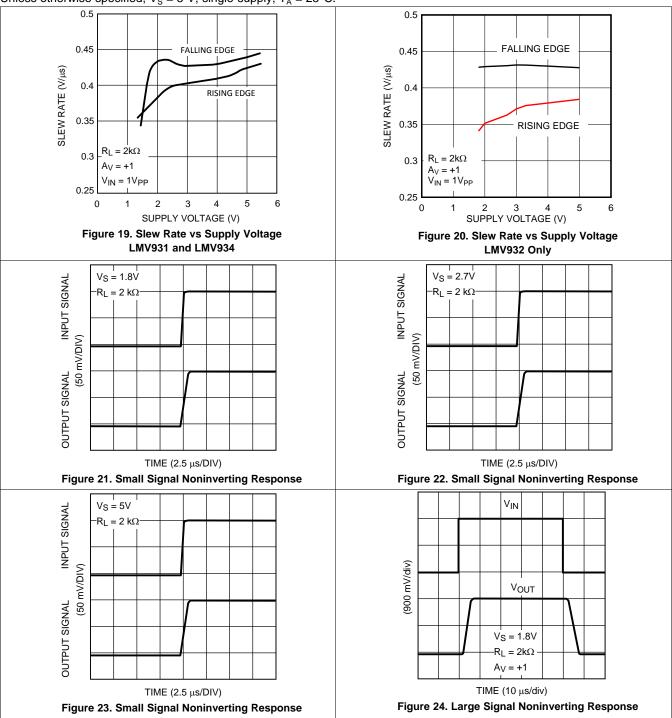



Unless otherwise specified, $V_S = 5 \text{ V}$, single-supply, $T_A = 25^{\circ}\text{C}$.

Figure 27. Short Circuit Current vs Temperature (Sinking)

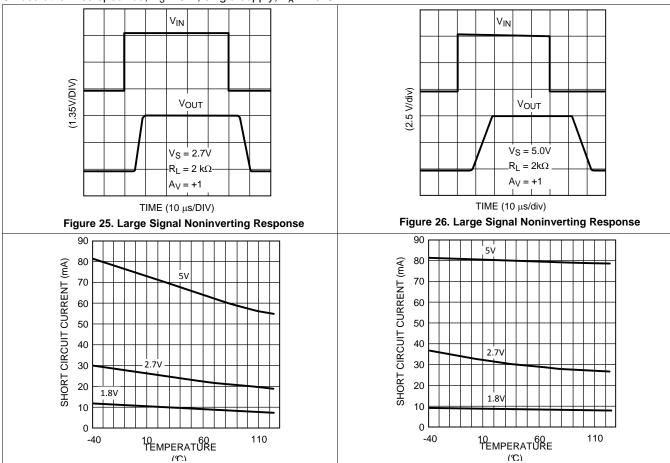


Figure 28. Short Circuit Current vs Temperature (Sourcing)




7 Detailed Description

7.1 Overview

The LMV93x-N are low-voltage, low-power operational amplifiers (op-amp) operating from 1.8-V to 5.5-V supply voltages and have rail-to-rail input and output. LMV93x-N input common-mode voltage extends 200 mV beyond the supplies which enables user enhanced functionality beyond the supply voltage range.

7.2 Functional Block Diagram



(Each Amplifier)

7.3 Feature Description

The differential inputs of the amplifier consist of a noninverting input (+IN) and an inverting input (-IN). The amplifier amplifies only the difference in voltage between the two inputs, which is called the differential input voltage. The output voltage of the op-amp V_{OUT} is given by Equation 1:

$$V_{OUT} = A_{OL} (IN^+ - IN^-)$$

where

A_{OI} is the open-loop gain of the amplifier, typically around 100 dB (100,000x, or 10 μV per volt).

7.4 Device Functional Modes

7.4.1 Input and Output Stage

The rail-to-rail input stage of this family provides more flexibility for the designer. The LMV93x-N use a complimentary PNP and NPN input stage in which the PNP stage senses common-mode voltage near V⁻ and the NPN stage senses common-mode voltage near V⁺. The transition from the PNP stage to NPN stage occurs 1 V below V⁺. Because both input stages have their own offset voltage, the offset of the amplifier becomes a function of the input common-mode voltage and has a crossover point at 1 V below V⁺.



Device Functional Modes (continued)

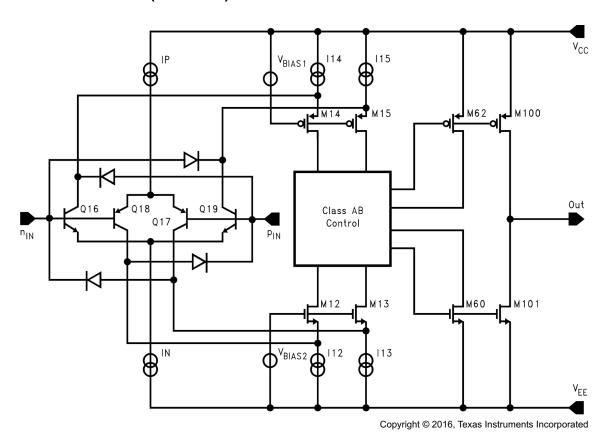


Figure 29. Simplified Schematic Diagram

This V_{OS} crossover point can create problems for both DC- and AC-coupled signals if proper care is not taken. Large input signals that include the V_{OS} crossover point will cause distortion in the output signal. One way to avoid such distortion is to keep the signal away from the crossover. For example, in a unity gain buffer configuration with $V_S = 5$ V, a 5-V peak-to-peak signal will contain input-crossover distortion while a 3-V peak-to-peak signal centered at 1.5 V will not contain input-crossover distortion as it avoids the crossover point. Another way to avoid large signal distortion is to use a gain of -1 circuit which avoids any voltage excursions at the input terminals of the amplifier. In that circuit, the common-mode DC voltage can be set at a level away from the V_{OS} cross-over point. For small signals, this transition in V_{OS} shows up as a V_{CM} dependent spurious signal in series with the input signal and can effectively degrade small signal parameters such as gain and common-mode rejection ratio. To resolve this problem, the small signal should be placed such that it avoids the V_{OS} crossover point. In addition to the rail-to-rail performance, the output stage can provide enough output current to drive 600- V_{OS} loads. Because of the high-current capability, take care not to exceed the 150°C maximum junction temperature specification.

7.4.2 Input Bias Current Consideration

The LMV93x-N family has a complementary bipolar input stage. The typical input bias current (I_B) is 15 nA. The input bias current can develop a significant offset voltage. This offset is primarily due to I_B flowing through the negative feedback resistor, R_F . For example, if I_B is 50 nA and R_F is 100 k Ω , then an offset voltage of 5 mV will develop ($V_{OS} = I_B \times R_F$). Using a compensation resistor (R_C), as shown in Figure 30, cancels this effect. But the input offset current (I_{OS}) will still contribute to an offset voltage in the same manner.

Device Functional Modes (continued)

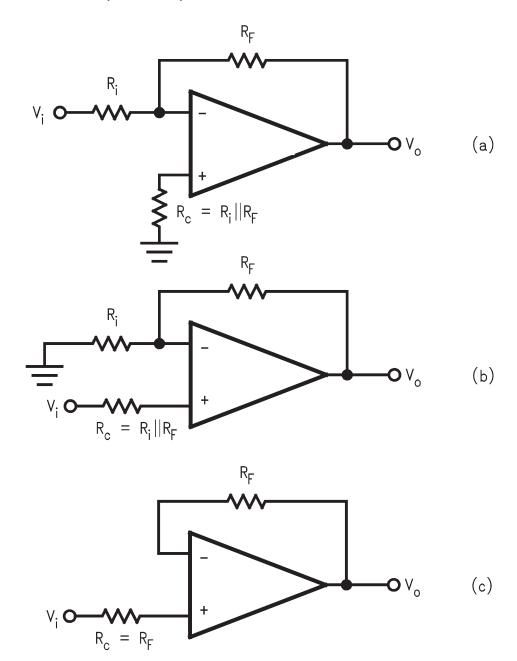


Figure 30. Canceling the Offset Voltage due to Input Bias Current



8 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The LMV93x-N devices bring performance, economy and ease-of-use to low-voltage, low-power systems. They provide rail-to-rail input and rail-to-rail output swings into heavy loads.

8.2 Typical Applications

8.2.1 High-Side Current-Sensing Application




Figure 31. High-Side Current Sensing

8.2.1.1 Design Requirements

The high-side current-sensing circuit (Figure 31) is commonly used in a battery charger to monitor charging current to prevent overcharging. A sense resistor R_{SENSE} is connected to the battery directly. This system requires an op amp with rail-to-rail input. The LMV93x-N are ideal for this application because its common-mode input range extends up to the positive supply.

8.2.1.1.1 Custom Design With WEBENCH® Tools

Click here to create a custom design using the LMV93x-N device with the WEBENCH® Power Designer.

- 1. Start by entering the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}) requirements.
- 2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
- 3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- · Export customized schematic and layout into popular CAD formats
- Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at www.ti.com/WEBENCH.



8.2.1.2 Detailed Design Procedure

As seen in Figure 31, the I_{CHARGE} current flowing through sense resistor R_{SENSE} develops a voltage drop equal to V_{SENSE} . The voltage at the negative sense point will now be less than the positive sense point by an amount proportional to the V_{SENSE} voltage.

The low-bias currents of the LMV93x cause little voltage drop through R_2 , so the negative input of the LMV93x amplifier is at essentially the same potential as the negative sense input.

The LMV93x will detect this voltage error between its inputs and servo the transistor base to conduct more current through Q1, increasing the voltage drop across R_1 until the LMV93x inverting input matches the noninverting input. At this point, the voltage drop across R_1 now matches V_{SENSE} .

I_G, a current proportional to I_{CHARGE}, will flow according to the following relation:

$$I_{G} = V_{RSENSE} / R_{1} = (R_{SENSE} * I_{CHARGE}) / R_{1}$$

$$(2)$$

I_G also flows through the gain resistor R₃ developing a voltage drop equal to:

$$V_{3} = I_{G} * R_{3} = (V_{RSENSE} / R_{1}) * R_{3} = ((R_{SENSE} * I_{CHARGE}) / R_{2}) * R_{3}$$
(3)




$$V_{OUT} = (R_{SENSE} * I_{CHARGE}) * G$$
 where
$$\bullet \quad G = R_3 / R_1$$
 (4)

The other channel of the LMV93x may be used to buffer the voltage across R3 to drive the following stages.

8.2.1.3 Application Curve

Figure 32 shows the results of the example current sense circuit.



NOTE: the error after 4 V where transistor Q1 runs out of headroom and saturates, limiting the upper output swing.

Figure 32. Current Sense Amplifier Results

8.2.2 Half-Wave Rectifier Applications

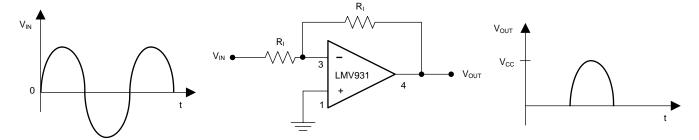


Figure 33. Half-Wave Rectifier With Rail-To-Ground Output Swing Referenced to Ground

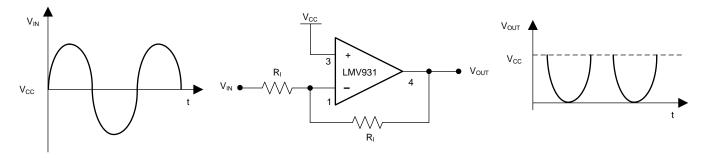


Figure 34. Half-Wave Rectifier With Negative-Going Output Referenced to V_{CC}




8.2.2.1 Design Requirements

Because the LMV931-N, LMV932-N, LMV934-N input common-mode range includes both positive and negative supply rails and the output can also swing to either supply, achieving half-wave rectifier functions in either direction is an easy task. All that is needed are two external resistors; there is no need for diodes or matched resistors. The half-wave rectifier can have either positive or negative going outputs, depending on the way the circuit is arranged.

8.2.2.2 Detailed Design Procedure

In Figure 33 the circuit is referenced to ground, while in Figure 34 the circuit is biased to the positive supply. These configurations implement the half-wave rectifier because the LMV93x-N can not respond to one-half of the incoming waveform. It can not respond to one-half of the incoming because the amplifier cannot swing the output beyond either rail therefore the output disengages during this half cycle. During the other half cycle, however, the amplifier achieves a half wave that can have a peak equal to the total supply voltage. R_I should be large enough not to load the LMV93x-N.

8.2.2.3 Application Curve






Figure 35. Output of Ground-to-Rail Circuit

Figure 36. Output of Rail-to-Ground Circuit

8.2.3 Instrumentation Amplifier With Rail-to-Rail Input and Output Application

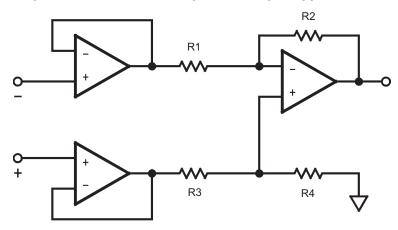


Figure 37. Rail-to-Rail Instrumentation Amplifier

8.2.3.1 Design Requirements

Using three of the LMV93x-N amplifiers, an instrumentation amplifier with rail-to-rail inputs and outputs can be made as shown in Figure 37.

8.2.3.2 Detailed Design Procedure

In this example, amplifiers on the left side act as buffers to the differential stage. These buffers assure that the input impedance is very high. They also assure that the difference amp is driven from a voltage source. This is necessary to maintain the CMRR set by the matching R_1 - R_2 with R_3 - R_4 . The gain is set by the ratio of R_2/R_1 and R_3 should equal R_1 and R_4 equal R_2 . With both rail-to-rail input and output ranges, the input and output are only limited by the supply voltages. Remember that even with rail-to-rail outputs, the output can not swing past the supplies so the combined common-mode voltages plus the signal should not be greater that the supplies or limiting will occur.



8.2.3.3 Application Curve

Figure 38 shows the results of the instrumentation amplifier with R_1 and R_3 = 1 K, and R_2 and R_4 = 100 k Ω , for a gain of 100, running on a single 5-V supply with a input of $V_{CM} = V_S/2$. The combined effects of the individual offset voltages can be seen as a shift in the offset of the curve.




Figure 38. Instrumentation Amplifier Output Results

8.3 Dos and Don'ts

Do properly bypass the power supplies.

Do add series resistence to the output when driving capacitive loads, particularly cables, Muxes and ADC inputs.

Do add series current limiting resistors and external schottky clamp diodes if input voltage is expected to exceed the supplies. Limit the current to 1 mA or less (1 $k\Omega$ per volt).

9 Power Supply Recommendations

For proper operation, the power supplies must be properly decoupled. For decoupling the supply lines, TI recommends that 10-nF capacitors be placed as close as possible to the op amp power supply pins. For single-supply, place a capacitor between V^+ and V^- supply leads. For dual supplies, place one capacitor between V^+ and ground, and one capacitor between V^- and ground.



10 Layout

10.1 Layout Guidelines

The V⁺ pin must be bypassed to ground with a low-ESR capacitor.

The optimum placement is closest to the V⁺ and ground pins.

Take care to minimize the loop area formed by the bypass capacitor connection between V⁺ and ground.

The ground pin must be connected to the PCB ground plane at the pin of the device.

The feedback components should be placed as close as possible to the device minimizing strays.

10.2 Layout Example




Figure 39. SOT-23 Layout Example



11 Device and Documentation Support

11.1 Device Support

11.1.1 Custom Design With WEBENCH® Tools

Click here to create a custom design using the LMV93x-N device with the WEBENCH® Power Designer.

- 1. Start by entering the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}) requirements.
- 2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
- 3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- Export customized schematic and layout into popular CAD formats
- · Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at www.ti.com/WEBENCH.

11.1.2 Development Support

LMV931 PSPICE Model (also applicable to the LMV932 and LMV934), http://www.ti.com/lit/zip/snom028

TINA-TI SPICE-Based Analog Simulation Program, http://www.ti.com/tool/tina-ti

DIP Adapter Evaluation Module, http://www.ti.com/tool/dip-adapter-evm

TI Universal Operational Amplifier Evaluation Module, http://www.ti.com/tool/opampevm

TI Filterpro Software, http://www.ti.com/tool/filterpro

11.2 Documentation Support

11.2.1 Related Documentation

For additional applications, see

AN-31 Op Amp Circuit Collection

11.3 Related Links

Table 1 lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to order now.

Table 1. Related Links

PARTS	PRODUCT FOLDER	ORDER NOW	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
LMV931-N	Click here	Click here	Click here	Click here	Click here
LMV932-N	Click here	Click here	Click here	Click here	Click here
LMV934-N	Click here	Click here	Click here	Click here	Click here

11.4 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.



11.5 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support TI's Design Support Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.6 Trademarks

E2E is a trademark of Texas Instruments. WEBENCH is a registered trademark of Texas Instruments. All other trademarks are the property of their respective owners.

11.7 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

11.8 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
LMV931MF/NOPB	Active	Production	SOT-23 (DBV) 5	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A79A
LMV931MF/NOPB.A	Active	Production	SOT-23 (DBV) 5	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A79A
LMV931MFX/NOPB	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A79A
LMV931MFX/NOPB.A	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A79A
LMV931MG/NOPB	Active	Production	SC70 (DCK) 5	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A74
LMV931MG/NOPB.A	Active	Production	SC70 (DCK) 5	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A74
LMV931MGX/NOPB	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A74
LMV931MGX/NOPB.A	Active	Production	SC70 (DCK) 5	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A74
LMV932MA/NOPB	Active	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV9 32MA
LMV932MA/NOPB.A	Active	Production	SOIC (D) 8	95 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV9 32MA
LMV932MAX/NOPB	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV9 32MA
LMV932MAX/NOPB.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV9 32MA
LMV932MM/NOPB	Active	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	NIPDAUAG SN	Level-1-260C-UNLIM	-40 to 125	A86A
LMV932MM/NOPB.A	Active	Production	VSSOP (DGK) 8	1000 SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A86A
LMV932MMX/NOPB	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	NIPDAUAG SN	Level-1-260C-UNLIM	-40 to 125	A86A
LMV932MMX/NOPB.A	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	A86A
LMV932MMX/NOPB.B	Active	Production	VSSOP (DGK) 8	3500 LARGE T&R	-	Call TI	Call TI	-40 to 125	
LMV934MA/NOPB	Active	Production	SOIC (D) 14	55 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV934MA
LMV934MA/NOPB.A	Active	Production	SOIC (D) 14	55 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV934MA
LMV934MAX/NOPB	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV934MA
LMV934MAX/NOPB.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LMV934MA
LMV934MT/NOPB	Active	Production	TSSOP (PW) 14	94 TUBE	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 125	LMV93 4MT
LMV934MT/NOPB.A	Active	Production	TSSOP (PW) 14	94 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LMV93 4MT
LMV934MT/NOPBG4	Active	Production	TSSOP (PW) 14	94 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LMV93 4MT

10-Nov-2025

4MT

www.ti.com

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
LMV934MT/NOPBG4.A	Active	Production	TSSOP (PW) 14	94 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LMV93
			` , '	·					4MT
LMV934MTX/NOPB	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 125	LMV93
			\	·		·			4MT
LMV934MTX/NOPB.A	Active	Production	TSSOP (PW) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LMV93

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LMV931-N, LMV932-N, LMV934-N:

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

• Automotive : LMV931-N-Q1, LMV932-N-Q1, LMV934-N-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects



www.ti.com 5-Sep-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMV931MF/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV931MF/NOPB	SOT-23	DBV	5	1000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV931MFX/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV931MG/NOPB	SC70	DCK	5	1000	178.0	8.4	2.25	2.45	1.2	4.0	8.0	Q3
LMV931MGX/NOPB	SC70	DCK	5	3000	178.0	8.4	2.25	2.45	1.2	4.0	8.0	Q3
LMV932MAX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMV932MM/NOPB	VSSOP	DGK	8	1000	177.8	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMV932MMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMV934MAX/NOPB	SOIC	D	14	2500	330.0	16.4	6.5	9.35	2.3	8.0	16.0	Q1
LMV934MTX/NOPB	TSSOP	PW	14	2500	330.0	12.4	6.95	5.6	1.6	8.0	12.0	Q1



www.ti.com 5-Sep-2025



*All dimensions are nominal

7 til dilliciololio die Hollina							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMV931MF/NOPB	SOT-23	DBV	5	1000	208.0	191.0	35.0
LMV931MF/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV931MFX/NOPB	SOT-23	DBV	5	3000	208.0	191.0	35.0
LMV931MG/NOPB	SC70	DCK	5	1000	208.0	191.0	35.0
LMV931MGX/NOPB	SC70	DCK	5	3000	208.0	191.0	35.0
LMV932MAX/NOPB	SOIC	D	8	2500	367.0	367.0	35.0
LMV932MM/NOPB	VSSOP	DGK	8	1000	208.0	191.0	35.0
LMV932MMX/NOPB	VSSOP	DGK	8	3500	367.0	367.0	35.0
LMV934MAX/NOPB	SOIC	D	14	2500	367.0	367.0	35.0
LMV934MTX/NOPB	TSSOP	PW	14	2500	367.0	367.0	35.0

PACKAGE MATERIALS INFORMATION

www.ti.com 5-Sep-2025

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
LMV932MA/NOPB	D	SOIC	8	95	495	8	4064	3.05
LMV932MA/NOPB.A	D	SOIC	8	95	495	8	4064	3.05
LMV934MA/NOPB	D	SOIC	14	55	495	8	4064	3.05
LMV934MA/NOPB.A	D	SOIC	14	55	495	8	4064	3.05
LMV934MT/NOPB	PW	TSSOP	14	94	530	10.2	3600	3.5
LMV934MT/NOPB	PW	TSSOP	14	94	495	8	2514.6	4.06
LMV934MT/NOPB.A	PW	TSSOP	14	94	495	8	2514.6	4.06
LMV934MT/NOPB.A	PW	TSSOP	14	94	530	10.2	3600	3.5
LMV934MT/NOPBG4	PW	TSSOP	14	94	530	10.2	3600	3.5
LMV934MT/NOPBG4.A	PW	TSSOP	14	94	530	10.2	3600	3.5



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
- 5. Reference JEDEC registration MS-012, variation AB.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT




NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE TRANSISTOR

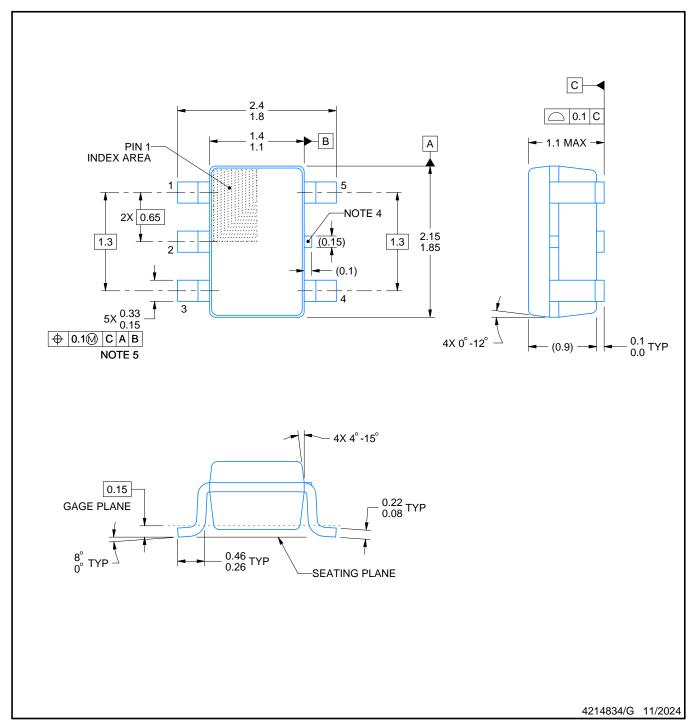

NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
 3. Reference JEDEC MO-203.

- 4. Support pin may differ or may not be present.5. Lead width does not comply with JEDEC.
- 6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side





NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





- 9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 10. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE INTEGRATED CIRCUIT



- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
 3. Reference JEDEC MO-178.

- 4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
- 5. Support pin may differ or may not be present.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.





- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.





- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025