













OPA317, OPA2317, OPA4317

SBOS682B - MAY 2013-REVISED JUNE 2016

OPAx317 Zerø-Drift, Low-Offset, Rail-to-Rail I/O Operational Amplifier Precision Catalog

1 Features

Supply Voltage: 1.8 V to 5.5 V

microPackages:

Single: SOT23-5, SC-70, SOIC-8

Dual: VSSOP-8, SOIC-8Quad: SOIC-14, TSSOP-14

Low Offset Voltage: 20 μV (Typical)
 CMRR: 108-dB (Typical) PSRR

Quiescent Current: 35 μA (Maximum)

Gain Bandwidth: 300 kHz
Rail-to-Rail Input and Output
Internal EMI and RFI Filtering

2 Applications

- · Battery-Powered Instruments
- · Temperature Measurements
- Transducer Applications
- Electronic Scales
- Medical Instrumentation
- Handheld Test Equipment
- Current Sense

3 Description

The OPA317 series of CMOS operational amplifiers offer precision performance at a very competitive price. These devices are members of the Zerø-Drift family of amplifiers that use a proprietary autocalibration technique to simultaneously provide low offset voltage (90 μV maximum) and near-zero drift over time and temperature at only 35 μA (maximum) of quiescent current.

The OPA317 family features rail-to-rail input and output in addition to near flat 1/f noise, making this amplifier ideal for many applications, and much easier to design into a system. These devices are optimized for low-voltage operation as low as 1.8 V (±0.9 V) and up to 5.5 V (±2.75 V).


The OPA317 (single version) is available in the SC70-5, SOT23-5, and SOIC-8 packages. The OPA2317 (dual version) is offered in the VSSOP-8 and SOIC-8 packages. The OPA4317 is offered in the standard SOIC-14 and TSSOP-14 packages. All versions are specified for operation from -40°C to +125°C.

Device Information⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|------------|-------------------|
| | SOIC (8) | 3.91 mm × 4.90 mm |
| OPA317 | SOT-23 (5) | 1.60 mm × 2.90 mm |
| | SC70 (5) | 1.25 mm × 2.00 mm |
| OPA2317 | SOIC (8) | 3.91 mm × 4.90 mm |
| UPA2317 | VSSOP (8) | 3.00 mm × 3.00 mm |
| ODA 4047 | SOIC (14) | 3.91 mm × 8.65 mm |
| OPA4317 | TSSOP (14) | 4.40 mm × 5.00 mm |

⁽¹⁾ For all available packages, see the orderable addendum at the end of the data sheet.

Distribution of Offset Voltage





| Т | al | ٦l | e (| n | F (| C. | n | n | tو | 'n | te |
|---|----|----|-----|---|-----|----|---|---|----|-----|----|
| | ш | | _ | _ | | • | _ | | | , , | |

| 1 | Features 1 | | 8.4 Device Functional Modes | 14 |
|---|---|----|---|------|
| 2 | Applications 1 | 9 | Application and Implementation | 18 |
| 3 | Description 1 | | 9.1 Application Information | 1 |
| 4 | Revision History2 | | 9.2 Typical Applications | 16 |
| 5 | Pin Configuration and Functions3 | | 9.3 System Example | 18 |
| 6 | Specifications5 | 10 | Power Supply Recommendations | 18 |
| • | 6.1 Absolute Maximum Ratings 5 | 11 | Layout | 19 |
| | 6.2 ESD Ratings | | 11.1 Layout Guidelines | 19 |
| | 6.3 Recommended Operating Conditions 5 | | 11.2 Layout Example | 19 |
| | 6.4 Thermal Information: OPA3176 | 12 | Device and Documentation Support | 20 |
| | 6.5 Thermal Information: OPA2317 6 | | 12.1 Documentation Support | 20 |
| | 6.6 Thermal Information: OPA43176 | | 12.2 Receiving Notification of Documentation Update | es 2 |
| | 6.7 Electrical Characteristics: V _S = 1.8 V to 5.5 V | | 12.3 Related Links | 20 |
| | 6.8 Typical Characteristics8 | | 12.4 Community Resources | 20 |
| 7 | Parameter Measurement Information 11 | | 12.5 Trademarks | 20 |
| 8 | Detailed Description 12 | | 12.6 Electrostatic Discharge Caution | 20 |
| · | 8.1 Overview | | 12.7 Glossary | 20 |
| | 8.2 Functional Block Diagram | 13 | Mechanical, Packaging, and Orderable Information | 2 |
| | • | | | |

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (June 2013) to Revision B

Page

Added ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and Mechanical, Packaging, and Orderable Information section.
 Deleted Ordering Information table; see POA at the end of the data sheet.

Changes from Original (May 2013) to Revision A

Page


| • | Deleted PSRR Features bullet | |
|---|---|-----|
| • | Changed Quiescent Current Features bullet | . • |
| • | Changed second sentence in <i>Description</i> section | |
| • | Changed PSRR maximum value | |

Submit Documentation Feedback




5 Pin Configuration and Functions

OPA317: DBV Package 5-Pin SOT-23 Top View




OPA317: DCK Package 5-Pin SC70 Top View




Pin Functions (5-Pin Packages)

| | PIN | | 1/0 | DESCRIPTION | |
|------|--------|------|-----|---------------------------------|--|
| NAME | SOT-23 | SC70 | I/O | DESCRIPTION | |
| +IN | 3 | 1 | 1 | Noninverting input | |
| -IN | 4 | 3 | I | Inverting input | |
| OUT | 1 | 4 | 0 | Output | |
| V+ | 5 | 5 | _ | Positive (highest) power supply | |
| V- | 2 | 2 | _ | Negative (lowest) power supply | |

OPA317: D Package 8-Pin SOIC Top View



OPA2317: D and DGK Packages 8-Pin SOIC and VSSOP Top View



(1) NC - No internal connection

Pin Functions (8-Pin Packages)

| | PIN | | | | |
|-------|----------------|------------------------------|-----|---------------------------------|--|
| NAME | OPA317 SOIC | OPA2317 SOIC and VSSOP | I/O | DESCRIPTION | |
| +IN | 3 | _ | I | Noninverting input | |
| -IN | 2 | _ | I | Inverting input | |
| +IN A | _ | 3 | I | Noninverting input, channel A | |
| –IN A | _ | 2 | I | Inverting input, channel A | |
| +IN B | _ | 5 | I | Noninverting input, channel B | |
| –IN B | _ | 6 | I | Inverting input, channel B | |
| | 1 | | | | |
| NC | 5 | _ | _ | No internal connection | |
| | 8 | | | | |
| OUT | 6 | _ | 0 | Output | |
| OUT A | _ | 1 | 0 | Output, channel A | |
| OUT B | _ | 7 | 0 | Output, channel B | |
| V+ | 7 | 8 | _ | Positive (highest) power supply | |
| V- | 4 | 4 | _ | Negative (lowest) power supply | |

Copyright © 2013–2016, Texas Instruments Incorporated


Submit Documentation Feedback



14-Pin SOIC Top View 0 OUT A OUT D 14 -IN D -IN A 2 13 12 +IN A 3 +IN D V-V+ 4 +IN B 10 +IN C 5 -IN B 6 9 -IN C OUT B 7 8 OUT C

OPA4317: D Package

OPA4317: SW Package 14-Pin TSSOP Top View



Pin Functions (14-Pin Packages)

| | PIN | | DESCRIPTION . | | |
|-------|-------------|-----|---------------------------------|--|--|
| NAME | SOIC, TSSOP | I/O | DESCRIPTION | | |
| +IN A | 3 | I | Noninverting input, channel A | | |
| −IN A | 2 | I | Inverting input, channel A | | |
| +IN B | 5 | I | Noninverting input, channel B | | |
| −IN B | 6 | I | Inverting input, channel B | | |
| +IN C | 10 | I | Noninverting input, channel C | | |
| –IN C | 9 | 1 | Inverting input, channel C | | |
| +IN D | 12 | I | Noninverting input, channel D | | |
| –IN D | 13 | I | Inverting input, channel D | | |
| OUT A | 1 | 0 | Output, channel A | | |
| OUT B | 7 | 0 | Output, channel B | | |
| OUT C | 8 | 0 | Output, channel C | | |
| OUT D | 14 | 0 | Output, channel D | | |
| V+ | 4 | _ | Positive (highest) power supply | | |
| V- | 11 | _ | Negative (lowest) power supply | | |



6 Specifications

6.1 Absolute Maximum Ratings

Over operating free-air temperature range, unless otherwise noted. (1)

| | | MIN | MAX | UNIT |
|---------------------|-------------------------------------|------------|------------|------|
| $V_S = (V+) - (V-)$ | Supply voltage | | 7 | V |
| | Signal input terminals (2) | (V-) - 0.3 | (V+) + 0.3 | V |
| | Signal input terminals (2) | -10 | 10 | mA |
| | Output short circuit ⁽³⁾ | Conti | nuous | |
| T _A | Operating temperature | -40 | 150 | °C |
| T _J | Junction temperature | | 150 | °C |
| T _{stg} | Storage temperature | -65 | 150 | °C |

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

| | | | VALUE | UNIT |
|--------------------|-------------------------|---|-------|------|
| | | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±4000 | |
| V _(ESD) | Electrostatic discharge | Charged-device model (CDM), per JEDEC specification JESD22-C101 (2) | ±1000 | V |
| | | Machine model (MM) | ±400 | |

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted).

| | | MIN | MAX | UNIT |
|----------------|-----------------------|------------|-------------|------|
| (V+ - V-) | Supply voltage | 1.8 (±0.9) | 5.5 (±2.25) | V |
| T _A | Specified temperature | -40 | 125 | °C |

Copyright © 2013–2016, Texas Instruments Incorporated

⁽²⁾ Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.3 V beyond the supply rails must be current-limited to 10 mA or less.

⁽³⁾ Short-circuit to ground, one amplifier per package.

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



6.4 Thermal Information: OPA317

| THERMAL METRIC ⁽¹⁾ | | | | | |
|-------------------------------|--|----------|--------------|------------|------|
| | | D (SOIC) | DBV (SOT-23) | DCK (SC70) | UNIT |
| | | 8 PINS | 5 PINS | 5 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 140.1 | 220.8 | 298.4 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 89.8 | 97.5 | 65.4 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 80.6 | 61.7 | 97.1 | °C/W |
| ΨЈТ | Junction-to-top characterization parameter | 28.7 | 7.6 | 0.8 | °C/W |
| ΨЈВ | Junction-to-board characterization parameter | 80.1 | 61.1 | 95.5 | °C/W |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | _ | _ | _ | °C/W |

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

6.5 Thermal Information: OPA2317

| | | OP. | | |
|----------------------|--|----------|-------------|------|
| | THERMAL METRIC ⁽¹⁾ | D (SOIC) | DGK (VSSOP) | UNIT |
| | | 8 PINS | 8 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 124 | 180.3 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 73.7 | 48.1 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 64.4 | 100.9 | °C/W |
| ΨЈТ | Junction-to-top characterization parameter | 18 | 2.4 | °C/W |
| ΨЈВ | Junction-to-board characterization parameter | 63.9 | 99.3 | °C/W |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | _ | _ | °C/W |

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

6.6 Thermal Information: OPA4317

| | | OP | OPA4317 | | | | | |
|----------------------|--|----------|------------|------|--|--|--|--|
| | THERMAL METRIC ⁽¹⁾ | D (SOIC) | PW (TSSOP) | UNIT | | | | |
| | | 14 PINS | 14 PINS | | | | | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 83.8 | 120.8 | °C/W | | | | |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 70.7 | 34.3 | °C/W | | | | |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 59.5 | 62.8 | °C/W | | | | |
| ΨЈТ | Junction-to-top characterization parameter | 11.6 | 1 | °C/W | | | | |
| ΨЈВ | Junction-to-board characterization parameter | 37.7 | 56.5 | °C/W | | | | |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | _ | _ | °C/W | | | | |

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

Submit Documentation Feedback

Copyright © 2013–2016, Texas Instruments Incorporated



6.7 Electrical Characteristics: $V_s = 1.8 \text{ V}$ to 5.5 V

At $T_A = 25$ °C, $R_L = 10~k\Omega$ connected to midsupply, $V_{CM} = V_{OUT} =$ midsupply, unless otherwise noted.


| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|----------------------|--------------------------------------|--|-----------------|-------------------|------------|--------------------|--|
| OFFSET \ | VOLTAGE | | | | | | |
| V | Input offset voltage | V _S = 5 V | | 20 | ±90 | \/ | |
| Vos | Input offset voltage | $T_A = -40$ °C to +125°C, $V_S = 5$ V | | . | ±100 | μV | |
| dV _{OS} /dT | Input offset voltage vs temperature | $T_A = -40$ °C to +125°C | | 0.05 | | μV/°C | |
| PSRR | Input offset voltage vs power supply | $T_A = -40$ °C to +125°C, $V_S = 1.8$ V to 5.5 V | | 1 | 10 | μV/V | |
| | Long-term stability ⁽¹⁾ | | | See (1) | | | |
| | Channel separation, DC | | | 5 | | μV/V | |
| INPUT BI | AS CURRENT | | | · | | | |
| | | | | ±275 | | | |
| I _B | Input bias current | OPA4317 | | ±155 | | pA | |
| | | $T_A = -40$ °C to +125°C | | ±300 | | | |
| | | | | ±400 | | _ | |
| los | Input offset current | OPA4317 | | ±140 | | pA | |
| NOISE | | 1 | | | | | |
| e _n | Input voltage noise density | f = 1 kHz | | 55 | | nV/√ Hz | |
| | | f = 0.01 Hz to 1 Hz | | 0.3 | | | |
| | Input voltage noise | f = 0.1 Hz to 10 Hz | | 1.1 | | μV_{PP} | |
| i _n | Input current noise | f = 10 Hz | | 100 | | fA/√ Hz | |
| | DLTAGE RANGE | | | , | | | |
| V _{CM} | Common-mode voltage | | (V-) - 0.1 | | (V+) + 0.1 | V | |
| OW | | $T_A = -40$ °C to +125°C (V-) - 0.1 V < V _{CM} < (V+) + 0.1 V | 95 | 95 108 | | | |
| CMRR | Common-mode rejection ratio | OPA4317 T _A = -40°C to +125°C (V-) - 0.1 V < V _{CM} < (V+) + 0.1 V, V _S = 5.5 V | 95 | 108 | | dB | |
| INPUT CA | APACITANCE | | | · | | | |
| | Differential | | | 2 | | pF | |
| | Common-mode | | | 4 | | pF | |
| OPEN-LO | OP GAIN | | | · | , | | |
| A _{OL} | Open-loop voltage gain | $T_A = -40$ °C to +125°C, $R_L = 10 \text{ k}\Omega$ (V-) + 100 mV < V _O < (V+) - 100 mV | 100 | 110 | | dB | |
| FREQUE | NCY RESPONSE | | | | <u>.</u> | | |
| GBW | Gain-bandwidth product | C _L = 100 pF | | 300 | | kHz | |
| SR | Slew rate | G = 1 | | 0.15 | | V/μs | |
| OUTPUT | | | | · | , | | |
| | Voltage output swing from rail | $T_A = -40$ °C to +125°C | | 30 | 100 | mV | |
| I _{sc} | Short-circuit current | | | ±5 | | mA | |
| C _L | Capacitive load drive | | See the Typical | Characteristics s | ection | | |
| | Open-loop output impedance | f = 350 kHz, I _O = 0 | | 2 | | kΩ | |
| POWER S | SUPPLY | | | | I | | |
| Vs | Specified voltage | | 1.8 | | 5.5 | V | |
| | | $T_A = -40$ °C to +125°C, $I_O = 0$ | | 21 | | μА | |
| ΙQ | Quiescent current per amplifier | 1A = -40 C to +125 C, 10 = 0 | | Z I | 35 | μΛ | |

^{(1) 300-}hour life test at 150°C demonstrated randomly distributed variation of approximately 1 μ V.

TEXAS INSTRUMENTS

6.8 Typical Characteristics


At $T_A = 25^{\circ}C$, $C_L = 0$ pF, $R_L = 10$ k Ω connected to midsupply, $V_{CM} = V_{OUT} =$ midsupply, unless otherwise noted.

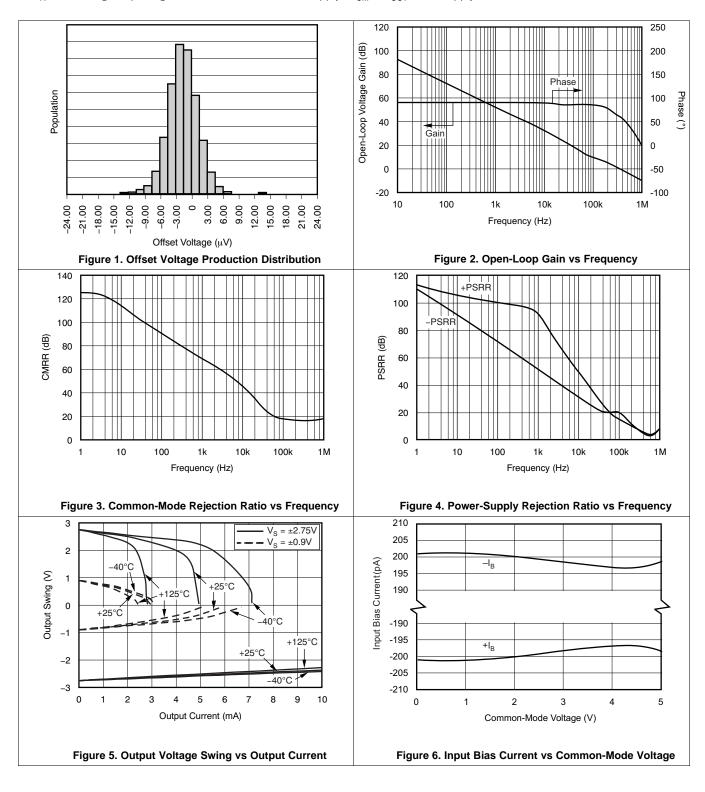




Typical Characteristics (continued)


At $T_A = 25^{\circ}C$, $C_L = 0$ pF, $R_L = 10$ k Ω connected to midsupply, $V_{CM} = V_{OUT} =$ midsupply, unless otherwise noted.

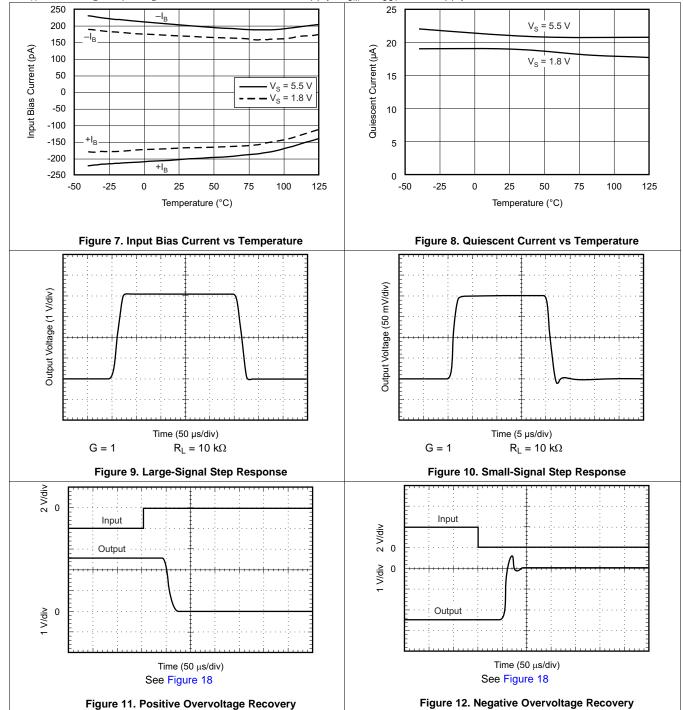

TEXAS INSTRUMENTS

Typical Characteristics (continued)



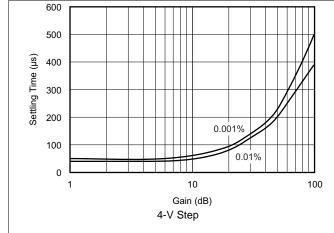

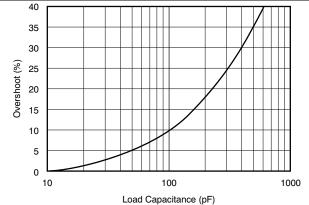
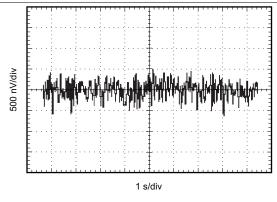


Figure 13. Settling Time vs Closed-Loop Gain

Figure 14. Small-Signal Overshoot vs Load Capacitance



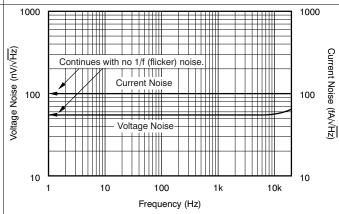


Figure 15. 0.1-Hz to 10-Hz Noise

Figure 16. Current and Voltage Noise Spectral Density vs Frequency

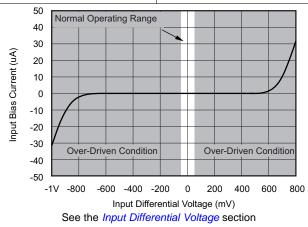


Figure 17. Input Bias Current vs

Input Differential Voltage

Submit Documentation Feedback



7 Parameter Measurement Information

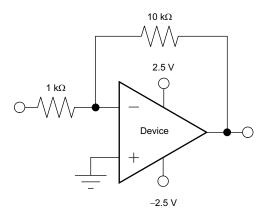


Figure 18. Overvoltage Recovery Circuit




8 Detailed Description

8.1 Overview

The OPAx317 series is a family of low-power, rail-to-rail input and output operational amplifiers. These devices operate from 1.8 V to 5.5 V, are unity-gain stable, and are suitable for a wide range of general-purpose applications. The class AB output stage is capable of driving \leq 10-k Ω loads connected to any point between V+ and ground. The input common-mode voltage range includes both rails and allows the OPA317 series to be used in virtually any single-supply application. Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications, and makes them ideal for driving sampling analog-to-digital converters (ADCs).

8.2 Functional Block Diagram

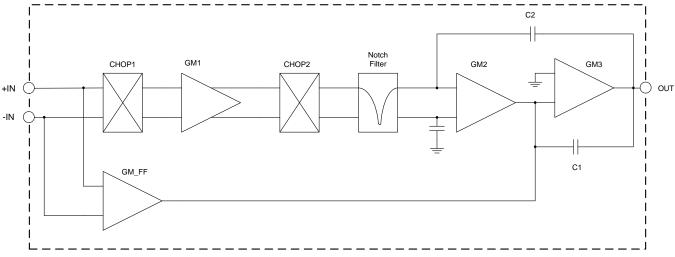

Copyright © 2016, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Operating Voltage

The OPA317 series of operational amplifiers can be used with single or dual supplies from an operating range of $V_S = 1.8 \text{ V } (\pm 0.9 \text{ V})$ up to 5.5 V ($\pm 2.75 \text{ V}$).

CAUTION

Supply voltages greater than 7 V can permanently damage the device.

See the *Absolute Maximum Ratings* table. Key parameters that vary over the supply voltage or temperature range are shown in the *Typical Characteristics* section.

Submit Documentation Feedback




Feature Description (continued)

8.3.2 Input Voltage

The OPA317, OPA2317, and OPA4317 input common-mode voltage range extends 0.1 V beyond the supply rails. The OPA317 device is designed to cover the full range without the troublesome transition region found in some other rail-to-rail amplifiers.

Typically, input bias current is about 200 pA; however, input voltages exceeding the power supplies can cause excessive current to flow into or out of the input pins. Momentary voltages greater than the power supply can be tolerated if the input current is limited to 10 mA. This limitation is easily accomplished with an input resistor, as shown in Figure 19.



NOTE: Current limiting resistor required if input voltage exceeds supply rails by ≥ 0.3 V.

Figure 19. Input Current Protection

8.3.3 Input Differential Voltage

The typical input bias current of the OPA317 during normal operation is approximately 200 pA. In overdriven conditions, the bias current can increase significantly (see Figure 17). The most common cause of an overdriven condition occurs when the operational amplifier is outside of the linear range of operation. When the output of the operational amplifier is driven to one of the supply rails, the feedback loop requirements cannot be satisfied, and a differential input voltage develops across the input pins. This differential input voltage results in activation of parasitic diodes inside the front-end input chopping switches that combine with $10-k\Omega$ electromagnetic interference (EMI) filter resistors to create the equivalent circuit shown in Figure 20.

NOTE

The input bias current remains within specification within the linear region.




Figure 20. Equivalent Input Circuit

8.3.4 Internal Offset Correction

The OPA317, OPA2317, and OPA4317 operational amplifiers use an auto-calibration technique with a timecontinuous, 125-kHz operational amplifier in the signal path. This amplifier is zero-corrected every 8 μs using a proprietary technique. Upon power up, the amplifier requires approximately 100 μs to achieve specified V_{OS} accuracy. This design has no aliasing or flicker noise.

8.3.5 EMI Susceptibility and Input Filtering

Operational amplifiers vary in susceptibility to EMI. If conducted EMI enters the operational amplifier, the DC offset observed at the amplifier output may shift from its nominal value while the EMI is present. This shift is a result of signal rectification associated with the internal semiconductor junctions. While all operational amplifier pin functions can be affected by EMI, the input pins are likely to be the most susceptible. The OPA317 operational amplifier family incorporates an internal input low-pass filter that reduces the amplifier response to EMI. Both common-mode and differential mode filtering are provided by the input filter. The filter is designed for a cutoff frequency of approximately 8 MHz (-3 dB), with a roll-off of 20 dB per decade.

Copyright © 2013-2016, Texas Instruments Incorporated



8.4 Device Functional Modes

The OPAx317 family of devices are powered on when the supply is connected. The device can be operated as a single-supply operational amplifier or a dual-supply amplifier, depending on the application.

Submit Documentation Feedback

Copyright © 2013–2016, Texas Instruments Incorporated



9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The OPA317, OPA2317, and OPA4317 are unity-gain stable, precision operational amplifiers free from unexpected output and phase reversal. Proprietary Zerø-Drift circuitry gives the benefit of low input offset voltage over time and temperature, as well as lowering the 1/f noise component. As a result of the high PSRR, these devices work well in applications that run directly from battery power without regulation. The OPA317 family is optimized for low-voltage, single-supply operation. These miniature, high-precision, low quiescent current amplifiers offer high impedance inputs that have a common-mode range 100 mV beyond the supplies, and a rail-to-rail output that swings within 100 mV of the supplies under normal test conditions. The OPA317 series are precision amplifiers for cost-sensitive applications.

9.1.1 Achieving Output Swing to the Op Amp Negative Rail

Some applications require output voltage swings from 0 V to a positive full-scale voltage (such as 2.5 V) with excellent accuracy. With most single-supply operational amplifiers, problems arise when the output signal approaches 0 V, near the lower output swing limit of a single-supply operational amplifier. A good single-supply operational amplifier may swing close to single-supply ground, but does not reach ground. The output of the OPA317, OPA2317, and OPA4317 can be made to swing to ground, or slightly below, on a single-supply power source. To do so requires the use of another resistor and an additional, more negative power supply than the operational amplifier negative supply. A pulldown resistor can be connected between the output and the additional negative supply to pull the output down below the value that the output would otherwise achieve, as shown in Figure 21.




Figure 21. For V_{OUT} Range to Ground


The OPA317, OPA2317, and OPA4317 have an output stage that allows the output voltage to be pulled to its negative supply rail, or slightly below, using the technique previously described. This technique only works with some types of output stages. The OPA317, OPA2317, and OPA4317 have been characterized to perform with this technique; the recommended resistor value is approximately 20 k Ω . This configuration increases the current consumption by several hundreds of microamps. Accuracy is excellent down to 0 V and as low as –2 mV. Limiting and nonlinearity occur below –2 mV, but excellent accuracy returns as the output drives back up above –2 mV. Lowering the resistance of the pulldown resistor allows the operational amplifier to swing even further below the negative rail. Use resistances as low as 10 k Ω to achieve excellent accuracy down to –10 mV.

Submit Documentation Feedback



9.2 Typical Applications

The circuit shown in Figure 22 is a high-side voltage-to-current (V-I) converter. It translates an input voltage of 0 V to 2 V to an output current of 0 mA to 100 mA. Figure 23 shows the measured transfer function for this circuit. The low offset voltage and offset drift of the OPA317 facilitate excellent DC accuracy for the circuit.

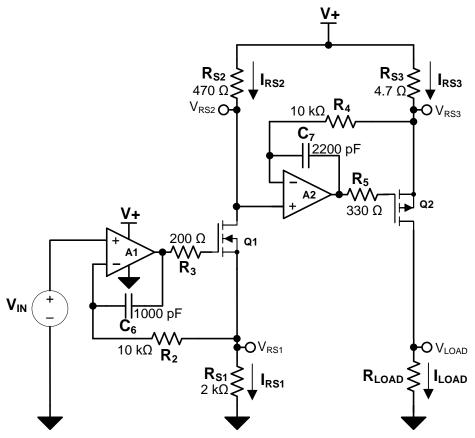

Copyright © 2016, Texas Instruments Incorporated

Figure 22. High-Side Voltage-to-Current (V-I) Converter

9.2.1 Design Requirements

The design requirements are as follows:

- Supply Voltage: 5-V DCInput: 0-V to 2-V DC
- Output: 0-mA to 100-mA DC

9.2.2 Detailed Design Procedure

The V-I transfer function of the circuit is based on the relationship between the input voltage, V_{IN} , and the three current-sensing resistors: R_{S1} , R_{S2} , and R_{S3} . The relationship between V_{IN} and R_{S1} determines the current that flows through the first stage of the design. The current gain from the first stage to the second stage is based on the relationship between R_{S2} and R_{S3} .

Submit Documentation Feedback



Typical Applications (continued)

For a successful design, pay close attention to the DC characteristics of the operational amplifier chosen for the application. To meet the performance goals, this application benefits from an operational amplifier with low offset voltage, low temperature drift, and rail-to-rail output. The OPA2317 CMOS operational amplifier is a highprecision, 5-μV offset, 0.05-μV/°C drift amplifier optimized for low-voltage, single-supply operation with an output swing to within 50 mV of the positive rail. The OPA2317 family uses chopping techniques to provide low initial offset voltage and near-zero drift over time and temperature. Low offset voltage and low drift reduce the offset error in the system, making these devices appropriate for precise DC control. The rail-to-rail output stage of the OPA2317 ensures that the output swing of the operational amplifier is able to fully control the gate of the MOSFET devices within the supply rails.

9.2.3 Application Curve

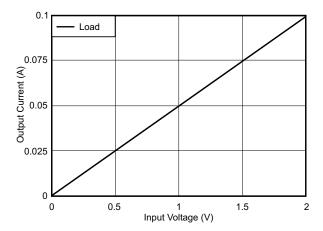



Figure 23. Measured Transfer Function for High-Side V-I Converter

Copyright © 2013-2016, Texas Instruments Incorporated



9.3 System Example

R_N are operational resistors used to isolate the ADS1100 from the noise of the digital I²C bus. The ADS1100 device is a 16-bit converter; therefore, a precise reference is essential for maximum accuracy. If absolute accuracy is not required and the 5-V power supply is sufficiently stable, the REF3130 device may be omitted.

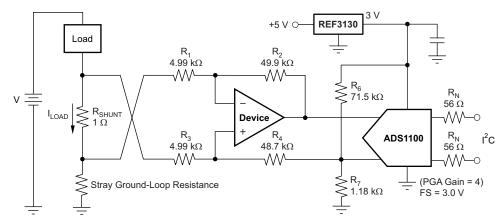

Copyright © 2016, Texas Instruments Incorporated

NOTE: 1% resistors provide adequate common-mode rejection at small ground-loop errors.

Figure 24. Low-Side Current Monitor

10 Power Supply Recommendations

The OPAx317 device is specified for operation from 1.8 V to 5.5 V (\pm 0.9 V to \pm 2.75 V); many specifications apply from -40° C to $+125^{\circ}$ C. The *Electrical Characteristics:* $V_{S} = 1.8$ V to 5.5 V table presents parameters that can exhibit significant variance with regard to operating voltage or temperature.

CAUTION

Supply voltages larger than 7 V can permanently damage the device (see the *Absolute Maximum Ratings*) table.

Place $0.1-\mu F$ bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see the *Layout Guidelines* section.

Submit Documentation Feedback



11 Layout

11.1 Layout Guidelines


Attention to good layout practice is always recommended. Keep traces short and, when possible, use a printed-circuit board (PCB) ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1-μF capacitor closely across the supply pins. Apply these guidelines throughout the analog circuit to improve performance and provide benefits, such as reducing the electromagnetic interference (EMI) susceptibility.

Optimize circuit layout and mechanical conditions for lowest offset voltage and precision performance. Avoid temperature gradients that create thermoelectric (Seebeck) effects in the thermocouple junctions formed from connecting dissimilar conductors. These thermally-generated potentials can be made to cancel by assuring they are equal on both input terminals. Other layout and design considerations include:

- Use low thermoelectric-coefficient conditions (avoid dissimilar metals).
- Thermally isolate components from power supplies or other heat sources.
- Shield operational amplifier and input circuitry from air currents, such as cooling fans.

Following these guidelines reduces the likelihood of junctions being at different temperatures, which can cause thermoelectric voltage drift of 0.1 μ V/°C or higher, depending on the materials used.

11.2 Layout Example

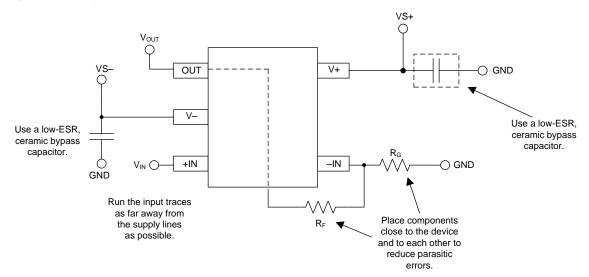

Copyright © 2016, Texas Instruments Incorporated

Figure 25. OPAx317 Layout Example



12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation see the following:

- Self-Calibrating, 16-Bit Analog-to-Digital Converter,
- 15ppm/°C Max, 100μA, SOT23-3 Series Voltage Reference,

12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on Alert me to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.3 Related Links

Table 1 lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 1. Related Links

| PARTS | PRODUCT FOLDER | SAMPLE & BUY | TECHNICAL DOCUMENTS | TOOLS & SOFTWARE | SUPPORT & COMMUNITY |
|---------|----------------|--------------|---------------------|---------------------|---------------------|
| OPA317 | Click here | Click here | Click here | Click here | Click here |
| OPA2317 | Click here | Click here | Click here | Click here | Click here |
| OPA4317 | Click here | Click here | Click here | Click here | Click here |

12.4 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community T's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support TI's Design Support Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.5 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.



ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.7 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

Submit Documentation Feedback



13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2013–2016, Texas Instruments Incorporated

Submit Documentation Feedback

www.ti.com

2-Dec-2025

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material | MSL rating/ Peak reflow | Op temp (°C) | Part marking (6) |
|-----------------------|------------|---------------|------------------|-----------------------|-----------------|-------------------------------|----------------------------|--------------|------------------|
| OPA2317ID | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O2317A |
| OPA2317ID.B | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O2317A |
| OPA2317IDGKR | Active | Production | VSSOP (DGK) 8 | 2500 LARGE T&R | Yes | NIPDAU SN NIPDAUAG | Level-2-260C-1 YEAR | -40 to 125 | OVBQ |
| OPA2317IDGKR.B | Active | Production | VSSOP (DGK) 8 | 2500 LARGE T&R | Yes | SN | Level-2-260C-1 YEAR | -40 to 125 | OVBQ |
| OPA2317IDGKRG4 | Active | Production | VSSOP (DGK) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVBQ |
| OPA2317IDGKRG4.B | Active | Production | VSSOP (DGK) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVBQ |
| OPA2317IDGKT | Active | Production | VSSOP (DGK) 8 | 250 SMALL T&R | Yes | NIPDAU SN NIPDAUAG | Level-2-260C-1 YEAR | -40 to 125 | OVBQ |
| OPA2317IDGKT.B | Active | Production | VSSOP (DGK) 8 | 250 SMALL T&R | Yes | SN | Level-2-260C-1 YEAR | -40 to 125 | OVBQ |
| OPA2317IDR | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O2317A |
| OPA2317IDR.B | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O2317A |
| OPA2317IDRG4 | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O2317A |
| OPA2317IDRG4.B | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O2317A |
| OPA317ID | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O317A |
| OPA317ID.B | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O317A |
| OPA317IDBVR | Active | Production | SOT-23 (DBV) 5 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVCQ |
| OPA317IDBVR.B | Active | Production | SOT-23 (DBV) 5 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVCQ |
| OPA317IDBVT | Active | Production | SOT-23 (DBV) 5 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVCQ |
| OPA317IDBVT.B | Active | Production | SOT-23 (DBV) 5 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVCQ |
| OPA317IDBVTG4 | Active | Production | SOT-23 (DBV) 5 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVCQ |
| OPA317IDBVTG4.B | Active | Production | SOT-23 (DBV) 5 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | OVCQ |
| OPA317IDCKR | Active | Production | SC70 (DCK) 5 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | SJP |
| OPA317IDCKR.B | Active | Production | SC70 (DCK) 5 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | SJP |
| OPA317IDCKRG4 | Active | Production | SC70 (DCK) 5 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | SJP |
| OPA317IDCKRG4.B | Active | Production | SC70 (DCK) 5 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | SJP |
| OPA317IDCKT | Active | Production | SC70 (DCK) 5 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | SJP |
| OPA317IDCKT.B | Active | Production | SC70 (DCK) 5 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | SJP |
| OPA317IDR | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O317A |
| OPA317IDR.B | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O317A |



-40 to 125

-40 to 125

Level-2-260C-1 YEAR

Level-2-260C-1 YEAR

2-Dec-2025

O4317A

O4317A



OPA4317IPWR

OPA4317IPWR.A

www.ti.com

| Orderable part number | Status | Material type | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material | MSL rating/ Peak reflow | Op temp (°C) | Part marking (6) |
|-----------------------|--------|---------------|-----------------|-----------------------|-----------------|-------------------------------|----------------------------|--------------|------------------|
| | | | | | | (4) | (5) | | |
| OPA4317ID | Active | Production | SOIC (D) 14 | 50 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O4317A |
| OPA4317ID.A | Active | Production | SOIC (D) 14 | 50 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O4317A |
| OPA4317IDR | Active | Production | SOIC (D) 14 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O4317A |
| OPA4317IDR.A | Active | Production | SOIC (D) 14 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | O4317A |
| OPA4317IPW | Active | Production | TSSOP (PW) 14 | 90 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | O4317A |
| OPA4317IPW.A | Active | Production | TSSOP (PW) 14 | 90 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | O4317A |

2000 | LARGE T&R

2000 | LARGE T&R

Active

Active

Yes

Yes

NIPDAU

NIPDAU

Production

Production

TSSOP (PW) | 14

TSSOP (PW) | 14

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽¹⁾ Status: For more details on status, see our product life cycle.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE OPTION ADDENDUM

www.ti.com 2-Dec-2025

OTHER QUALIFIED VERSIONS OF OPA2317, OPA317:

• Automotive : OPA2317-Q1, OPA317-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects



www.ti.com 30-Nov-2025

TAPE AND REEL INFORMATION





| A0 | Dimension designed to accommodate the component width |
|----|---|
| В0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|-----------------|--------------------|------|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| OPA2317IDGKR | VSSOP | DGK | 8 | 2500 | 330.0 | 12.4 | 5.3 | 3.4 | 1.4 | 8.0 | 12.0 | Q1 |
| OPA2317IDGKRG4 | VSSOP | DGK | 8 | 2500 | 330.0 | 12.4 | 5.3 | 3.4 | 1.4 | 8.0 | 12.0 | Q1 |
| OPA2317IDGKT | VSSOP | DGK | 8 | 250 | 330.0 | 12.4 | 5.25 | 3.35 | 1.25 | 8.0 | 12.0 | Q1 |
| OPA2317IDGKT | VSSOP | DGK | 8 | 250 | 330.0 | 12.4 | 5.3 | 3.4 | 1.4 | 8.0 | 12.0 | Q1 |
| OPA2317IDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| OPA2317IDRG4 | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| OPA317IDBVR | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| OPA317IDBVR | SOT-23 | DBV | 5 | 3000 | 178.0 | 9.0 | 3.3 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| OPA317IDBVT | SOT-23 | DBV | 5 | 250 | 178.0 | 9.0 | 3.3 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| OPA317IDBVT | SOT-23 | DBV | 5 | 250 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| OPA317IDBVTG4 | SOT-23 | DBV | 5 | 250 | 178.0 | 9.0 | 3.3 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| OPA317IDCKR | SC70 | DCK | 5 | 3000 | 178.0 | 9.0 | 2.4 | 2.5 | 1.2 | 4.0 | 8.0 | Q3 |
| OPA317IDCKRG4 | SC70 | DCK | 5 | 3000 | 178.0 | 9.0 | 2.4 | 2.5 | 1.2 | 4.0 | 8.0 | Q3 |
| OPA317IDCKT | SC70 | DCK | 5 | 250 | 178.0 | 9.0 | 2.4 | 2.5 | 1.2 | 4.0 | 8.0 | Q3 |
| OPA317IDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| OPA4317IDR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |



PACKAGE MATERIALS INFORMATION

www.ti.com 30-Nov-2025

| | Device | Package Type | Package Drawing | | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---|-------------|-----------------|--------------------|----|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| ı | OPA4317IPWR | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |



www.ti.com 30-Nov-2025



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| OPA2317IDGKR | VSSOP | DGK | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| OPA2317IDGKRG4 | VSSOP | DGK | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| OPA2317IDGKT | VSSOP | DGK | 8 | 250 | 366.0 | 364.0 | 50.0 |
| OPA2317IDGKT | VSSOP | DGK | 8 | 250 | 353.0 | 353.0 | 32.0 |
| OPA2317IDR | SOIC | D | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| OPA2317IDRG4 | SOIC | D | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| OPA317IDBVR | SOT-23 | DBV | 5 | 3000 | 210.0 | 185.0 | 35.0 |
| OPA317IDBVR | SOT-23 | DBV | 5 | 3000 | 180.0 | 180.0 | 18.0 |
| OPA317IDBVT | SOT-23 | DBV | 5 | 250 | 180.0 | 180.0 | 18.0 |
| OPA317IDBVT | SOT-23 | DBV | 5 | 250 | 210.0 | 185.0 | 35.0 |
| OPA317IDBVTG4 | SOT-23 | DBV | 5 | 250 | 180.0 | 180.0 | 18.0 |
| OPA317IDCKR | SC70 | DCK | 5 | 3000 | 180.0 | 180.0 | 18.0 |
| OPA317IDCKRG4 | SC70 | DCK | 5 | 3000 | 180.0 | 180.0 | 18.0 |
| OPA317IDCKT | SC70 | DCK | 5 | 250 | 180.0 | 180.0 | 18.0 |
| OPA317IDR | SOIC | D | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| OPA4317IDR | SOIC | D | 14 | 2500 | 353.0 | 353.0 | 32.0 |
| OPA4317IPWR | TSSOP | PW | 14 | 2000 | 353.0 | 353.0 | 32.0 |

PACKAGE MATERIALS INFORMATION

www.ti.com 30-Nov-2025

TUBE



*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (µm) | B (mm) |
|--------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| OPA2317ID | D | SOIC | 8 | 75 | 506.6 | 8 | 3940 | 4.32 |
| OPA2317ID.B | D | SOIC | 8 | 75 | 506.6 | 8 | 3940 | 4.32 |
| OPA317ID | D | SOIC | 8 | 75 | 506.6 | 8 | 3940 | 4.32 |
| OPA317ID.B | D | SOIC | 8 | 75 | 506.6 | 8 | 3940 | 4.32 |
| OPA4317ID | D | SOIC | 14 | 50 | 506.6 | 8 | 3940 | 4.32 |
| OPA4317ID.A | D | SOIC | 14 | 50 | 506.6 | 8 | 3940 | 4.32 |
| OPA4317IPW | PW | TSSOP | 14 | 90 | 530 | 10.2 | 3600 | 3.5 |
| OPA4317IPW.A | PW | TSSOP | 14 | 90 | 530 | 10.2 | 3600 | 3.5 |





NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
- 5. Reference JEDEC registration MS-012, variation AB.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
 3. Reference JEDEC MO-203.

- 4. Support pin may differ or may not be present.5. Lead width does not comply with JEDEC.
- 6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side





NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 10. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
 3. Reference JEDEC MO-178.

- 4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
- 5. Support pin may differ or may not be present.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.





NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.





NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025