

PCA9535 Remote 16-BIT I²C and SMBus Low-Power I/O Expander With Interrupt **Output and Configuration Registers**

1 Features

- Low standby-current consumption of 1 µA Max
- I²C to Parallel port expander
- Open-drain active-low interrupt output
- 5-V Tolerant I/O ports
- Compatible with most microcontrollers
- 400-kHz Fast I²C Bus
- Address by three hardware address pins for use of up to eight devices
- Polarity inversion register
- Latched outputs with high-current drive capability for directly driving LEDs
- Latch-up performance exceeds 100 mA Per JESD 78, class II
- ESD Protection exceeds JESD 22
 - 2000-V Human-body model (A114-A)
 - 1000-V Charged-device model (C101)

2 Description

This 16-bit I/O expander for the two-line bidirectional bus (I^2C) is designed for 2.3-V to 5.5-V V_{CC} operation. It provides general-purpose remote I/O expansion for most microcontroller families via the I²C interface [serial clock (SCL), serial data (SDA)].

The PCA9535 consists of two 8-bit Configuration (input or output selection), Input Port, Output Port, and Polarity Inversion (active-high or active-low operation) registers. At power on, the I/Os are configured as inputs. The system master can enable the I/Os as either inputs or outputs by writing to the I/O configuration bits. The data for each input or output is kept in the corresponding Input or Output Port register. The polarity of the Input Port register can be inverted with the Polarity Inversion register. All registers can be read by the system master.

The system master can reset the PCA9535 in the event of a timeout or other improper operation by utilizing the power-on reset feature, which puts the registers in their default state and initializes the I²C/ SMBus state machine.

The PCA9535 open-drain interrupt (INT) output is activated when any input state differs from its corresponding Input Port register state and is used to indicate to the system master that an input state has changed.

Device Information (1)

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|-----------|-------------------|
| | SSOP (16) | 6.20 mm × 5.30 mm |
| PCA9535 | VQFN (16) | 4.00 mm × 4.00 mm |
| | QFN (16) | 3.00 mm × 3.00 mm |

For all available packages, see the orderable addendum at the end of the datasheet.

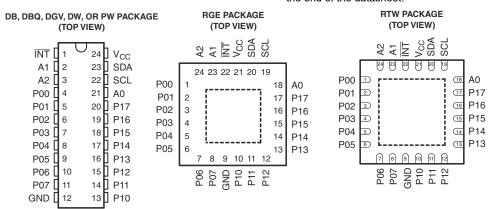




Table of Contents

| 1 Features | 1 | 8.1 Functional Block Diagram | 14 |
|--|---|--|-------------|
| 2 Description | 1 | 8.2 Device Functional Modes | 15 |
| 3 Revision History | <mark>2</mark> | 8.3 Programming | 16 |
| 4 Description Continued | | 9 Application Information Disclaimer | 24 |
| 5 Pin Configuration and Functions | | 9.1 Application Information | |
| 6 Specifications | | 9.2 Typical Application | |
| 6.1 Absolute Maximum Ratings | | 10 Power Supply Recommendations | |
| 6.2 ESD Ratings | | 10.1 Power-On Reset Requirements | |
| 6.3 Recommended Operating Conditions | | 11 Device and Documentation Support | |
| 6.4 Thermal Resistance Characteristics | | 11.1 Receiving Notification of Documentation U | |
| 6.5 Electrical Characteristics | | 11.2 Support Resources | |
| 6.6 I ² C Interface Timing Requirements | | 11.3 Trademarks | |
| 6.7 Switching Characteristics | | 11.4 Electrostatic Discharge Caution | |
| 6.8 Typical Characteristics | | 11.5 Glossary | 28 |
| 7 Parameter Measurement Information | | 12 Mechanical, Packaging, and Orderable | |
| | | Information | 28 |
| 8 Detailed Description | 14 | | |
| 3 Revision History Changes from Revision J (May 2014) to Rev | ision K (| March 2021) | Page |
| · Moved the "Storage temperature range" to t | he <i>Absol</i> | ute Maximum Ratings | |
| | | rmal Resistance Characteristic | |
| • | | 5 V To: V _{CC} in the <i>Recommended Operating C</i> | onditions |
| | | | 5 |
| Changed the V_{PORR} Typ value From: 1.5 V | To 1.2 V i | n the Electrical Characteristics | 6 |
| • Added V _{PORF} to the Electrical Characteristic | 20 | | |
| | , | | |
| Changed the I_{CC} Standby mode values in th | | | 6 |
| | ne <i>Electric</i> | cal Characteristics | 6 |
| - Changed the C_i SCL Max value From: 7 pF | ne <i>Electric</i> To: 8 pF | cal Characteristicsin the Electrical Characteristics | 6 6 |
| Changed the C_i SCL Max value From: 7 pF Changed the C_{io} SDA Max value From: 7 pF | ne <i>Electric</i> To: 8 pF F To: 9.5 | cal Characteristicsin the Electrical CharacteristicspF in the Electrical Characteristics | 6 6 6 |
| Changed the C_i SCL Max value From: 7 pF Changed the C_{io} SDA Max value From: 7 pF Changed the <i>Typical Characteristics</i> graphs | ne <i>Electric</i> To: 8 pF F To: 9.5 | cal Characteristicsin the Electrical CharacteristicspF in the Electrical Characteristics | 6 6 6 |
| Changed the C_i SCL Max value From: 7 pF Changed the C_{io} SDA Max value From: 7 pF Changed the <i>Typical Characteristics</i> graphs | ne <i>Electric</i> To: 8 pF F To: 9.5 | cal Characteristicsin the Electrical CharacteristicspF in the Electrical Characteristics | 6 6 6 |

Added Interrupt Errata section......16

Submit Document Feedback

4 Description Continued

INT can be connected to the interrupt input of a microcontroller. By sending an interrupt signal on this line, the remote I/O can inform the microcontroller if there is incoming data on its ports without having to communicate via the I²C bus. Thus, the PCA9535 can remain a simple slave device.

The device outputs (latched) have high-current drive capability for directly driving LEDs. The device has low current consumption.

Although pin-to-pin and I²C address compatible with the PCF8575, software changes are required due to the enhancements.

The PCA9535 is identical to the PCA9555, except for the removal of the internal I/O pullup resistor, which greatly reduces power consumption when the I/Os are held low.

Three hardware pins (A0, A1, and A2) are used to program and vary the fixed I^2C address and allow up to eight devices to share the same I^2C bus or SMBus. The fixed I^2C address of the PCA9535 is the same as the PCA9555, PCF8575C, and PCF8574, allowing up to eight of these devices in any combination to share the same I^2C bus or SMBus.



5 Pin Configuration and Functions

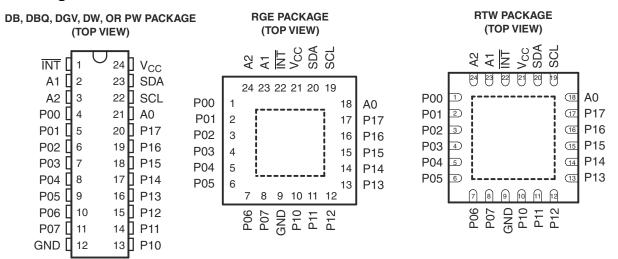


Table 5-1. Pin Functions

| | PIN | | ble 3-1. Fill 1 unctions | | | |
|-----------------|--|-------------------------|---|--|--|--|
| NAME | SOIC (D), SSOP (DB), QSOP (DBQ), TSSOP (PW), AND TVSOP (DGV) | QFN (RGE AND RTW) | DESCRIPTION | | | |
| ĪNT | 1 | 22 | Interrupt output. Connect to V _{CC} through a pullup resistor. | | | |
| A1 | 2 | 23 | Address input. Connect directly to V _{CC} or ground. | | | |
| A2 | 3 | 24 | Address input. Connect directly to V _{CC} or ground. | | | |
| P00 | 4 | 1 | P-port input/output. Push-pull design structure. | | | |
| P01 | 5 | 2 | P-port input/output. Push-pull design structure. | | | |
| P02 | 6 | 3 | P-port input/output. Push-pull design structure. | | | |
| P03 | 7 | 4 | P-port input/output. Push-pull design structure. | | | |
| P04 | 8 | 5 | P-port input/output. Push-pull design structure. | | | |
| P05 | 9 | 6 | P-port input/output. Push-pull design structure. | | | |
| P06 | 10 | 7 | P-port input/output. Push-pull design structure. | | | |
| P07 | 11 | 8 | P-port input/output. Push-pull design structure. | | | |
| GND | 12 | 9 | Ground | | | |
| P10 | 13 | 10 | P-port input/output. Push-pull design structure. | | | |
| P11 | 14 | 11 | P-port input/output. Push-pull design structure. | | | |
| P12 | 15 | 12 | P-port input/output. Push-pull design structure. | | | |
| P13 | 16 | 13 | P-port input/output. Push-pull design structure. | | | |
| P14 | 17 | 14 | P-port input/output. Push-pull design structure. | | | |
| P15 | 18 | 15 | P-port input/output. Push-pull design structure. | | | |
| P16 | 19 | 16 | P-port input/output. Push-pull design structure. | | | |
| P17 | 20 | 17 | P-port input/output. Push-pull design structure. | | | |
| A0 | 21 | 18 | Address input. Connect directly to V _{CC} or ground. | | | |
| SCL | 22 | 19 | Serial clock bus. Connect to V _{CC} through a pullup resistor. | | | |
| SDA | 23 | 20 | Serial data bus. Connect to V _{CC} through a pullup resistor. | | | |
| V _{CC} | 24 | 21 | Supply voltage | | | |

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

| | | · | MIN | MAX | UNIT |
|------------------|--|-----------------------------|------|------|------|
| V _{CC} | Supply voltage range | | -0.5 | 6 | V |
| VI | Input voltage range ⁽²⁾ | | -0.5 | 6 | V |
| Vo | Output voltage range ⁽²⁾ | | -0.5 | 6 | V |
| I _{IK} | Input clamp current | V ₁ < 0 | | -20 | mA |
| I _{OK} | Output clamp current | V _O < 0 | | -20 | mA |
| I _{IOK} | Input/output clamp current | $V_O < 0$ or $V_O > V_{CC}$ | | ±20 | mA |
| I _{OL} | Continuous output low current | $V_O = 0$ to V_{CC} | | 50 | mA |
| I _{OH} | Continuous output high current | $V_O = 0$ to V_{CC} | | -50 | mA |
| | Continuous current through GND | | | -250 | mA |
| I _{CC} | Continuous current through V _{CC} | | | 160 | ША |
| T _{stg} | Storage temperature range | | -65 | 150 | °C |

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

| | | | MIN | MAX | UNIT |
|--------------------|---|--|------|------|------|
| | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾ | 0 | 2000 | V | |
| V _(ESD) | Liectiostatic discriatge | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾ | 0 | 1000 | V |

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

| | | | MIN | MAX | UNIT |
|--|--------------------------------|-------------------------|-----------------------|-----------------------|------|
| V _{CC} | Supply voltage | | 2.3 | V _{CC} | V |
| V _{IH} High-level input voltage | SCL, SDA | 0.7 × V _{CC} | V _{CC} | V | |
| | підп-іечеї іприт чопаде | A2-A0, P07-P00, P17-P10 | 0.7 × V _{CC} | 5.5 | V |
| ., | Low-level input voltage | SCL, SDA | -0.5 | 0.3 × V _{CC} | V |
| V _{IL} | Low-level input voltage | A2–A0, P07–P00, P17–P10 | -0.5 | 0.3 × V _{CC} | V |
| I _{OH} | High-level output current | P07–P00, P17–P10 | | -10 | mA |
| I _{OL} | Low-level output current | P07–P00, P17–P10 | | 25 | mA |
| T _A | Operating free-air temperature | | -40 | 85 | °C |

⁽²⁾ The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



6.4 Thermal Resistance Characteristics

| THERMAL METRIC ⁽¹⁾ | | PCA9535 | | | | | | |
|-------------------------------|--|--------------|---------------|----------------|--------------|---------------|---------------|------|
| | | DB (SSOP) | DBQ (SSOP) | DVG (TVSOP) | DW (SOIC) | PW (TSSOP) | RGV (VQFN) | UNIT |
| | | 16 PINS | 16 PINS | 16 PINS | 16 PINS | 16 PINS | 16 PINS | °C/W |
| R _{θJA} | Junction-to-ambient thermal resistance | 92.9 | 61 | 86 | 108.8 | 48.4 | 43.6 | °C/W |

For more information about traditional and new thermal metrics, see the <u>Semiconductor and IC package thermal metrics</u> application report.

6.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| | PARAMETER | TEST CONDITIONS | V _{CC} | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|-------------------|--|--|-----------------|------|--------------------|------|------|
| V _{IK} | Input diode clamp voltage | I _I = -18 mA | 2.3 V to 5.5 V | -1.2 | | | V |
| V _{PORR} | Power-on reset voltage, V _{CC} rising | $V_I = V_{CC}$ or GND, $I_O = 0$ | | | 1.2 | 1.65 | V |
| V _{PORF} | Power-on reset voltage, V _{CC} falling | $V_I = V_{CC}$ or GND, $I_O = 0$ | | 0.75 | 1 | | V |
| | | | 2.3 V | 1.8 | | | |
| | | I _{OH} = –8 mA | 3 V | 2.6 | | | |
| | OH P-port high-level output voltage ⁽²⁾ | | 4.75 V | 4.1 | | | v |
| VOH | | | 2.3 V | 1.7 | | | · |
| | | I _{OH} = -10 mA | 3 V | 2.5 | | | |
| | | | 4.75 V | 4 | | | |
| | SDA | V _{OL} = 0.4 V | | 3 | | | |
| | P port ⁽³⁾ | V _{OL} = 0.5 V | 2.3 V to 5.5 V | 8 | 20 | | mA |
| I _{OL} | r porte | V _{OL} = 0.7 V | 2.3 V to 3.3 V | 10 | 24 | | |
| | INT | V _{OL} = 0.4 V | | 3 | | | |
| ı. | SCL, SDA | V _I = V _{CC} or GND | 2.3 V to 5.5 V | | | ±1 | μA |
| l _l | A2-A0 | A L A CC OL GIAD | 2.3 V to 3.3 V | | | ±1 | μА |
| I _{IH} | P port | V _I = V _{CC} | 2.3 V to 5.5 V | | | 1 | μA |
| I _{IL} | P port | V _I = GND | 2.3 V to 5.5 V | | | -1 | μA |
| | | | 5.5 V | | 100 | 200 | |
| | Operating mode | $V_I = V_{CC}$ or GND, $I_O = 0$, $I/O = inputs$, $f_{SCL} = 400 \text{ kHz}$ | 3.6 V | | 30 | 75 | |
| laa | | | 2.7 V | | 20 | 50 | μΑ |
| Icc | | V 0ND 1 0 NO 1 | 5.5 V | | 1.5 | 8.7 | μΛ |
| | Standby mode | V_I = GND, I_O = 0, I/O = inputs, f_{SCL} = 0 kHz | 3.6 V | | 0.9 | 4 | |
| | | 1302 5 111 12 | 2.7 V | | 0.6 | 3 | |
| ΔI _{CC} | Additional current in standby mode | One input at V _{CC} – 0.6 V, Other inputs at V _{CC} or GND | 2.3 V to 5.5 V | | | 200 | μA |
| Cı | SCL | V _I = V _{CC} or GND | 2.3 V to 5.5 V | | 3 | 8 | pF |
| C | SDA | V _{IO} = V _{CC} or GND | 2.3 V to 5.5 V | | 3 | 9.5 | nE. |
| C _{io} | P port | A IO - A CC OI GIAD | 2.3 V 10 5.5 V | | 3.7 | 9.5 | pF |

⁽¹⁾ All typical values are at nominal supply voltage (2.5-V, 3.3-V, or 5-V V_{CC}) and T_A = 25°C.

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

⁽²⁾ Each I/O must be limited externally to a maximum of 25 mA, and each octal (P07–P00 and P17–P10) must be limited to a maximum current of 100 mA, for a device total of 200 mA.

⁽³⁾ The total current sourced by all I/Os must be limited to 160 mA (80 mA for P07–P00 and 80 mA for P17–P10).

6.6 I²C Interface Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 7-1)

| | | | MIN | MAX | UNIT |
|-----------------------|---|--|---------------------------------------|-----|------|
| f _{scl} | I ² C clock frequency | | 0 | 400 | kHz |
| t _{sch} | I ² C clock high time | | 0.6 | | μs |
| t _{scl} | I ² C clock low time | | 1.3 | | μs |
| t _{sp} | I ² C spike time | | 50 | ns | |
| t _{sds} | I ² C serial-data setup time | | 100 | | ns |
| t _{sdh} | I ² C serial-data hold time | | 0 | | ns |
| t _{icr} | I ² C input rise time | | 20 + 0.1C _b ⁽¹⁾ | 300 | ns |
| t _{icf} | I ² C input fall time | | 20 + 0.1C _b ⁽¹⁾ | 300 | ns |
| t _{ocf} | I ² C output fall time | 10-pF to 400-pF bus | 20 + 0.1C _b ⁽¹⁾ | 300 | ns |
| t _{buf} | I ² C bus free time between Stop and Star | t | 1.3 | | μs |
| t _{sts} | I ² C Start or repeated Start condition setu | р | 0.6 | | μs |
| t _{sth} | I ² C Start or repeated Start condition hold | | 0.6 | | μs |
| t _{sps} | I ² C Stop condition setup | | 0.6 | | μs |
| t _{vd(data)} | Valid-data time | SCL low to SDA output valid | 50 | | ns |
| t _{vd(ack)} | Valid-data time of ACK condition | ACK signal from SCL low to SDA (out) low | 0.1 | 0.9 | μs |
| C _b | I ² C bus capacitive load | | | 400 | pF |

⁽¹⁾ C_b = total capacitance of one bus line in pF

6.7 Switching Characteristics


over recommended operating free-air temperature range, $C_L \le 100 \text{ pF}$ (unless otherwise noted) (see Figure 7-2 and Figure 7-3)

| | PARAMETER | FROM (INPUT) | TO (OUTPUT) | MIN | MAX | UNIT |
|-----------------|----------------------------|-----------------|----------------|-----|-----|------|
| t _{iv} | Interrupt valid time | P port | ĪNT | | 4 | μs |
| t _{ir} | Interrupt reset delay time | SCL | ĪNT | | 4 | μs |
| t _{pv} | Output data valid | SCL | P port | | 200 | ns |
| t _{ps} | Input data setup time | P port | SCL | 150 | | ns |
| t _{ph} | Input data hold time | P port | SCL | 1 | | μs |



6.8 Typical Characteristics

T_A = 25°C (unless otherwise noted)

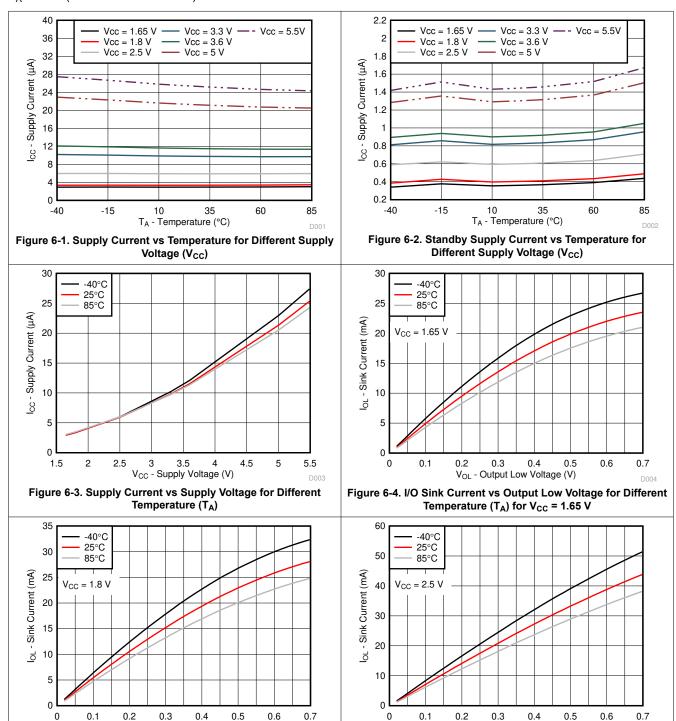

 $V_{OL} \mbox{-} \mbox{Output Low Voltage (V)}$ Figure 6-5. I/O Sink Current vs Output Low Voltage for Different

Temperature (T_A) for $V_{CC} = 1.8 \text{ V}$


V_{OL} - Output Low Voltage (V)

Figure 6-6. I/O Sink Current vs Output Low Voltage for Different

Temperature (T_A) for $V_{CC} = 2.5 \text{ V}$

6.8 Typical Characteristics (continued)

T_A = 25°C (unless otherwise noted)

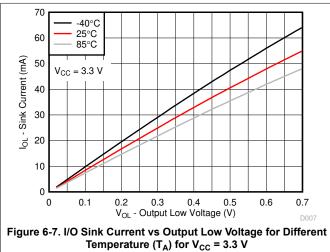

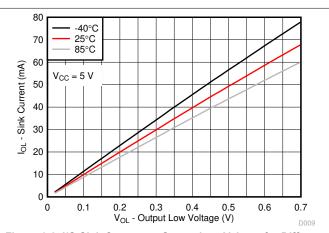


Figure 6-8. I/O Sink Current vs Output Low Voltage for Different Temperature (T_A) for $V_{CC} = 5 \text{ V}$

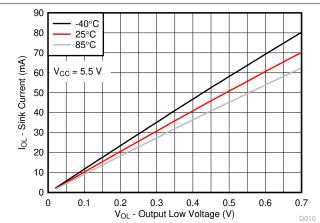


Figure 6-9. I/O Sink Current vs Output Low Voltage for Different Temperature (T_A) for $V_{CC} = 5.5 \text{ V}$

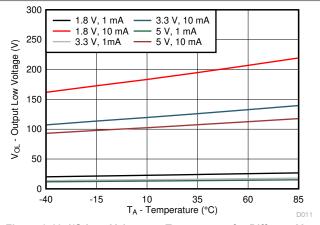


Figure 6-10. I/O Low Voltage vs Temperature for Different V_{CC} and I_{OL}

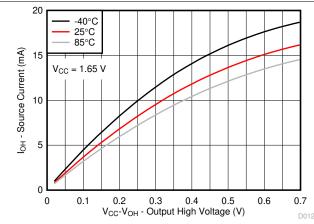


Figure 6-11. I/O Source Current vs Output High Voltage for Different Temperature (T_A) for V_{CC} = 1.65 V


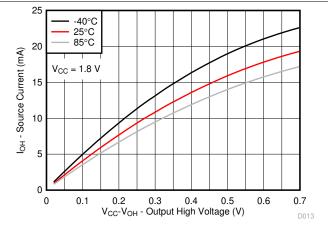


Figure 6-12. I/O Source Current vs Output High Voltage for Different Temperature (T_A) for $V_{CC} = 1.8 \text{ V}$



6.8 Typical Characteristics (continued)

T_A = 25°C (unless otherwise noted)

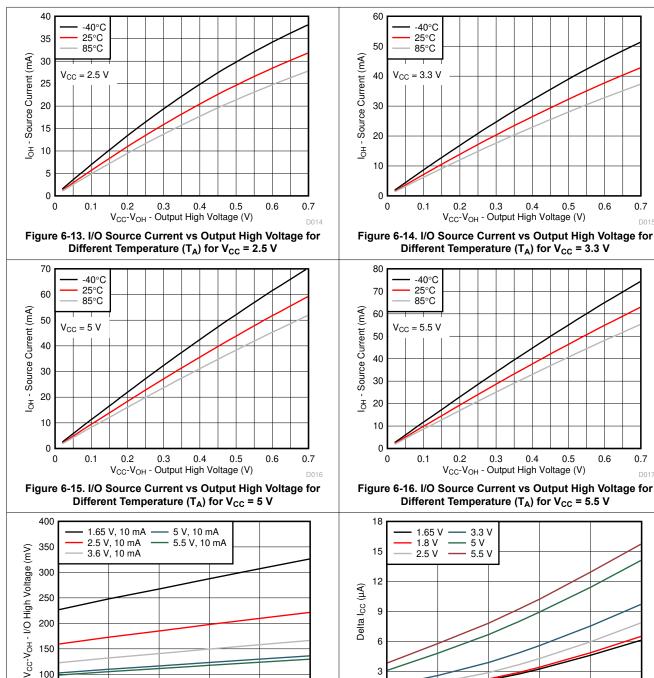

-40 -15 60 85 T_A - Temperature (°C) Figure 6-17. V_{CC} – V_{OH} Voltage vs Temperature for Different V_{CC}


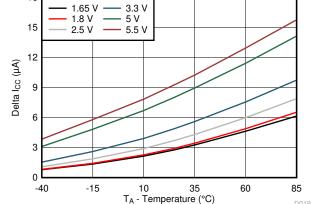



Figure 6-18. Δ I_{CC} vs Temperature for Different V_{CC} (V_I = V_{CC} – 0.6 V)

100 50

7 Parameter Measurement Information



SDA LOAD CONFIGURATION

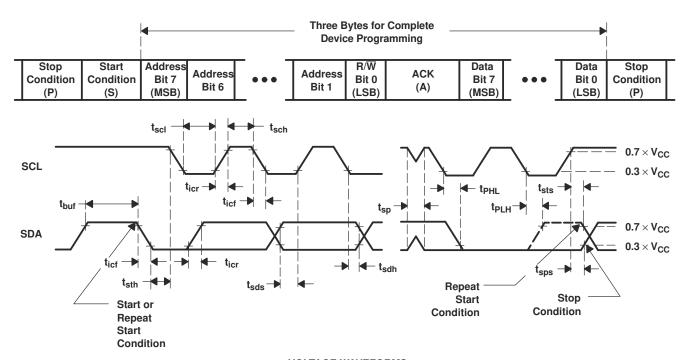


VOLTAGE WAVEFORMS

| BYTE | DESCRIPTION |
|------|--------------------------|
| 1 | I ² C address |
| 2, 3 | P-port data |


- A. C_L includes probe and jig capacitance.
- B. All inputs are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_O = 50 Ω , $t_r/t_f \leq$ 30 ns.
- C. All parameters and waveforms are not applicable to all devices.

Figure 7-1. I²C Interface Load Circuit And Voltage Waveforms






INTERRUPT LOAD CONFIGURATION

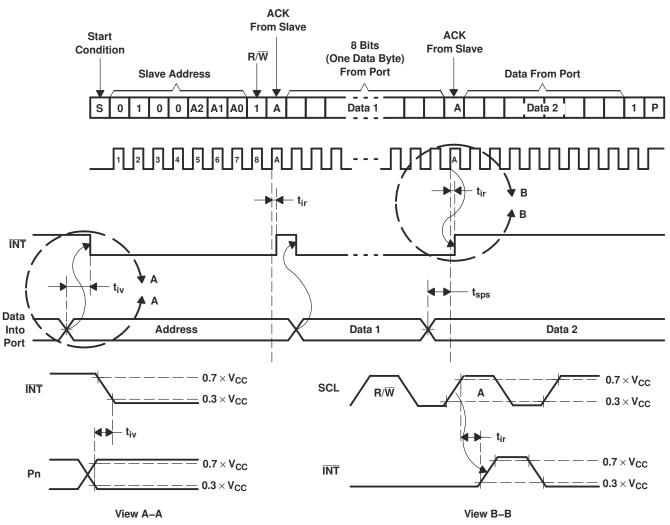


- A. C_L includes probe and jig capacitance.
- B. All inputs are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_O = 50 Ω , $t_r/t_f \leq$ 30 ns.
- C. All parameters and waveforms are not applicable to all devices.


Figure 7-2. Interrupt Load Circuit And Voltage Waveforms

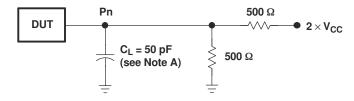

P-PORT LOAD CONFIGURATION

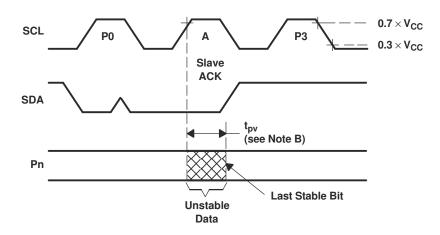

WRITE MODE $(R/\overline{W} = 0)$

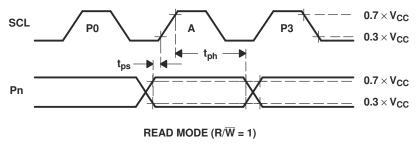


- A. $\,C_L\,$ includes probe and jig capacitance.
- B. t_{pv} is measured from 0.7 × V_{CC} on SCL to 50% I/O (Pn) output.
- C. All inputs are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_O = 50 Ω , $t_r/t_f \leq$ 30 ns.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

Figure 7-3. P-Port Load Circuit And Voltage Waveforms



8 Detailed Description

8.1 Functional Block Diagram

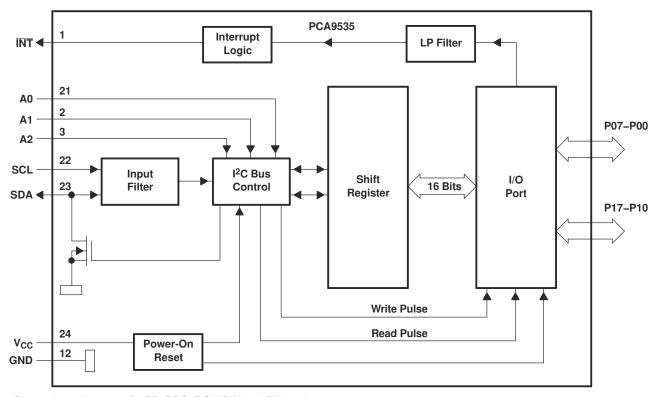


- A. Pin numbers shown are for DB, DBQ, DGV, DW, and PW packages.
- B. All I/Os are set to inputs at reset.

Figure 8-1. Logic Diagram (Positive Logic)

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

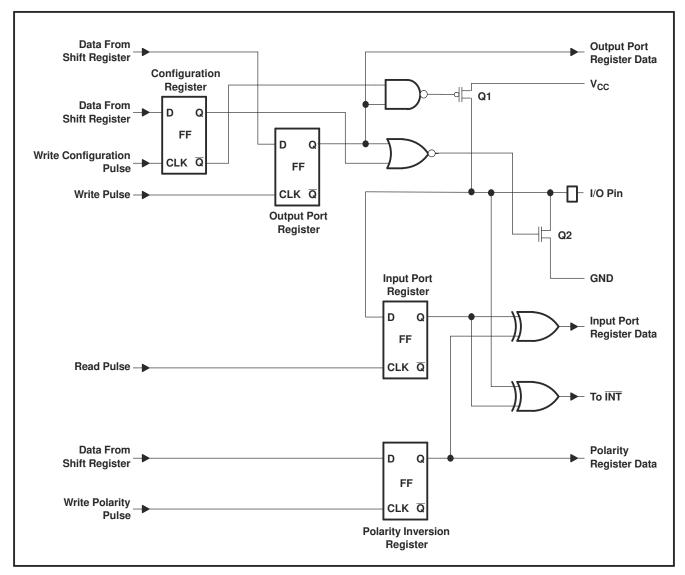

A. At power-on reset, all registers return to default values.

Figure 8-2. Simplified Schematic Of P-Port I/Os

8.2 Device Functional Modes

8.2.1 Power-On Reset

When power (from 0 V) is applied to V_{CC} , an internal power-on reset holds the PCA9535 in a reset condition until V_{CC} has reached V_{POR} . At that point, the reset condition is released and the PCA9535 registers and $I^2C/SMBus$ state machine initialize to their default states. After that, V_{CC} must be lowered to below 0.2 V and then back up to the operating voltage for a power-reset cycle.

8.2.2 I/O Port

When an I/O is configured as an input, FETs Q1 and Q2 (in Simplified Schematic Of P-Port I/Os) are off, which creates a high-impedance input. The input voltage may be raised above V_{CC} to a maximum of 5.5 V.

If the I/O is configured as an output, Q1 or Q2 is enabled, depending on the state of the Output Port register. In this case, there are low-impedance paths between the I/O pin and either V_{CC} or GND. The external voltage applied to this I/O pin should not exceed the recommended levels for proper operation.



8.2.3 Interrupt (INT) Output

An interrupt is generated by any rising or falling edge of the port inputs in the input mode. After time, t_{iv} , the signal \overline{INT} is valid. Resetting the interrupt circuit is achieved when data on the port is changed to the original setting, data is read from the port that generated the interrupt. Resetting occurs in the read mode at the acknowledge (ACK) or not acknowledge (NACK) bit after the rising edge of the SCL signal.

Interrupts that occur during the ACK or NACK clock pulse can be lost (or be very short) due to the resetting of the interrupt during this pulse. Each change of the I/Os after resetting is detected and is transmitted as $\overline{\text{INT}}$. Writing to another device does not affect the interrupt circuit, and a pin configured as an output cannot cause an interrupt. Changing an I/O from an output to an input may cause a false interrupt to occur, if the state of the pin does not match the contents of the Input Port register. Because each 8-pin port is read independently, the interrupt caused by port 0 is not cleared by a read of port 1 or vice versa.

The $\overline{\text{INT}}$ output has an open-drain structure and requires pullup resistor to V_{CC} .

8.2.3.1 Interrupt Errata

Description

The INT will be improperly de-asserted if the following two conditions occur:

1. The last I²C command byte (register pointer) written to the device was 00h.

Note

This generally means the last operation with the device was a Read of the input register. However, the command byte may have been written with 00h without ever going on to read the input register. After reading from the device, if no other command byte written, it will remain 00h.

2. Any other slave device on the I²C bus acknowledges an address byte with the R/W bit set high

System Impact

Can cause improper interrupt handling as the Master will see the interrupt as being cleared.

System Workaround

Minor software change: User must change command byte to something besides 00h after a Read operation to the PCA9535 device or before reading from another slave device.

Note

Software change will be compatible with other versions (competition and TI redesigns) of this device.

8.3 Programming

8.3.1 I²C Interface

The bidirectional I²C bus consists of the serial clock (SCL) and serial data (SDA) lines. Both lines must be connected to a positive supply via a pullup resistor when connected to the output stages of a device. Data transfer may be initiated only when the bus is not busy.

I²C communication with this device is initiated by a master sending a Start condition, a high-to-low transition on the SDA input/output while the SCL input is high (see Figure 8-3). After the Start condition, the device address byte is sent, MSB first, including the data direction bit (R/W). This device does not respond to the general call address.

After receiving the valid address byte, this device responds with an ACK, a low on the SDA input/output during the high of the ACK-related clock pulse. The address inputs (A0–A2) of the slave device must not be changed between the Start and Stop conditions.

On the I²C bus, only one data bit is transferred during each clock pulse. The data on the SDA line must remain stable during the high pulse of the clock period, as changes in the data line at this time are interpreted as control commands (Start or Stop) (see Figure 8-4).

A Stop condition, a low-to-high transition on the SDA input/output while the SCL input is high, is sent by the master (see Figure 8-3).

Any number of data bytes can be transferred from the transmitter to the receiver between the Start and the Stop conditions. Each byte of eight bits is followed by one ACK bit. The transmitter must release the SDA line before the receiver can send an ACK bit. The device that acknowledges must pull down the SDA line during the ACK clock pulse so that the SDA line is stable low during the high pulse of the ACK-related clock period (see Figure 8-5). When a slave receiver is addressed, it must generate an ACK after each byte is received. Similarly, the master must generate an ACK after each byte that it receives from the slave transmitter. Setup and hold times must be met to ensure proper operation.

A master receiver signals an end of data to the slave transmitter by not generating an acknowledge (NACK) after the last byte has been clocked out of the slave. This is done by the master receiver by holding the SDA line high. In this event, the transmitter must release the data line to enable the master to generate a Stop condition.

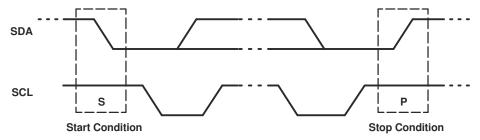


Figure 8-3. Definition Of Start And Stop Conditions

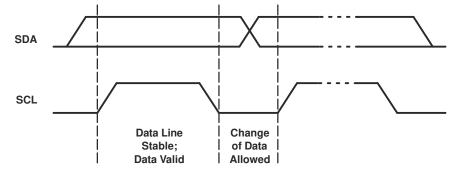


Figure 8-4. Bit Transfer



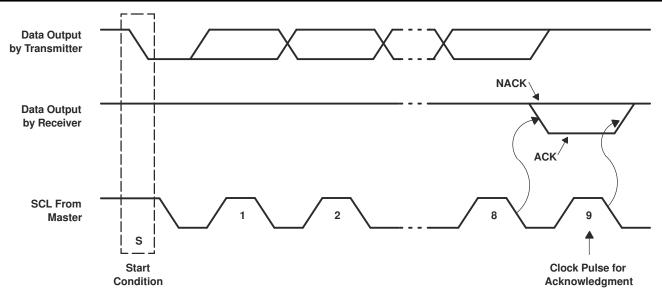


Figure 8-5. Acknowledgment On I²C Bus

8.3.2 Register Map

Table 8-1. Interface Definition

| вуте | | | | В | IT | | | |
|--------------------------------|---------|-----|-----|-----|-----|-----|-----|---------|
| | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) |
| I ² C slave address | L | Н | L | L | A2 | A1 | A0 | R/W |
| P0x I/O data bus | P07 | P06 | P05 | P04 | P03 | P02 | P01 | P00 |
| P1x I/O data bus | P17 | P16 | P15 | P14 | P13 | P12 | P11 | P10 |

8.3.2.1 Device Address

Figure 8-6 shows the address byte of the PCA9535.




Figure 8-6. Pca9535 Address

Table 8-2. Address Reference

| | INPUTS | | I ² C BUS SLAVE ADDRESS |
|----|--------|----|------------------------------------|
| A2 | A1 | A0 | I-C BUS SLAVE ADDRESS |
| L | L | L | 32 (decimal), 20 (hexadecimal) |
| L | L | Н | 33 (decimal), 21 (hexadecimal) |
| L | Н | L | 34 (decimal), 22 (hexadecimal) |
| L | Н | Н | 35 (decimal), 23 (hexadecimal) |
| Н | L | L | 36 (decimal), 24 (hexadecimal) |
| Н | L | Н | 37 (decimal), 25 (hexadecimal) |
| Н | Н | L | 38 (decimal), 26 (hexadecimal) |
| Н | Н | Н | 39 (decimal), 27 (hexadecimal) |

The last bit of the slave address defines the operation (read or write) to be performed. A high (1) selects a read operation, while a low (0) selects a write operation.

8.3.2.2 Control Register And Command Byte

Following the successful acknowledgment of the address byte, the bus master sends a command byte that is stored in the control register in the PCA9535. Three bits of this data byte state the operation (read or write) and the internal register (Input, Output, Polarity Inversion, or Configuration) that will be affected. This register can be written or read through the I²C bus. The command byte is sent only during a write transmission.

Once a command byte has been sent, the register that was addressed continues to be accessed by reads until a new command byte has been sent.




Figure 8-7. Control Register Bits

Table 8-3. Control Register

| CONTR | OL REGISTER BITS | | COMMAND | REGISTER | PROTOCOL | POWER-UP |
|-------|------------------|----|------------|---------------------------|-----------------|-----------|
| B2 | B1 | В0 | BYTE (HEX) | REGISTER | PROTOCOL | DEFAULT |
| 0 | 0 | 0 | 0x00 | Input Port 0 Read byte | | xxxx xxxx |
| 0 | 0 | 1 | 0x01 | Input Port 1 | Read byte | xxxx xxxx |
| 0 | 1 | 0 | 0x02 | Output Port 0 | Read/write byte | 1111 1111 |
| 0 | 1 | 1 | 0x03 | Output Port 1 | Read/write byte | 1111 1111 |
| 1 | 0 | 0 | 0x04 | Polarity Inversion Port 0 | Read/write byte | 0000 0000 |
| 1 | 0 | 1 | 0x05 | Polarity Inversion Port 1 | Read/write byte | 0000 0000 |
| 1 | 1 | 0 | 0x06 | Configuration Port 0 | Read/write byte | 1111 1111 |
| 1 | 1 | 1 | 0x07 | Configuration Port 1 | Read/write byte | 1111 1111 |

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback

8.3.2.3 Register Descriptions

The Input Port registers (registers 0 and 1) reflect the incoming logic levels of the pins, regardless of whether the pin is defined as an input or an output by the Configuration Register. It only acts on read operation. Writes to these registers have no effect. The default value, X, is determined by the externally applied logic level.

Before a read operation, a write transmission is sent with the command byte to let the I²C device know that the Input Port registers will be accessed next.

Table 8-4. Registers 0 And 1 (Input Port Registers)

| Bit | 10.7 | 10.6 | 10.5 | 10.4 | 10.3 | 10.2 | 10.1 | 10.0 |
|---------|------|------|------|------|------|------|------|------|
| Default | Х | Х | Х | Х | Х | Х | Х | Х |
| Bit | I1.7 | I1.6 | I1.5 | I1.4 | I1.3 | I1.2 | I1.1 | I1.0 |
| Default | Х | Х | Х | Х | Х | Х | Х | Х |

The Output Port registers (registers 2 and 3) show the outgoing logic levels of the pins defined as outputs by the Configuration register. Bit values in this register have no effect on pins defined as inputs. In turn, reads from this register reflect the value that is in the flip-flop controlling the output selection, not the actual pin value.

Table 8-5. Registers 2 And 3 (Output Port Registers)

| | | - | | • | • | • | , | |
|---------|------|------|------|------|------|------|------|------|
| Bit | O0.7 | O0.6 | O0.5 | O0.4 | O0.3 | O0.2 | O0.1 | O0.0 |
| Default | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Bit | 01.7 | O1.6 | O1.5 | 01.4 | 01.3 | 01.2 | 01.1 | O1.0 |
| Default | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

The Polarity Inversion registers (registers 4 and 5) allow polarity inversion of pins defined as inputs by the Configuration register. If a bit in this register is set (written with 1), the corresponding pin's polarity is inverted. If a bit in this register is cleared (written with a 0), the corresponding pin's original polarity is retained.

Table 8-6. Registers 4 And 5 (Polarity Inversion Registers)

| Bit | N0.7 | N0.6 | N0.5 | N0.4 | N0.3 | N0.2 | N0.1 | N0.0 |
|---------|------|------|------|------|------|------|------|------|
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | N1.7 | N1.6 | N1.5 | N1.4 | N1.3 | N1.2 | N1.1 | N1.0 |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

The Configuration registers (registers 6 and 7) configure the directions of the I/O pins. If a bit in this register is set to 1, the corresponding port pin is enabled as an input with a high-impedance output driver. If a bit in this register is cleared to 0, the corresponding port pin is enabled as an output.

Table 8-7. Registers 6 And 7 (Configuration Registers)

| Bit | C0.7 | C0.6 | C0.5 | C0.4 | C0.3 | C0.2 | C0.1 | C0.0 |
|---------|------|------|------|------|------|------|------|------|
| Default | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Bit | C1.7 | C1.6 | C1.5 | C1.4 | C1.3 | C1.2 | C1.1 | C1.0 |
| Default | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

8.3.2.4 Bus Transactions

Data is exchanged between the master and the PCA9535 through write and read commands.

8.3.2.4.1 Writes

Data is transmitted to the PCA9535 by sending the device address and setting the least-significant bit to a logic 0 (see Figure 8-6 for device address). The command byte is sent after the address and determines which register receives the data that follows the command byte.

The eight registers within the PCA9535 are configured to operate as four register pairs. The four pairs are Input Ports, Output Ports, Polarity Inversions, and Configurations. After sending data to one register, the next data byte is sent to the other register in the pair (see Figure 8-8 and Figure 8-9). For example, if the first byte is sent to Output Port 1 (register 3), the next byte is stored in Output Port 0 (register 2).

There is no limitation on the number of data bytes sent in one write transmission. In this way, each 8-bit register may be updated independently of the other registers.

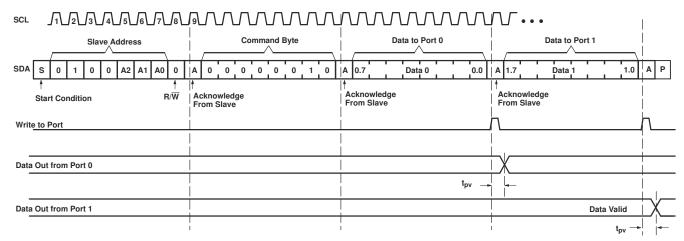


Figure 8-8. Write To Output Port Registers

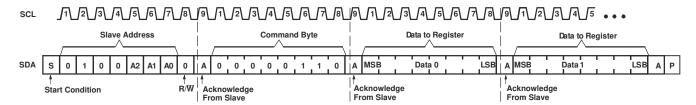


Figure 8-9. Write To Configuration Registers

8.3.2.4.2 Reads

The bus master first must send the PCA9535 address with the least-significant bit set to a logic 0 (see Figure 8-6 for device address). The command byte is sent after the address and determines which register is accessed. After a restart, the device address is sent again, but this time, the least-significant bit is set to a logic 1. Data from the register defined by the command byte then is sent by the PCA9535 (see Figure 8-10 through Figure 8-12).

After a restart, the value of the register defined by the command byte matches the register being accessed when the restart occurred. For example, if the command byte references Input Port 1 before the restart, and the restart occurs when Input Port 0 is being read, the stored command byte changes to reference Input Port 0. The original command byte is forgotten. If a subsequent restart occurs, Input Port 0 is read first. Data is clocked into the register on the rising edge of the ACK clock pulse. After the first byte is read, additional bytes may be read, but the data now reflect the information in the other register in the pair. For example, if Input Port 1 is read, the next byte read is Input Port 0.

Data is clocked into the register on the rising edge of the ACK clock pulse. There is no limitation on the number of data bytes received in one read transmission, but when the final byte is received, the bus master must not acknowledge the data


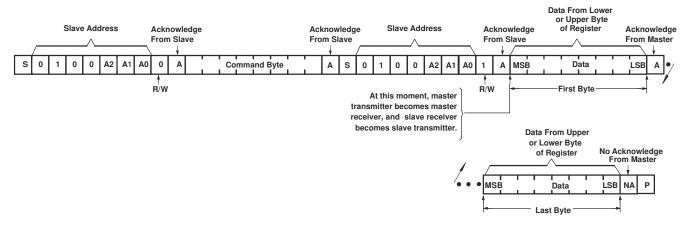


Figure 8-10. Read From Register

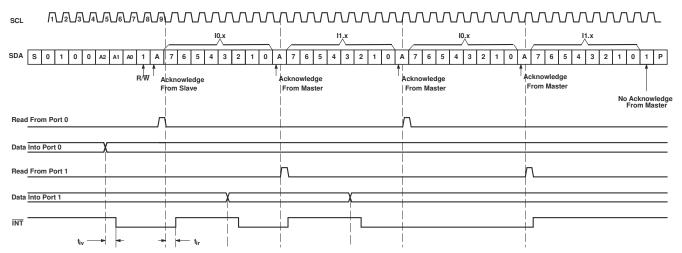


- A. Transfer of data can be stopped at any time by a Stop condition. When this occurs, data present at the latest acknowledge phase is valid (output mode). It is assumed that the command byte previously has been set to 00 (read Input Port register).
- B. This figure eliminates the command byte transfer, a restart, and slave address call between the initial slave address call and actual data transfer from P port (see Figure 8-10 for these details).

Figure 8-11. Read Input Port Register, Scenario 1

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

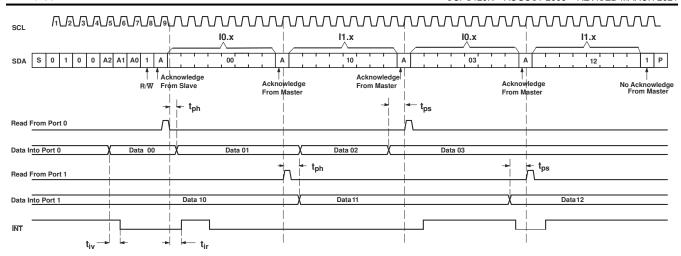

- A. Transfer of data can be stopped at any time by a Stop condition. When this occurs, data present at the latest acknowledge phase is valid (output mode). It is assumed that the command byte previously has been set to 00 (read Input Port register).
- B. This figure eliminates the command byte transfer, a restart, and slave address call between the initial slave address call and actual data transfer from P port (see Figure 8-10 for these details).

Figure 8-12. Read Input Port Register, Scenario 2



9 Application Information Disclaimer


Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

9.2 Typical Application

Figure 9-1 shows an application in which the PCA9535 can be used.

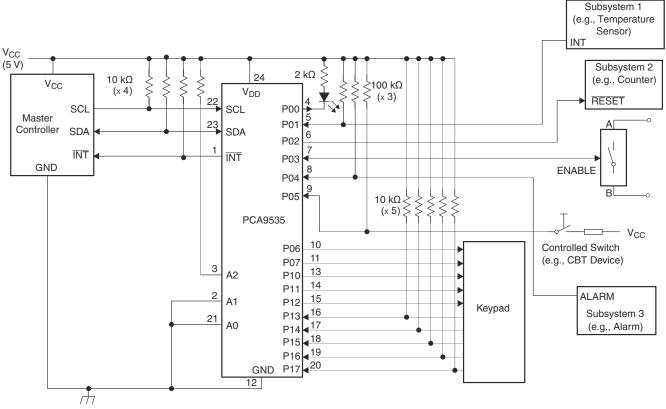

- A. Device address is configured as 0100100 for this example.
- B. P00, P02, and P03 are configured as outputs.
- C. P01, P04–P07, and P10–P17 are configured as inputs.
- D. Pin numbers shown are for DB, DBQ, DGV, DW, and PW packages.

Figure 9-1. Typical Application

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

9.2.1 Design Requirements

9.2.1.1 Minimizing I_{CC} When I/O Is Used To Control Led

When an I/O is used to control an LED, normally it is connected to V_{CC} through a resistor as shown in Figure 9-3. Because the LED acts as a diode, when the LED is off, the I/O V_{IN} is about 1.2 V less than V_{CC} . The ΔI_{CC} parameter in Electrical Characteristics shows how I_{CC} increases as V_{IN} becomes lower than V_{CC} . For battery-powered applications, it is essential that the voltage of I/O pins is greater than or equal to V_{CC} , when the LED is off, to minimize current consumption.

Figure 9-2 shows a high-value resistor in parallel with the LED. Figure 9-3 shows V_{CC} less than the LED supply voltage by at least 1.2 V. Both of these methods maintain the I/O V_{IN} at or above V_{CC} and prevent additional supply-current consumption when the LED is off.




Figure 9-2. High-Value Resistor In Parallel With Led




Figure 9-3. Device Supplied By Lower Voltage



10 Power Supply Recommendations

10.1 Power-On Reset Requirements

In the event of a glitch or data corruption, PCA9535 can be reset to its default conditions by using the power-on reset feature. Power-on reset requires that the device go through a power cycle to be completely reset. This reset also happens when the device is powered on for the first time in an application.

The two types of power-on reset are shown in Figure 10-1 and Figure 10-2.

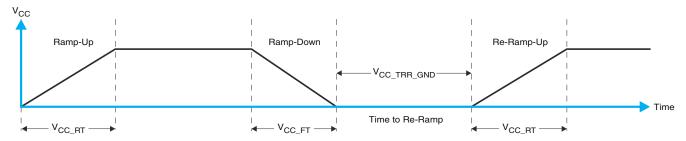


Figure 10-1. V_{CC} Is Lowered Below 0.2 V Or 0 V And Then Ramped Up To V_{CC}

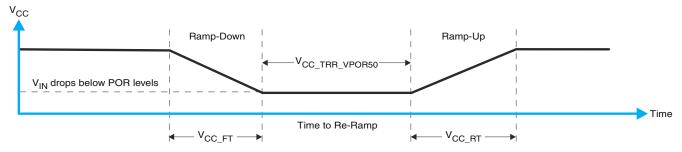


Figure 10-2. V_{CC} Is Lowered Below The Por Threshold, Then Ramped Back Up To V_{CC}

Table 10-1 specifies the performance of the power-on reset feature for PCA9535 for both types of power-on reset.

| Table 10-1 | . Recommended Supply | Seguencing And Rai | mp Rates (1) |
|-------------------|----------------------|--------------------|--------------|
|-------------------|----------------------|--------------------|--------------|

| | iable to introdumienaea cappi, coquen | | | | | |
|---------------------------|---|-----------------|-------|-----|-------|------|
| | PARAMETER | | MIN | TYP | MAX | UNIT |
| V _{CC_FT} | Fall rate | See Figure 10-1 | 1 | | 100 | ms |
| V _{CC_RT} | Rise rate | See Figure 10-1 | 0.01 | | 100 | ms |
| V _{CC_TRR_GND} | Time to re-ramp (when V _{CC} drops to GND) | See Figure 10-1 | 0.001 | | | ms |
| V _{CC_TRR_POR50} | Time to re-ramp (when V _{CC} drops to V _{POR_MIN} – 50 mV) | See Figure 10-2 | 0.001 | | | ms |
| V _{CC_GH} | Level that V_{CCP} can glitch down to, but not cause a functional disruption when V_{CCX_GW} = 1 μs | See Figure 10-3 | | | 1.2 | V |
| V _{CC_GW} | Glitch width that will not cause a functional disruption when $V_{CCX_GH} = 0.5 \times V_{CCx}$ | See Figure 10-3 | | | | μs |
| V _{PORF} | Voltage trip point of POR on falling V _{CC} | | 0.767 | | 1.144 | V |
| V _{PORR} | Voltage trip point of POR on rising V _{CC} | | 1.033 | | 1.428 | V |

(1) $T_A = -40^{\circ}C$ to 85°C (unless otherwise noted)

Glitches in the power supply can also affect the power-on reset performance of this device. The glitch width (V_{CC_GW}) and height (V_{CC_GH}) are dependent on each other. The bypass capacitance, source impedance, and the device impedance are factors that affect power-on reset performance. Figure 10-3 and Table 10-1 provide more information on how to measure these specifications.

Submit Document Feedback

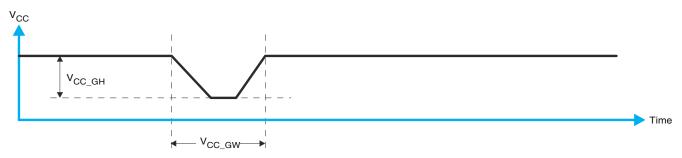


Figure 10-3. Glitch Width And Glitch Height

 V_{POR} is critical to the power-on reset. V_{POR} is the voltage level at which the reset condition is released and all the registers and the I²C/SMBus state machine are initialized to their default states. The value of V_{POR} differs based on the V_{CC} being lowered to or from 0. Figure 10-4 and Table 10-1 provide more details on this specification.

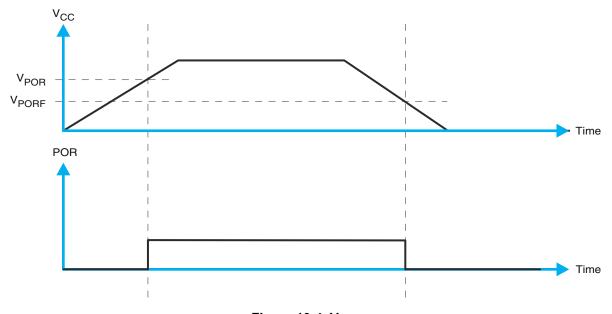


Figure 10-4. V_{POR}



11 Device and Documentation Support

11.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on Subscribe to updates to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.2 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

11.3 Trademarks

TI E2E[™] is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

11.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.5 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: PCA9535

Submit Document Feedback

www.ti.com

9-Nov-2025

PACKAGING INFORMATION

| Orderable part number | Status | Material type | Package Pins | Package qty Carrier | RoHS | Lead finish/ Ball material | MSL rating/ Peak reflow | Op temp (°C) | Part marking (6) |
|-----------------------|----------|---------------|------------------|-----------------------|------|-------------------------------|----------------------------|--------------|------------------|
| | | | | | | (4) | (5) | | |
| PCA9535DB | Obsolete | Production | SSOP (DB) 24 | - | - | Call TI | Call TI | -40 to 85 | PD9535 |
| PCA9535DBQR | Active | Production | SSOP (DBQ) 24 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PCA9535 |
| PCA9535DBQR.A | Active | Production | SSOP (DBQ) 24 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PCA9535 |
| PCA9535DGVR | Active | Production | TVSOP (DGV) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535DGVR.A | Active | Production | TVSOP (DGV) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535DW | Active | Production | SOIC (DW) 24 | 25 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PCA9535 |
| PCA9535DW.A | Active | Production | SOIC (DW) 24 | 25 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PCA9535 |
| PCA9535DWR | Active | Production | SOIC (DW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PCA9535 |
| PCA9535DWR.A | Active | Production | SOIC (DW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PCA9535 |
| PCA9535PWR | Active | Production | TSSOP (PW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535PWR.A | Active | Production | TSSOP (PW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535PWR.B | Active | Production | TSSOP (PW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535PWRG4 | Active | Production | TSSOP (PW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535PWRG4.A | Active | Production | TSSOP (PW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535PWRG4.B | Active | Production | TSSOP (PW) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535RGER | Active | Production | VQFN (RGE) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535RGER.A | Active | Production | VQFN (RGE) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535RGER.B | Active | Production | VQFN (RGE) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535RGERG4 | Active | Production | VQFN (RGE) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535RGERG4.A | Active | Production | VQFN (RGE) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535RGERG4.B | Active | Production | VQFN (RGE) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD9535 |
| PCA9535RTWR | Active | Production | WQFN (RTW) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD535 |
| PCA9535RTWR.A | Active | Production | WQFN (RTW) 24 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD535 |

⁽¹⁾ Status: For more details on status, see our product life cycle.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.



PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



www.ti.com 9-Oct-2025

TAPE AND REEL INFORMATION





| A0 | Dimension designed to accommodate the component width |
|----|---|
| В0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|-----------------|--------------------|----|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| PCA9535DBQR | SSOP | DBQ | 24 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| PCA9535DGVR | TVSOP | DGV | 24 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| PCA9535DWR | SOIC | DW | 24 | 2000 | 330.0 | 24.4 | 10.75 | 15.7 | 2.7 | 12.0 | 24.0 | Q1 |
| PCA9535PWR | TSSOP | PW | 24 | 2000 | 330.0 | 16.4 | 6.95 | 8.3 | 1.6 | 8.0 | 16.0 | Q1 |
| PCA9535PWRG4 | TSSOP | PW | 24 | 2000 | 330.0 | 16.4 | 6.95 | 8.3 | 1.6 | 8.0 | 16.0 | Q1 |
| PCA9535RGER | VQFN | RGE | 24 | 3000 | 330.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| PCA9535RGERG4 | VQFN | RGE | 24 | 3000 | 330.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| PCA9535RTWR | WQFN | RTW | 24 | 3000 | 330.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |



www.ti.com 9-Oct-2025



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| PCA9535DBQR | SSOP | DBQ | 24 | 2500 | 353.0 | 353.0 | 32.0 |
| PCA9535DGVR | TVSOP | DGV | 24 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9535DWR | SOIC | DW | 24 | 2000 | 350.0 | 350.0 | 43.0 |
| PCA9535PWR | TSSOP | PW | 24 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9535PWRG4 | TSSOP | PW | 24 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9535RGER | VQFN | RGE | 24 | 3000 | 346.0 | 346.0 | 33.0 |
| PCA9535RGERG4 | VQFN | RGE | 24 | 3000 | 346.0 | 346.0 | 33.0 |
| PCA9535RTWR | WQFN | RTW | 24 | 3000 | 353.0 | 353.0 | 32.0 |

PACKAGE MATERIALS INFORMATION

www.ti.com 9-Oct-2025

TUBE



*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (µm) | B (mm) |
|-------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| PCA9535DW | DW | SOIC | 24 | 25 | 506.98 | 12.7 | 4826 | 6.6 |
| PCA9535DW.A | DW | SOIC | 24 | 25 | 506.98 | 12.7 | 4826 | 6.6 |

PLASTIC QUAD FLATPACK - NO LEAD



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4204104/H





PLASTIC QUAD FLATPACK - NO LEAD



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



DBQ (R-PDSO-G24)

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
- D. Falls within JEDEC MO-137 variation AE.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



DW (R-PDSO-G24)

PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AD.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)


- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.




4 x 4, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

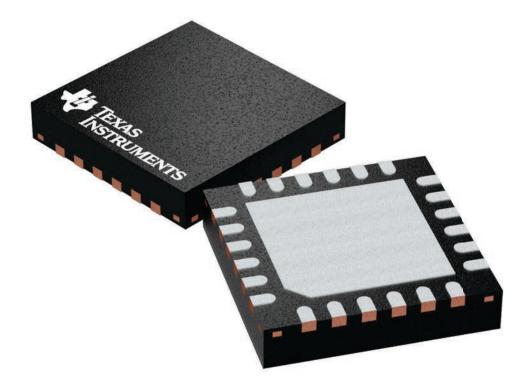


PLASTIC QUAD FLATPACK-NO LEAD

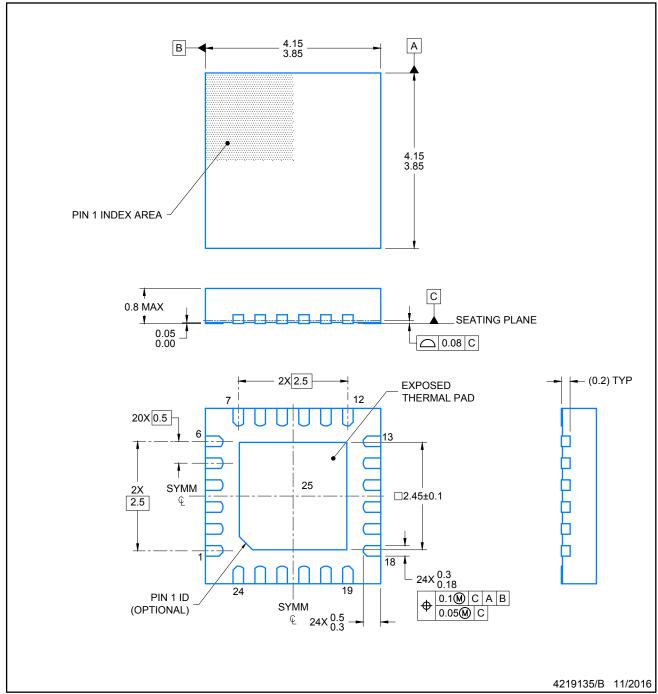

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.




PLASTIC QUAD FLATPACK-NO LEAD

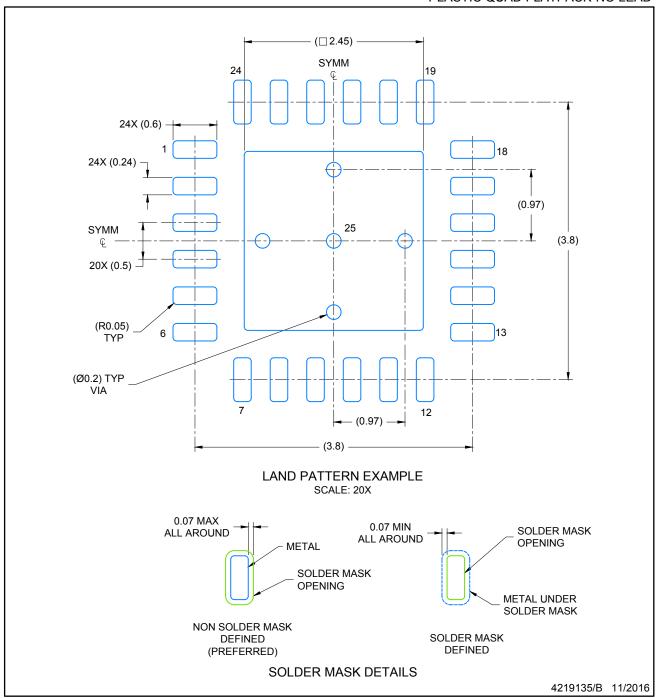

NOTES: (continued)

3. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

PLASTIC QUAD FLATPACK-NO LEAD

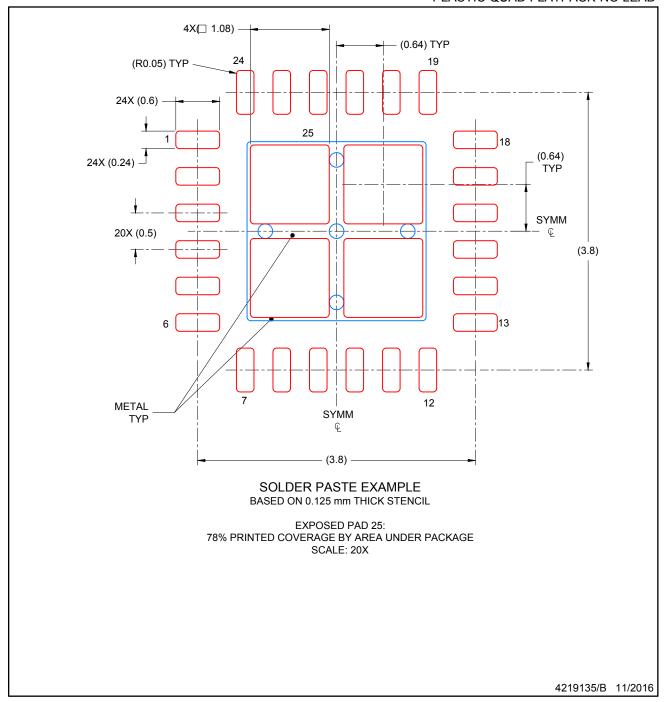

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

DB (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025