

# OPAx134 High-Performance, SoundPlus™ Audio Operational Amplifiers

### 1 Features

**Excellent sound quality** 

Ultra-low distortion: 0.00008%

Low noise: 8nV/√Hz True FET-input:  $I_B = 5pA$ 

High speed:

- Slew rate: 20V/µs - Bandwidth: 8MHz

High open-loop gain: 120dB ( $2k\Omega$ ) Wide supply range: ±2.5V to ±18V Single, dual, and quad versions

# 2 Applications

Professional audio and music

Line drivers

Line receivers


Multimedia audio

Active filters

Preamplifiers

Integrators

Crossover networks

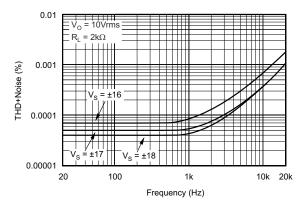

**THD+Noise vs Frequency** 

# 3 Description

The OPA134, OPA2134, and OPA4134 (OPAx134) series are ultra-low distortion, low-noise operational amplifiers fully specified for audio applications. A true FET input stage is incorporated to provide excellent sound quality and speed for exceptional audio performance. This feature, in combination with high output drive capability and excellent dc performance, allows for use in a wide variety of demanding applications. In addition, the OPAx134 series has a wide output swing, to within 1V of the rails, allowing increased headroom and making these devices an excellent choice for use in any audio circuit.

The OPAx134 SoundPlus™ audio operational amplifiers are easy to use and free from phaseinversion and the overload problems often found in common FET-input operational amplifiers. The devices can be operated from ±2.5V to ±18V power supplies. Input cascode circuitry provides excellent common-mode rejection and maintains low input bias current over the wide input voltage range, minimizing distortion. The OPAx134 series operational amplifiers are unity-gain stable and provide excellent dynamic behavior over a wide range of load conditions, including high load capacitance. The dual and quad versions feature completely independent circuitry for lowest crosstalk and freedom from interaction, even when overdriven or overloaded.

Single and dual versions are available in 8-pin DIP and SO-8 surface-mount packages in standard configurations. The guad is available in SO-14 surface-mount package. All are specified for -40°C to +85°C operation. A SPICE macromodel is available for design analysis.

#### **Device Information**

PART NUMBER	CHANNEL COUNT	PACKAGE <sup>(1)</sup>	
OPA134	Single	D (SOIC, 8)	
UPA 134	Single	P (PDIP, 8)	
OPA2134	Dual	D (SOIC, 8)	
UPA2134	Duai	P (PDIP, 8)	
OPA4134	Quad	D (SOIC, 14)	

For more information, see also Section 10.



# **Table of Contents**

1 Features	1	6.4 Device Functional Modes	15
2 Applications	1	7 Application and Implementation	16
3 Description		7.1 Application Information	16
4 Pin Configuration and Functions	3	7.2 Typical Application	
5 Specifications	<mark>5</mark>	7.3 Power Supply Recommendations	18
5.1 Absolute Maximum Ratings		7.4 Layout	18
5.2 ESD Ratings		8 Device and Documentation Support	20
5.3 Recommended Operating Conditions	5	8.1 Device Support	<mark>2</mark> 0
5.4 Thermal Information - OPA134	6	8.2 Documentation Support	20
5.5 Thermal Information - OPA2134	6	8.3 Receiving Notification of Documentation Updates	20
5.6 Thermal Information - OPA4134	6	8.4 Support Resources	20
5.7 Electrical Characteristics	7	8.5 Trademarks	20
5.8 Typical Characteristics	9	8.6 Electrostatic Discharge Caution	21
6 Detailed Description	13	8.7 Glossary	21
6.1 Overview	13	9 Revision History	
6.2 Feature Description		10 Mechanical, Packaging, and Orderable	
6.3 Functional Block Diagram	15	Information	<mark>22</mark>



# **4 Pin Configuration and Functions**




Figure 4-1. OPA134: D Package, 8-Pin SOIC, and P Package, 8-Pin PDIP (Top View)

### Pin Functions: OPA134

PIN		TYPE	DESCRIPTION	
NAME	NO.	ITPE	DESCRIPTION	
+IN	3	Input	Noninverting input	
-IN	2	Input	Inverting input	
NC	1, 5	_	Do not connect these pins <sup>(1)</sup>	
NC	8	_	No internal connection. Float this pin.	
Output	6	Output	Output	
V+	7	Power	Positive power supply	
V-	4	Power	Negative power supply	

(1) Existing layouts for the OPA134 before revision B of this data sheet do not need to be redesigned.




Figure 4-2. OPA2134: D Package, 8-Pin SOIC, and P Package, 8-Pin PDIP (Top View)

Table 4-1. Pin Functions: OPA2134

PIN		TYPE	DESCRIPTION
NAME	NO.	ITPE	DESCRIPTION
+IN A	3	Input	Noninverting input, channel A
+IN B	5	Input	Noninverting input, channel B
−IN A	2	Input	Inverting input, channel A
–IN B	6	Input	Inverting input, channel B
OUT A	1	Output	Output, channel A
OUT B	7	Output	Output, channel B
V+	8	Power	Positive (highest) power supply
V-	4	Power	Negative (lowest) power supply



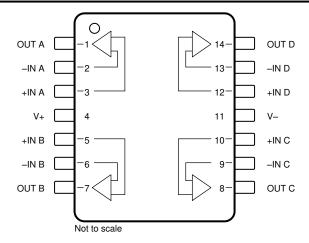


Figure 4-3. OPA4134: D Package, 14-Pin SOIC (Top View)

Table 4-2. Pin Functions: OPA4134

	PIN	TYPE	DESCRIPTION	
NAME	NO.	ITPE	DESCRIPTION	
+IN A	3	Input	Noninverting input, channel A	
+IN B	5	Input	Noninverting input, channel B	
+IN C	10	Input	Noninverting input, channel C	
+IN D	12	Input	nverting input, channel D	
-IN A	2	Input	Inverting input, channel A	
–IN B	6	Input	nverting input, channel B	
–IN C	9	Input	Inverting input, channel C	
–IN D	13	Input	Inverting input, channel D	
OUT A	1	Output	Output, channel A	
OUT B	7	Output	Output, channel B	
OUT C	8	Output	Output, channel C	
OUT D	14	Output	Output, channel D	
V+	4	Power	Positive (highest) power supply	
V–	11	Power	Negative (lowest) power supply	

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

# **5 Specifications**

# 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		·	MIN	MAX	UNIT
Vs	Supply voltage, (V+) – (V–)	Single supply		36	V
	Input voltage <sup>(2)</sup>	·	(V-) - 0.5 (V	+) + 0.5	V
	Input current <sup>(2)</sup>			±10	mA
I <sub>SC</sub>	Output short-circuit <sup>(3)</sup>		Continuous		
T <sub>A</sub>	Operating temperature		-40	125	°C
TJ	Junction temperature			150	°C
T <sub>stg</sub>	Storage temperature		<b>–</b> 55	125	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) Input pins are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails must be current limited to 10mA or less.
- (3) Short-circuit to ground, one amplifier per package.

### 5.2 ESD Ratings

			VALUE	UNIT	
OPA134	in SOIC and PDIP Packages, ar	nd OPA2134 in PDIP Package			
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	V	
OPA213	4 in SOIC Package				
	Flacture teticodicalismos	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>		V	
V <sub>(ESD)</sub> Electrostatic discharge		Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>		<b>V</b>	
OPA413	OPA4134 in SOIC Package				
V	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	\/	
V <sub>(ESD)</sub>	Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	±200	V	

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

# **5.3 Recommended Operating Conditions**

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V	Supply voltage, (V+) – (V–)	Dual supply	±2.5	±15	±18	.,
V <sub>S</sub>	Supply voltage, (v+) = (v=)	Single supply	5	30	36	V
T <sub>A</sub>	T <sub>A</sub> Ambient temperature		-40		+85	°C



# 5.4 Thermal Information - OPA134

		OPA	<b>\134</b>	
	THERMAL METRIC(1)	D (SOIC)	P (PDIP)	UNIT
		8 PINS	8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	160	73	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	75	50	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	60	36	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	9	17	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	50	35	°C/W
R <sub>0JC(bot)</sub>	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

### 5.5 Thermal Information - OPA2134

		OPA		
	THERMAL METRIC(1)	D (SOIC)	P (PDIP)	UNIT
		8 PINS	8 PINS	-
R <sub>0JA</sub>	Junction-to-ambient thermal resistance	160	71	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	75	50	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	60	36	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	9	16	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	50	35	°C/W
R <sub>0JC(bot)</sub>	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

### 5.6 Thermal Information - OPA4134

		OPA4132	
	THERMAL METRIC(1)	D (SOIC)	UNIT
		14 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	97	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	56	°C/W
R <sub>0JB</sub>	Junction-to-board thermal resistance	53	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	19	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	46	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

 For more information about traditional and new thermal metrics, see the <u>Semiconductor and IC Package Thermal Metrics</u> application report.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated



# **5.7 Electrical Characteristics**

at  $T_A$  = 25°C,  $V_S$  = ±15V,  $R_L$  = 2k $\Omega$  connected to midsupply, and  $V_{CM}$  =  $V_{OUT}$  = midsupply (unless otherwise noted)

	PARAMETER	TEST C	ONDITIONS	MIN	TYP	MAX	UNIT
AUDIO P	ERFORMANCE						
TUD:N	Total harmonic distortion plus	f = 1kHz, G = 1,	$R_L = 2k\Omega$		0.00008		0/
THD+N	noise	$V_O = 3V_{rms}$	$R_L = 600\Omega$		0.00015		%
	Intermodulation distortion	f = 1kHz, G = 1, V <sub>O</sub> =	= 1V <sub>PP</sub>		-98		dB
	Headroom <sup>(1)</sup>	THD < 0.01%, R <sub>L</sub> = 2	2kΩ, V <sub>S</sub> = 18V		21.3		dBu
FREQUE	NCY RESPONSE						
GBW	Gain bandwidth product				8		MHz
SR	Slew rate <sup>(2)</sup>				±20		V/µs
	Cattling times	10V step, G = 1,	0.1%		0.7		
	Settling time	C <sub>L</sub> = 100pF	0.01%		1		μs
FPBW	Full power bandwidth				1.3		MHz
	Overload recovery time	$V_{IN} \times G = V_{S}$			0.6		μs
NOISE							
	Input voltage noise	f = 20Hz to 20kHz			1.2		$\mu V_{rms}$
e <sub>n</sub>	Input voltage noise density	f = 1kHz			8		nV/√Hz
In	Input current noise density	f = 1kHz			3		fA/√Hz
OFFSET	VOLTAGE						
\ /	land affect wells as				±1	±3.5	\/
V <sub>OS</sub>	Input offset voltage	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	;		±1		mV
dV <sub>OS</sub> /dT	Input offset voltage drift	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	;		±2		μV/°C
PSRR	Power-supply rejection ratio	5V ≤ V <sub>S</sub> ≤ 36V		90	106		dB
	Channel concretion (dual guad)	DC, $R_L = 2k\Omega$			128		٩D
	Channel separation (dual, quad)	$f = 20kHz, R_L = 2k\Omega$			126		dB
INPUT B	IAS CURRENT						
					±5	±100	pA
I <sub>B</sub>	Input bias current <sup>(3)</sup>	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	:	S	See Section 5.8	±5	nA
I <sub>OS</sub>	Input offset current <sup>(3)</sup>				±2	±50	pА
INPUT V	OLTAGE						
V <sub>CM</sub>	Common-mode voltage			(V-) + 2.5	±13	(V+) - 3.5	V
CMDD	Common mode with the work	40.51/21/21/21		86	100		,ID
CMRR	Common-mode rejection ratio	$-12.5V \le V_{CM} \le 11.5$	TA = -40°C to +85°C		90		dB
INPUT IN	MPEDANCE	1	1				
	Differential				10 <sup>13</sup>    8		Ω    pF
	Common-mode	-12.5V ≤ V <sub>CM</sub> ≤ 11.5	V		10 <sup>13</sup>    6		Ω    pF
OPEN-LO	OOP GAIN	l					1
Λ.	On an Isan walta a seein	R <sub>L</sub> = 10kΩ, -14.5V ≤	V <sub>O</sub> ≤ 13.8V	104	120		,ID
A <sub>OL</sub>	Open-loop voltage gain	$R_L = 2k\Omega, -13.8V \le 3$	V <sub>O</sub> ≤ 13.5V	104	120		dB



# **5.7 Electrical Characteristics (continued)**

at  $T_A = 25^{\circ}C$ ,  $V_S = \pm 15V$ ,  $R_L = 2k\Omega$  connected to midsupply, and  $V_{CM} = V_{OUT} =$  midsupply (unless otherwise noted)

	PARAMETER	TEST	CONDITIONS	MIN	TYP	MAX	UNIT		
OUTP	UT			1		'			
		D = 10k0	Positive	(V+) - 1.2					
V	Valtage output	$R_L = 10k\Omega$	Negative			(V-) + 0.5	\ /		
Vo	Voltage output	D 01-0	Positive	(V+) - 1.5			V		
		$R_L = 2k\Omega$	Negative			(V–) + 1.2			
	Ch and aimstrik attended	Sourcing			36		mA		
I <sub>SC</sub>	Short-circuit current	Sinking			-30				
7	Outrout incomed and	f - 40kl l-	Closed-loop <sup>(4)</sup>		0.01				
Z <sub>O</sub>	Output impedance	f = 10kHz	Open-loop		10		Ω		
	Capacitive load drive	Stable operation	-	See Typica	al Characte	ristics			
POWE	R SUPPLY			•		'			
IQ	Quiescent current (per amplifier)	I <sub>O</sub> = 0mA			4	5	mA		

<sup>(1)</sup> dBu = 20 × log (V<sub>rms</sub> / 0.7746) where V<sub>rms</sub> is the maximum output voltage for which THD+Noise is less than 0.01%. See *Total Harmonic Distortion*.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

<sup>(2)</sup> Proposed by design.

<sup>(3)</sup> High-speed test at  $T_J = 25$ °C.

<sup>(4)</sup> See Closed-Loop Output Impedance vs Frequency in Typical Characteristics.

## **5.8 Typical Characteristics**

at  $T_A = 25$ °C,  $V_S = \pm 15$ V,  $R_L = 2k\Omega$  connected to midsupply, and  $V_{CM} = V_{OUT} =$  midsupply (unless otherwise noted)

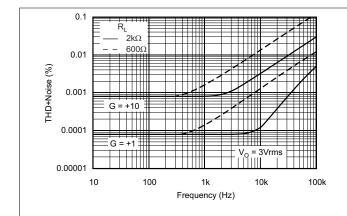


Figure 5-1. Total Harmonic Distortion + Noise vs Frequency

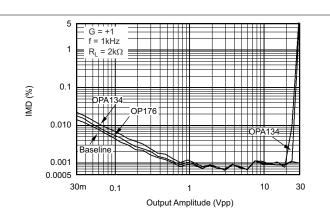


Figure 5-2. SMPTE Intermodulation Distortion vs Output Amplitude

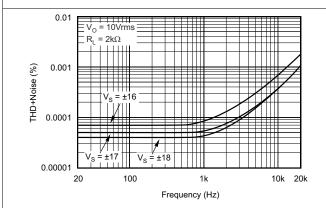


Figure 5-3. Total Harmonic Distortion + Noise vs Frequency

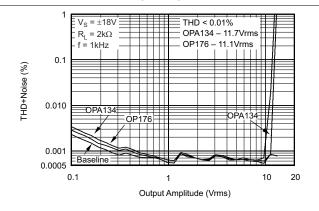


Figure 5-4. Headroom – Total Harmonic Distortion + Noise vs Output Amplitude

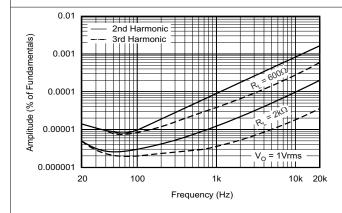


Figure 5-5. Harmonic Distortion + Noise vs Frequency

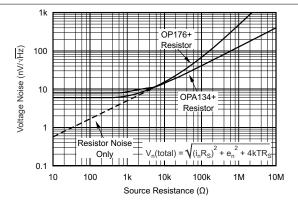


Figure 5-6. Voltage Noise vs Source Resistance



## **5.8 Typical Characteristics (continued)**

at  $T_A = 25$ °C,  $V_S = \pm 15$ V,  $R_L = 2k\Omega$  connected to midsupply, and  $V_{CM} = V_{OUT} =$  midsupply (unless otherwise noted)

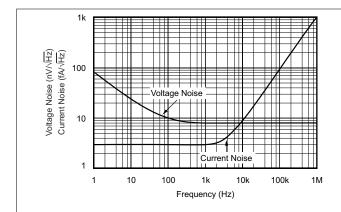
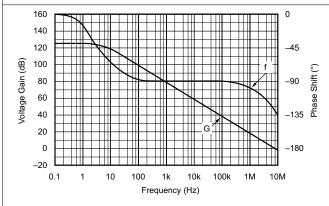


Figure 5-7. Input Voltage and Current Noise Spectral Density vs Frequency

Figure 5-8. Input-Referred Noise Voltage vs Noise Bandwidth



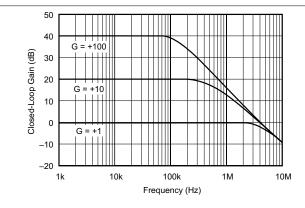
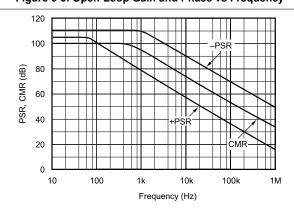


Figure 5-9. Open-Loop Gain and Phase vs Frequency

Figure 5-10. Closed-Loop Gain vs Frequency



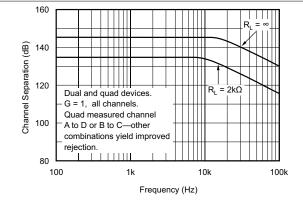



Figure 5-11. Power Supply and Common-Mode Rejection vs Frequency

Figure 5-12. Channel Separation vs Frequency

Submit Document Feedback

# **5.8 Typical Characteristics (continued)**

at  $T_A = 25$ °C,  $V_S = \pm 15$ V,  $R_L = 2k\Omega$  connected to midsupply, and  $V_{CM} = V_{OUT} =$  midsupply (unless otherwise noted)

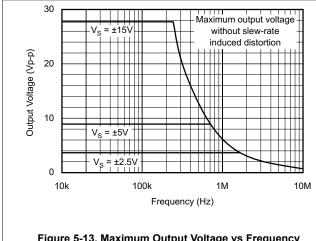

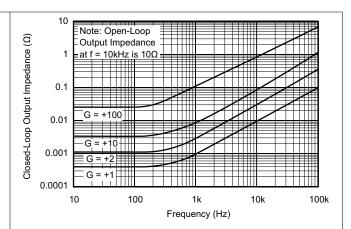

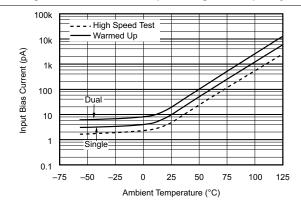


Figure 5-13. Maximum Output Voltage vs Frequency





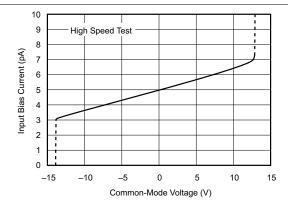
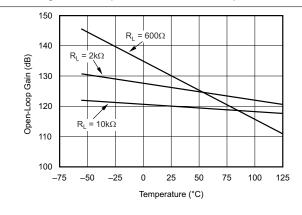


Figure 5-15. Input Bias Current vs Temperature

Figure 5-16. Input Bias Current vs Input Common-Mode Voltage



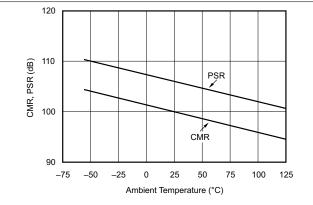


Figure 5-17. Open-Loop Gain vs Temperature

Figure 5-18. CMR, PSR vs Temperature



# **5.8 Typical Characteristics (continued)**

at  $T_A = 25$ °C,  $V_S = \pm 15$ V,  $R_L = 2k\Omega$  connected to midsupply, and  $V_{CM} = V_{OUT} =$  midsupply (unless otherwise noted)

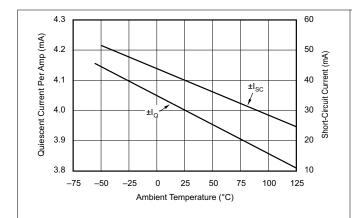


Figure 5-19. Quiescent Current and Short-Circuit Current vs Temperature

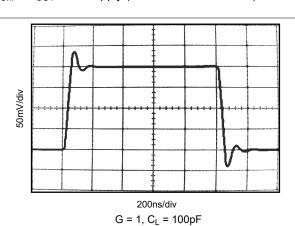


Figure 5-20. Small-Signal Step Response

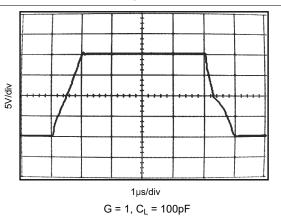


Figure 5-21. Large-Signal Step Response

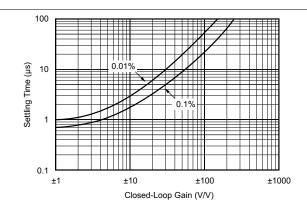
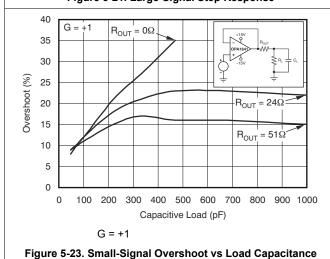


Figure 5-22. Settling Time vs Closed-Loop Gain



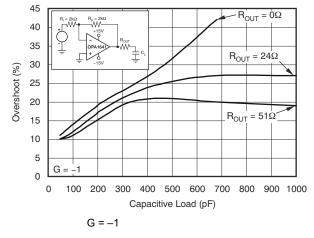


Figure 5-24. Small-Signal Overshoot vs Load Capacitance



# **6 Detailed Description**

#### 6.1 Overview

The OPA134 series are ultra-low distortion, low-noise operational amplifiers fully specified for audio applications. A true FET input stage is incorporated to provide unmatched sound quality and speed for exceptional audio performance. This, in combination with high output drive capability and excellent DC performance, allows for use in a wide variety of demanding applications. In addition, the OPA134 has a wide output swing, to within 1V of the rails, allowing increased headroom and making this op amp an excellent choice for any audio circuit.

### **6.2 Feature Description**

#### 6.2.1 Total Harmonic Distortion

The OPAx134 series of operational amplifiers have excellent distortion characteristics. THD+Noise is below 0.0004% throughout the audio frequency range, 20Hz to 20kHz, with a  $2k\Omega$  load. In addition, distortion remains relatively flat through the wide output voltage swing range, providing increased headroom compared to other audio amplifiers, including the OP176/275.

Headroom is a subjective measurement, and can be thought of as the maximum output amplitude allowed while still maintaining a low level of distortion. In an attempt to quantify headroom, TI defines very low distortion as 0.01%. Headroom is expressed as a ratio which compares the maximum allowable output voltage level to a standard output level (1mW into  $600\Omega$ , or 0.7746Vrms). Therefore, OPA134 series of operational amplifiers, which have a maximum allowable output voltage level of 11.7Vrms (THD+Noise < 0.01%), have a headroom specification of 23.6dBu. See Figure 5-4.

#### 6.2.2 Distortion Measurements

The distortion produced by OPAx134 series of operational amplifiers is below the measurement limit of all known commercially-available equipment. However, a special test circuit can extend the measurement capabilities.

Operational amplifier distortion can be considered an internal error source which can be referred to the input. Figure 6-1 shows a circuit which causes the operational amplifier distortion to be 101 times greater than that which the operational amplifier normally produces. The addition of  $R_3$  to the otherwise standard non-inverting amplifier configuration alters the feedback factor or noise gain of the circuit. The closed-loop gain is unchanged, but the feedback available for error correction is reduced by a factor of 101, thus extending the resolution by 101. The input signal and load applied to the operational amplifier are the same as with conventional feedback without  $R_3$ . Keep the value of  $R_3$  small to minimize effect on the distortion measurements.

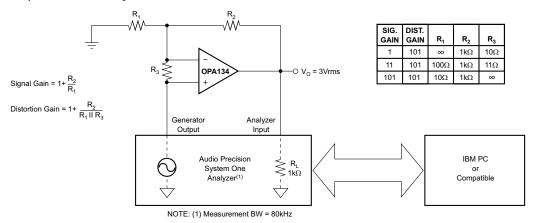


Figure 6-1. Distortion Test Circuit

This technique can be verified by duplicating measurements at high gain or high frequency, where the distortion is within the measurement capability of the test equipment. Measurements for this data sheet were made with an Audio Precision distortion and noise analyzer, which greatly simplifies repetitive measurements. The measurement technique can, however, be performed with manual distortion measurement instruments.

#### 6.2.3 Source Impedance and Distortion

For lowest distortion with a source or feedback network with an impedance greater than  $2k\Omega$ , match the impedance seen by the positive and negative inputs in noninverting applications. The p-channel JFETs in the FET input stage exhibit a varying input capacitance with applied common-mode input voltage. In inverting configurations, the input does not vary with input voltage, because the inverting input is held at virtual ground. However, in noninverting applications the inputs do vary, and the gate-to-source voltage is not constant. The effect is increased distortion due to the varying capacitance for unmatched source impedances greater than  $2k\Omega$ .

To maintain low distortion, match unbalanced source impedance with the appropriate values in the feedback network as shown in Figure 6-2. Of course, the unbalanced impedance can be from gain-setting resistors in the feedback path. If the parallel combination of  $R_1$  and  $R_2$  is greater than  $2k\Omega$ , use a matching impedance on the noninverting input. As always, minimize resistor values to reduce the effects of thermal noise.

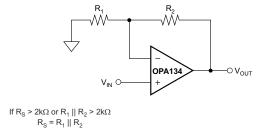


Figure 6-2. Impedance Matching for Maintaining Low Distortion in Noninverting Circuits

Submit Document Feedback




#### 6.2.4 Phase Reversal Protection

The OPAx134 series of operational amplifiers are free from output phase-reversal problems. Many audio operational amplifiers, such as the OP176, exhibit phase-reversal of the output when the input common-mode voltage range is exceeded. This can occur in voltage-follower circuits, causing serious problems in control loop applications. The OPA134 series operational amplifiers are free from this undesirable behavior even with inputs of 10V beyond the input common-mode range.

### 6.2.5 Output Current Limit

Output current is limited by internal circuitry to approximately sourcing 36mA and sinking –30mA at 25°C. The limit current decreases with increasing temperature, as shown in Figure 5-19.

### 6.3 Functional Block Diagram

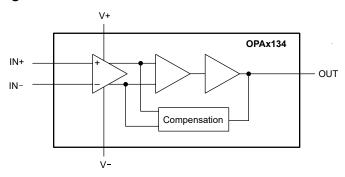

#### **6.4 Device Functional Modes**

#### 6.4.1 Noise Performance

Circuit noise is determined by the thermal noise of external resistors and operational amplifier noise. Operational amplifier noise is described by two parameters: noise voltage and noise current. The total noise is quantified by the equation:

$$V_n(total) = \sqrt{e_n^2 + (i_n R_S)^2 + 4kTR_S}$$
(1)

With low source impedance, the current noise term is insignificant and voltage noise dominates the noise performance. At high source impedance, the current noise term becomes the dominant contributor.

Low-noise bipolar operational amplifiers such as the OPA27 and OPA37 provide low voltage noise at the expense of a higher current noise. However, OPAx134 series operational amplifiers provide both low voltage noise and low current noise. This provides optimum noise performance over a wide range of sources, including reactive source impedances; refer to Figure 5-6. Above  $2k\Omega$  source resistance, the operational amplifier contributes little additional noise; the voltage and current terms in the total noise equation become insignificant and the source resistance term dominates. Below  $2k\Omega$ , operational amplifier voltage noise dominates over the resistor noise, but compares favorably with other audio operational amplifiers such as the OP176.



# 7 Application and Implementation

#### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

# 7.1 Application Information

The OPAx134 series operational amplifiers are unity-gain stable, and an excellent choice for a wide range of audio and general-purpose applications. All circuitry is independent in the dual version, maintaining normal behavior when one amplifier in a package is overdriven or short-circuited. Bypass the power supply pins with 10nF ceramic capacitors or larger to minimize power supply noise.

# 7.1.1 Operating Voltage

The OPAx134 series of operational amplifiers operate with power supplies from ±2.5V to ±18V with excellent performance. Although specifications are production tested with ±15V supplies, most behavior remains unchanged throughout the full operating voltage range. Parameters which vary significantly with operating voltage are shown in Section 5.8.

### 7.1.2 Offset Voltage Trim

Offset voltage of OPAx134 series amplifiers are laser-trimmed, and usually require no user adjustment. The OPAx134 provide less than ±2mV of input offset voltage and a typical input offset voltage drift of 10μV/°C over the operating temperature range.

Product Folder Links: OPA134 OPA2134 OPA4134



## 7.2 Typical Application

The OPAx134 family offers outstanding dc precision and AC performance. These devices operate up to 36V supply rails and offer ultra-low distortion and noise, as well as 8MHz bandwidth and high capacitive load drive. These features make the OPAx134 a robust, high-performance operational amplifier for high-voltage professional audio applications.

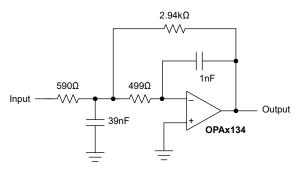


Figure 7-1. OPA134 2nd-Order, 30kHz, Low-Pass Filter Schematic

### 7.2.1 Design Requirements

- Gain = 5V/V (inverting)
- Low-pass cutoff frequency = 30kHz
- -40db/dec filter response
- · Maintain less than 3dB gain peaking in the gain versus frequency response

### 7.2.2 Detailed Design Procedure

The infinite-gain multiple-feedback circuit for a low-pass network function is shown in Figure 7-1. The voltage transfer function is:

$$\frac{Output}{Input}(s) = \frac{\frac{-1}{R_1 R_3 C_2 C_5}}{s^2 + s \left(\frac{1}{C_2}\right) \left(\frac{1}{R_1} + \frac{1}{R_3} + \frac{1}{R_4}\right) + \left(\frac{1}{R_3 R_4 C_2 C_5}\right)}$$
(2)

This circuit produces a signal inversion. For this circuit, the gain at DC and the low-pass cutoff frequency are calculated using Equation 3 and Equation 4.

$$Gain = \frac{R_4}{R_1} \tag{3}$$

$$f_C = \frac{1}{2\pi} \sqrt{\frac{1}{R_3 R_4 C_2 C_5}} \tag{4}$$

WEBENCH® Circuit Designer creates customized power supply and active filter circuits based on your system requirements. The environment gives you end-to-end selection, design, and simulation capabilities that save you time during all phases of the analog design process.

Use our tools to help with your designs:

- · Filter design tool
- Powerstage designer
- WEBENCH® Power designer
- PCB thermal calculator

### 7.2.3 Application Curve

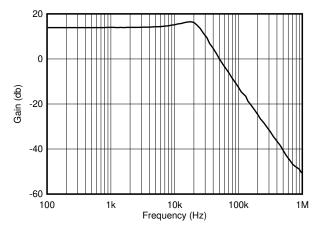


Figure 7-2. OPA134 2nd-Order, 30kHz, Low-Pass Filter Response

# 7.3 Power Supply Recommendations

The OPAx134 is specified for operation from 5V to 36V (±2.5V to ±18V); many specifications apply from –40°C to +85°C. Parameters that can exhibit significant variance with regard to operating voltage or temperature are presented in Section 5.8.

#### **CAUTION**

Supply voltages larger than 36V can permanently damage the device; see Section 5.1.

Place 10nF bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see Section 7.4.1.

#### 7.4 Layout

# 7.4.1 Layout Guidelines


For best operational performance of the device, use good PCB layout practices, including:

- Noise can propagate into analog circuitry through the operational amplifier and the power pins of the circuit
  as a whole. Bypass capacitors are used to reduce the coupled noise by providing low-impedance power
  sources local to the analog circuitry.
  - Connect low-ESR, 10nF ceramic bypass capacitors between each supply pin and ground, placed as close as possible to the device. A single bypass capacitor from V+ to ground is applicable for single-supply applications.
- Separate grounding for analog and digital portions of circuitry is one of the simplest and most-effective
  methods of noise suppression. One or more layers on multilayer PCBs are usually devoted to ground planes.
  A ground plane helps distribute heat and reduces EMI noise pickup. Make sure to physically separate digital
  and analog grounds paying attention to the flow of the ground current.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If these traces cannot be kept separate, crossing the sensitive trace perpendicular is much better as opposed to in parallel with the noisy trace.
- Place the external components as close to the device as possible. As shown in Section 7.4.2, keeping RF and RG close to the inverting input minimizes parasitic capacitance.
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.
- Cleaning the PCB following board assembly is recommended for best performance.



Any precision integrated circuit can experience performance shifts due to moisture ingress into the plastic
package. Following any aqueous PCB cleaning process, TI recommends baking the PCB assembly to
remove moisture introduced into the device packaging during the cleaning process. A low temperature, post
cleaning bake at 85°C for 30 minutes is sufficient for most circumstances.

# 7.4.2 Layout Example



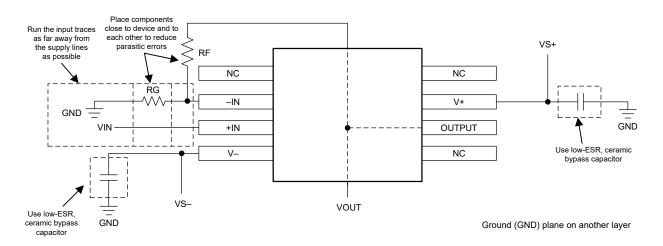


Figure 7-3. OPA134 Layout Example for the Noninverting Configuration

# 8 Device and Documentation Support

# 8.1 Device Support

#### 8.1.1 Development Support

#### 8.1.1.1 Analog Filter Designer

Available as a web-based tool from the Design and simulation tool web page, the Analog Filter Designer allows the user to design, optimize, and simulate complete multistage active filter solutions within minutes.

#### 8.1.1.2 TINA-TI™ Simulation Software (Free Download)

TINA-TI™ simulation software is a simple, powerful, and easy-to-use circuit simulation program based on a SPICE engine. TINA-TI simulation software is a free, fully-functional version of the TINA™ software, preloaded with a library of macromodels, in addition to a range of both passive and active models. TINA-TI simulation software provides all the conventional dc, transient, and frequency domain analysis of SPICE, as well as additional design capabilities.

Available as a free download from the Design and simulation tools web page, TINA-TI simulation software offers extensive post-processing capability that allows users to format results in a variety of ways. Virtual instruments offer the ability to select input waveforms and probe circuit nodes, voltages, and waveforms, creating a dynamic quick-start tool.

#### Note

These files require that either the TINA software or TINA-TI software be installed. Download the free TINA-TI simulation software from the TINA-TI™ software folder.

#### 8.1.1.3 TI Reference Designs

TI reference designs are analog solutions created by TI's precision analog applications experts. TI reference designs offer the theory of operation, component selection, simulation, complete PCB schematic and layout, bill of materials, and measured performance of many useful circuits. TI reference designs are available online at <a href="https://www.ti.com/reference-designs">https://www.ti.com/reference-designs</a>.

### 8.2 Documentation Support

#### 8.2.1 Related Documentation

For related documentation, see the following (available for download from www.ti.com):

- Texas Instruments, EMI Rejection Ratio of Operational Amplifiers
- Texas Instruments, Circuit Board Layout Techniques

# 8.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### **8.4 Support Resources**

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 8.5 Trademarks

SoundPlus<sup>™</sup>, TINA-TI<sup>™</sup>, and TI E2E<sup>™</sup> are trademarks of Texas Instruments.

TINA™ is a trademark of DesignSoft, Inc.

All trademarks are the property of their respective owners.

**Page** 



## 8.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 8.7 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

# 9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (April 2015) to Revision B (August 2024)

_	<u> </u>	
•	Updated the numbering format for tables, figures, and cross-references throughout the document	
•	Updated open-loop gain load condition in <i>Features</i>	
•	Deleted PDIP package option for quad version device	
•	Updated Device Information table	
•	Changed W to Ω symbol in front-page figure (typo)	
•	Updated Pin Configuration and Functions format	3
•	Changed OPA134 pin 1 and 8 from "Offset Trim" to "NC"	3
•	Changed input voltage from $(V-)$ – 0.7V to $(V+)$ + 0.7V to $(V-)$ – 0.5V to $(V+)$ + 0.5V in Absolute Maximum	ım
	Ratings	
•	Added input current and related footnote to Absolute Maximum Ratings	
•	Added Thermal Information	
•	Updated format of Electrical Characteristics	7
•	Updated nominal conditions in the header of Electrical Characteristics	
•	Changed headroom from 23.6dB to 21.3dB	
•	Deleted slew rate MIN	
•	Changed overload recovery time from 0.5µs to 0.6µs	
•	Changed input offset voltage MIN from ±0.5mV to ±1mV and MAX from ±2mV to ±3.5mV	
•	Deleted input offset voltage over temperature MAX	<u>7</u>
•	Changed channel separation from 135dB to 128dB for dc, and from 130dB to 126dB for f = 20kHz	
•	Deleted note 3	
•	Added ± to input bias current TYP	
•	Changed common-mode voltage MAX value from (V+) – 2.5V to (V+) – 3.5V	
•	Updated common-mode rejection ratio and common-mode input impedance test conditions	
•	Changed differential input impedance from $10^{13}\Omega \parallel 2pF$ to $10^{13}\Omega \parallel 8pF$	
•	Changed common-mode input impedance from $10^{13}\Omega$    5pF to $10^{13}\Omega$    6pF	
•	Deleted open-loop voltage gain for $R_L = 600\Omega$ .	
•	Deleted voltage output for $R_L$ = 600 $\Omega$	
•	Deleted output current	
•	Deleted note 1 from Electrical Characteristics	
	Changed typos in typical characteristic graphs; corrected ohms symbol ( $\Omega$ ) and radical symbol ( $$ )	
	Changed typos in typical characteristic graphs, corrected online symbol ( $\Omega$ ) and radical symbol ( $\forall$ )	
	Changed Figure 26, Small-Signal Overshoot vs Load Capacitance into new Figures 5-23 and 5-24	
	Deleted old Figure 20, Output Voltage Swing vs Output Current, Figure 21, Offset Voltage Production	9
•	Distribution, Figure 22, Offset Voltage Drift Production Distribution	۵
	Updated Functional Block Diagram	
•	Updated Offset Voltage Trim	
	Updated OPA134 Layout Example for the Noninverting Configuration	
	Spaces Critical Edyout Example for the Normintening Configuration	13



### Changes from Revision \* (September 2000) to Revision A (April 2015)

**Page** 

# 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated

www.ti.com

7-Oct-2025

# **PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
OPA134PA	Active	Production	PDIP (P)   8	50   TUBE	Yes	NIPDAU	N/A for Pkg Type	-	OPA134PA
OPA134PA.A	Active	Production	PDIP (P)   8	50   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	OPA134PA
OPA134UA	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 134UA
OPA134UA.B	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 134UA
OPA134UA/2K5	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 134UA
OPA134UA/2K5.B	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 134UA
OPA2134PA	Active	Production	PDIP (P)   8	50   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	OPA2134PA
OPA2134PA.A	Active	Production	PDIP (P)   8	50   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	OPA2134PA
OPA2134PAG4	Active	Production	PDIP (P)   8	50   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	OPA2134PA
OPA2134UA	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 2134UA
OPA2134UA.B	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 2134UA
OPA2134UA/2K5	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 2134UA
OPA2134UA/2K5.B	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 2134UA
OPA4134UA	Active	Production	SOIC (D)   14	50   TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA4134UA
OPA4134UA.B	Active	Production	SOIC (D)   14	50   TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA4134UA
OPA4134UA/2K5	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA4134UA
OPA4134UA/2K5.B	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA4134UA
SN412008DRE4	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	OPA 2134UA

<sup>(1)</sup> Status: For more details on status, see our product life cycle.



# PACKAGE OPTION ADDENDUM

www.ti.com 7-Oct-2025

- (2) Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

# TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA134UA/2K5	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA2134UA/2K5	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA4134UA/2K5	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

www.ti.com 24-Jul-2025



### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA134UA/2K5	SOIC	D	8	2500	353.0	353.0	32.0
OPA2134UA/2K5	SOIC	D	8	2500	353.0	353.0	32.0
OPA4134UA/2K5	SOIC	D	14	2500	353.0	353.0	32.0

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

# **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
OPA134PA	Р	PDIP	8	50	506	13.97	11230	4.32
OPA134PA.A	Р	PDIP	8	50	506	13.97	11230	4.32
OPA134UA	D	SOIC	8	75	506.6	8	3940	4.32
OPA134UA.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA2134PA	Р	PDIP	8	50	506	13.97	11230	4.32
OPA2134PA.A	Р	PDIP	8	50	506	13.97	11230	4.32
OPA2134PAG4	Р	PDIP	8	50	506	13.97	11230	4.32
OPA2134UA	D	SOIC	8	75	506.6	8	3940	4.32
OPA2134UA.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA4134UA	D	SOIC	14	50	506.6	8	3940	4.32
OPA4134UA.B	D	SOIC	14	50	506.6	8	3940	4.32





### NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
- 5. Reference JEDEC registration MS-012, variation AB.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







# NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# P (R-PDIP-T8)

# PLASTIC DUAL-IN-LINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001 variation BA.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2025. Texas Instruments Incorporated