

## **ULTRA-CONFIGURABLE MULTIPLE-FUNCTION GATE WITH 3-STATE OUTPUT**

Check for Samples: SN74LVC1G99-Q1

### **FEATURES**

- Qualified for Automotive Applications
- Supports 5-V V<sub>CC</sub> Operation
- Inputs Accept Voltages to 5.5 V
- Low Power Consumption, 15-µA Max I<sub>CC</sub>
- ±24-mA Output Drive at 3.3 V
- Offers Nine Different Logic Functions in a Single Package
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Input Hysteresis Allows for Slow Input Transition Time and Better Noise Immunity at Input

#### 

### **DESCRIPTION/ORDERING INFORMATION**

The SN74LVC1G99-Q1 is operational from 1.65 V to 5.5 V.

The SN74LVC1G99-Q1 features configurable multiple functions with a 3-state output. The output is disabled when the output-enable ( $\overline{OE}$ ) input is high. When  $\overline{OE}$  is low, the output state is determined by 16 patterns of 4-bit input. The user can choose logic functions, such as MUX, AND, OR, NAND, NOR, XOR, XNOR, inverter, and buffer. All inputs can be connected to  $V_{CC}$  or GND.

This device functions as an independent inverter, but because of Schmitt action, it has different input threshold levels for positive-going ( $V_{T+}$ ) and negative-going ( $V_{T-}$ ) signals.

To ensure the high-impedance state during power up or power down,  $\overline{\text{OE}}$  should be tied to  $V_{\text{CC}}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

This device is fully specified for partial-power-down applications using  $I_{\text{off}}$ . The  $I_{\text{off}}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

#### ORDERING INFORMATION

T <sub>A</sub>	PACKAGE <sup>(1)</sup> (2)		ORDERABLE PART NUMBER	TOP-SIDE MARKING <sup>(3)</sup>	
-40°C to 125°C	VSSOP - DCU	Reel of 3000	SN74LVC1G99QDCURQ1	CAZ_	

- (1) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.
- (2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.
- (3) DCU: The actual top-side marking has one additional character that designates the assembly/test site.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.




## **FUNCTION TABLE**

		INPUTS			OUTPUT
ŌĒ	D	С	В	Α	Y
L	L	L	L	L	L
L	L	L	L	Н	Н
L	L	L	Н	L	L
L	L	L	Н	Н	Н
L	L	Н	L	L	L
L	L	Н	L	Н	L
L	L	Н	Н	L	Н
L	L	Н	Н	Н	Н
L	Н	L	L	L	Н
L	Н	L	L	Н	L
L	Н	L	Н	L	Н
L	Н	L	Н	Н	L
L	Н	Н	L	L	Н
L	Н	Н	L	Н	Н
L	Н	Н	Н	L	L
L	Н	Н	Н	Н	L
Н	H or L	H or L	H or L	H or L	Z




## **LOGIC DIAGRAM (POSITIVE LOGIC)**

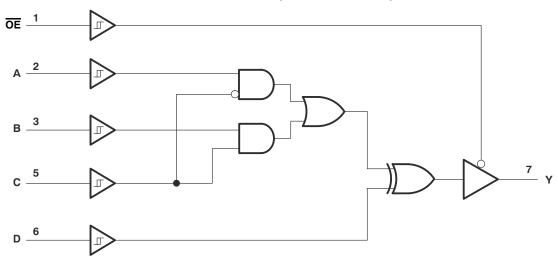

### **FUNCTION SELECTION TABLE**

PRIMARY FUNCTION	COMPLEMENTARY FUNCTION	PAGE
3-state buffer		3
3-state inverter		3
3-state 2-in-1 data selector MUX		4
3-state 2-in-1 data selector MUX, inverted out		4
3-state 2-input AND	3-state 2-input NOR, both inputs inverted	5
3-state 2-input AND, one input inverted	3-state 2-input NOR, one input inverted	5
3-state 2-input AND, both inputs inverted	3-state 2-input NOR	5
3-state 2-input NAND	3-state 2-input OR, both inputs inverted	6
3-state 2-input NAND, one input inverted	3-state 2-input OR, one input inverted	6
3-state 2-input NAND, both inputs inverted	3-state 2-input OR	6
3-state 2-input XOR		7
3-state 2-input XNOR	3-state 2-input XOR, one input inverted	7


## **3-STATE BUFFER FUNCTIONS AVAILABLE**



FUNCTION	ŌĒ	Α	В	С	D
		Input	H or L	L	L
		H or L	Input	Н	L
		L	Н	Input	L
3-state buffer	L	Н	L	Input	Н
		Н	H or L	L	Input
		H or L	L	Н	Input
		L	L	H or L	Input



### **3-STATE INVERTER FUNCTIONS AVAILABLE**



FUNCTION	ŌĒ	Α	В	С	D
		Input	H or L	L	Н
		X	Input	Н	Н
		L	Н	Input	Н
3-state buffer	L	Н	L	Input	L
		Н	H or L	L	Input
		H or L	Н	Н	Input
		Н	Н	H or L	Input

## **3-STATE MUX FUNCTIONS AVAILABLE**




FUNCTION	ŌĒ	Α	В	С	D
3-state 2-to-1, data selector MUX		Input 1	Input 2	Input 1 or Input 2	L
3-state 2-to-1, data selector MUX		Input 2	Input 1	Input 2 or Input 1	L
3-state 2-to-1, data selector MUX, inverted out	L	Input 1	Input 2	Input 1 or Input 2	Н
3-state 2-to-1, data selector MUX, inverted out		Input 2	Input 1	Input 2 or Input 1	Н




## 3-STATE AND/NOR/OR FUNCTIONS AVAILABLE




NO. OF INPUTS	AND/NAND FUNCTION	OR/NOR FUNCTION	ŌĒ	Α	В	С	D
2	3-state AND	3-state NOR		L	Input 1	Input 2	L
2	3-state AND	3-state NOR	L	L	Input 2	Input 1	L



NO. OF INPUTS	AND/NAND FUNCTION	<b>OR/NOR FUNCTION</b>	ΘE	Α	В	С	D
2	3-state AND	3-state NOR		Input 2	L	Input 1	L
2	3-state AND	3-state NOR	L	Н	Input 1	Input 2	Н




NO. OF INPUTS	AND/NAND FUNCTION	OR/NOR FUNCTION	ŌĒ	Α	В	С	D
2	3-state AND	3-state NOR		Input 1	L	Input 2	L
2	3-state AND	3-state NOR	L	Н	Input 2	Input 1	Н




NO. OF INPUTS	AND/NAND FUNCTION	OR/NOR FUNCTION	OE	Α	В	С	D
2	3-state AND, both inverted inputs	3-state NOR		Input 1	Н	Input 2	Н
2	3-state AND, both inverted inputs	3-state NOR	L	Input 2	Н	Input 1	Н




## **3-STATE NAND/OR FUNCTIONS AVAILABLE**




NO. OF INPUTS	AND/NAND FUNCTION	OR/NOR FUNCTION	ŌĒ	Α	В	С	D
2	3-state NAND	3-state OR		Г	Input 1	Input 2	Н
2	3-state NAND	3-state OR	L	٦	Input 2	Input 1	Н



NO. OF INPUTS	AND/NAND FUNCTION	OR/NOR FUNCTION	ŌĒ	Α	В	С	D
2	3-state NAND	3-state OR		Input 2	L	Input 1	Н
2	3-state NAND	3-state OR	_ <b>L</b>	Н	Input 1	Input 2	L




NO. OF INPUTS	AND/NAND FUNCTION	OR/NOR FUNCTION	ŌĒ	Α	В	С	D
2	3-state NAND	3-state OR		Input 1	L	Input 2	Н
2	3-state NAND	3-state OR	L	Н	Input 2	Input 1	L




NO. OF INPUTS	AND/NAND FUNCTION	OR/NOR FUNCTION	ŌĒ	Α	В	С	D
2	3-state NAND	3-state OR		Input 1	Н	Input 2	L
2	3-state NAND	3-state OR	L	Input 2	Н	Input 1	L




## 3-STATE XOR/XNOR FUNCTIONS AVAILABLE




FUNCTION	OE	Α	В	C	D
		Input 1	H or L	L	Input 2
		Input 2	H or L	L	Input 1
3-state XOR		H or L	Input 1	Н	Input 2
5-State AOR	L .	H or L	Input 2	Н	Input 1
		L	Н	Input 1	Input 2
		L	Н	Input 2	Input 1



FUNCTION	ŌĒ	Α	В	С	D
3-state XOR	L	Н	L	Input 1	Input 2



FUNCTION	ŌĒ	Α	В	С	D
3-state XOR	L	Н	L	Input 1	Input 2



FUNCTION	ŌĒ	Α	В	С	D
3-state XNOR		Н	L	Input 1	Input 2
3-state XNOR	L	Н	L	Input 2	Input 1



## ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range		-0.5	6.5	V
VI	Input voltage range (2)		-0.5	6.5	V
Vo	Voltage range applied to any output in the hi	-0.5	6.5	V	
Vo	Voltage range applied to any output in the hi	-0.5	V <sub>CC</sub> + 0.5	V	
I <sub>IK</sub>	Input clamp current	V <sub>1</sub> < 0		<b>–</b> 50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		<b>–</b> 50	mA
Io	Continuous output current	•		±50	mA
	Continuous current through V <sub>CC</sub> or GND			±100	mA
$\theta_{JA}$	Package thermal impedance <sup>(4)</sup>	DCU package		227	°C/W
T <sub>stg</sub>	Storage temperature range			150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- (2) The input and output negative voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V<sub>CC</sub> is provided in the recommended operating conditions table.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.

### **RECOMMENDED OPERATING CONDITIONS<sup>(1)</sup>**

			MIN	MAX	UNIT	
V	Cumphy valtage	Operating	1.65	5.5	V	
$V_{CC}$	Supply voltage	Data retention only	1.5		V	
VI	Input voltage	•	0	5.5	V	
Vo	Output voltage		0	V <sub>CC</sub>	V	
		V <sub>CC</sub> = 1.65 V		-4		
	I <sub>OH</sub> High-level output current	V <sub>CC</sub> = 2.3 V		-8		
$I_{OH}$		V <sub>CC</sub> = 3 V		-16	mA	
		V <sub>CC</sub> = 3 V		-24		
		V <sub>CC</sub> = 4.5 V				
		V <sub>CC</sub> = 1.65 V		4		
		V <sub>CC</sub> = 2.3 V		8		
$I_{OL}$	Low-level output current	V 2.V		16	mA	
		V <sub>CC</sub> = 3 V		24		
		V <sub>CC</sub> = 4.5 V		32		
		$V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}, 2.5 \text{ V} \pm 0.2 \text{ V}$		20		
Δt/Δν	Input transition rise or fall rate	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		10	ns/V	
		$V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$		5		

All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



## **ELECTRICAL CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST COND	DITIONS	V <sub>CC</sub>	MIN	TYP <sup>(1)</sup> MAX	UNIT				
			1.65 V	0.79	1.26					
$V_{T+}$			2.3 V	1.11	1.66					
Positive-going input threshold			3 V	1.5	1.97	V				
voltage			4.5 V	2.16	2.84					
			5.5 V	2.61	3.43					
			1.65 V	0.39	0.72					
V <sub>T</sub> _ Negative-			2.3 V	0.58	0.97					
going input			3 V	0.84	1.24	V				
threshold voltage			4.5 V	1.41	1.89					
voltage			5.5 V 1.87							
			1.65 V	0.37	0.72					
$\Delta V_T$			2.3 V	0.48	0.87					
Hysteresis			3 V	0.56	0.97	V				
$(V_{T+} - V_{T-})$			4.5 V	0.71	1.14					
			5.5 V	0.71	1.21	1.21				
	I <sub>OH</sub> = -100 μA		1.65 V to 5.5 V	V <sub>CC</sub> - 0.1						
	$I_{OH} = -4 \text{ mA}$		1.65 V	1.2						
$V_{OH}$	$I_{OH} = -8 \text{ mA}$		2.3 V	1.9		V				
<b></b>	I <sub>OH</sub> = -16 mA		3 V	2.4						
	$I_{OH} = -24 \text{ mA}$		3 V	2.3						
	$I_{OH} = -32 \text{ mA}$		4.5 V	3.8						
	I <sub>OL</sub> = 100 μA		1.65 V to 5.5 V		0.1					
	I <sub>OL</sub> = 4 mA		1.65 V		0.45					
$V_{OL}$	I <sub>OL</sub> = 8 mA		2.3 V		0.35	V				
02	I <sub>OL</sub> = 16 mA		3 V		0.45					
	I <sub>OL</sub> = 24 mA		3 V		0.55					
	I <sub>OL</sub> = 32 mA		4.5 V		0.60					
I <sub>I</sub>	V <sub>I</sub> = 5.5 V or GND		0 V to 5.5 V		±5	μA				
I <sub>off</sub>	$V_I$ or $V_O = 5.5 \text{ V}$		0 V		±10	μA				
I <sub>OZ</sub>	$V_O = V_{CC}$ or GND		1.65 V to 5.5 V		±10	μA				
Icc	$V_I = 5.5 \text{ V or GND},$ $I_C$	<sub>O</sub> = 0	1.65 V to 5.5 V		15	μA				
ΔI <sub>CC</sub>	One input at V <sub>CC</sub> - 0.6 V,	Other inputs at V <sub>CC</sub> or GND	3 V to 5.5 V		500	μA				
C <sub>i</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND		3.3 V		3.5	pF				
C <sub>o</sub>	$V_O = V_{CC}$ or GND		3.3 V		6	pF				

<sup>(1)</sup>  $T_A = 25^{\circ}C$ 



## **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range,  $C_L = 30 \text{ pF}$  or 50 pF (unless otherwise noted) (see Figure 1)

				O					, ,	_	
PARAMETER	FROM	TO (OUTPUT)	V <sub>CC</sub> = 1 ± 0.15		V <sub>CC</sub> = 2 ± 0.2		V <sub>CC</sub> = 3 ± 0.3		V <sub>CC</sub> = ± 0.5		UNIT
(INPUT) (O		(OUTPUT)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
	Α		4.6	32.8	2.6	13.7	2.4	10.4	1.8	6.9	
	В	V	4.6	30.9	2.6	13.3	2.3	10.2	1.8	6.8	
t <sub>pd</sub>	С	Ť	4.4	31.8	2.5	14.3	2.5	10.6	1.8	7.2	ns
	D		4.3	27.7	2.5	12.7	2.4	9.6	1.6	6.5	
t <sub>en</sub>	ŌĒ	Y	4.2	27.2	2.4	13.3	2	9	1.7	6.0	ns
t <sub>dis</sub>	ŌĒ	Y	3.7	17	2	7.3	2.1	7.4	1	5.6	ns


## **OPERATING CHARACTERISTICS**

 $T_A = 25^{\circ}C$ 

PARAMETER		TEST CONDITIONS	V <sub>CC</sub> = 1.8 V	V <sub>CC</sub> = 2.5 V	$V_{CC} = 3.3 \text{ V}$	$V_{CC} = 5 V$	UNIT
		TEST CONDITIONS	TYP	TYP	TYP	TYP	UNII
$C_{pd}$	Power dissipation capacitance	f = 10 MHz	19	20	22	27	pF




#### PARAMETER MEASUREMENT INFORMATION

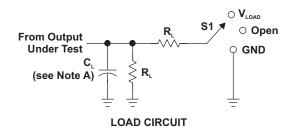

TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	<b>V</b> <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

	INPUTS		V	.,		_	.,
V <sub>cc</sub>	V,	t,/t,	V <sub>M</sub>	<b>V</b> <sub>LOAD</sub>	C <sub>∟</sub>	R <sub>⊾</sub>	V <sub>A</sub>
1.8 V ± 0.15 V	V <sub>cc</sub>	≤2 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	30 pF	<b>1 k</b> Ω	0.15 V
2.5 V ± 0.2 V	V <sub>cc</sub>	≤2 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	30 pF	500 Ω	0.15 V
3.3 V ± 0.3 V	3 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
5 V ± 0.5 V	V <sub>cc</sub>	≤2.5 ns	V <sub>cc</sub> /2	2 × V <sub>cc</sub>	50 pF	500 Ω	0.3 V

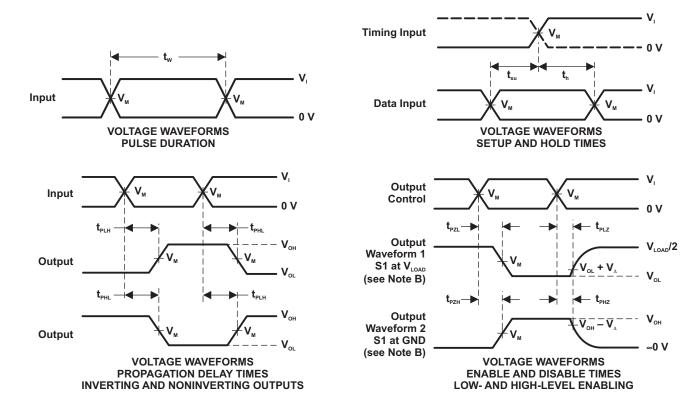

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_o$  = 50  $\Omega$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{\text{PLZ}}$  and  $t_{\text{PHZ}}$  are the same as  $t_{\text{dis}}$ .
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{od}$ .
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms

www.ti.com 11-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
SN74LVC1G99QDCURQ1	Active	Production	VSSOP (DCU)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	CAZR
SN74LVC1G99QDCURQ1.B	Active	Production	VSSOP (DCU)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	CAZR

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74LVC1G99-Q1:

Catalog: SN74LVC1G99

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



# **PACKAGE OPTION ADDENDUM**

www.ti.com 11-Nov-2025

NOTE: Qualified Version Definitions:

 $_{\bullet}$  Catalog - TI's standard catalog product

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 25-Sep-2019

## TAPE AND REEL INFORMATION





		Dimension designed to accommodate the component width
E	30	Dimension designed to accommodate the component length
K	(0	Dimension designed to accommodate the component thickness
	N	Overall width of the carrier tape
F	21	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVC1G99QDCURQ1	VSSOP	DCU	8	3000	180.0	8.4	2.25	3.35	1.05	4.0	8.0	Q3

www.ti.com 25-Sep-2019



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
SN74LVC1G99QDCURQ1	VSSOP	DCU	8	3000	202.0	201.0	28.0	



SMALL OUTLINE PACKAGE



### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
  4. Reference JEDEC registration MO-187 variation CA.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025