

# TS5USBC400 Dual 2:1 USB 2.0 Mux/DeMux with 16-V Overvoltage Protection

## 1 Features

- Supply Range 2.3 V to 5.5 V
- Differential 2:1 or 1:2 Switch/Multiplexer
- 0-V to 16-V Overvoltage Protection (OVP) on Common Pins
- Powered Off Protection When  $V_{CC} = 0$  V
- Low  $R_{ON}$  of 9  $\Omega$  Maximum
- BW of 1.1 GHz Typical
- $C_{ON}$  of 4.5 pF Typical
- Low Power Disable Mode
- 1.8-V Compatible Logic Inputs
- ESD Protection Exceeds JESD 22
  - 2000-V Human Body Model (HBM)
- TS5USBC400: Standard Temperature Range of 0°C to 70°C
- TS5USBC400I: Industrial Temperature Range of -40°C to 85°C
- Small DSBGA Package

## 2 Applications

- Mobile
- PC/Notebook
- Tablet
- Anywhere a USB Type-C™ or Micro-B Connector is Used

## 3 Description

The TS5USBC400 is a bidirectional low-power dual port, high-speed, USB 2.0 analog switch with integrated protection for USB Type-C™ systems. The device is configured as a dual 2:1 or 1:2 switch and is optimized for handling the USB 2.0 D+/- lines in a USB Type-C™ systems.

The TS5USBC400 protection on the I/O pins can tolerate up to 16V with automatic shutoff circuitry to protect system components behind the switch.


The TS5USBC400 comes in a small 12 pin DSBGA package making it a perfect candidate for mobile and space constrained applications.

### Device Information<sup>(1)</sup>

| PART NUMBER               | PACKAGE    | BODY SIZE (NOM)     |
|---------------------------|------------|---------------------|
| TS5USBC400<br>TS5USBC400I | DSBGA (12) | 1.582 mm × 1.182 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

## Simplified Schematic

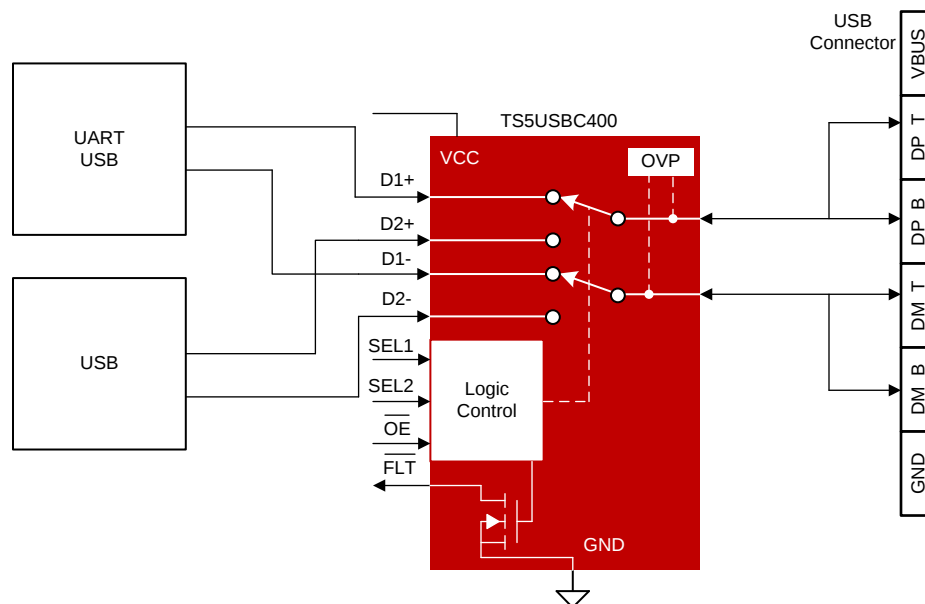

Copyright © 2017, Texas Instruments Incorporated



## Table of Contents


|                                                  |           |                                                                  |           |
|--------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                          | <b>1</b>  | 8.2 Functional Block Diagram .....                               | <b>13</b> |
| <b>2 Applications</b> .....                      | <b>1</b>  | 8.3 Feature Description .....                                    | <b>14</b> |
| <b>3 Description</b> .....                       | <b>1</b>  | 8.4 Device Functional Modes .....                                | <b>16</b> |
| <b>4 Revision History</b> .....                  | <b>2</b>  | <b>9 Application and Implementation</b> .....                    | <b>17</b> |
| <b>5 Pin Configuration and Functions</b> .....   | <b>3</b>  | 9.1 Application Information .....                                | <b>17</b> |
| <b>6 Specifications</b> .....                    | <b>4</b>  | 9.2 Typical Application .....                                    | <b>17</b> |
| 6.1 Absolute Maximum Ratings .....               | <b>4</b>  | <b>10 Power Supply Recommendations</b> .....                     | <b>18</b> |
| 6.2 ESD Ratings .....                            | <b>4</b>  | <b>11 Layout</b> .....                                           | <b>19</b> |
| 6.3 Recommended Operating Conditions .....       | <b>4</b>  | 11.1 Layout Guidelines .....                                     | <b>19</b> |
| 6.4 Thermal Information .....                    | <b>5</b>  | 11.2 Layout Example .....                                        | <b>20</b> |
| 6.5 Electrical Characteristics .....             | <b>5</b>  | <b>12 Device and Documentation Support</b> .....                 | <b>21</b> |
| 6.6 Dynamic Characteristics .....                | <b>7</b>  | 12.1 Documentation Support .....                                 | <b>21</b> |
| 6.7 Timing Requirements .....                    | <b>7</b>  | 12.2 Community Resources .....                                   | <b>21</b> |
| 6.8 Typical Characteristics .....                | <b>8</b>  | 12.3 Trademarks .....                                            | <b>21</b> |
| <b>7 Parameter Measurement Information</b> ..... | <b>9</b>  | 12.4 Electrostatic Discharge Caution .....                       | <b>21</b> |
| <b>8 Detailed Description</b> .....              | <b>13</b> | 12.5 Glossary .....                                              | <b>21</b> |
| 8.1 Overview .....                               | <b>13</b> | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>21</b> |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Original (September 2017) to Revision A                                                                                     | Page     |
|------------------------------------------------------------------------------------------------------------------------------------------|----------|
| • Added I <sub>CC</sub> Active supply current and Supply current during OVP condition to the <i>Electrical Specification</i> table ..... | <b>4</b> |

## 5 Pin Configuration and Functions

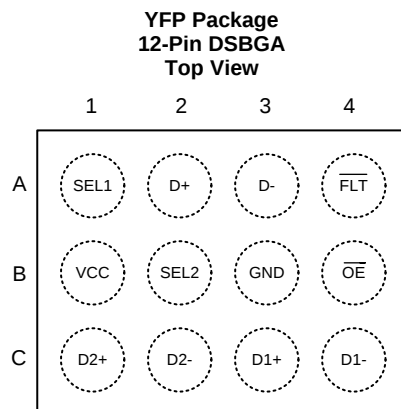

**Pin Functions**

| PIN  |     | I/O | DESCRIPTION                                          |
|------|-----|-----|------------------------------------------------------|
| NAME | NO. |     |                                                      |
| SEL1 | A1  | I   | Switch select1 (Active high)                         |
| D+   | A2  | I/O | Data switch input (Differential +)                   |
| D-   | A3  | I/O | Data switch input (Differential -)                   |
| FLT  | A4  | O   | Fault indicator output pin (Active low) - open drain |
| VCC  | B1  | PWR | Supply Voltage                                       |
| SEL2 | B2  | I   | Switch select2 (Active high)                         |
| GND  | B3  | GND | Ground                                               |
| OE   | B4  | I   | Output enable (Active low)                           |
| D2+  | C1  | I/O | Data switch output 2 (Differential +)                |
| D2-  | C2  | I/O | Data switch output 2 (Differential -)                |
| D1+  | C3  | I/O | Data switch output 1 (Differential +)                |
| D1-  | C4  | I/O | Data switch output 1 (Differential -)                |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1) (2)</sup>

|                  |                                                                                                       | MIN  | MAX | UNIT |
|------------------|-------------------------------------------------------------------------------------------------------|------|-----|------|
| V <sub>CC</sub>  | Supply voltage <sup>(3)</sup>                                                                         | –0.5 | 6   | V    |
| V <sub>I/O</sub> | Input/Output DC voltage (D+, D-) <sup>(3)</sup>                                                       | –0.5 | 18  | V    |
| V <sub>I/O</sub> | Input/Output DC voltage (D1+/D1-, D2+/D2-) <sup>(3)</sup>                                             | –0.5 | 6   | V    |
| V <sub>I</sub>   | Digital input voltage (SEL1, SEL2, $\overline{OE}$ )                                                  | –0.5 | 6   | V    |
| V <sub>O</sub>   | Digital output voltage ( $\overline{FLT}$ )                                                           | –0.5 | 6   | V    |
| I <sub>K</sub>   | Input-output port diode current (D+, D-, D1+, D1-, D2+, D2-)<br>V <sub>IN</sub> < 0                   | –50  |     | mA   |
| I <sub>IK</sub>  | Digital logic input clamp current (SEL1, SEL2, $\overline{OE}$ ) <sup>(3)</sup><br>V <sub>I</sub> < 0 | –50  |     | mA   |
| I <sub>CC</sub>  | Continuous current through VCC                                                                        |      | 100 | mA   |
| I <sub>GND</sub> | Continuous current through GND                                                                        | –100 |     | mA   |
| T <sub>stg</sub> | Storage temperature                                                                                   | –65  | 150 | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.
- (3) All voltages are with respect to ground, unless otherwise specified.

### 6.2 ESD Ratings

|                    |                         | VALUE                                                                          | UNIT  |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

|                                               |                                                         | MIN | MAX | UNIT |
|-----------------------------------------------|---------------------------------------------------------|-----|-----|------|
| V <sub>CC</sub>                               | Supply voltage                                          | 2.3 | 5.5 | V    |
| V <sub>I/O</sub> (D+, D-)                     | Analog input/output voltage                             | 0   | 18  | V    |
| V <sub>I/O</sub> (D1, D1-, D2+, D2-)          |                                                         | 0   | 3.6 | V    |
| V <sub>I</sub>                                | Digital input voltage (SEL1, SEL2, $\overline{OE}$ )    | 0   | 5.5 | V    |
| V <sub>O</sub>                                | Digital output voltage ( $\overline{FLT}$ )             | 0   | 5.5 | V    |
| I <sub>I/O</sub> (D+, D-, D1+, D1-, D2+, D2-) | Analog input/output port continuous current             | –50 | 50  | mA   |
| I <sub>OL</sub>                               | Digital output current                                  |     | 3   | mA   |
| T <sub>A</sub>                                | Operating free-air temperature (TS5USBC400) Standard    | 0   | 70  | °C   |
| T <sub>A</sub>                                | Operating free-air temperature (TS5USBC400I) Industrial | –40 | 85  | °C   |
| T <sub>J</sub>                                | Junction temperature                                    | –40 | 125 | °C   |

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TS5USBC400 | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | YFP        |      |
|                               |                                              | 12 PINS    |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 91.8       | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 0.8        | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 22.8       | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.5        | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 23.0       | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

T<sub>A</sub> = –40°C to +85°C (Industrial), T<sub>A</sub> = 0°C to 70°C (Standard), V<sub>CC</sub> = 2.3 V to 5.5 V, GND = 0V, Typical values are at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C, (unless otherwise noted)

| PARAMETER                      |                                            | TEST CONDITIONS                                                                                                                                                          | MIN | TYP  | MAX | UNIT |
|--------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| <b>SUPPLY</b>                  |                                            |                                                                                                                                                                          |     |      |     |      |
| V <sub>CC</sub>                | Power supply voltage                       |                                                                                                                                                                          | 2.3 |      | 5.5 | V    |
| I <sub>CC</sub>                | Active supply current                      | $\overline{OE} = 0\text{ V}$<br>SEL1, SEL2 = 0 V, 1.8 V or V <sub>CC</sub><br>0 V < V <sub>I/O</sub> < 3.6 V                                                             |     | 72   | 100 | μA   |
|                                | Supply current during OVP condition        | $\overline{OE} = 0\text{ V}$<br>SEL1, SEL2 = 0 V, 1.8 V or V <sub>CC</sub><br>V <sub>I/O</sub> > V <sub>POS_THLD</sub>                                                   |     | 80   | 120 | μA   |
| I <sub>CC_PD</sub>             | Standby powered down supply current        | $\overline{OE} = 1.8\text{ V or }V_{CC}$<br>SEL1 = 0 V, 1.8 V, or V <sub>CC</sub><br>SEL2 = 0 V, 1.8 V, or V <sub>CC</sub>                                               |     | 2.2  | 10  | μA   |
| <b>DC Characteristics</b>      |                                            |                                                                                                                                                                          |     |      |     |      |
| R <sub>ON</sub>                | ON-state resistance                        | V <sub>I/O</sub> = 0.4 V<br>I <sub>SINK</sub> = 8 mA<br>Refer to <a href="#">ON-State Resistance Figure</a>                                                              |     | 5.6  | 9   | Ω    |
| ΔR <sub>ON</sub>               | ON-state resistance match between channels | V <sub>I/O</sub> = 0.4 V<br>I <sub>SINK</sub> = 8 mA<br>Refer to <a href="#">ON-State Resistance Figure</a>                                                              |     | 0.07 | 0.3 | Ω    |
| R <sub>ON (FLAT)</sub>         | ON-state resistance flatness               | V <sub>I/O</sub> = 0 V to 0.4 V<br>I <sub>SINK</sub> = 8 mA<br>Refer to <a href="#">ON-State Resistance Figure</a>                                                       |     | 0.07 | 0.4 | Ω    |
| I <sub>OFF</sub>               | I/O pin OFF leakage current                | V <sub>D±</sub> = 0 V or 3.6 V<br>V <sub>CC</sub> = 2.3 V to 5.5 V<br>V <sub>D1±</sub> or V <sub>D2±</sub> = 3.6 V or 0 V<br>Refer to <a href="#">Off Leakage Figure</a> | -1  | 1.2  | 6   | μA   |
|                                |                                            | V <sub>D±</sub> = 0 V or 16 V<br>V <sub>CC</sub> = 2.3 V to 5.5 V<br>V <sub>D1±</sub> or V <sub>D2±</sub> = 0 V<br>Refer to <a href="#">Off Leakage Figure</a>           | -1  | 165  | 200 | μA   |
| I <sub>ON</sub>                | ON leakage current                         | V <sub>D±</sub> = 0 V or 3.6 V<br>V <sub>D1±</sub> and V <sub>D2±</sub> = high-Z<br>Refer to <a href="#">On Leakage Figure</a>                                           | -1  | 1.2  | 6   | μA   |
| <b>Digital Characteristics</b> |                                            |                                                                                                                                                                          |     |      |     |      |
| V <sub>IH</sub>                | Input logic high                           | SEL1, SEL2, $\overline{OE}$                                                                                                                                              | 1.4 |      |     | V    |
| V <sub>IL</sub>                | Input logic low                            | SEL1, SEL2, $\overline{OE}$                                                                                                                                              |     |      | 0.5 | V    |
| V <sub>OL</sub>                | Output logic low                           | $\overline{FLT}$<br>I <sub>OL</sub> = 3 mA                                                                                                                               |     |      | 0.4 | V    |
| I <sub>IH</sub>                | Input high leakage current                 | SEL1, SEL2, $\overline{OE} = 1.8\text{ V, }V_{CC}$                                                                                                                       | -1  | 1    | 5   | μA   |
| I <sub>IL</sub>                | Input low leakage current                  | SEL1, SEL2, $\overline{OE} = 0\text{ V}$                                                                                                                                 | -1  | ±0.2 | 5   | μA   |

**TS5USBC400**

SCDS374A – SEPTEMBER 2017 – REVISED SEPTEMBER 2017

[www.ti.com](http://www.ti.com)
**Electrical Characteristics (continued)**

$T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  (Industrial),  $T_A = 0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  (Standard),  $V_{CC} = 2.3\text{ V}$  to  $5.5\text{ V}$ ,  $\text{GND} = 0\text{V}$ , Typical values are at  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ , (unless otherwise noted)

| PARAMETER         |                                                                   | TEST CONDITIONS                                                                                                                                                       | MIN | TYP | MAX | UNIT             |
|-------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|------------------|
| $R_{PD}$          | Internal pull-down resistor on digital input pins                 |                                                                                                                                                                       |     | 6   |     | $\text{M}\Omega$ |
| $C_I$             | Digital input capacitance                                         | SEL1, SEL2 = 0 V, 1.8 V or VCC<br>$f = 1\text{ MHz}$                                                                                                                  |     | 3.4 |     | pF               |
| <b>Protection</b> |                                                                   |                                                                                                                                                                       |     |     |     |                  |
| $V_{OVP\_TH}$     | OVP positive threshold                                            |                                                                                                                                                                       | 4.5 | 4.8 | 5.2 | V                |
| $V_{OVP\_HYST}$   | OVP threshold hysteresis                                          |                                                                                                                                                                       | 75  | 230 | 425 | mV               |
| $V_{CLAMP\_V}$    | Maximum voltage to appear on D1± and D2± pins during OVP scenario | $V_{D\pm} = 0$ to 18 V<br>$t_{RISE}$ and $t_{FALL}(10\% \text{ to } 90\%) = 100\text{ ns}$<br>$R_L = \text{Open}$<br>Switch on or off<br>$\overline{OE} = 0\text{ V}$ | 0   |     | 9.6 | V                |
|                   |                                                                   | $V_{D\pm} = 0$ to 18 V<br>$t_{RISE}$ and $t_{FALL}(10\% \text{ to } 90\%) = 100\text{ ns}$<br>$R_L = 50\Omega$<br>Switch on or off<br>$\overline{OE} = 0\text{ V}$    | 0   |     | 9.0 | V                |
| $t_{EN\_OVP}$     | OVP enable time                                                   | $R_{PU} = 10\text{ k}\Omega$ to VCC ( $\overline{FLT}$ )<br>$C_L = 35\text{ pF}$<br>Refer to <a href="#">OVP Timing Diagram Figure</a>                                |     | 0.6 | 3   | $\mu\text{s}$    |
| $t_{REC\_OVP}$    | OVP recovery time                                                 | $R_{PU} = 10\text{ k}\Omega$ to VCC ( $\overline{FLT}$ )<br>$C_L = 35\text{ pF}$<br>Refer to <a href="#">OVP Timing Diagram Figure</a>                                |     | 1.5 | 5   | $\mu\text{s}$    |

## 6.6 Dynamic Characteristics

$T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  (Industrial),  $T_A = 0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  (Standard),  $V_{CC} = 2.3\text{ V}$  to  $5.5\text{ V}$ ,  $\text{GND} = 0\text{ V}$ , Typical values are at  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ , (unless otherwise noted)


| PARAMETER  |                                    | TEST CONDITIONS                                                                                                                                              |                            | MIN | TYP  | MAX | UNIT |
|------------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----|------|-----|------|
| $C_{OFF}$  | D+, D- off capacitance             | $V_{D+/-} = 0$ or $3.3\text{ V}$ ,<br>$\overline{OE} = V_{CC}$<br>$f = 240\text{ MHz}$                                                                       | Switch OFF                 | 1.2 | 3.5  | 6.2 | pF   |
|            | D1+, D1-, D2+, D2- off capacitance | $V_{D+/-} = 0$ or $3.3\text{ V}$ ,<br>$\overline{OE} = V_{CC}$ or $\overline{OE} = 0\text{ V}$ with SEL1, SEL2 (switch not selected)<br>$f = 240\text{ MHz}$ | Switch OFF or not selected | 1.2 | 3.5  | 6.2 | pF   |
| $C_{ON}$   | IO pins ON capacitance             | $V_{D+/-} = 0$ or $3.3\text{ V}$ ,<br>$f = 240\text{ MHz}$                                                                                                   | Switch ON                  | 1.4 | 4.5  | 6.2 | pF   |
| $O_{ISO}$  | Differential off isolation         | $R_L = 50\ \Omega$<br>$C_L = 5\text{ pF}$<br>$f = 100\text{ kHz}$<br>Refer to <a href="#">Off Isolation Figure</a>                                           | Switch OFF                 |     | -90  |     | dB   |
|            |                                    | $R_L = 50\ \Omega$<br>$C_L = 5\text{ pF}$<br>$f = 240\text{ MHz}$<br>Refer to <a href="#">Off Isolation Figure</a>                                           | Switch OFF                 |     | -22  |     | dB   |
| $X_{TALK}$ | Channel to Channel crosstalk       | $R_L = 50\ \Omega$<br>$C_L = 5\text{ pF}$<br>$f = 100\text{ kHz}$<br>Refer to <a href="#">Crosstalk Figure</a>                                               | Switch ON                  |     | -90  |     | dB   |
| BW         | Bandwidth                          | $R_L = 50\ \Omega$ ; Refer to <a href="#">BW and Insertion Loss Figure</a>                                                                                   | Switch ON                  |     | 1.1  |     | GHz  |
| $I_{LOSS}$ | Insertion loss                     | $R_L = 50\ \Omega$<br>$f = 240\text{ MHz}$ ; Refer to <a href="#">BW and Insertion Loss Figure</a>                                                           | Switch ON                  |     | -0.7 |     | dB   |

## 6.7 Timing Requirements

$T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  (Industrial),  $T_A = 0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  (Standard),  $V_{CC} = 2.3\text{ V}$  to  $5.5\text{ V}$ ,  $\text{GND} = 0\text{ V}$ , Typical values are at  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ , (unless otherwise noted)

| PARAMETER    |                                                                 | TEST CONDITIONS                                                             |                                                                                            | MIN | NOM  | MAX | UNIT          |
|--------------|-----------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----|------|-----|---------------|
| $t_{switch}$ | Switching time between channels (SEL1, SEL2 to output)          | $V_{D+/-} = 0.8\text{ V}$<br>Refer to <a href="#">Tswitch Timing Figure</a> | $R_L = 50\ \Omega$ ,<br>$C_L = 5\text{ pF}$ ,<br>$V_{CC} = 2.3\text{ V}$ to $5.5\text{ V}$ |     | 0.45 | 1.2 | $\mu\text{s}$ |
| $t_{on}$     | Device turn on time ( $\overline{OE}$ to output)                | $V_{D+/-} = 0.8\text{ V}$<br>Refer to <a href="#">Ton and Toff Figure</a>   |                                                                                            |     | 100  | 250 | $\mu\text{s}$ |
| $t_{off}$    | Device turn off time ( $\overline{OE}$ to output)               | $V_{D+/-} = 0.8\text{ V}$<br>Refer to <a href="#">Ton and Toff Figure</a>   |                                                                                            |     | 0.35 | 1   | $\mu\text{s}$ |
| $t_{SK(P)}$  | Skew of opposite transitions of same output (between D+ and D-) | $V_{D+/-} = 0.4\text{ V}$<br>Refer to <a href="#">Tsk Figure</a>            | $R_L = 50\ \Omega$ ,<br>$C_L = 1\text{ pF}$ ,<br>$V_{CC} = 2.3\text{ V}$ to $5.5\text{ V}$ |     | 9    | 50  | ps            |
| $t_{pd}$     | Propagation delay                                               | $V_{D+/-} = 0.4\text{ V}$<br>Refer to <a href="#">Tpd Figure</a>            | $R_L = 50\ \Omega$ ,<br>$C_L = 5\text{ pF}$ ,<br>$V_{CC} = 2.3\text{ V}$ to $5.5\text{ V}$ |     | 130  | 180 | ps            |

## 6.8 Typical Characteristics

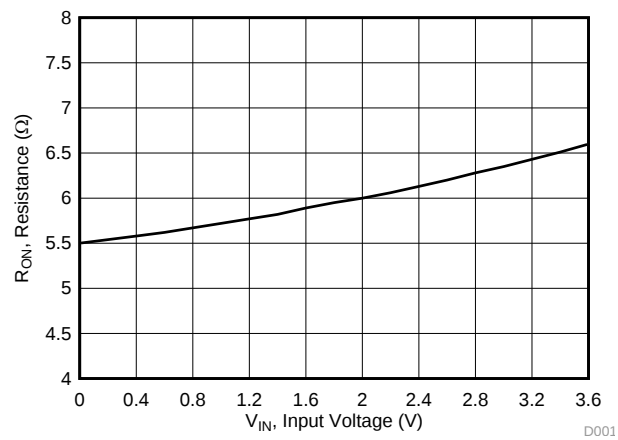


$V_{CC} = 3.3 \text{ V}$

$T_A = 25^\circ\text{C}$


**Figure 1. ON-Resistance vs Input Voltage**

## 7 Parameter Measurement Information

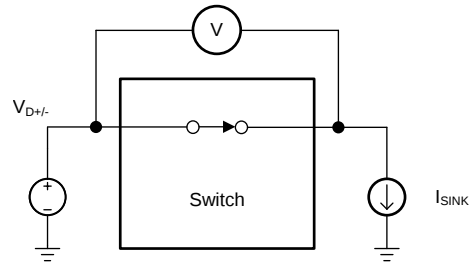


Channel ON,  $R_{ON} = V/I_{SINK}$


**Figure 2. ON-State Resistance ( $R_{ON}$ )**

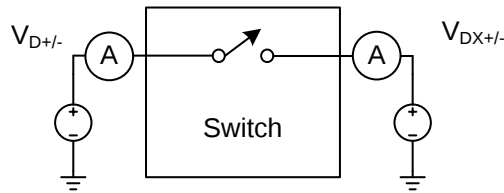

**Figure 3. Off Leakage**

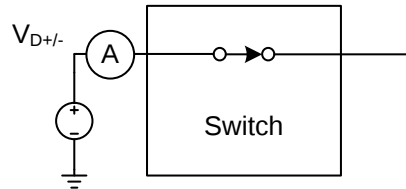

**Figure 4. On Leakage**

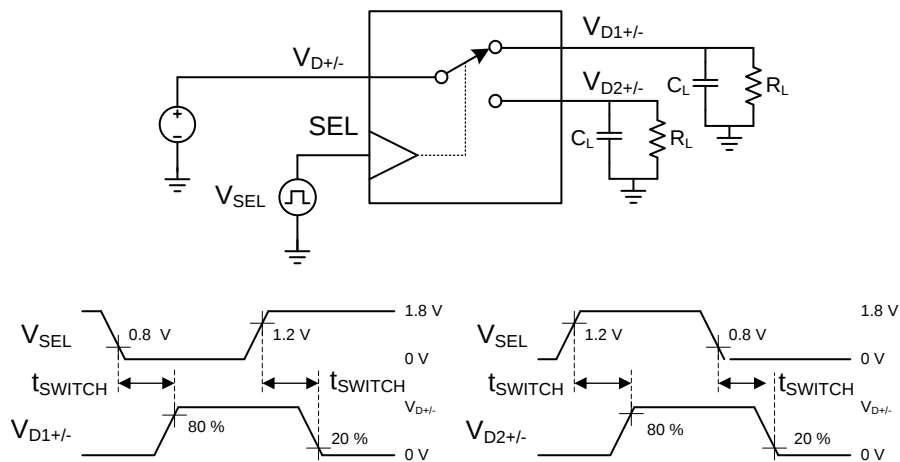


Copyright © 2017, Texas Instruments Incorporated

- (1) All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r < 500 \text{ ps}$ ,  $t_f < 500 \text{ ps}$ .
- (2)  $C_L$  includes probe and jig capacitance.

**Figure 5.  $t_{SWITCH}$  Timing**


## Parameter Measurement Information (continued)

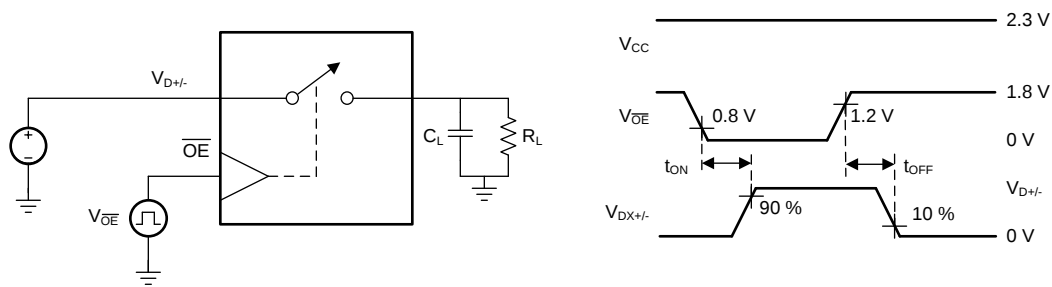

Copyright © 2017, Texas Instruments Incorporated


- (1) All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10$  MHz,  $Z_O = 50 \Omega$ ,  $t_r < 500$  ps,  $t_f < 500$  ps.
- (2)  $C_L$  includes probe and jig capacitance.

**Figure 6.  $t_{ON}$ ,  $t_{OFF}$  for  $\overline{OE}$**

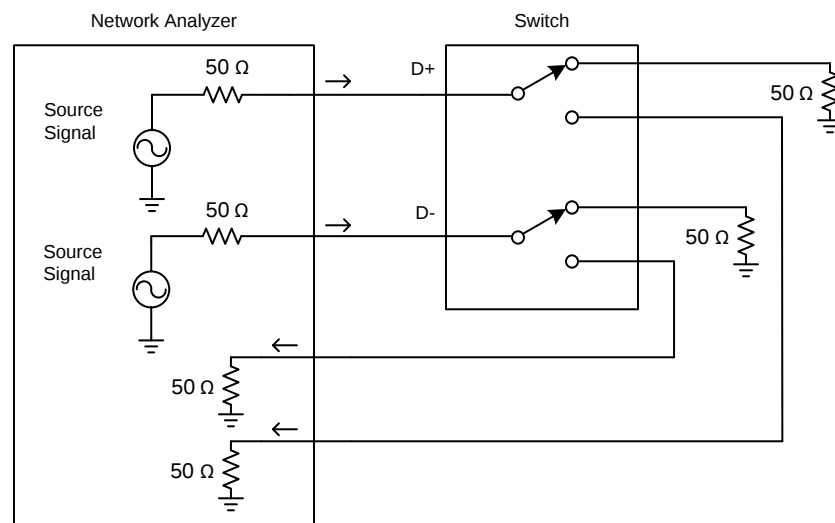

Copyright © 2017, Texas Instruments Incorporated


**Figure 7. Off Isolation**

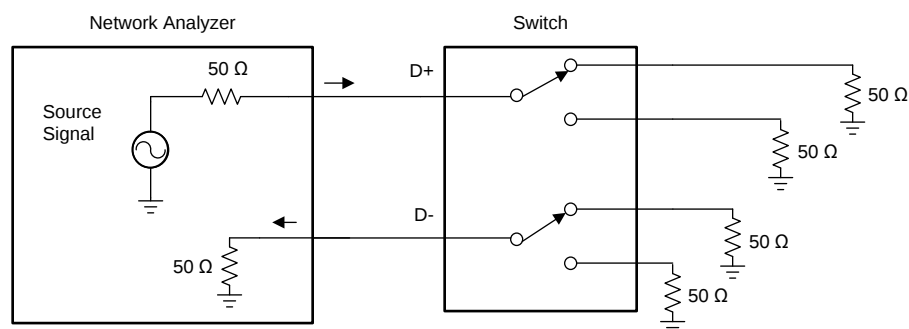

Copyright © 2017, Texas Instruments Incorporated


**Figure 8. Cross Talk**

## Parameter Measurement Information (continued)

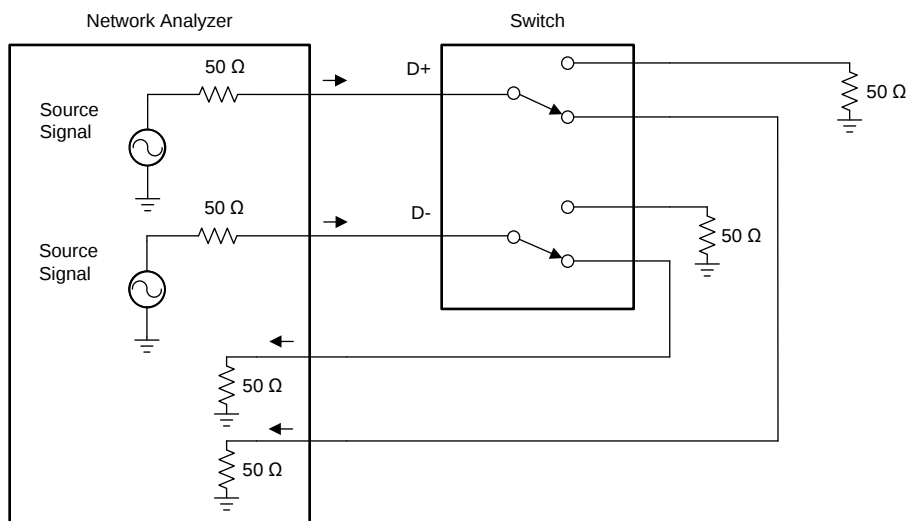


Copyright © 2017, Texas Instruments Incorporated

**Figure 9. BW and Insertion Loss**

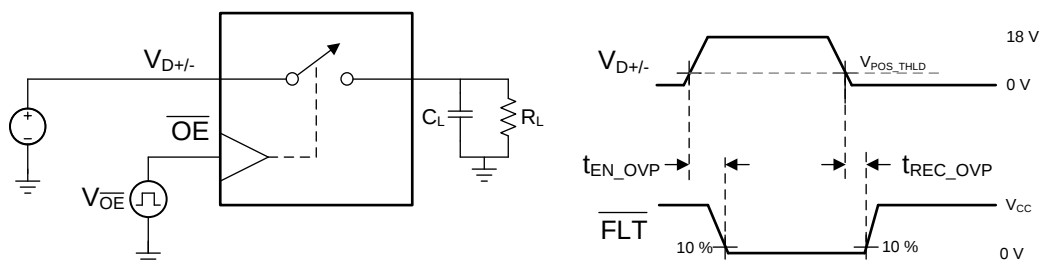

Copyright © 2017, Texas Instruments Incorporated

**Figure 10.  $t_{EN\_OVP}$  and  $t_{DIS\_OVP}$  Timing Diagram**

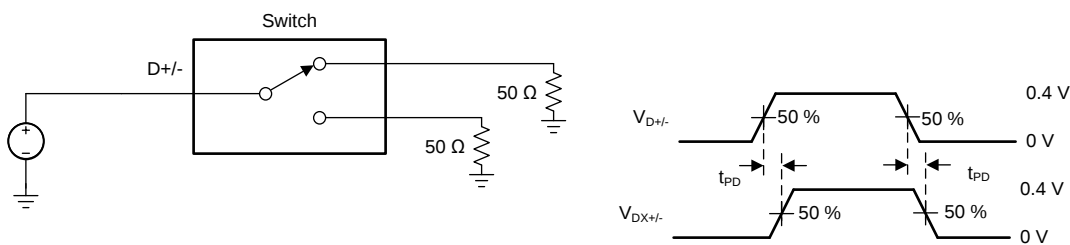


Copyright © 2017, Texas Instruments Incorporated

- (1) All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r < 500 \text{ ps}$ ,  $t_f < 500 \text{ ps}$ .
- (2)  $C_L$  includes probe and jig capacitance.

**Figure 11.  $t_{PD}$**

## Parameter Measurement Information (continued)

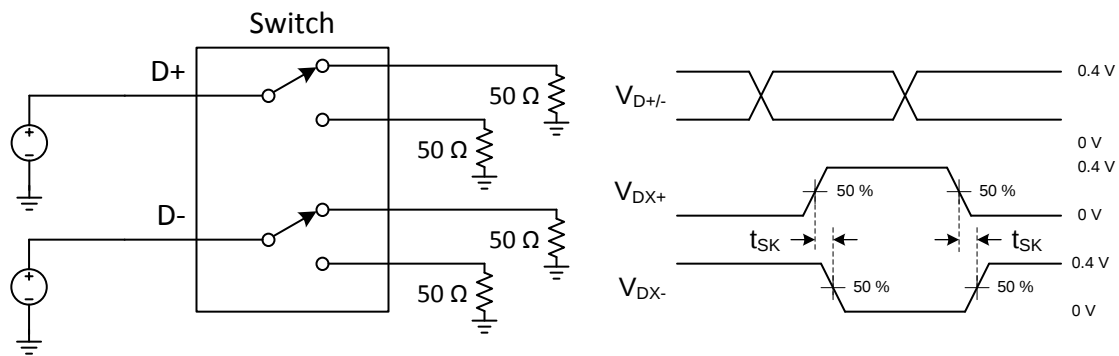

Copyright © 2017, Texas Instruments Incorporated

- (1) All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10$  MHz,  $Z_O = 50$   $\Omega$ ,  $t_r < 500$  ps,  $t_f < 500$  ps.
- (2)  $C_L$  includes probe and jig capacitance.

**Figure 12.**  $t_{SK}$

## 8 Detailed Description

### 8.1 Overview

The TS5USBC400 is a bidirectional low-power dual port, high-speed, USB 2.0 analog switch with integrated protection for USB Type-C systems. The device is configured as a dual 2:1 or 1:2 switch and is optimized for handling the USB 2.0 D+/- lines in a USB Type-C system as shown in Figure 13.


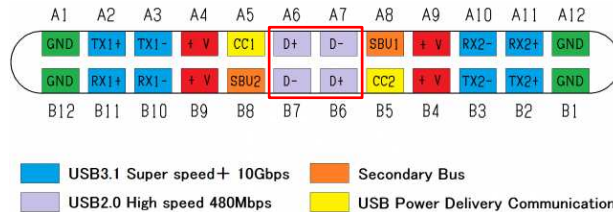


Figure 13. USB Type-C Connector Pinout

The TS5USBC400 also works in traditional USB systems that need protection from fault conditions such as automotive and applications that require higher voltage charging. The device maintains excellent signal integrity through the optimization of both  $R_{ON}$  and BW while protecting the system with 0 V to 16 V OVP protection. The OVP implementation is designed to protect sensitive system components behind the switch that cannot survive a fault condition where VBUS is shorted the D+ and D- pins on the connector.

### 8.2 Functional Block Diagram

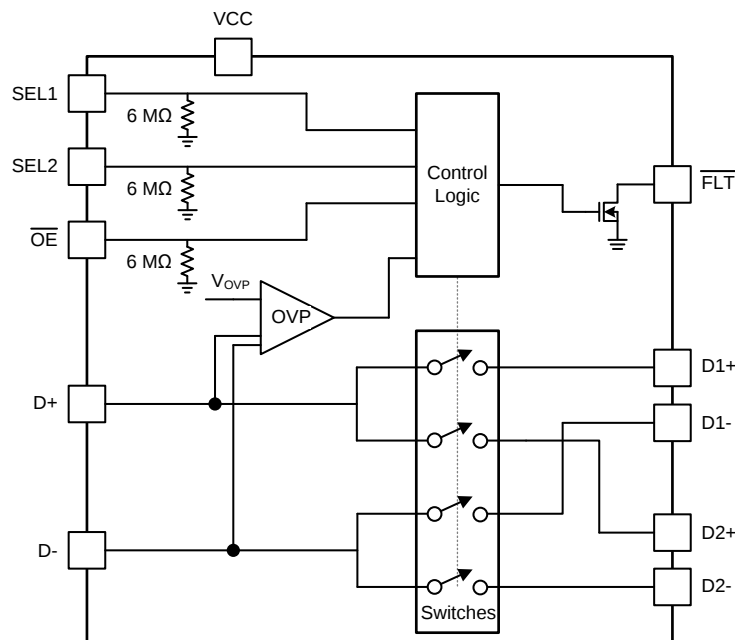

Copyright © 2017, Texas Instruments Incorporated

## 8.3 Feature Description


### 8.3.1 Powered-off Protection

When the TS5USBC400 is powered off the I/Os of the device remain in a high-Z state. The crosstalk, off-isolation, and leakage remain within the [Electrical Specifications](#).

This prevents errant voltages from reaching the rest of the system and maintains isolation when the system is powering up.

### 8.3.2 Overvoltage Protection


The OVP of the TS5USBC400 is designed to protect the system from D+/- shorts to VBUS at the USB and USB Type-C connector. [Figure 14](#) depicts a moisture short that would cause 16 V to appear on an existing USB solution that could pass through the device and damage components behind the device.

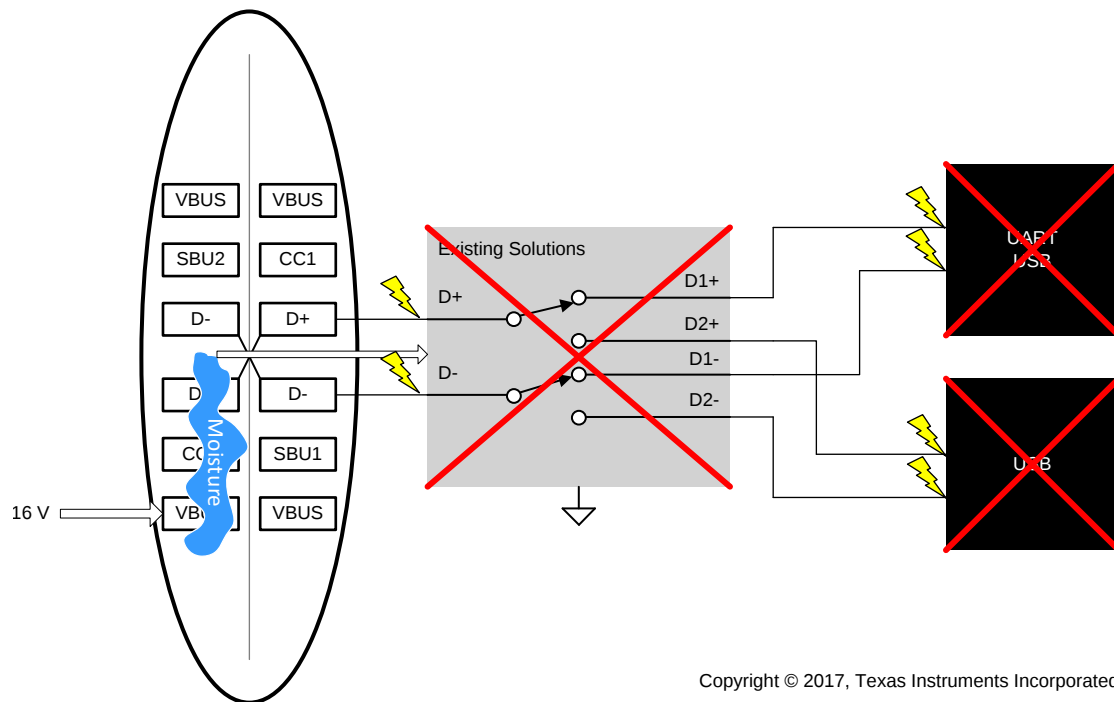

**Figure 14. Existing Solution Being Damaged by a Short, 16 V**


The TS5USBC400 will open the switches and protect the rest of the system by blocking the 16 V as depicted in .

## Feature Description (continued)

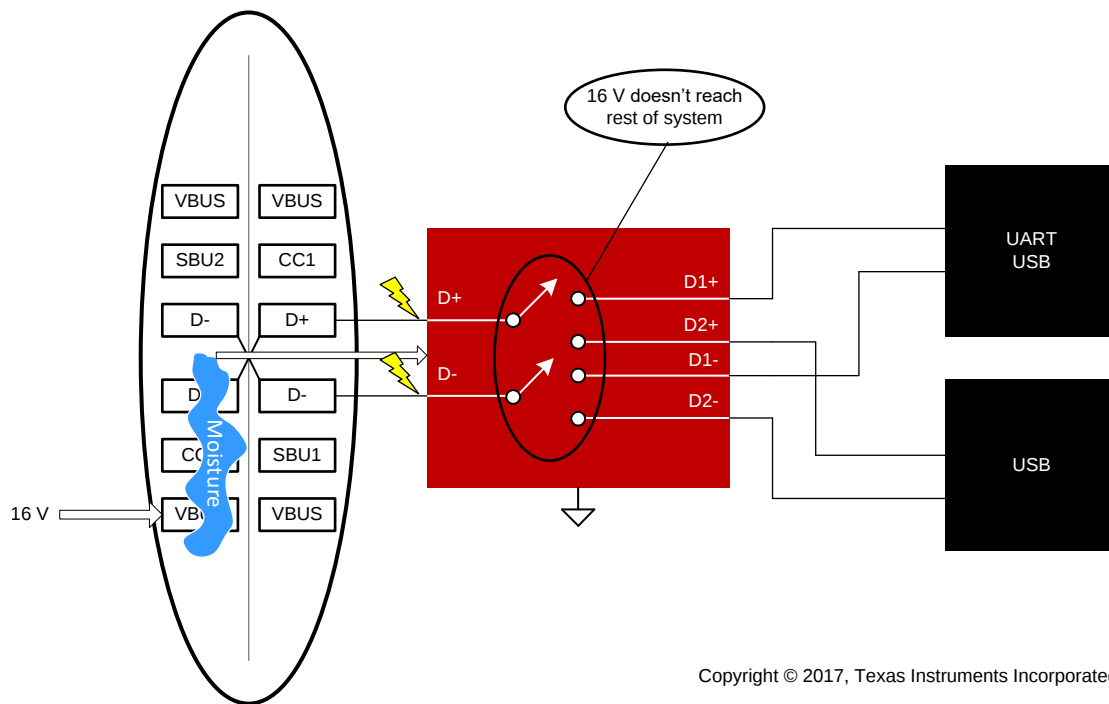

**Figure 15. Protecting During a 16-V Short**

Figure 16 is a waveform showing the voltage on the pins during an over-voltage scenario.

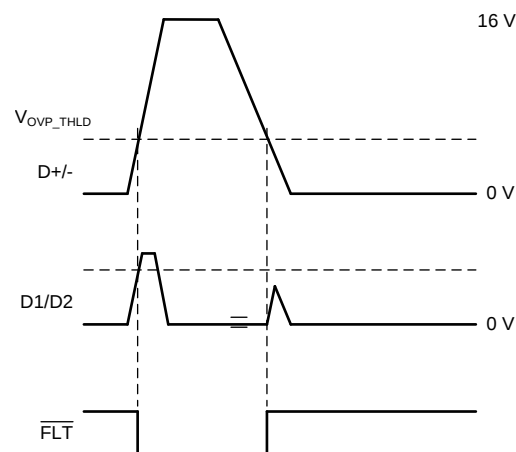

**Figure 16. Overvoltage Protection Waveform, 16 V**

## 8.4 Device Functional Modes

### 8.4.1 Pin Functions

**Table 1. Function Table**

| $\overline{\text{OE}}$ | SEL1 | SEL2 | D- Connection | D+ Connection |
|------------------------|------|------|---------------|---------------|
| H                      | X    | X    | High-Z        | High-Z        |
| L                      | L    | L    | D- to D1-     | D+ to D1+     |
| L                      | L    | H    | D- to D1-     | D+ to D2+     |
| L                      | H    | L    | D- to D2-     | D+ to D1+     |
| L                      | H    | H    | D- to D2-     | D+ to D2+     |

## 9 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

There are many USB applications in which the USB hubs or controllers have a limited number of USB I/Os or need to route signals from a single USB connector. The TS5USBC400 solution can effectively expand the limited USB I/Os by switching between multiple USB buses to interface them to a single USB hub or controller or route signals from one connector to two different locations. With independent control of the two switches using SEL1 and SEL2, TS5USBC400 can be used to cross switch single ended signals.

### 9.2 Typical Application

TS5USBC400 USB/UART switch. The TS5USBC400 is used to switch signals between the USB path, which goes to the baseband or application processor, or the UART path, which goes to debug port. The TS5USBC400 has internal 6-M $\Omega$  pull-down resistors on SEL1, SEL2, and  $\overline{OE}$ . The pull-down on SEL1 and SEL2 pins ensure the D1+/D1- channel is selected by default. The pull-down on  $\overline{OE}$  enables the switch when power is applied.

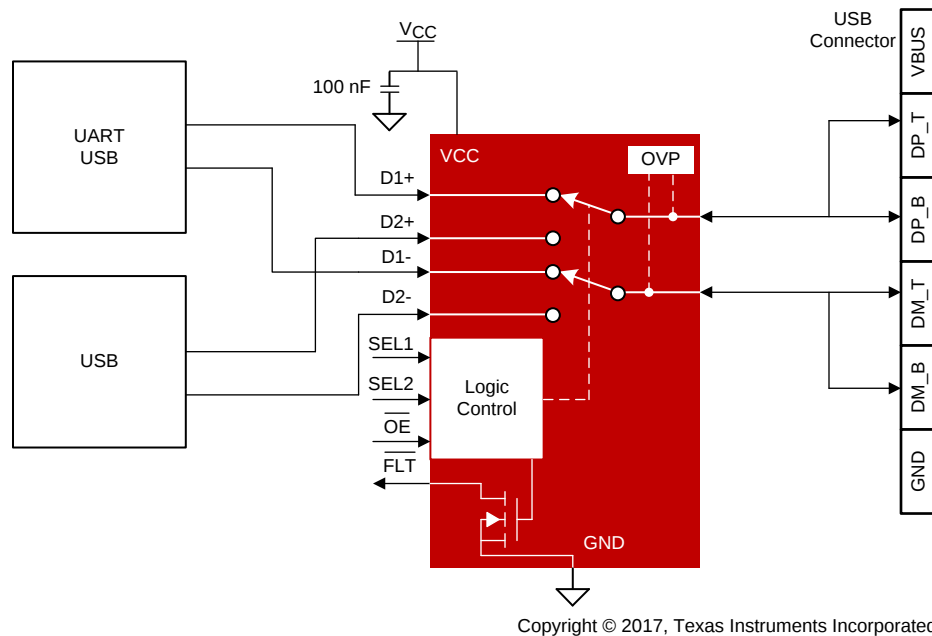

**Figure 17. Typical TS5USBC400 Application**

#### 9.2.1 Design Requirements

Design requirements of USB 1.0, 1.1, and 2.0 standards must be followed. The TS5USBC400 has internal 6-M $\Omega$  pull-down resistors on SEL1, SEL2, and  $\overline{OE}$ , so no external resistors are required on the logic pins. The internal pull-down resistor on SEL1 and SEL2 pins ensures the D1+ and D1- channels are selected by default. The internal pull-down resistor on  $\overline{OE}$  enables the switch when power is applied to VCC.

#### 9.2.2 Detailed Design Procedure

The TS5USBC400 can be properly operated without any external components. However, TI recommends that unused pins must be connected to ground through a 50- $\Omega$  resistor to prevent signal reflections back into the device. TI does recommend a 100nF bypass capacitor placed close to TS5USBC400 VCC pin.

## Typical Application (continued)

### 9.2.3 Application Curves

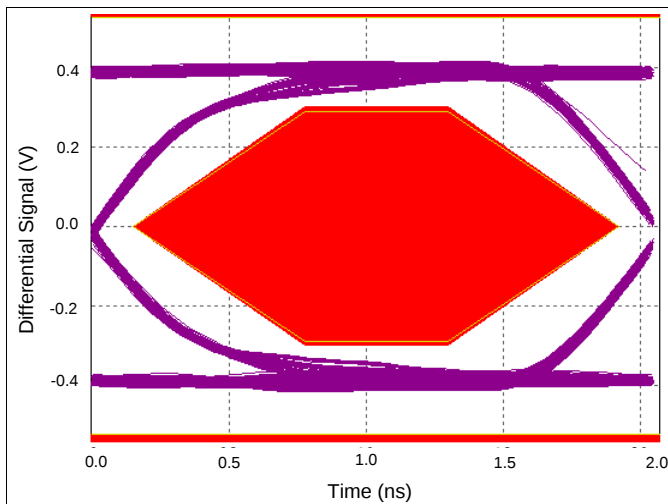


Figure 18. High Speed Eye Diagram With TS5USBC400

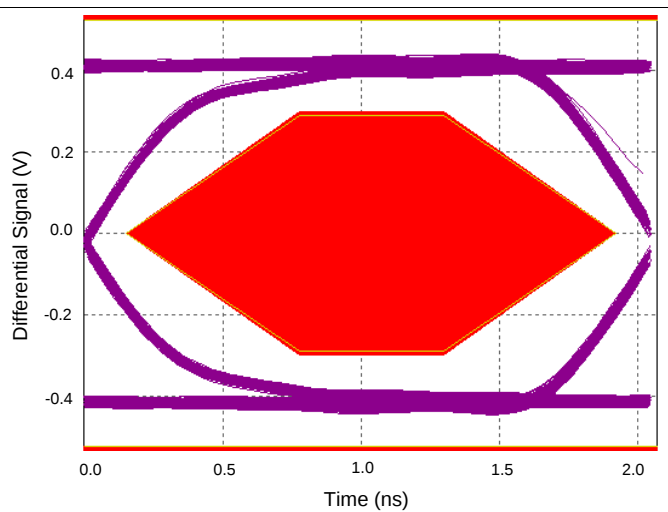


Figure 19. High Speed Eye Diagram Without TS5USBC400


## 10 Power Supply Recommendations

Power to the device is supplied through the VCC pin and must follow the USB 1.0, 1.1, and 2.0 standards. TI recommends placing a 100nF bypass capacitor as close to the supply pin VCC as possible to help smooth out lower frequency noise to provide better load regulation across the frequency spectrum.

## 11 Layout

### 11.1 Layout Guidelines

1. Place supply bypass capacitors as close to VCC pin as possible and avoid placing the bypass caps near the  $D\pm$  traces.
2. The high-speed  $D\pm$  must match and be no more than 4 inches long; otherwise, the eye diagram performance may be degraded. A high-speed USB connection is made through a shielded, twisted pair cable with a differential characteristic impedance. In layout, the impedance of  $D+$  and  $D-$  traces must match the cable characteristic differential impedance for optimal performance.
3. Route the high-speed USB signals using a minimum of vias and corners which reduces signal reflections and impedance changes. When a via must be used, increase the clearance size around it to minimize its capacitance. Each via introduces discontinuities in the signal's transmission line and increases the chance of picking up interference from the other layers of the board. Be careful when designing test points on twisted pair lines; through-hole pins are not recommended.
4. When it becomes necessary to turn  $90^\circ$ , use two  $45^\circ$  turns or an arc instead of making a single  $90^\circ$  turn. This reduces reflections on the signal traces by minimizing impedance discontinuities.
5. Do not route USB traces under or near crystals, oscillators, clock signal generators, switching regulators, mounting holes, magnetic devices or ICs that use or duplicate clock signals.
6. Avoid stubs on the high-speed USB signals because they cause signal reflections. If a stub is unavoidable, then the stub must be less than 200 mm.
7. Route all high-speed USB signal traces over continuous GND planes, with no interruptions.
8. Avoid crossing over anti-etch, commonly found with plane splits.
9. Due to high frequencies associated with the USB, a printed circuit board with at least four layers is recommended; two signal layers separated by a ground and power layer as shown in [Figure 20](#).




**Figure 20. Four-Layer Board Stack-Up**

The majority of signal traces must run on a single layer, preferably Signal 1. Immediately next to this layer must be the GND plane, which is solid with no cuts. Avoid running signal traces across a split in the ground or power plane. When running across split planes is unavoidable, sufficient decoupling must be used. Minimizing the number of signal vias reduces EMI by reducing inductance at high frequencies.

## 11.2 Layout Example

Example 4 layer PCB Stackup

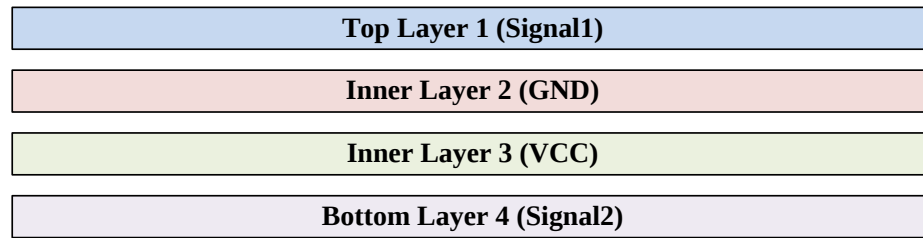

-  Via to layer 2 (GND)
-  Via to layer 3 (VCC)
-  Via to layer 4 (Signal)

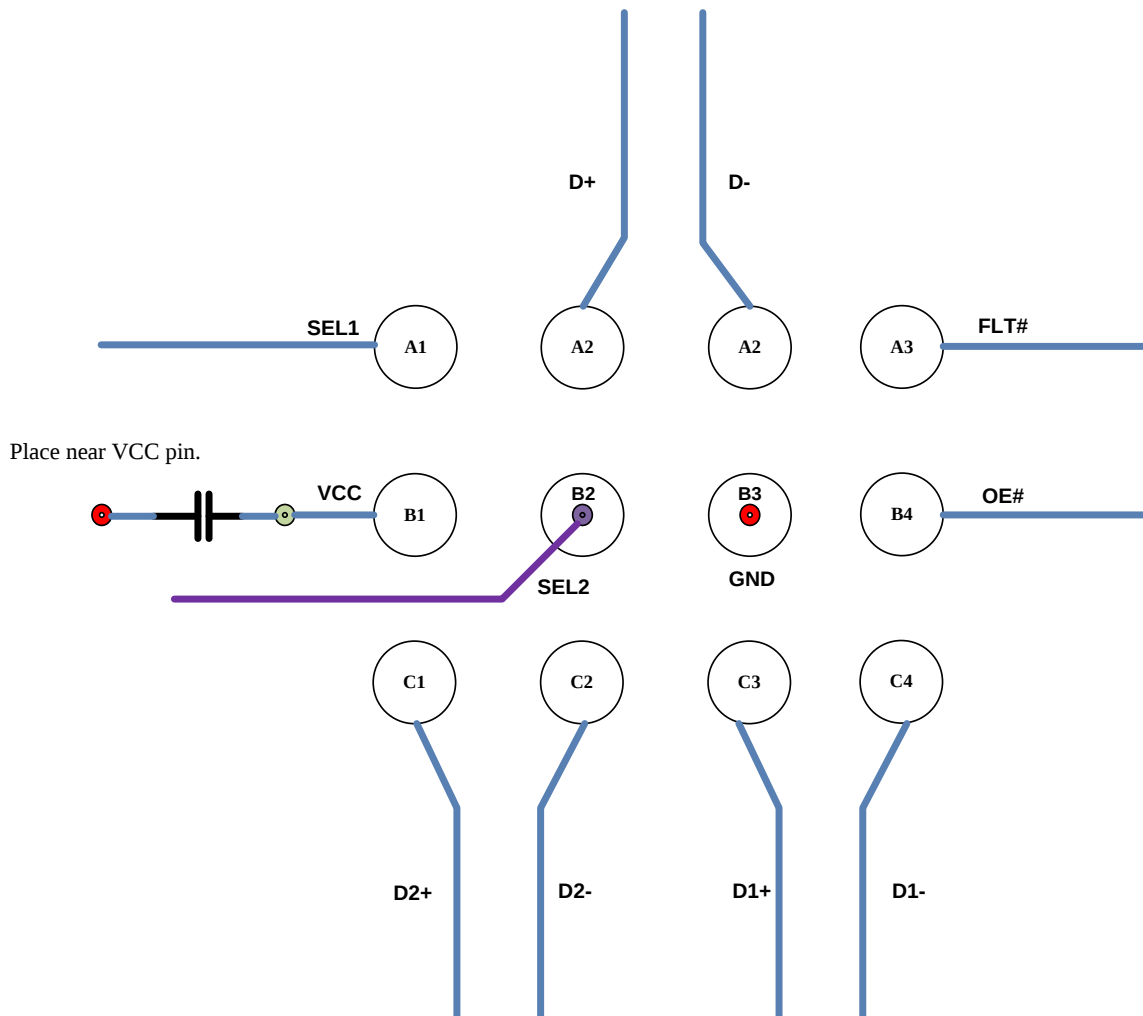


Figure 21. Layout Example

## 12 Device and Documentation Support

### 12.1 Documentation Support

#### 12.1.1 Related Documentation

For related documentation see the following:

- [USB 2.0 Board Design and Layout Guidelines](#)
- [High-Speed Layout Guidelines Application Report](#)
- [High-Speed Interface Layout Guidelines](#)

### 12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.3 Trademarks

E2E is a trademark of Texas Instruments.

USB Type-C is a trademark of USB Implementers Forum.

All other trademarks are the property of their respective owners.

### 12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.


### 12.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.




# YFP0012-C01

## PACKAGE OUTLINE

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

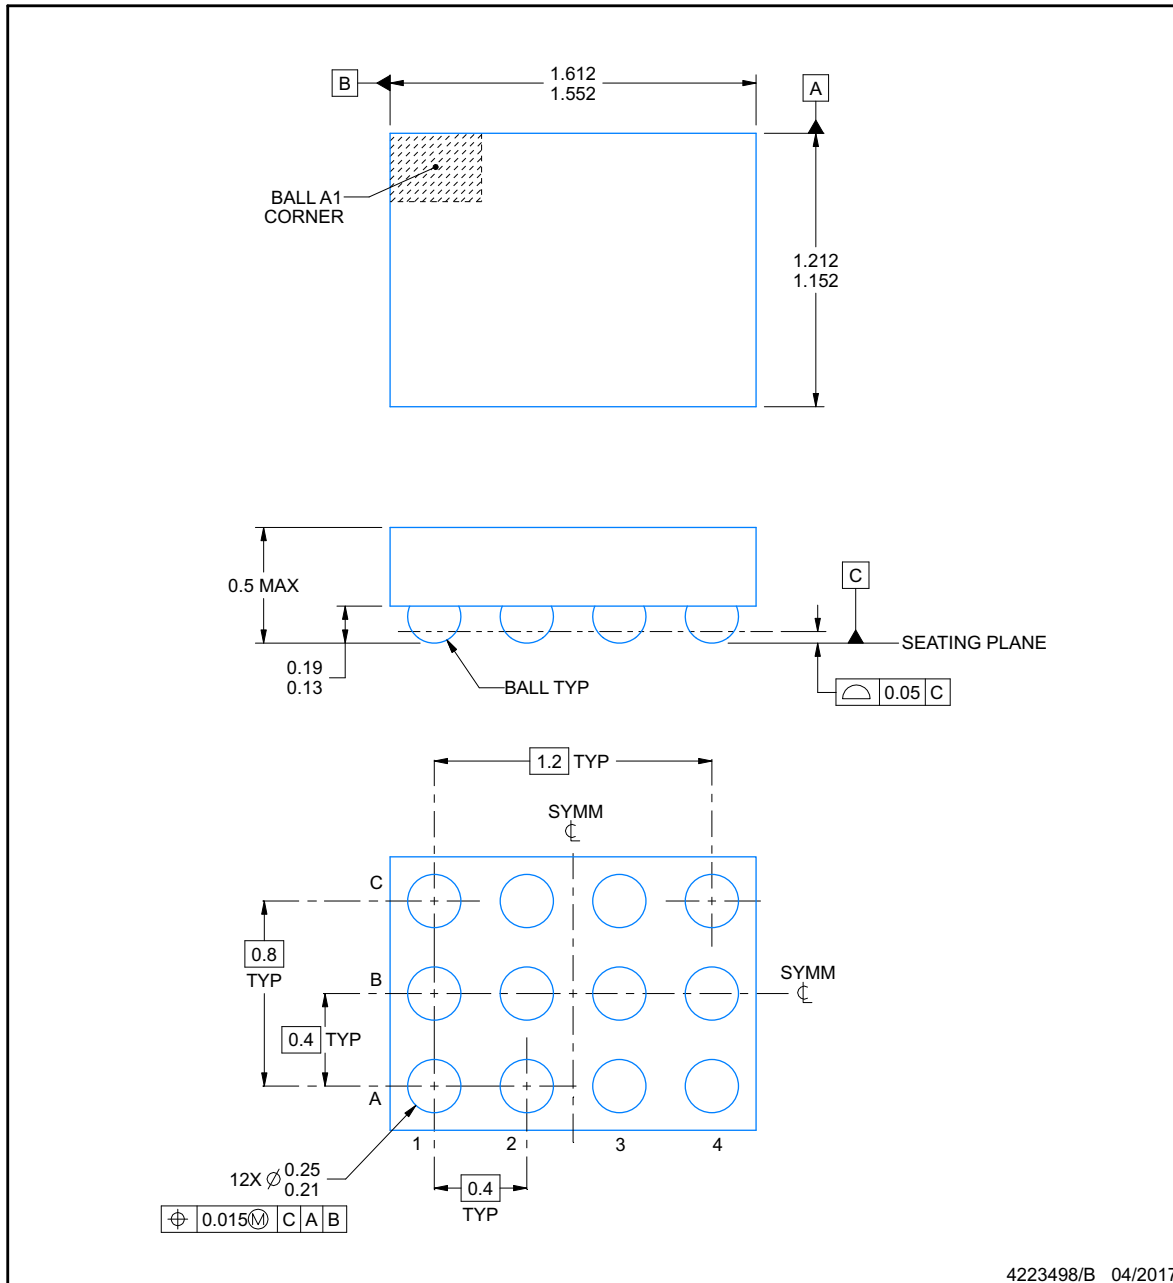

### NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

## EXAMPLE BOARD LAYOUT


**YFP0012-C01**

**DSBGA - 0.5 mm max height**

DIE SIZE BALL GRID ARRAY

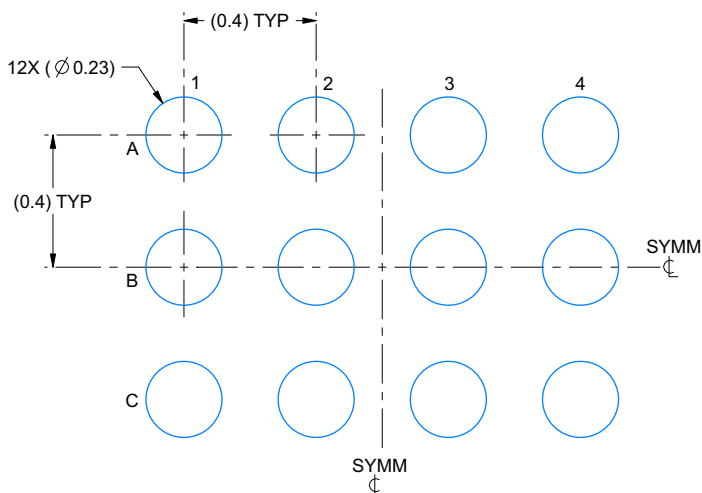

**LAND PATTERN EXAMPLE**  
EXPOSED METAL SHOWN  
SCALE:50X

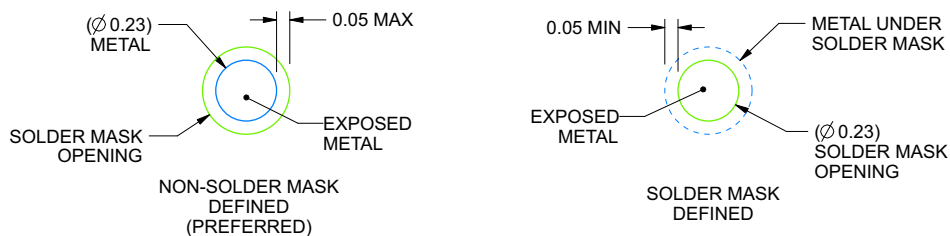

**SOLDER MASK DETAILS**  
NOT TO SCALE

4223498/B 04/2017

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

## EXAMPLE STENCIL DESIGN

**YFP0012-C01**

**DSBGA - 0.5 mm max height**

DIE SIZE BALL GRID ARRAY

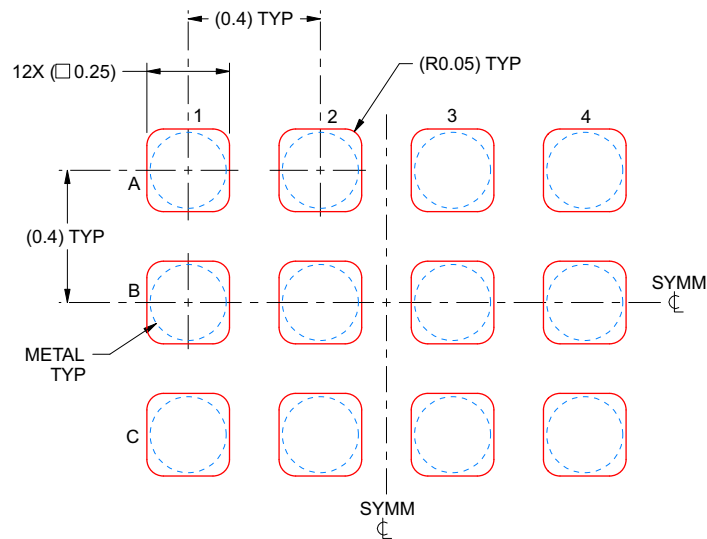

**SOLDER PASTE EXAMPLE**  
BASED ON 0.1 mm THICK STENCIL  
SCALE:50X

4223498/B 04/2017

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TS5USBC400IYFPR</a> | Active        | Production           | DSBGA (YFP)   12 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | USB4                |
| TS5USBC400IYFPR.A               | Active        | Production           | DSBGA (YFP)   12 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | USB4                |
| <a href="#">TS5USBC400IYFPT</a> | Active        | Production           | DSBGA (YFP)   12 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | USB4                |
| TS5USBC400IYFPT.A               | Active        | Production           | DSBGA (YFP)   12 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | USB4                |
| <a href="#">TS5USBC400YFPR</a>  | Active        | Production           | DSBGA (YFP)   12 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | 0 to 70      | USB4                |
| TS5USBC400YFPR.A                | Active        | Production           | DSBGA (YFP)   12 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | 0 to 70      | USB4                |
| <a href="#">TS5USBC400YFPT</a>  | Active        | Production           | DSBGA (YFP)   12 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | 0 to 70      | USB4                |
| TS5USBC400YFPT.A                | Active        | Production           | DSBGA (YFP)   12 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | 0 to 70      | USB4                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TS5USBC400IYFPR | DSBGA        | YFP             | 12   | 3000 | 180.0              | 8.4                | 1.32    | 1.72    | 0.62    | 4.0     | 8.0    | Q2            |
| TS5USBC400IYFPT | DSBGA        | YFP             | 12   | 250  | 180.0              | 8.4                | 1.32    | 1.72    | 0.62    | 4.0     | 8.0    | Q2            |
| TS5USBC400YFPR  | DSBGA        | YFP             | 12   | 3000 | 180.0              | 8.4                | 1.32    | 1.72    | 0.62    | 4.0     | 8.0    | Q2            |
| TS5USBC400YFPT  | DSBGA        | YFP             | 12   | 250  | 180.0              | 8.4                | 1.32    | 1.72    | 0.62    | 4.0     | 8.0    | Q2            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TS5USBC400IYFPR | DSBGA        | YFP             | 12   | 3000 | 182.0       | 182.0      | 20.0        |
| TS5USBC400IYFPT | DSBGA        | YFP             | 12   | 250  | 182.0       | 182.0      | 20.0        |
| TS5USBC400YFPR  | DSBGA        | YFP             | 12   | 3000 | 182.0       | 182.0      | 20.0        |
| TS5USBC400YFPT  | DSBGA        | YFP             | 12   | 250  | 182.0       | 182.0      | 20.0        |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated