






LMR36015

SNVSB49D - APRIL 2018 - REVISED SEPTEMBER 2020

LMR36015 4.2-V to 60-V, 1.5-A Ultra-Small Synchronous Step-Down Converter

1 Features

- · Functional Safety-Capable
 - Documentation available to aid functional safety system design
- Designed for reliable and rugged applications
 - Input transient protection up to 66 V
 - Junction temperature range –40°C to +150°C
 - 0.4-V dropout with 1.5-A load (typical)
- Suited for scalable industrial power supplies
 - Pin compatible with:
 - LMR36006 (60 V, 0.6 A)
 - LMR33620/LMR33630 (36 V, 2 A, or 3 A)
 - 400-kHz, 1-MHz frequency options
- Low power dissipation across load spectrum
 - 90% efficiency at 400 kHz (24 V_{IN}, 5 V_{OUT}, 1 A)
 - 93% efficiency at 400 kHz (12 V_{IN}, 5 V_{OUT}, 1 A)
 - Increased light load efficiency in PFM
 - Low operating quiescent current of 26 µA
- Small 2-mm × 3-mm HotRod™ package
- Solution with few external components
- LMR36006-Q1 and LMR36015-Q1 available in 400 kHz and 2.1 MHz, adjustable output, and fixed 3.3
- Optimized for ultra low EMI requirements
 - Meets CISPR25 class 5 standard
 - Hotrod[™] package minimizes switch node ringing
 - Parallel input path minimizes parasitic inductance
 - Spread spectrum reduces peak emissions
- Create a custom design using the LMR36015 with the WEBENCH® Power Designer



2 Applications

- Field transmitters and sensors, PLC modules
- Thermostats, video surveillance, HVAC systems
- AC and servo drives, rotary encoders
- Industrial transport, asset tracking

3 Description


The LMR36015 regulator is an easy-to-use, synchronous, step-down DC/DC converter. With integrated high-side and low-side power MOSFETs, up to 1.5 A of output current is delivered over a wide input voltage range of 4.2 V to 60 V. Tolerance goes up to 66 V. The transient tolerance reduces the necessary design effort to protect against overvoltages and meets the surge immunity requirements of IEC 61000-4-5.

The LMR36015 uses peak-current-mode control to provide optimal efficiency and output voltage accuracy. Load transient performance is improved with FPWM feature in the 1-MHz regulator. Precision enable gives flexibility by enabling a direct connection to the wide input voltage or precise control over device start-up and shutdown. The power-good flag, with built-in filtering and delay, offers a true indication of system status eliminating the requirement for an external supervisor.

Device Information

PART NUMBER	PACKAGE ⁽¹⁾	BODY SIZE (NOM)
LMR36015	VQFN-HR (12)	2.00 mm × 3.00 mm

For all available packages, see the orderable addendum at the end of the data sheet.



Simplified Schematic



Table of Contents

1 Features1	9.3 Feature Description	.11
2 Applications 1	9.4 Device Functional Modes	.16
3 Description1	10 Application and Implementation	18
4 Revision History2	10.1 Application Information	18
5 Description (continued)2	10.2 Typical Application	18
6 Device Comparison Table3	10.3 What to Do and What Not to Do	
7 Pin Configuration and Functions4	11 Power Supply Recommendations	.33
Pin Functions4	12 Layout	
8 Specifications 5	12.1 Layout Guidelines	
8.1 Absolute Maximum Ratings5	12.2 Layout Example	36
8.2 ESD Ratings5	13 Device and Documentation Support	.37
8.3 Recommended Operating Conditions5	13.1 Device Support	
8.4 Thermal Information6	13.2 Documentation Support	37
8.5 Electrical Characteristics6	13.3 Receiving Notification of Documentation Updates	.37
8.6 Timing Requirements7	13.4 Support Resources	37
8.7 System Characteristics8	13.5 Trademarks	.38
8.8 Typical Characteristics9	13.6 Electrostatic Discharge Caution	.38
9 Detailed Description10	13.7 Glossary	
9.1 Overview10	14 Mechanical, Packaging, and Orderable	
9.2 Functional Block Diagram11	Information	38
_		

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision C (October 2019) to Revision D (September 2020)	Page
Added functional safety bullet to Section 1	1
Replaced front page image	
• Updated the numbering format for tables, figures and cross-references throughout the document	
Replaced Figure 10-4	26
Changes from Revision B (February 2019) to Revision C (October 2019)	Page
Added EMI description to the Section 1	1
Added Figure 10-4 through Figure 10-27	26
Changes from Revision A (November 2018) to Revision B (February 2019)	Page
Added Updated package quantities in Device Comparison Table	3
Changes from Revision * (April 2018) to Revision A (November 2018)	Page
First release of production-data data sheet	1

5 Description (continued)

The LMR36015 is in a HotRod package which enables low noise, higher efficiency, and the smallest package to die ratio. The device requires few external components and has a pinout designed for simple PCB layout. The small solution size and feature set of the LMR36015 are designed to simplify implementation for a wide range of end equipment, including space critical applications of ultra-small field transmitters and vision sensors.



6 Device Comparison Table

ORDERABLE PART NUMBER	OUTPUT VOLTAGE	FPWM	f _{SW}	PACKAGE QUANTITY
LMR36015ARNXT	Adjustable	No	400 kHz	250
LMR36015ARNXR	Adjustable	No	400 kHz	3000
LMR36015FBRNXT	Adjustable	Yes	1 MHz	250
LMR36015FBRNXR	Adjustable	Yes	1 MHz	3000
LMR36015BRNXT	Adjustable	No	1 MHz	250
LMR36015BRNXR	Adjustable	No	1 MHz	3000



7 Pin Configuration and Functions




Figure 7-1. 12-Pin VQFN-HR RNX Package (Top View)

Pin Functions

NO.	NAME	TYPE	DESCRIPTION
1, 11	PGND	G	Power ground terminal. Connect to system ground and AGND. Connect to C _{IN} with short wide traces.
2, 10	VIN	Р	Input supply to regulator. Connect to C _{IN} with short wide traces.
3	NC	_	Connect the SW pin to NC on the PCB. This simplifies the connection from the C_{BOOT} capacitor to the SW pin. This pin has no internal connection to the regulator.
4	воот	Р	Bootstrap supply voltage for internal high-side driver. Connect a high-quality 100-nF capacitor from this pin to the SW pin. Connect the SW pin to NC on the PCB. This simplifies the connection from the C _{BOOT} capacitor to the SW pin.
5 VCC P Internal 5-V LDO output. Used as supply to internal control circuits. Do not connect to external location can be used as logic supply for power-good flag. Connect a high-quality 1-μF capacitor from this GND.			
6	AGND	G	Analog ground for regulator and system. Ground reference for internal references and logic. All electrical parameters are measured with respect to this pin. Connect to system ground on PCB.
7	FB	А	Feedback input to regulator. Connect to tap point of feedback voltage divider. Do not float. Do not ground.
8	PG	А	Open-drain power-good flag output. Connect to suitable voltage supply through a current limiting resistor. High = power OK, low = power bad. Goes low when EN = Low. Can be open or grounded when not used.
9	EN	Α	Enable input to regulator. High = ON, low = OFF. Can be connected directly to V _{IN} ; <i>Do not float</i> .
Regulator switch node. Connect to power inductor. Connect the SW pin to NC on the PCB. This simplifies the connection from the C _{BOOT} capacitor to the SW pin.		Regulator switch node. Connect to power inductor. Connect the SW pin to NC on the PCB. This simplifies the connection from the C_{BOOT} capacitor to the SW pin.	
A = Anal	log, P = Power,	G = Groun	nd

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated

8 Specifications

8.1 Absolute Maximum Ratings

Over operating junction temperature range of -40°C to 150°C (unless otherwise noted)(1)

	· · · · · · · · · · · · · · · · · · ·	MIN	MAX	UNIT
Input voltage	VIN to PGND	-0.3	66	V
Input voltage	EN to AGND	-0.3	66.3	V
Input voltage	FB to AGND	-0.3	5.5	V
Input voltage	PG to AGND	-0.3	22	V
Input voltage	AGND to PGND	-0.3	0.3	V
Output voltage	SW to PGND	-0.3	66.3	V
Output voltage	SW to PGND less than 10-ns transients	-3.5	66.3	V
Output voltage	CBOOT to SW	-0.3	5.5	V
Output voltage	VCC to AGND	-0.3	5.5	V
Junction Temperature T _J		-40	150	°C
Storage tempera	ture, T _{stg}	-65	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

8.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM) ⁽¹⁾	±2500	٧
V _(ESD)	Electrostatic discharge	Charged-device model (CDM) ⁽²⁾	±750	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

8.3 Recommended Operating Conditions

Over the recommended operating junction temperature range of -40 °C to 150 °C (unless otherwise noted)(1)

	1 0, 1		· · · · · · · · · · · · · · · · · · ·	
		MIN	MAX	UNIT
	VIN to PGND	4.2	60	V
Input voltage	EN to PGND ⁽²⁾	0	60	V
	PG to PGND ⁽²⁾	0	18	V
Output current	I _{OUT}	0	1.5	Α

⁽¹⁾ Recommended operating conditions indicate conditions for which the device is intended to be functional, but do not ensure specific performance limits. For ensured specifications, see *Electrical Characteristics*.

⁽²⁾ The voltage on this pin must not exceed the voltage on the VIN pin by more than 0.3 V.



8.4 Thermal Information

		LMR36015	
	THERMAL METRIC ⁽¹⁾	RNX (VQFN-HR)	UNIT
		12 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	72.5	°C/W
R _{0JC(top)}	Junction-to-case (top) thermal resistance	35.9	°C/W
R _{θJB}	Junction-to-board thermal resistance	23.3	°C/W
ΨЈТ	Junction-to-top characterization parameter	0.8	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	23.5	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

8.5 Electrical Characteristics

Limits apply over operating junction temperature (T_J) range of -40° C to $+150^{\circ}$ C, unless otherwise stated. Minimum and Maximum limits⁽¹⁾ are specified through test, design or statistical correlation. Typical values represent the most likely parametric norm at T_J = 25°C, and are provided for reference purposes only. Unless otherwise stated, the following conditions apply: V_{IN} = 24 V.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY VOL	TAGE (VIN PIN)					
I _{Q-nonSW}	Operating quiescent current (non-switching) ⁽²⁾	V _{EN} = 3.3 V (PFM variant only)	18	26	36	μA
I _{SD}	Shutdown quiescent current; measured at VIN pin	V _{EN} = 0 V		5		μΑ
ENABLE (EN	PIN)					
V _{EN-VCC-H}	Enable input high level for V _{CC} output	V _{ENABLE} rising			1.14	V
V _{EN-VCC-L}	Enable input low level for V _{CC} output	V _{ENABLE} falling	0.3			V
V _{EN-VOUT-H}	Enable input high level for V _{OUT}	V _{ENABLE} rising	1.157	1.231	1.3	V
V _{EN-VOUT-HYS}	Enable input hysteresis for V _{OUT}	Hysteresis below V _{ENABLE-H} ; falling		110		mV
I _{LKG-EN}	Enable input leakage current	V _{EN} = 3.3V		0.2		nA
INTERNAL LI	DO (VCC PIN)					
V _{CC}	Internal V _{CC} voltage	6 V ≤ V _{IN} ≤ 60 V	4.75	5	5.25	V
V _{CC-UVLO-} Rising	Internal V _{CC} undervoltage lockout	V _{CC} rising	3.6	3.8	4.0	V
V _{CC-UVLO-} Falling	Internal V _{CC} undervoltage lockout	V _{CC} falling	3.1	3.3	3.5	V
VOLTAGE RE	FERENCE (FB PIN)					
V _{FB}	Feedback voltage		0.985	1	1.015	V
I _{LKG-FB}	Feedback leakage current	FB = 1 V		0.2		nA
CURRENT LI	MITS AND HICCUP		•		'	
I _{SC}	High-side current limit ⁽³⁾		2	2.4	2.8	Α
I _{LS-LIMIT}	Low-side current limit ⁽³⁾		1.55	1.8	2.07	Α
I _{L-ZC}	Zero cross detector threshold	PFM variants only		0.02		Α
I _{PEAK-MIN}	Minimum inductor peak current ⁽³⁾			0.45		Α
I _{L-NEG}	Negative current limit ⁽³⁾	FPWM variant only	-1.8	-1.4	-0.9	Α

Product Folder Links: LMR36015

Limits apply over operating junction temperature (T_J) range of -40° C to $+150^{\circ}$ C, unless otherwise stated. Minimum and Maximum limits⁽¹⁾ are specified through test, design or statistical correlation. Typical values represent the most likely parametric norm at T_J = 25°C, and are provided for reference purposes only. Unless otherwise stated, the following conditions apply: V_{IN} = 24 V.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OD (PGOOD PIN)					
Power-Good upper threshold - rising	% of FB voltage	105%	107%	110%	
Power-Good lower threshold - falling	% of FB voltage	90%	93%	95%	
Power-Good hysteresis (rising & falling)	% of FB voltage		2%		
Power-Good rising/falling edge deglitch delay		80	140	200	μs
Minimum input voltage for proper Power-Good function				2	V
Power-Good on-resistance	V _{EN} = 2.5 V		80	165	Ω
Power-Good on-resistance	V _{EN} = 0 V		35	90	Ω
R					
Internal oscillator frequency	1-MHz variant	0.85	1	1.15	MHz
Internal oscillator frequency	400-kHz variant	340	400	460	kHz
		<u> </u>		<u>'</u>	
High-side MOSFET ON-resistance	I _{OUT} = 0.5 A		225	435	mΩ
Low-side MOSFET ON-resistance	I _{OUT} = 0.5 A		150	280	mΩ
	Power-Good upper threshold - rising Power-Good lower threshold - falling Power-Good lower threshold - falling Power-Good hysteresis (rising & falling) Power-Good rising/falling edge deglitch delay Minimum input voltage for proper Power-Good function Power-Good on-resistance Power-Good on-resistance R Internal oscillator frequency Internal oscillator frequency High-side MOSFET ON-resistance	PARAMETER DD (PGOOD PIN) Power-Good upper threshold - rising % of FB voltage Power-Good lower threshold - falling % of FB voltage Power-Good hysteresis (rising & falling) Power-Good rising/falling edge deglitch delay Minimum input voltage for proper Power-Good function Power-Good on-resistance V _{EN} = 2.5 V Power-Good on-resistance V _{EN} = 0 V R Internal oscillator frequency 1-MHz variant Internal oscillator frequency 400-kHz variant High-side MOSFET ON-resistance I _{OUT} = 0.5 A	PARAMETER DD (PGOOD PIN) Power-Good upper threshold - rising % of FB voltage 105% Power-Good lower threshold - falling % of FB voltage 90% Power-Good hysteresis (rising & falling) % of FB voltage 80 Power-Good rising/falling edge deglitch delay 80 Minimum input voltage for proper Power-Good function Power-Good on-resistance V _{EN} = 2.5 V Power-Good on-resistance V _{EN} = 0 V R Internal oscillator frequency 1-MHz variant 0.85 Internal oscillator frequency 400-kHz variant 340 High-side MOSFET ON-resistance I _{OUT} = 0.5 A	PARAMETERTEST CONDITIONSMINTYPDD (PGOOD PIN)Power-Good upper threshold - rising% of FB voltage105%107%Power-Good lower threshold - falling% of FB voltage90%93%Power-Good hysteresis (rising & falling)% of FB voltage2%Power-Good rising/falling edge deglitch delay80140Minimum input voltage for proper Power-Good functionVEN = 2.5 V80Power-Good on-resistanceVEN = 0 V35RInternal oscillator frequency1-MHz variant0.851Internal oscillator frequency400-kHz variant340400High-side MOSFET ON-resistanceIout = 0.5 A225	PARAMETER TEST CONDITIONS MIN TYP MAX DD (PGOOD PIN) Power-Good upper threshold - rising % of FB voltage 105% 107% 110% Power-Good lower threshold - falling % of FB voltage 90% 93% 95% Power-Good hysteresis (rising & falling) % of FB voltage 2% 2% Power-Good rising/falling edge deglitch delay 80 140 200 Minimum input voltage for proper Power-Good function 2 80 165 Power-Good on-resistance V _{EN} = 2.5 V 80 165 Power-Good on-resistance V _{EN} = 0 V 35 90 R Internal oscillator frequency 1-MHz variant 0.85 1 1.15 Internal oscillator frequency 400-kHz variant 340 400 460 High-side MOSFET ON-resistance I _{OUT} = 0.5 A 225 435

- (1) MIN and MAX limits are 100% production tested at 25°C. Limits over the operating temperature range verified through correlation using Statistical Quality Control (SQC) methods. Limits are used to calculate Average Outgoing Quality Level (AOQL).
- (2) This is the current used by the device open loop. It does not represent the total input current of the system when in regulation.
- (3) The current limit values in this table are tested, open loop, in production. They may differ from those found in a closed loop application.

8.6 Timing Requirements

Limits apply over operating junction temperature (T_J) range of -40° C to $+150^{\circ}$ C, unless otherwise stated. Minimum and Maximum limits⁽¹⁾ are specified through test, design or statistical correlation. Typical values represent the most likely parametric norm at T_J = 25°C, and are provided for reference purposes only. Unless otherwise stated, the following conditions apply: V_{IN} = 24 V.

		MIN	NOM	MAX	UNIT
t _{ON-MIN}	Minimum switch on-time		55	83	ns
t _{OFF-MIN}	Minimum switch off-time		53	73	ns
t _{ON-MAX}	Maximum switch on-time		7	12	μs
t _{SS}	Internal soft-start time	3	4.5	6	ms

(1) MIN and MAX limits are 100% production tested at 25°C. Limits over the operating temperature range verified through correlation using Statistical Quality Control (SQC) methods. Limits are used to calculate Average Outgoing Quality Level (AOQL).

Copyright © 2022 Texas Instruments Incorporated



8.7 System Characteristics

The following specifications apply to a typical application circuit with nominal component values. Specifications in the typical (TYP) column apply to T_J = 25°C only. Specifications in the minimum (MIN) and maximum (MAX) columns apply to the case of typical components over the temperature range of T_J = -40°C to 150°C. These specifications are not ensured by production testing.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{IN}	Operating input voltage range		4.2		60	V
V _{OUT}	Adjustable output voltage regulation ⁽¹⁾	PFM operation	-1.5%		2.5%	
V _{OUT}	Adjustable output voltage regulation ⁽¹⁾	FPWM operation	-1.5%		1.5%	
I _{SUPPLY}	Input supply current when in regulation	V_{IN} = 24 V, V_{OUT} = 3.3 V, I_{OUT} = 0 A, R_{FBT} = 1 M Ω , PFM variant		26		μΑ
D _{MAX}	Maximum switch duty cycle ⁽²⁾			98%		
V _{HC}	FB pin voltage required to trip short- circuit hiccup mode			0.4		V
t _{HC}	Time between current-limit hiccup burst			94		ms
t _D	Switch voltage dead time			2		ns
T _{SD}	Thermal shutdown temperature	Shutdown temperature		170		°C
T _{SD}	Thermal shutdown temperature	Recovery temperature		158		°C


⁽¹⁾ Deviation in V_{OUT} from nominal output voltage value at $V_{IN} = 24$ V, $I_{OUT} = 0$ A to 1.5 A

Product Folder Links: LMR36015

⁽²⁾ In dropout the switching frequency drops to increase the effective duty cycle. The lowest frequency is clamped at approximately: F_{MIN} = 1 / (t_{ON-MAX} + t_{OFF-MIN}). D_{MAX} = t_{ON-MAX} /(t_{ON-MAX} + t_{OFF-MIN}).

8.8 Typical Characteristics

Unless otherwise specified the following conditions apply: T_A = 25°C. V_{IN} = 24 V.

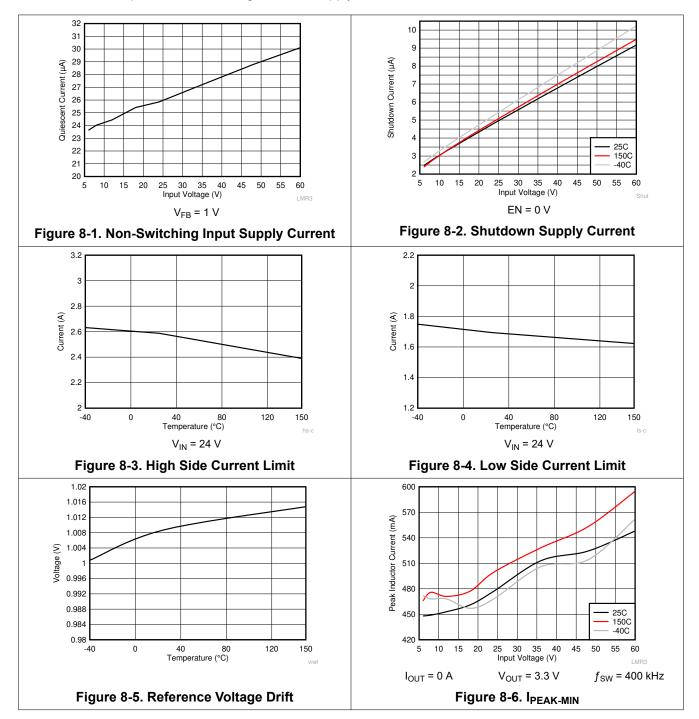



9 Detailed Description

9.1 Overview

The LMR36015 is a synchronous peak-current-mode buck regulator designed for a wide variety of industrial applications. The regulator automatically switches modes between PFM and PWM, depending on load. At heavy loads, the device operates in PWM at a constant switching frequency. At light loads, the mode changes to PFMW with diode emulation allowing DCM. This reduces the input supply current and keeps efficiency high. The device features internal loop compensation which reduces design time and requires fewer external components than externally compensated regulators.

The LMR36015 is designed with a flip-chip or HotRod technology, greatly reducing the parasitic inductance of pins. In addition, the layout of the device allows for reduction in the radiated noise generated by the switching action through partial cancellation of the current generated magnetic field. As a result the switch-node waveform exhibits less overshoot and ringing.

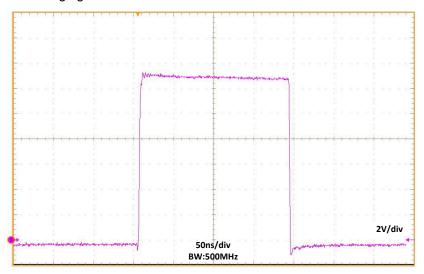



Figure 9-1. Switch Node Waveform

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated



9.2 Functional Block Diagram

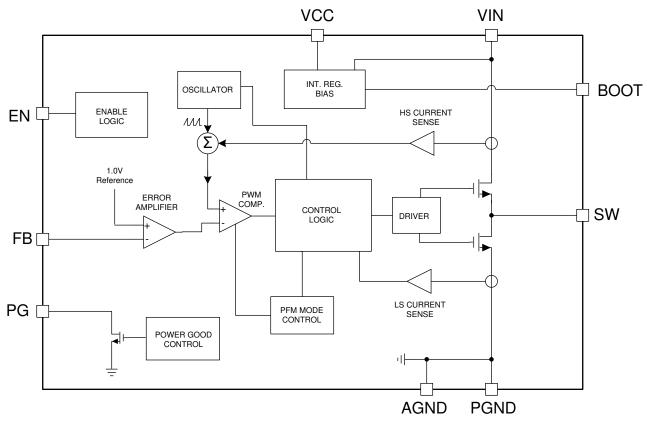

9.3 Feature Description

9.3.1 Power-Good Flag Output

The power-good flag function (PG output pin) of the LMR36015 can be used to reset a system microprocessor whenever the output voltage is out of regulation. This open-drain output goes low under fault conditions, such as current limit and thermal shutdown, as well as during normal start-up. A glitch filter prevents false flag operation for short excursions of the output voltage, such as during line and load transients. Output voltage excursions lasting less than t_{PG} do not trip the power-good flag. Power-good operation can best be understood by reference to Figure 9-2 and Figure 9-3. Note that during initial power-up, a delay of about 4 ms (typical) is inserted from the time that EN is asserted to the time that the power-good flag goes high. This delay only occurs during start-up and is not encountered during normal operation of the power-good function.

The power-good output consists of an open-drain NMOS, requiring an external pullup resistor to a suitable logic supply. It can also be pulled up to either VCC or V_{OUT} through an appropriate resistor as desired. If this function is not needed, the PG pin must be grounded. When EN is pulled low, the flag output is also forced low. With EN low, power good remains valid as long as the input voltage is $\geq 2 \text{ V}$ (typical). Limit the current into this pin to $\leq 4 \text{ mA}$.



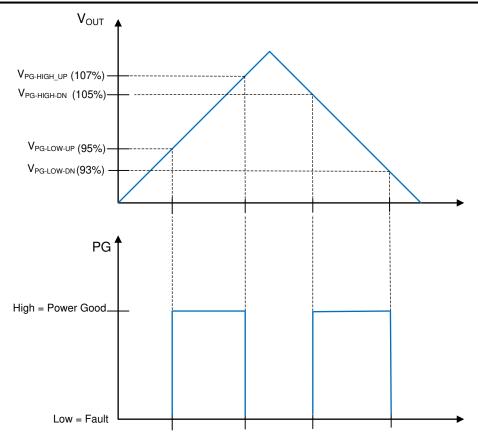


Figure 9-2. Static Power-Good Operation

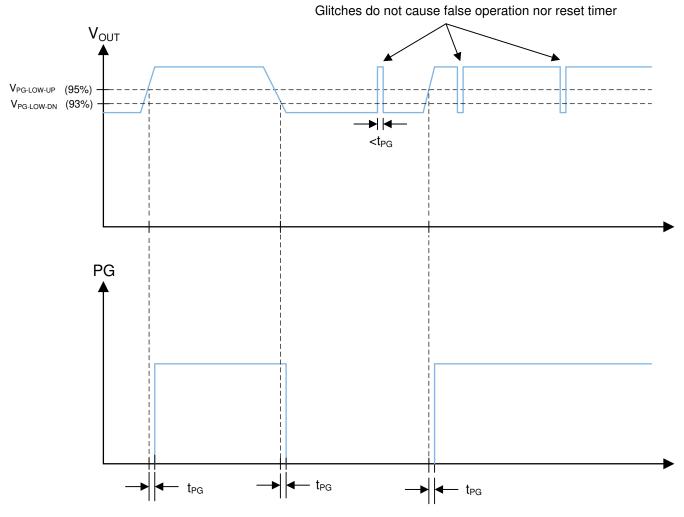


Figure 9-3. Power-Good-Timing Behavior

9.3.2 Enable and Start-up

Start-up and shutdown are controlled by the EN input. This input features precision thresholds, allowing the use of an external voltage divider to provide an adjustable input UVLO (see Section 10.2.1.2.9.1). Applying a voltage of $\geq V_{EN-VCC-H}$ causes the device to enter standby mode, powering the internal VCC, but not producing an output voltage. Increasing the EN voltage to $V_{EN-OUT-H}$ (V_{EN-H} in Figure 9-4) fully enables the device, allowing it to enter start-up mode and starting the soft-start period. When the EN input is brought below $V_{EN-OUT-H}$ (V_{EN-H} in Figure 9-4) by $V_{EN-OUT-HYS}$ (V_{EN-HYS} in Figure 9-4), the regulator stops running and enters standby mode. Further decrease in the EN voltage to below $V_{EN-VCC-L}$ completely shuts down the device. This behavior is shown in Figure 9-4. The EN input can be connected directly to VIN if this feature is not needed. This input must not be allowed to float. The values for the various EN thresholds can be found in Section 8.5.

The LMR36015 utilizes a reference-based soft start that prevents output voltage overshoots and large inrush currents as the regulator is starting up. A typical start-up waveform is shown in Figure 9-5 along with typical timings. The rise time of the output voltage is about 4 ms.



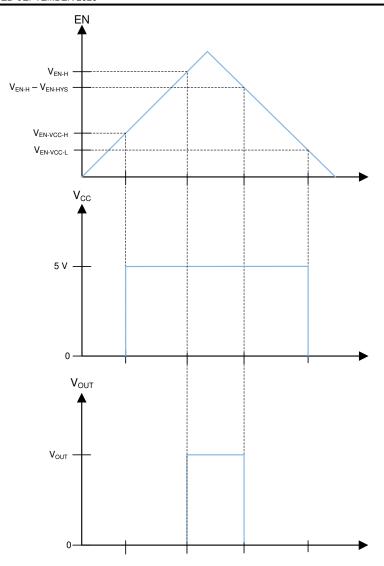


Figure 9-4. Precision Enable Behavior

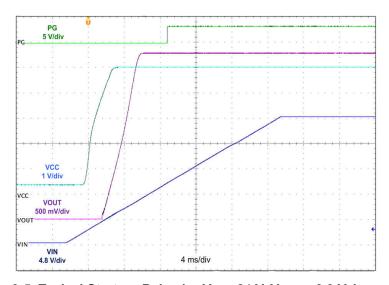


Figure 9-5. Typical Start-up Behavior V_{IN} = 24 V, V_{OUT} = 3.3 V, I_{OUT} = 1.5 A

9.3.3 Current Limit and Short Circuit

The LMR36015 incorporates valley current limit for normal overloads and for short-circuit protection. In addition, the high-side power MOSFET is protected from excessive current by a peak current limit circuit. Cycle-by-cycle current limit is used for overloads, while hiccup mode is used for short circuits. Finally, a zero current detector is used on the low-side power MOSFET to implement diode emulation mode (DEM) at light loads (see Section 13.7).

During overloads, the low-side current limit, I_{LIMIT} , determines the maximum load current that the LMR36015 can supply. When the low-side switch turns on, the inductor current begins to ramp down. If the current does not fall below I_{LIMIT} before the next turnon cycle, then that cycle is skipped, and the low-side MOSFET is left on until the current falls below I_{LIMIT} . This is somewhat different than the more typical peak current limit and results in Equation 1 for the maximum load current.

$$I_{OUT}\big|_{max} = I_{LIMIT} + \frac{\left(V_{IN} - V_{OUT}\right)}{2 \cdot f_{SW} \cdot L} \cdot \frac{V_{OUT}}{V_{IN}}$$
(1)

where

- f_{SW} = switching frequency
- L = inductor value

If, during current limit, the voltage on the FB input falls below about 0.4~V due to a short circuit, the device enters hiccup mode. In this mode, the device stops switching for t_{HC} or about 94 ms, and then goes through a normal re-start with soft start. If the short-circuit condition remains, the device runs in current limit for about 20 ms (typical) and then shuts down again. This cycle repeats, as shown in Figure 9-6 as long as the short-circuit condition persists. This mode of operation helps to reduce the temperature rise of the device during a hard short on the output. Of course, the output current is greatly reduced during hiccup mode. Once the output short is removed and the hiccup delay is passed, the output voltage recovers normally as shown in Figure 9-6.

The high-side-current limit trips when the peak inductor current reaches I_{SC} . This is a cycle-by-cycle current limit and does not produce any frequency or load current foldback. It is meant to protect the high-side MOSFET from excessive current. Under some conditions, such as high input voltages, this current limit can trip before the low-side protection. Under this condition, I_{SC} determines the maximum output current. Note that I_{SC} varies with duty cycle.




Figure 9-6. Short-Circuit Transient and Recovery

9.3.4 Undervoltage Lockout and Thermal Shutdown

The LMR36015 incorporates an undervoltage-lockout feature on the output of the internal LDO (at the VCC pin). When VCC reaches 3.8 V (typ.), the device receives the EN signal and starts switching. When VCC falls below 3.3 V (typ.), the device shuts down, regardless of EN status. Because the LDO is in dropout during these transitions, the previously mentioned values roughly represent the input voltage levels during the transitions.

Copyright © 2022 Texas Instruments Incorporated

Thermal shutdown is provided to protect the regulator from excessive junction temperature. When the junction temperature reaches about 170°C, the device shuts down; re-start occurs when the temperature falls to about 158°C.

9.4 Device Functional Modes

9.4.1 Auto Mode

In auto mode, the device moves between PWM and PFM as the load changes. At light loads, the regulator operates in PFM. At higher loads, the mode changes to PWM.

In PWM, the regulator operates as a constant frequency, current mode, full synchronous converter using PWM to regulate the output voltage. While operating in this mode, the output voltage is regulated by switching at a constant frequency and modulating the duty cycle to control the power to the load. This provides excellent line and load regulation and low output voltage ripple.

In PFM, the high-side MOSFET is turned on in a burst of one or more pulses to provide energy to the load. The duration of the burst depends on how long it takes the inductor current to reach I_{PEAK-MIN}. The frequency of these bursts is adjusted to regulate the output, while diode emulation (DEM) is used to maximize efficiency (see *Section 13.7*). This mode provides high light-load efficiency by reducing the amount of input supply current required to regulate the output voltage at small loads. This trades off very good light-load efficiency for larger output voltage ripple and variable switching frequency. Also, a small increase in output voltage occurs at light loads. The actual switching frequency and output voltage ripple depend on the input voltage, output voltage, and load. Typical switching waveforms in PFM and PWM are shown in Figure 9-7 and Figure 9-8. See *Section 10.2.2* for output voltage variation with load in auto mode.




Figure 9-7. Typical PFM Switching Waveforms $V_{IN} = 24 \text{ V}$, $V_{OUT} = 5 \text{ V}$, $I_{OUT} = 200 \text{ mA}$




Figure 9-8. Typical PWM Switching Waveforms V_{IN} = 24 V, V_{OUT} = 5 V, I_{OUT} = 1.5 A, f_S = 400 kHz

9.4.2 Forced PWM Operation

The following select variant or variants are factory options made available for cases when constant frequency operation is more important than light load efficiency.

Table 9-1. LMR36015 Device Variants with Fixed Frequency Operation at No Load


ORDERABLE PART NUMBER	OUTPUT VOLTAGE	FPWM	f _{SW}
LMR36015FBRNXT Adjustable		Yes	1 MHz
LMR36015FBRNXR Adjustable		Yes	1 MHz

In FPWM operation, the diode emulation feature is turned off. This means that the device remains in CCM under light loads. Under conditions where the device must reduce the on-time or off-time below the ensured minimum to maintain regulation, the frequency reduces to maintain the effective duty cycle required for regulation. This occurs for very high and very low input/output voltage ratios. When in FPWM mode, a limited reverse current is allowed through the inductor allowing power to pass from the output of the regulator to its input. Note that in FPWM mode, larger currents pass through the inductor, if lightly loaded, than in auto mode. Once loads are heavy enough to necessitate CCM operation, FPWM mode has no measurable effect on regulator operation.

9.4.3 Dropout

The dropout performance of any buck regulator is affected by the R_{DSON} of the power MOSFETs, the DC resistance of the inductor, and the maximum duty cycle that the controller can achieve. As the input voltage

is reduced to near the output voltage, the off-time of the high-side MOSFET starts to approach the minimum value. Beyond this point, the switching may become erratic, the output voltage falls out of regulation, or both. To avoid this problem, the LMR36015 automatically reduces the switching frequency to increase the effective duty cycle and maintain regulation. In this data sheet, the dropout voltage is defined as the difference between the input and output voltage when the output has dropped by 1% of its nominal value. Under this condition, the switching frequency has dropped to its minimum value of about 140 kHz. Note that the 0.4-V short circuit detection threshold is not activated when in dropout mode. Typical dropout characteristics can be found in Figure 9-9 and Figure 9-10.

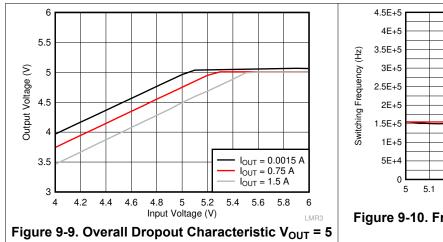




Figure 9-10. Frequency Dropout Characteristics $f_{SW} = 400 \text{ kHz}$

9.4.4 Minimum Switch On-Time

Every switching regulator has a minimum controllable on-time dictated by the inherent delays and blanking times associated with the control circuits. This imposes a minimum switch duty cycle and, therefore, a minimum conversion ratio. The constraint is encountered at high input voltages and low output voltages. To help extend the minimum controllable duty cycle, the LMR36015 automatically reduces the switching frequency when the minimum on-time limit is reached. This way, the converter can regulate the lowest programmable output voltage at the maximum input voltage. An estimate for the approximate input voltage, for a given output voltage, before frequency foldback occurs, is found in Equation 2. As the input voltage is increased, the switch on-time (duty cycle) reduces to regulate the output voltage. When the on-time reaches the limit, the switching frequency drops, while the on-time remains fixed.

$$V_{IN} \le \frac{V_{OUT}}{t_{ON} \cdot f_{SW}} \tag{2}$$

Copyright © 2022 Texas Instruments Incorporated



10 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

10.1 Application Information

The LMR36015 step-down DC-to-DC converter is typically used to convert a higher DC voltage to a lower DC voltage with a maximum output current of 1.5 A. The following design procedure can be used to select components for the LMR36015. Alternately, the WEBENCH® Design Tool may be used to generate a complete design. This tool utilizes an iterative design procedure and has access to a comprehensive database of components. This allows the tool to create an optimized design and allows the user to experiment with various options.

Note

All of the capacitance values given in the following application information refer to effective values; unless otherwise stated. The effective value is defined as the actual capacitance under DC bias and temperature; not the rated or nameplate values. Use high-quality, low-ESR, ceramic capacitors with an X7R or better dielectric throughout. All high value ceramic capacitors have a large voltage coefficient in addition to normal tolerances and temperature effects. Under DC bias the capacitance drops considerably. Large case sizes and/or higher voltage ratings are better in this regard. To help mitigate these effects, multiple capacitors can be used in parallel to bring the minimum effective capacitance up to the required value. This can also ease the RMS current requirements on a single capacitor. A careful study of bias and temperature variation of any capacitor bank should be made in order to ensure that the minimum value of effective capacitance is provided.

10.2 Typical Application

Figure 10-1 shows a typical application circuit for the LMR36015. This device is designed to function over a wide range of external components and system parameters. However, the internal compensation is optimized for a

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated

certain range of external inductance and output capacitance. As a quick start guide, Table 10-1 provides typical component values for a range of the most common output voltages.

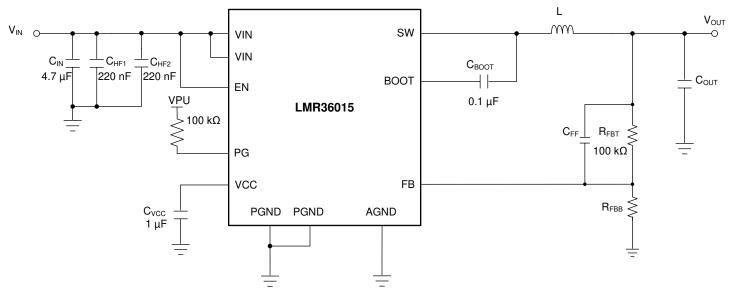


Figure 10-1. Example Applications Circuit

Table 10-1. Typical External Component Values

	Table 10 11 Typical External Component Value							
f _{sw} (kHz)	V _{OUT} (V)	L (µH)	NOMINAL C _{OUT} (RATED CAPACITANCE) (1)	MINIMUM C _{OUT} (RATED CAPACITANCE) (2)	R _{FBT} (Ω)	R _{FBB} (Ω)	C _{IN}	C _{FF}
400	3.3	10	2 × 47 µF	2 × 22 µF	100 k	43.2 k	4.7 µF + 2 × 220 nF	20 pF
1000	3.3	6.8	3 × 15 µF	2 × 15 µF	100 k	43.2 k	4.7 µF + 2 × 220 nF	20 pF
400	5	15	3 × 22 µF	2 × 22 µF	100 k	24.9 k	4.7 µF + 2 × 220 nF	20 pF
1000	5	10	3 × 15 µF	2 × 15 µF	100 k	24.9 k	4.7 µF + 2 × 220 nF	20 pF
400	12	27	3 × 22 µF	2 × 22 µF	100 k	9.09 k	4.7 µF + 2 × 220 nF	20 pF
1000	12	22	2 × 22 µF	2 × 15 µF	100 k	9.09 k	4.7 µF + 2 × 220 nF	20 pF

⁽¹⁾ Optimized for superior load transient performance from 0 to 100% rated load.

⁽²⁾ Optimized for size constrained end applications.



10.2.1 Design 1: Low Power 24-V, 1.5-A PFM Converter

10.2.1.1 Design Requirements

Example requirements for a typical 5-V or 3.3-V application. The input voltages are here for illustration purposes only. See Section 8 for the operating input voltage range.

Table 10-2. Detailed Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Input voltage	12 V to 24 V steady state, 4.2 V to 60-V transients
Output voltage	5 V/3.3 V
Maximum output current	0 A to 1.5 A
Switching frequency	400 kHz
Current consumption at 0-A load	Critical: Need to ensure low current consumption to reduce battery drain
Switching frequency at 0-A load	Not critical: Need fixed frequency operation at high load only

Table 10-3. List of Components for Design 1

V _{OUT}	FREQUENCY	R _{FBB}	C _{OUT}	L	U1
5 V	400 kHz	24.9 kΩ	2 × 22 μF	10 μH, 45 mΩ	LMR36015ARNX
3.3 V	400 kHz	43.3 kΩ	2 × 22 µF	10 μH, 45 mΩ	LMR36015ARNX

10.2.1.2 Detailed Design Procedure

The following design procedure applies to Figure 10-1 and Table 10-2.

10.2.1.2.1 Custom Design With WEBENCH Tools

Click here to create a custom design using the LMR36015 device and the WEBENCH Power Designer.

- 1. Start by entering the input voltage, output voltage, and output current requirements
- 2. Optimize the design for key performance such as efficiency, footprint, and cost using the optimizer dial.
- 3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases the following features are available with this tool:

- Run electrical simulations to see important waveforms and circuit performance.
- Run thermal simulations to help understand board thermal performance.
- Export customized schematic and layout into popular CAD formats.
- Print full design reports in PDF.

Get more information at ti.com

10.2.1.2.2 Choosing the Switching Frequency

The choice of switching frequency is a compromise between conversion efficiency and overall solution size. Lower switching frequency implies reduced switching losses and usually results in higher system efficiency. However, higher switching frequency allows the use of smaller inductors and output capacitors, and hence a more compact design. For this example, 400 kHz is used.

10.2.1.2.3 Setting the Output Voltage

The output voltage of LMR36015 is externally adjustable using a resistor divider network. The range of recommended output voltage is found in *Section 8.5*. The divider network is comprised of R_{FBT} and R_{FBB} , and closes the loop between the output voltage and the converter. The converter regulates the output voltage by holding the voltage on the FB pin equal to the internal reference voltage, V_{REF} . The resistance of the divider is a compromise between excessive noise pickup and excessive loading of the output. Smaller values of resistance reduce noise sensitivity but also reduce the light-load efficiency. The recommended value for R_{FBT} is 100 k Ω , with a maximum value of 1 M Ω . If a 1 M Ω is selected for R_{FBT} , then a feedforward capacitor must be used

across this resistor to provide adequate loop phase margin (see Section 10.2.1.2.9). Once R_{FBT} is selected, Equation 3 is used to select R_{FBB} . V_{REF} is nominally 1 V.

$$R_{FBB} = \frac{R_{FBT}}{\left[\frac{V_{OUT}}{V_{REF}} - 1\right]}$$
(3)

For this 5-V example, values are: R_{FBT} = 100 $k\Omega$ and R_{FBB} = 24.9 $k\Omega$.

10.2.1.2.4 Inductor Selection

The parameters for selecting the inductor are the inductance and saturation current. The inductance is based on the desired peak-to-peak ripple current and is normally chosen to be in the range of 20% to 40% of the maximum output current. Experience shows that the best value for inductor ripple current is 30% of the maximum load current. Note that when selecting the ripple current for applications with much smaller maximum load than the maximum available from the device, use the the maximum device current. Equation 4 can be used to determine the value of inductance. The constant K is the percentage of inductor current ripple. For this example, K = 0.4 was chosen and an inductance of L = 16 μ H was found; the standard value of 10 μ H was selected.

$$L = \frac{\left(V_{IN} - V_{OUT}\right)}{f_{SW} \cdot K \cdot I_{OUT max}} \cdot \frac{V_{OUT}}{V_{IN}} \tag{4}$$

Ideally, the saturation current rating of the inductor is at least as large as the high-side switch current limit, I_{SC}. This ensures that the inductor does not saturate even during a short circuit on the output. When the inductor core material saturates, the inductance falls to a very low value, causing the inductor current to rise very rapidly. Although the valley current limit, I_{LIMIT}, is designed to reduce the risk of current runaway, a saturated inductor can cause the current to rise to high values very rapidly. This can lead to component damage; *do not* allow the inductor to saturate. Inductors with a ferrite core material have very *hard* saturation characteristics, but usually have lower core losses than powdered iron cores. Powered iron cores exhibit a *soft* saturation, allowing some relaxation in the current rating of the inductor. However, they have more core losses at frequencies above about 1 MHz. In any case, the inductor saturation current must not be less than the device low-side current limit, I_{LIMIT}. To avoid subharmonic oscillation, the inductance value must not be less than that given in Equation 5:

$$L_{MIN} \ge 0.28 \cdot \frac{V_{OUT}}{f_{SW}} \tag{5}$$

10.2.1.2.5 Output Capacitor Selection

The value of the output capacitor and its ESR determine the output voltage ripple and load transient performance. The output capacitor bank is usually limited by the load transient requirements rather than the output voltage ripple. Equation 6 can be used to estimate a lower bound on the total output capacitance, and an upper bound on the ESR, required to meet a specified load transient.

Copyright © 2022 Texas Instruments Incorporated



$$C_{OUT} \geq \frac{\Delta I_{OUT}}{f_{SW} \cdot \Delta V_{OUT} \cdot K} \cdot \left\lceil \left(1 - D\right) \cdot \left(1 + K\right) + \frac{K^2}{12} \cdot \left(2 - D\right) \right\rceil$$

$$ESR \leq \frac{\left(2 + K\right) \cdot \Delta V_{OUT}}{2 \cdot \Delta I_{OUT} \left[1 + K + \frac{K^2}{12} \cdot \left(1 + \frac{1}{(1 - D)}\right)\right]}$$

$$D = \frac{V_{OUT}}{V_{IN}} \tag{6}$$

where

- ΔV_{OUT} = output voltage transient
- ΔI_{OUT} = output current transient
- K = ripple factor from Section 10.2.1.2.4

Once the output capacitor and ESR have been calculated, Equation 7 can be used to check the output voltage ripple.

$$V_{r} \cong \Delta I_{L} \cdot \sqrt{ESR^{2} + \frac{1}{\left(8 \cdot f_{SW} \cdot C_{OUT}\right)^{2}}}$$
(7)

where

V_r = peak-to-peak output voltage ripple

The output capacitor and ESR can then be adjusted to meet both the load transient and output ripple requirements.

In practice, the output capacitor has the most influence on the transient response and loop phase margin. Load transient testing and bode plots are the best way to validate any given design and must always be completed before the application goes into production. In addition to the required output capacitance, a small ceramic placed on the output can help reduce high frequency noise. Small case size ceramic capacitors in the range of 1 nF to 100 nF can be very helpful in reducing spikes on the output caused by inductor and board parasitics.

Limit the maximum value of total output capacitance to about 10 times the design value, or 1000 μ F, whichever is smaller. Large values of output capacitance can adversely affect the start-up behavior of the regulator as well as the loop stability. If values larger than noted here must be used, then a careful study of start-up at full load and loop stability must be performed.

10.2.1.2.6 Input Capacitor Selection

The ceramic input capacitors provide a low impedance source to the regulator in addition to supplying the ripple current and isolating switching noise from other circuits. A minimum ceramic capacitance of 4.7 µF is required on the input of the LMR36015. This must be rated for at least the maximum input voltage that the application requires; preferably twice the maximum input voltage. This capacitance can be increased to help reduce input voltage ripple, maintain the input voltage during load transients, or both. In addition, a small case size 220-nF ceramic capacitor must be used at the input as close a possible to the regulator. This provides a high frequency bypass for the control circuits internal to the device. For this example, a 4.7-µF, 100-V, X7R (or better) ceramic capacitor is chosen. The 220 nF must also be rated at 100 V with an X7R dielectric. The VQFN package provides two input voltage pins and two power ground pins on opposite sides of the package. This allows the input capacitors to be split, and placed optimally with respect to the internal power MOSFETs, thus improving the effectiveness of the input bypassing. In this example, place two 220-nF ceramic capacitors at each VIN-PGND location.

It is often desirable to use an electrolytic capacitor on the input in parallel with the ceramics. This is especially true if long leads/traces are used to connect the input supply to the regulator. The moderate ESR of this capacitor can help damp any ringing on the input supply caused by the long power leads. The use of this additional capacitor also helps with voltage dips caused by input supplies with unusually high impedance.

Most of the input switching current passes through the ceramic input capacitor or capacitors. The approximate RMS value of this current can be calculated from Equation 8 and should be checked against the manufacturers' maximum ratings.

$$I_{RMS} \cong \frac{I_{OUT}}{2}$$
 (8)

10.2.1.2.7 CBOOT

The LMR36015 requires a bootstrap capacitor connected between the BOOT pin and the SW pin. This capacitor stores energy that is used to supply the gate drivers for the power MOSFETs. A high-quality ceramic capacitor of 100 nF and at least 16 V is required.

10.2.1.2.8 VCC

The VCC pin is the output of the internal LDO used to supply the control circuits of the regulator. This output requires a 1- μ F, 16-V ceramic capacitor connected from VCC to GND for proper operation. In general, this output must not be loaded with any external circuitry. However, this output can be used to supply the pullup for the power-good function (see Section 9.3.1). A value in the range of 10 k Ω to 100 k Ω is a good choice in this case. The nominal output voltage on VCC is 5 V.

10.2.1.2.9 CFF Selection

In some cases, a feedforward capacitor can be used across R_{FBT} to improve the load transient response or improve the loop-phase margin. This is especially true when values of $R_{FBT} > 100 \text{ k}\Omega$ are used. Large values of R_{FBT} , in combination with the parasitic capacitance at the FB pin, can create a small signal pole that interferes with the loop stability. A C_{FF} can help to mitigate this effect. Equation 9 can be used to estimate the value of C_{FF} . The value found with Equation 9 is a starting point; use lower values to determine if any advantage is gained by the use of a C_{FF} capacitor. The Optimizing Transient Response of Internally Compensated DC-DC Converters with Feed-forward Capacitor Application Report is helpful when experimenting with a feedforward capacitor.

$$C_{FF} < \frac{V_{OUT} \cdot C_{OUT}}{120 \cdot R_{FBT} \cdot \sqrt{\frac{V_{REF}}{V_{OUT}}}}$$
(9)

Copyright © 2022 Texas Instruments Incorporated

10.2.1.2.9.1 External UVLO

In some cases, an input UVLO level different than that provided internal to the device is needed. This can be accomplished by using the circuit shown in Figure 10-2 can be used. The input voltage at which the device turns on is designated V_{ON} ; while the turnoff voltage is V_{OFF} . First, a value for R_{ENB} is chosen in the range of 10 k Ω to 100 k Ω and then Equation 10 is used to calculate R_{ENT} and V_{OFF}.




Figure 10-2. Setup for External UVLO Application

$$R_{ENT} = \left(\frac{V_{ON}}{V_{EN-H}} - 1\right) \cdot R_{ENB}$$

$$V_{OFF} = V_{ON} \cdot \left(1 - \frac{V_{EN-HYS}}{V_{EN}}\right)$$
(10)

where

- V_{ON} = V_{IN} turnon voltage
 V_{OFF} = V_{IN} turnoff voltage

10.2.1.2.10 Maximum Ambient Temperature

As with any power conversion device, the LMR36015 dissipates internal power while operating. The effect of this power dissipation is to raise the internal temperature of the converter above ambient. The internal die temperature (T_J) is a function of the ambient temperature, the power loss and the effective thermal resistance, $R_{\theta JA}$ of the device, and PCB combination. The maximum internal die temperature for the LMR36015 must be limited to 150°C. This establishes a limit on the maximum device power dissipation and, therefore, the load current. Equation 11 shows the relationships between the important parameters. It is easy to see that larger ambient temperatures (T_A) and larger values of $R_{\theta JA}$ reduce the maximum available output current. The converter efficiency can be estimated by using the curves provided in this data sheet. If the desired operating conditions cannot be found in one of the curves, then interpolation can be used to estimate the efficiency. Alternatively, the EVM can be adjusted to match the desired application requirements and the efficiency can be measured directly. The correct value of $R_{\theta JA}$ is more difficult to estimate. As stated in the Semiconductor and IC Package Thermal Metrics application report, the values given in Section 8.4 are not valid for design purposes and must not be used to estimate the thermal performance of the application. The values reported in that table were measured under a specific set of conditions that are rarely obtained in an actual application.

$$I_{OUT}|_{MAX} = \frac{(T_J - T_A)}{R_{\theta JA}} \cdot \frac{\eta}{(1 - \eta)} \cdot \frac{1}{V_{OUT}}$$
(11)

where

η = efficiency

The effective $R_{\theta JA}$ is a critical parameter and depends on many factors such as power dissipation, air temperature/flow, PCB area, copper heat-sink area, number of thermal vias under the package, and adjacent component placement; to mention just a few. Due to the ultra-miniature size of the VQFN (RNX) package, a DAP is not available. This means that this package exhibits a somewhat greater $R_{\theta JA}$. A typical example of $R_{\theta JA}$ vs copper board area can be found in Figure 10-3. Note that the data given in this graph is for illustration purposes only, and the actual performance in any given application depends on all of the factors mentioned above.




Figure 10-3. R_{0JA} versus Copper Board Area for the VQFN (RNX) Package

Use the following resources as guides to optimal thermal PCB design and estimating $R_{\theta JA}$ for a given application environment:


- Thermal Design by Insight not Hindsight Application Report
- Semiconductor and IC Package Thermal Metrics Application Report
- Thermal Design Made Simple with LM43603 and LM43602 Application Report
- Using New Thermal Metrics Application Report


Copyright © 2022 Texas Instruments Incorporated



10.2.2 Application Curves

Unless otherwise specified the following conditions apply: V_{IN} = 24 V, T_A = 25°C. The circuit is shown in Figure 10-1, with the appropriate BOM from Table 10-3.

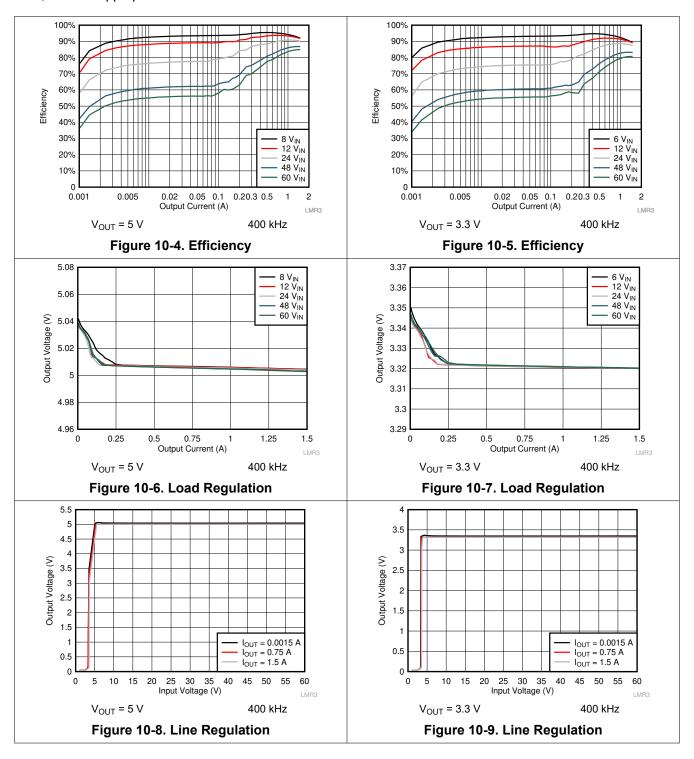







Figure 10-10. Overall Dropout Characteristic

Figure 10-11. Frequency Dropout Characteristic







Figure 10-12. Input Supply Current

Figure 10-13. Mode Change Thresholds








Figure 10-14. Start-Up Waveform

Figure 10-15. Start-Up Waveform




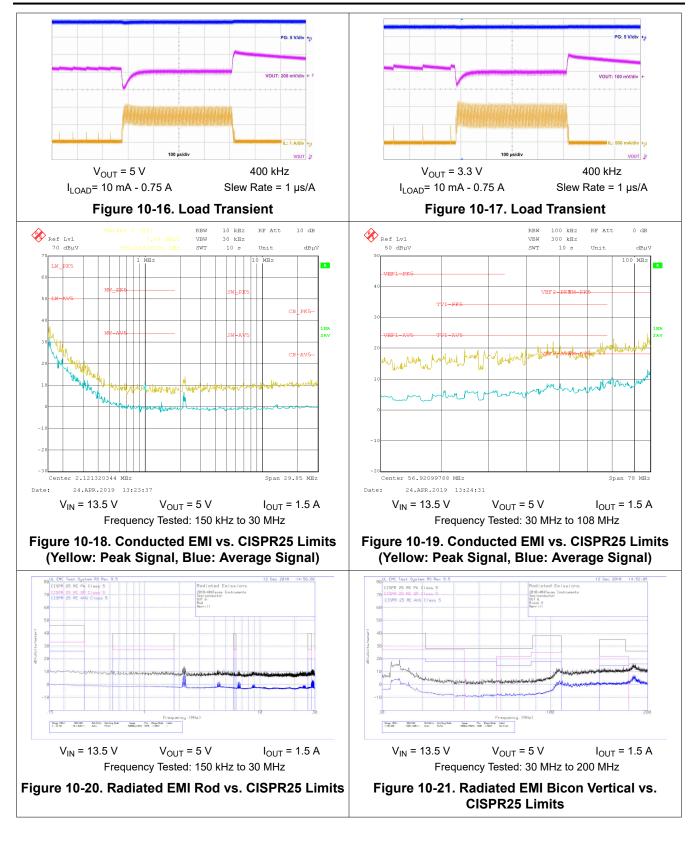



Frequency Tested: 30 MHz to 200 MHz

Figure 10-22. Radiated EMI Bicon Horizontal vs.



 $V_{OUT} = 5 V$ $V_{IN} = 13.5 V$ I_{OUT} = 1.5 A Frequency Tested: 200 MHz to 1 GHz

Figure 10-24. Radiated EMI Log Horizontal vs. **CISPR25 Limits**




Figure 10-26. Radiated EMI Horn Horizontal vs. **CISPR25 Limits**




Figure 10-23. Radiated EMI Log Vertical vs. **CISPR25 Limits**




Figure 10-25. Radiated EMI Horn Vertical vs. **CISPR25 Limits**




Figure 10-27. Recommended Input EMI Filter



10.2.3 Design 2: High Density 24-V, 1.5-A FPWM Converter

10.2.3.1 Design Requirements

Example requirements for a typical 5-V application. The input voltages are here for illustration purposes only. See Section 8 for the operating input voltage range.

Table 10-4. Detailed Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE	
Input voltage	8-V to 24-V steady state, 4.2-V to 60-V transients	
Output voltage	5 V	
Maximum output current	0 A to 1.5 A	
Switching frequency	1000 kHz	
Current consumption at 0-A load	Not critical: < 100 mA acceptable	
Switching frequency at 0-A load Critical: Need fixed frequency operation		


Table 10-5. List of Components for Design 2

V _{OUT}	FREQUENCY	R _{FBB}	C _{OUT}	L	U1
5 V	1000 KHz	24.9 kΩ	2 × 15 µF	8.5 μH, 30.5 mΩ	LMR36015FBRNXR


10.2.3.2 Detailed Design Procedure

See Section 10.2.1.2.

10.2.3.3 Application Curves

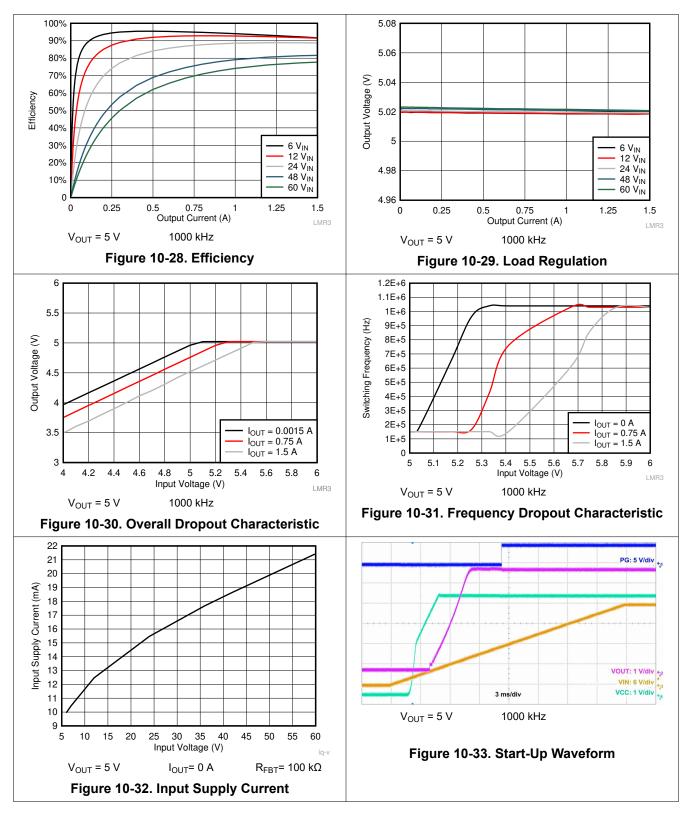



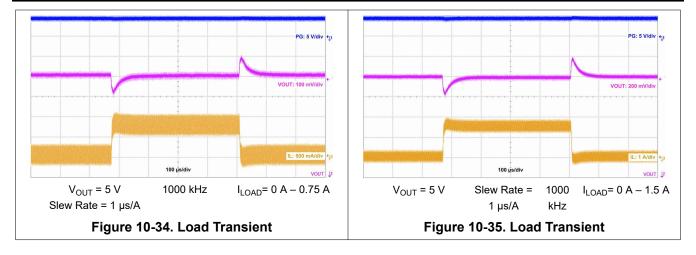

10.3 What to Do and What Not to Do

- Don't: Exceed the Absolute Maximum Ratings.
- Don't: Exceed the ESD Ratings.
- Don't: Allow the EN input to float.
- Don't: Allow the output voltage to exceed the input voltage, nor go below ground.
- **Don't:** Use the thermal data given in the *Thermal Information* table to design your application.
- **Do:** Follow all the guidelines and/or suggestions found in this data sheet before committing the design to production. TI application engineers are ready to help critique your design and PCB layout to help make your project a success (see *Support Resources*).

11 Power Supply Recommendations

The characteristics of the input supply must be compatible with *Section 8* found in this data sheet. In addition, the input supply must be capable of delivering the required input current to the loaded regulator. The average input current can be estimated with Equation 12.

$$I_{IN} = \frac{V_{OUT} \cdot I_{OUT}}{V_{IN} \cdot \eta}$$
(12)

where

η is the efficiency

If the regulator is connected to the input supply through long wires or PCB traces, special care is required to achieve good performance. The parasitic inductance and resistance of the input cables can have an adverse effect on the operation of the regulator. The parasitic inductance, in combination with the low-ESR, ceramic input capacitors, can form an underdamped resonant circuit, resulting in overvoltage transients at the input to the regulator. The parasitic resistance can cause the voltage at the VIN pin to dip whenever a load transient is applied to the output. If the application is operating close to the minimum input voltage, this dip can cause the regulator to momentarily shutdown, reset, or both. The best way to solve these kind of issues is to reduce the distance from the input supply to the regulator, use an aluminum or tantalum input capacitor in parallel with the ceramics, or both. The moderate ESR of these types of capacitors help to damp the input resonant circuit and reduce any overshoots. A value in the range of 20 μ F to 100 μ F is usually sufficient to provide input damping and help to hold the input voltage steady during large load transients.

Sometimes, for other system considerations, an input filter is used in front of the regulator. This can lead to instability, as well as some of the effects mentioned above, unless it is designed carefully. The AN-2162 Simple Success With Conducted EMI From DCDC Converters User's Guide provides helpful suggestions when designing an input filter for any switching regulator.

In some cases, a transient voltage suppressor (TVS) is used on the input of regulators. One class of this device has a *snap-back* characteristic (thyristor type). The use of a device with this type of characteristic is not recommended. When the TVS fires, the clamping voltage falls to a very low value. If this voltage is less than the output voltage of the regulator, the output capacitors discharge through the device back to the input. This uncontrolled current flow can damage the device.

Copyright © 2022 Texas Instruments Incorporated



12 Layout

12.1 Layout Guidelines

The PCB layout of any DC/DC converter is critical to the optimal performance of the design. Poor PCB layout can disrupt the operation of an otherwise good schematic design. Even if the converter regulates correctly, bad PCB layout can mean the difference between a robust design and one that cannot be mass produced. Furthermore, to a great extent, the EMI performance of the regulator is dependent on the PCB layout. In a buck converter, the most critical PCB feature is the loop formed by the input capacitor or capacitors and power ground, as shown in Figure 12-1. This loop carries large transient currents that can cause large transient voltages when reacting with the trace inductance. These unwanted transient voltages disrupt the proper operation of the converter. Because of this, the traces in this loop must be wide and short, and the loop area as small as possible to reduce the parasitic inductance. Figure 12-2 shows a recommended layout for the critical components of the LMR36015.

- 1. Place the input capacitor or capacitors as close as possible to the VIN and GND terminals. VIN and GND pins are adjacent, simplifying the input capacitor placement.
- 2. Place bypass capacitor for VCC close to the VCC pin. This capacitor must be placed close to the device and routed with short, wide traces to the VCC and GND pins.
- 3. Use wide traces for the C_{BOOT} capacitor. Place C_{BOOT} close to the device with short/wide traces to the BOOT and SW pins. Route the SW pin to the N/C pin and used to connect the BOOT capacitor to SW.
- 4. Place the feedback divider as close as possible to the FB pin of the device. Place R_{FBB}, R_{FBT}, and C_{FF}, if used, physically close to the device. The connections to FB and GND must be short and close to those pins on the device. The connection to V_{OUT} can be somewhat longer. However, this latter trace must not be routed near any noise source (such as the SW node) that can capacitively couple into the feedback path of the regulator.
- 5. Use at least one ground plane in one of the middle layers. This plane acts as a noise shield and also act as a heat dissipation path.
- 6. Provide wide paths for VIN, VOUT, and GND. Making these paths as wide and direct as possible reduces any voltage drops on the input or output paths of the converter and maximizes efficiency.
- 7. Provide enough PCB area for proper heat-sinking. As stated in Section 10.2.1.2.10, enough copper area must be used to ensure a low R_{θJA}, commensurate with the maximum load current and ambient temperature. The top and bottom PCB layers must be made with two ounce copper; and no less than one ounce. If the PCB design uses multiple copper layers (recommended), these thermal vias can also be connected to the inner layer heat-spreading ground planes.
- 8. *Keep switch area small.* Keep the copper area connecting the SW pin to the inductor as short and wide as possible. At the same time the total area of this node must be minimized to help reduce radiated EMI.

See the following PCB layout resources for additional important guidelines:

- Layout Guidelines for Switching Power Supplies Application Report
- · Simple Switcher PCB Layout Guidelines Application Report
- · Construction Your Power Supply- Layout Considerations Seminar
- Low Radiated EMI Layout Made Simple with LM4360x and LM4600x Application Report




Figure 12-1. Current Loops with Fast Edges


12.1.1 Ground and Thermal Considerations

As previously mentioned, TI recommends using one of the middle layers as a solid ground plane. A ground plane provides shielding for sensitive circuits and traces as well as a quiet reference potential for the control circuitry. Connect the AGND and PGND pins to the ground planes using vias next to the bypass capacitors. PGND pins are connected directly to the source of the low-side MOSFET switch and also connected directly to the grounds of the input and output capacitors. The PGND net contains noise at the switching frequency and can bounce due to load variations. The PGND trace, as well as the VIN and SW traces, must be constrained to one side of the ground planes. The other side of the ground plane contains much less noise; use for sensitive routes.

Use as much copper as possible, for system ground plane, on the top and bottom layers for the best heat dissipation. Use a four-layer board with the copper thickness for the four layers, starting from the top as: 2 oz / 1 oz / 2 oz. A four-layer board with enough copper thickness, and proper layout, provides low current conduction impedance, proper shielding, and lower thermal resistance.



12.2 Layout Example

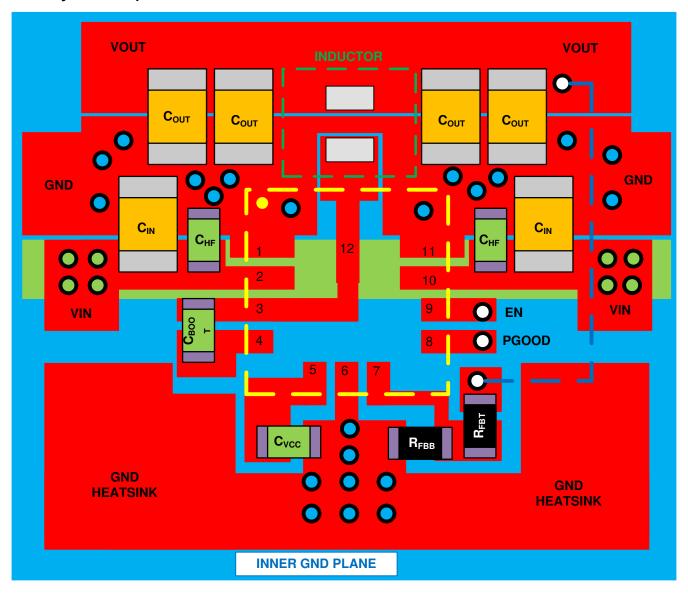

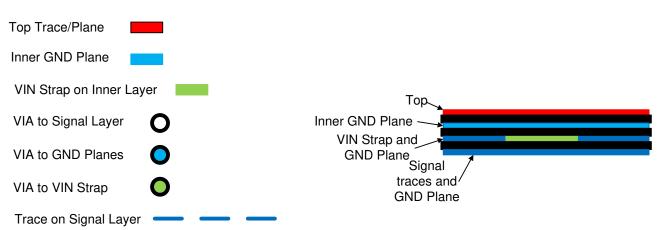


Figure 12-2. Example Layout

13 Device and Documentation Support

13.1 Device Support

13.1.1 Development Support

- Two-Stage Power Supply Reference Design for Field Transmitters
- Wide Vin Power Supply Reference Design for Space-Constrained Industrial Sensors
- · Automotive ADAS camera power supply reference design optimized for solution size and low noise
- How a DC/DC converter package and pinout design can enhance automotive EMI performance
- Introduction to Buck Converters Features: UVLO, Enable, Soft Start, Power Good
- Introduction to Buck Converters: Understanding Mode Transitions
- Introduction to Buck Converters: Minimum On-time and Minimum Off-time Operation
- Introduction to Buck Converters: Understanding Quiescent Current Specifications
- Trade-offs between thermal performance and small solution size with DC/DC converters
- Reduce EMI and shrink solution size with Hot Rod packaging

13.1.1.1 Custom Design With WEBENCH® Tools

Click here to create a custom design using the LMR36015 device with the WEBENCH® Power Designer.

- 1. Start by entering the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}) requirements.
- 2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
- 3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- Export customized schematic and layout into popular CAD formats
- Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at www.ti.com/WEBENCH.

13.2 Documentation Support

13.2.1 Related Documentation

For related documentation see the following:

- Texas Instruments, Designing High-Performance, Low-EMI Automotive Power Supplies Application Report
- Texas Instruments, Simple Switcher PCB Layout Guidelines Application Report
- Texas Instruments, Construction Your Power Supply- Layout Considerations Application Report
- Texas Instruments, Low Radiated EMI Layout Made Simple with LM4360x and LM4600x Application Report
- Texas Instruments, Semiconductor and IC Package Thermal Metrics Application Report
- Texas Instruments, Thermal Design Made Simple with LM43603 and LM43602 Application Report

13.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

13.4 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

Copyright © 2022 Texas Instruments Incorporated



13.5 Trademarks

HotRod[™] is a trademark of TI. Hotrod[™] and TI E2E[™] are trademarks of Texas Instruments.

WEBENCH® is a registered trademark of Texas Instruments.

All trademarks are the property of their respective owners.

13.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

13.7 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
LMR36015ARNXR	Active	Production	VQFN-HR (RNX) 12	3000 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15A
LMR36015ARNXR.A	Active	Production	VQFN-HR (RNX) 12	3000 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15A
LMR36015ARNXT	Active	Production	VQFN-HR (RNX) 12	250 SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15A
LMR36015ARNXT.A	Active	Production	VQFN-HR (RNX) 12	250 SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15A
LMR36015BRNXR	Active	Production	VQFN-HR (RNX) 12	3000 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15B
LMR36015BRNXR.A	Active	Production	VQFN-HR (RNX) 12	3000 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15B
LMR36015BRNXT	Active	Production	VQFN-HR (RNX) 12	250 SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15B
LMR36015BRNXT.A	Active	Production	VQFN-HR (RNX) 12	250 SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15B
LMR36015FBRNXR	Active	Production	VQFN-HR (RNX) 12	3000 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15FB
LMR36015FBRNXR.A	Active	Production	VQFN-HR (RNX) 12	3000 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15FB
LMR36015FBRNXT	Active	Production	VQFN-HR (RNX) 12	250 SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15FB
LMR36015FBRNXT.A	Active	Production	VQFN-HR (RNX) 12	250 SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 150	NH15FB

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LMR36015:

Automotive : LMR36015-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects



www.ti.com 8-Sep-2023

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMR36015ARNXR	VQFN- HR	RNX	12	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
LMR36015ARNXT	VQFN- HR	RNX	12	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
LMR36015BRNXR	VQFN- HR	RNX	12	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
LMR36015BRNXT	VQFN- HR	RNX	12	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
LMR36015FBRNXR	VQFN- HR	RNX	12	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
LMR36015FBRNXT	VQFN- HR	RNX	12	250	180.0	8.4	2.3	3.2	1.0	4.0	8.0	Q1
LMR36015FBRNXT	VQFN- HR	RNX	12	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1



www.ti.com 8-Sep-2023




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMR36015ARNXR	VQFN-HR	RNX	12	3000	210.0	185.0	35.0
LMR36015ARNXT	VQFN-HR	RNX	12	250	210.0	185.0	35.0
LMR36015BRNXR	VQFN-HR	RNX	12	3000	210.0	185.0	35.0
LMR36015BRNXT	VQFN-HR	RNX	12	250	210.0	185.0	35.0
LMR36015FBRNXR	VQFN-HR	RNX	12	3000	210.0	185.0	35.0
LMR36015FBRNXT	VQFN-HR	RNX	12	250	213.0	191.0	35.0
LMR36015FBRNXT	VQFN-HR	RNX	12	250	210.0	185.0	35.0

2 x 3 mm, 0.5 mm pitch

PLASTIC QUAD FLATPACK-NO LEAD

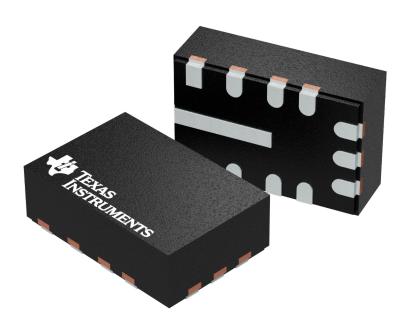


Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4224286/A






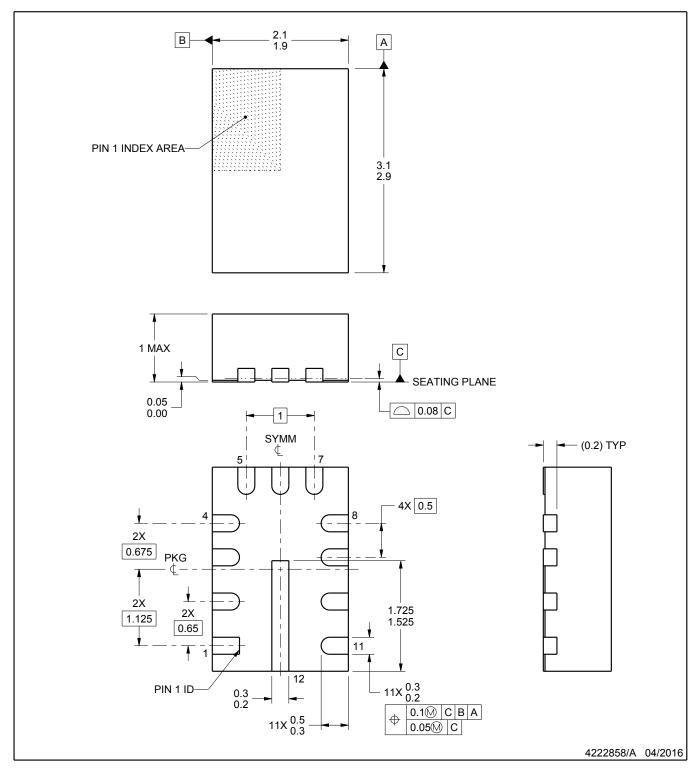

NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing
- per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.




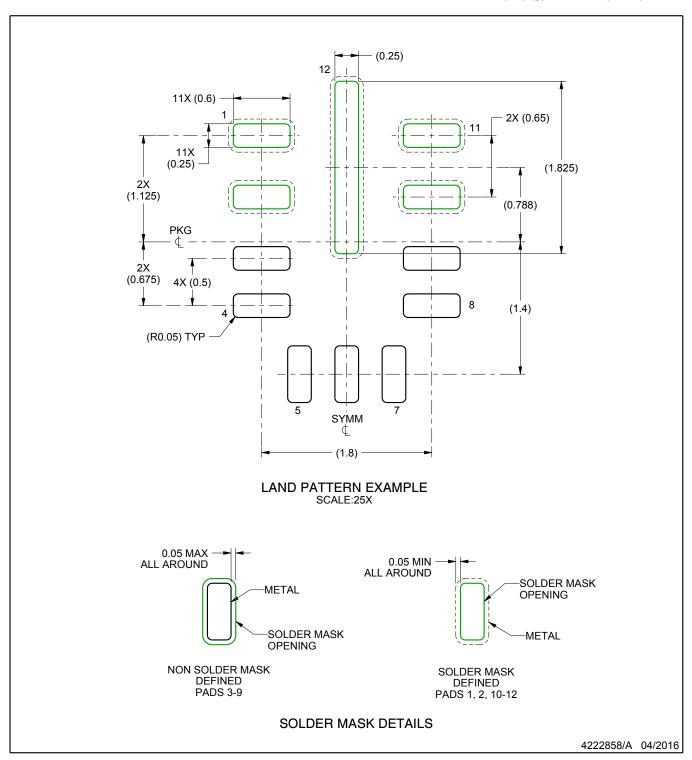

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).



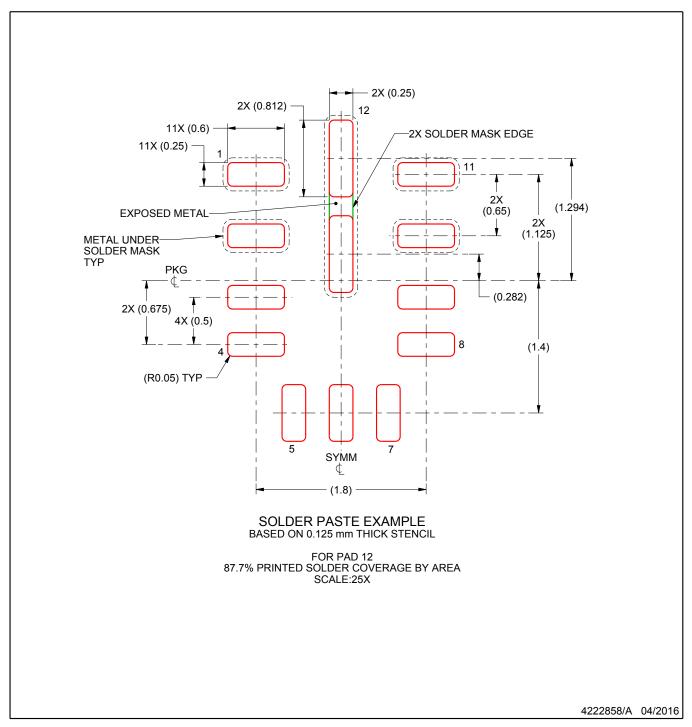


NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.






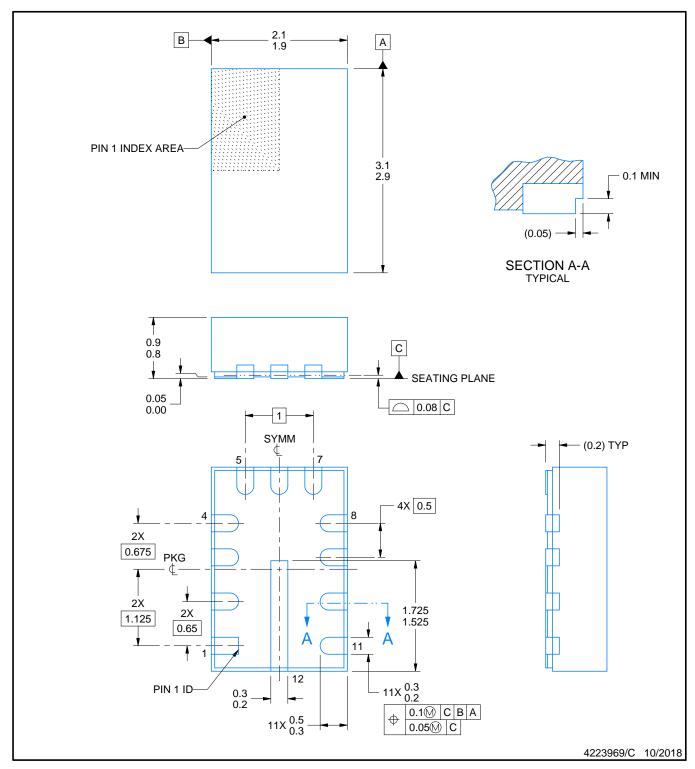

NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing
- per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.




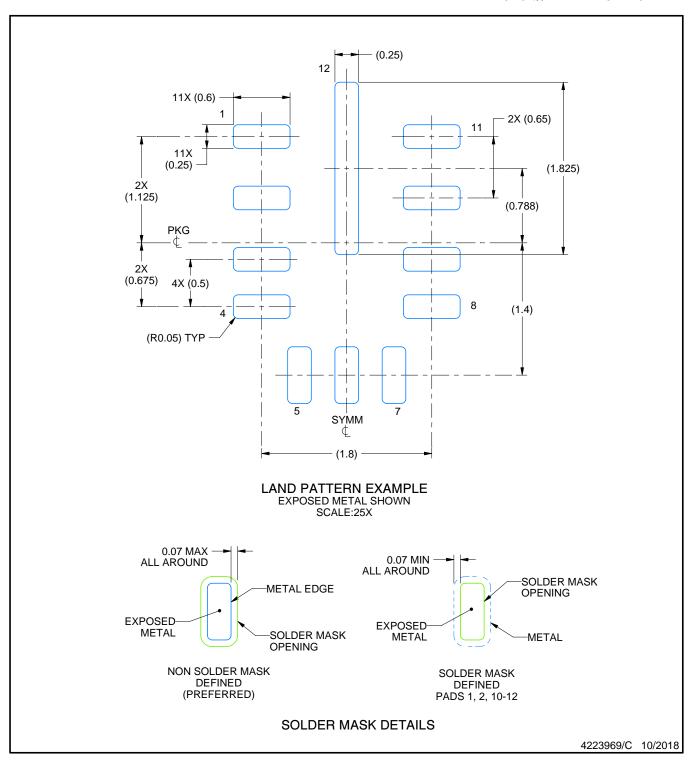

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).



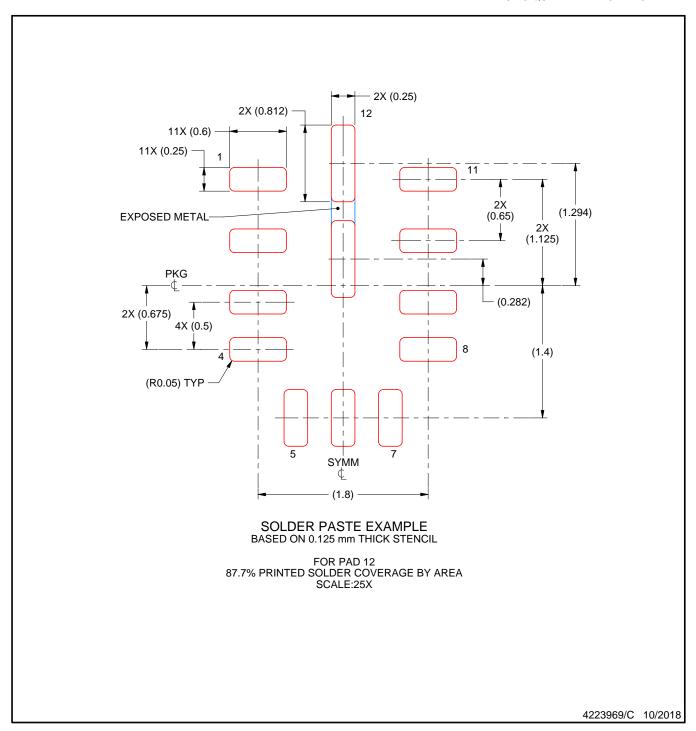

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025