

# SNx4LVC08A Quadruple 2-Input Positive-AND Gates

## 1 Features

- Latch-up performance exceeds 250mA per JESD 17
- ESD protection exceeds JESD 22
  - 2000V Human-Body Model (A114-A)
  - 1000V Charged-Device Model (C101)
  - On products compliant to MIL-PRF-38535, All parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.
- SN74LVC08A operates from 1.65V to 3.6V
- SN54LVC08A operates from 2.0V to 3.6V
- SNx4LVC08A specified from –40°C to +85°C and –40°C to +125°C
- SN54LVC08A specified from –55°C to +125°C
- Inputs accept voltages to 5.5V
- Max  $t_{pd}$  of 4.1ns at 3.3V
- Typical  $V_{OLP}$  (output ground bounce) <0.8V at  $V_{CC} = 3.3V$ ,  $T_A = 25^\circ C$
- Typical  $V_{OHV}$  (output  $V_{OH}$  undershoot) >2V at  $V_{CC} = 3.3V$ ,  $T_A = 25^\circ C$

## 2 Applications

- Servers
- LED Displays
- Network Switches
- I/O Expanders
- Base Station Processor Board

## 3 Description

The SN54LVC08A quadruple 2-input positive-AND gate is designed for 2.7V to 3.6V  $V_{CC}$  operation, and the SN74LVC08A quadruple 2-input positive-AND gate is designed for 1.65V to 3.6V  $V_{CC}$  operation.


The SNx4LVC08A devices perform the Boolean function  $Y = A \bullet B$  or  $Y = \overline{A} + \overline{B}$  in positive logic.

Inputs can be driven from either 3.3V or 5V devices. This feature allows the use of these devices as translators in a mixed 3.3V/5V system environment.

### Device Information

| PART NUMBER | PACKAGE <sup>(1)</sup> | PACKAGE SIZE <sup>(2)</sup> | BODY SIZE <sup>(3)</sup> |
|-------------|------------------------|-----------------------------|--------------------------|
| SNx4LVC08A  | BQA (WQFN, 14)         | 3mm × 2.5mm                 | 3mm × 2.5mm              |
|             | D (SOIC, 14)           | 8.65mm × 6mm                | 8.65mm × 3.91mm          |
|             | DB (SSOP, 14)          | 6.2mm × 7.8mm               | 6.20mm × 5.30mm          |
|             | NS (SOP, 14)           | 10.2mm × 7.8mm              | 10.30mm × 5.30mm         |
|             | PW (TSSOP, 14)         | 5mm × 4.4mm                 | 5.00mm × 4.40mm          |
|             | RGY (VQFN, 14)         | 3.5mm × 3.5mm               | 3.50mm × 3.50mm          |
|             | FK (LCCC, 20)          | 8.9mm × 8.9mm               | 8.89mm × 8.89mm          |
|             | J (CDIP, 14)           | 19.55mm × 7.9mm             | 19.55mm × 6.7mm          |
|             | W (CFP, 14)            | 9.21mm × 9mm                | 9.21mm × 6.28mm          |

- For more information, see [Section 11](#).
- The package size (length × width) is a nominal value and includes pins, where applicable.
- The body size (length × width) is a nominal value and does not include pins.




Logic Diagram, Each Gate  
(Positive Logic)




## Table of Contents

|                                                          |           |                                                                      |           |
|----------------------------------------------------------|-----------|----------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                                  | <b>1</b>  | <b>7 Detailed Description</b> .....                                  | <b>11</b> |
| <b>2 Applications</b> .....                              | <b>1</b>  | 7.1 Overview.....                                                    | 11        |
| <b>3 Description</b> .....                               | <b>1</b>  | 7.2 Functional Block Diagram.....                                    | 11        |
| <b>4 Pin Configuration and Functions</b> .....           | <b>3</b>  | 7.3 Feature Description.....                                         | 11        |
| <b>5 Specifications</b> .....                            | <b>5</b>  | 7.4 Device Functional Modes.....                                     | 12        |
| 5.1 Absolute Maximum Ratings.....                        | 5         | <b>8 Application and Implementation</b> .....                        | <b>13</b> |
| 5.2 ESD Ratings.....                                     | 5         | 8.1 Application Information.....                                     | 13        |
| 5.3 Recommended Operating Conditions,<br>SN54LVC08A..... | 5         | 8.2 Typical Application.....                                         | 13        |
| 5.4 Recommended Operating Conditions,<br>SN74LVC08A..... | 6         | 8.3 Layout.....                                                      | 14        |
| 5.5 Thermal Information.....                             | 6         | <b>9 Device and Documentation Support</b> .....                      | <b>16</b> |
| 5.6 Electrical Characteristics, SN54LVC08A.....          | 7         | 9.1 Documentation Support (Analog).....                              | 16        |
| 5.7 Electrical Characteristics, SN74LVC08A.....          | 7         | 9.2 Receiving Notification of Documentation Updates....              | 16        |
| 5.8 Switching Characteristics, SN54LVC08A.....           | 8         | 9.3 Support Resources.....                                           | 16        |
| 5.9 Switching Characteristics, SN74LVC08A.....           | 8         | 9.4 Trademarks.....                                                  | 16        |
| 5.10 Operating Characteristics.....                      | 8         | 9.5 Electrostatic Discharge Caution.....                             | 16        |
| 5.11 Typical Characteristics.....                        | 9         | 9.6 Glossary.....                                                    | 16        |
| <b>6 Parameter Measurement Information</b> .....         | <b>10</b> | <b>11 Mechanical, Packaging, and Orderable<br/>Information</b> ..... | <b>17</b> |


## 4 Pin Configuration and Functions



**Figure 4-1. D, DB, NS, J, W, or PW Package 14-Pin SOIC, SSOP, SOP, CDIP, or TSSOP (Top View)**



**Figure 4-2. BQA or RGY Package 14-Pin WQFN or VQFN (Top View)**



**Figure 4-3. FK Package 20-Pin LCCC (Top View)**

Table 4-1. Pin Functions

| PIN                                |                                                     |      | TYPE   | DESCRIPTION                                                                                             |
|------------------------------------|-----------------------------------------------------|------|--------|---------------------------------------------------------------------------------------------------------|
| NAME                               | SOIC,<br>SSOP, SOP,<br>CDIP,<br>TSSOP,<br>VQFN,WQFN | LCCC |        |                                                                                                         |
| 1A                                 | 1                                                   | 2    | I      | Channel 1 input A                                                                                       |
| 1B                                 | 2                                                   | 3    | I      | Channel 1 input B                                                                                       |
| 1Y                                 | 3                                                   | 4    | O      | Channel 1 output                                                                                        |
| 2A                                 | 4                                                   | 6    | I      | Channel 2 input A                                                                                       |
| 2B                                 | 5                                                   | 8    | I      | Channel 2 input B                                                                                       |
| 2Y                                 | 6                                                   | 9    | O      | Channel 2 output                                                                                        |
| GND                                | 7                                                   | 10   | Ground | Ground                                                                                                  |
| 3Y                                 | 8                                                   | 12   | O      | Channel 3 output                                                                                        |
| 3A                                 | 9                                                   | 13   | I      | Channel 3 input A                                                                                       |
| 3B                                 | 10                                                  | 14   | I      | Channel 3 input B                                                                                       |
| 4Y                                 | 11                                                  | 16   | O      | Channel 4 output                                                                                        |
| 4A                                 | 12                                                  | 18   | I      | Channel 4 input A                                                                                       |
| 4B                                 | 13                                                  | 19   | I      | Channel 4 input B                                                                                       |
| V <sub>CC</sub>                    | 14                                                  | 20   | Power  | Positive supply                                                                                         |
| Thermal Information <sup>(1)</sup> |                                                     |      | —      | The thermal pad can be connected to GND or left floating. Do not connect to any other signal or supply. |
| NC <sup>(2)</sup>                  | —                                                   | 1    | —      | No connect                                                                                              |
|                                    |                                                     | 5    |        |                                                                                                         |
|                                    |                                                     | 7    |        |                                                                                                         |
|                                    |                                                     | 11   |        |                                                                                                         |
|                                    |                                                     | 15   |        |                                                                                                         |
|                                    |                                                     | 17   |        |                                                                                                         |

(1) For BQA package only.

(2) NC – No internal connection

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                  |                                                   |                                  | MIN  | MAX                   | UNIT |
|------------------|---------------------------------------------------|----------------------------------|------|-----------------------|------|
| V <sub>CC</sub>  | Supply voltage                                    |                                  | −0.5 | 6.5                   | V    |
| V <sub>I</sub>   | Input voltage <sup>(2)</sup>                      |                                  | −0.5 | 6.5                   | V    |
| V <sub>O</sub>   | Output voltage <sup>(2) (3)</sup>                 |                                  | −0.5 | V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>  | Input clamp current                               | V <sub>I</sub> < 0               |      | −50                   | mA   |
| I <sub>OK</sub>  | Output clamp current                              | V <sub>O</sub> < 0               |      | −50                   | mA   |
| I <sub>O</sub>   | Continuous output current                         |                                  |      | ±50                   | mA   |
|                  | Continuous current through V <sub>CC</sub> or GND |                                  |      | ±100                  | mA   |
| P <sub>tot</sub> | Power dissipation <sup>(4) (5)</sup>              | T <sub>A</sub> = −40°C to +125°C |      | 500                   | mW   |
| T <sub>J</sub>   | Junction temperature                              |                                  | −65  | 150                   | °C   |
| T <sub>stg</sub> | Storage temperature                               |                                  | −65  | 150                   | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V<sub>CC</sub> is provided in the *Recommended Operating Conditions* table.
- (4) For the D package: above 70°C, the value of P<sub>tot</sub> derates linearly with 8 mW/K.
- (5) For the DB, NS, and PW packages: above 60°C, the value of P<sub>tot</sub> derates linearly with 5.5 mW/K.

### 5.2 ESD Ratings

|                    |                         | VALUE                                                                          | UNIT  |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |
|                    |                         | Machine Model (MM) A115-A                                                      | 200   |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions, SN54LVC08A

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                 |                                    |                                | SN54LVC08A      |                 | UNIT |
|-----------------|------------------------------------|--------------------------------|-----------------|-----------------|------|
|                 |                                    |                                | −55°C to +125°C |                 |      |
|                 |                                    |                                | MIN             | MAX             |      |
| V <sub>CC</sub> | Supply voltage                     | Operating                      | 2               | 3.6             | V    |
|                 |                                    | Data retention only            | 1.5             |                 |      |
| V <sub>IH</sub> | High-level input voltage           | V <sub>CC</sub> = 2.7V to 3.6V | 2               |                 | V    |
| V <sub>IL</sub> | Low-level input voltage            | V <sub>CC</sub> = 2.7V to 3.6V |                 | 0.8             | V    |
| V <sub>I</sub>  | Input voltage                      |                                | 0               | 5.5             | V    |
| V <sub>O</sub>  | Output voltage                     |                                | 0               | V <sub>CC</sub> | V    |
| I <sub>OH</sub> | High-level output current          | V <sub>CC</sub> = 2.7V         |                 | −12             | mA   |
|                 |                                    | V <sub>CC</sub> = 3V           |                 | −24             |      |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 2.7V         |                 | 12              | mA   |
|                 |                                    | V <sub>CC</sub> = 3V           |                 | 24              |      |
| Δt/Δv           | Input transition rise or fall rate |                                |                 | 8               | ns/V |

- (1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. See [Implications of Slow or Floating CMOS Inputs](#), SCBA004.

## 5.4 Recommended Operating Conditions, SN74LVC08A

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                 |                                    |                                  | SN74LVC08A             |                 |                        |                 |                        |                 | UNIT |
|-----------------|------------------------------------|----------------------------------|------------------------|-----------------|------------------------|-----------------|------------------------|-----------------|------|
|                 |                                    |                                  | T <sub>A</sub> = 25°C  |                 | −40°C to +85°C         |                 | −40°C to +125°C        |                 |      |
|                 |                                    |                                  | MIN                    | MAX             | MIN                    | MAX             | MIN                    | MAX             |      |
| V <sub>CC</sub> | Supply voltage                     | Operating                        | 1.65                   | 3.6             | 1.65                   | 3.6             | 1.65                   | 3.6             | V    |
|                 |                                    | Data retention only              | 1.5                    |                 | 1.5                    |                 | 1.5                    |                 |      |
| V <sub>IH</sub> | High-level input voltage           | V <sub>CC</sub> = 1.65V to 1.95V | 0.65 × V <sub>CC</sub> |                 | 0.65 × V <sub>CC</sub> |                 | 0.65 × V <sub>CC</sub> |                 | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V   | 1.7                    |                 | 1.7                    |                 | 1.7                    |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7V to 3.6V   | 2                      |                 | 2                      |                 | 2                      |                 |      |
| V <sub>IL</sub> | Low-level input voltage            | V <sub>CC</sub> = 1.65V to 1.95V | 0.35 × V <sub>CC</sub> |                 | 0.35 × V <sub>CC</sub> |                 | 0.35 × V <sub>CC</sub> |                 | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V   | 0.7                    |                 | 0.7                    |                 | 0.7                    |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7V to 3.6V   | 0.8                    |                 | 0.8                    |                 | 0.8                    |                 |      |
| V <sub>I</sub>  | Input voltage                      |                                  | 0                      | 5.5             | 0                      | 5.5             | 0                      | 5.5             | V    |
| V <sub>O</sub>  | Output voltage                     |                                  | 0                      | V <sub>CC</sub> | 0                      | V <sub>CC</sub> | 0                      | V <sub>CC</sub> | V    |
| I <sub>OH</sub> | High-level output current          | V <sub>CC</sub> = 1.65V          | −4                     |                 | −4                     |                 | −4                     |                 | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V           | −8                     |                 | −8                     |                 | −8                     |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V          | −12                    |                 | −12                    |                 | −12                    |                 |      |
|                 |                                    | V <sub>CC</sub> = 3V             | −24                    |                 | −24                    |                 | −24                    |                 |      |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 1.65V          | 4                      |                 | 4                      |                 | 4                      |                 | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V           | 8                      |                 | 8                      |                 | 8                      |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7V           | 12                     |                 | 12                     |                 | 12                     |                 |      |
|                 |                                    | V <sub>CC</sub> = 3V             | 24                     |                 | 24                     |                 | 24                     |                 |      |
| Δt/Δv           | Input transition rise or fall rate |                                  | 8                      |                 | 8                      |                 | 8                      |                 | ns/V |

(1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. See [Implications of Slow or Floating CMOS Inputs](#), SCBA004.

## 5.5 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | SN74LVC08A    |             |              |            |               |               | UNIT |
|-------------------------------|----------------------------------------------|---------------|-------------|--------------|------------|---------------|---------------|------|
|                               |                                              | BQA<br>(WQFN) | D<br>(SOIC) | DB<br>(SSOP) | NS<br>(SO) | PW<br>(TSSOP) | RGY<br>(LCCC) |      |
|                               |                                              | 14 PINS       | 14 PINS     | 14 PINS      | 14 PINS    | 14 PINS       | 14 PINS       |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 102.3         | 127.8       | 140.4        | 123.8      | 150.8         | 92.1          | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 96.8          | 81.9        | 65.3         | 52.7       | 56.0          | 56.6          | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 70.9          | 84.4        | 60.2         | 53.9       | 69.5          | 27.5          | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 16.6          | 39.6        | 25.3         | 17.9       | 8.9           | 4.5           | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 70.9          | 83.9        | 59.6         | 53.6       | 68.9          | 27.7          | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 50.1          | N/A         | N/A          | N/A        | N/A           | 19.1          | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 5.6 Electrical Characteristics, SN54LVC08A

over recommended operating free-air temperature range (unless otherwise noted)

| SN54LVC08A       |                                                                              |                          |                       |                    |     | UNIT |
|------------------|------------------------------------------------------------------------------|--------------------------|-----------------------|--------------------|-----|------|
| PARAMETER        | TEST CONDITIONS                                                              | V <sub>CC</sub>          | –55°C to +125°C       |                    |     |      |
|                  |                                                                              |                          | MIN                   | TYP <sup>(1)</sup> | MAX |      |
| V <sub>OH</sub>  | I <sub>OH</sub> = –100 μA                                                    | 2.7V to 3.6V             | V <sub>CC</sub> – 0.2 |                    |     | V    |
|                  | I <sub>OH</sub> = –12 mA                                                     | 2.7V                     | 2.2                   |                    |     |      |
|                  |                                                                              | 3V                       | 2.4                   |                    |     |      |
|                  |                                                                              | I <sub>OH</sub> = –24 mA | 3V                    | 2.2                |     |      |
| V <sub>OL</sub>  | I <sub>OL</sub> = 100 μA                                                     | 2.7V to 3.6V             | 0.2                   |                    |     | V    |
|                  | I <sub>OL</sub> = 12 mA                                                      | 2.7V                     | 0.4                   |                    |     |      |
|                  | I <sub>OL</sub> = 24 mA                                                      | 3V                       | 0.55                  |                    |     |      |
| I <sub>I</sub>   | V <sub>I</sub> = 5.5 V or GND                                                | 3.6V                     | ±5                    |                    |     | μA   |
| I <sub>CC</sub>  | V <sub>I</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0                  | 3.6V                     | 10                    |                    |     | μA   |
| ΔI <sub>CC</sub> | One input at V <sub>CC</sub> – 0.6 V, Other inputs at V <sub>CC</sub> or GND | 2.7V to 3.6V             | 500                   |                    |     | μA   |
| C <sub>i</sub>   | V <sub>I</sub> = V <sub>CC</sub> or GND                                      | 3.3V                     | 5                     |                    |     | pF   |

(1) T<sub>A</sub> = 25°C

## 5.7 Electrical Characteristics, SN74LVC08A

over recommended operating free-air temperature range (unless otherwise noted)

| Not recommended for use at temperature range (unless otherwise noted) |                                                                                 |                 |                       |     |     |                       |     |                       |      |     |
|-----------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------|-----------------------|-----|-----|-----------------------|-----|-----------------------|------|-----|
| PARAMETER                                                             | TEST CONDITIONS                                                                 | V <sub>CC</sub> | SN74LVC08A            |     |     |                       |     |                       | UNIT |     |
|                                                                       |                                                                                 |                 | T <sub>A</sub> = 25°C |     |     | –40°C to +85°C        |     | –40°C to +125°C       |      |     |
|                                                                       |                                                                                 |                 | MIN                   | TYP | MAX | MIN                   | MAX | MIN                   |      | MAX |
| V <sub>OH</sub>                                                       | I <sub>OH</sub> = –100 μA                                                       | 1.65V to 3.6V   | V <sub>CC</sub> – 0.2 |     |     | V <sub>CC</sub> – 0.2 |     | V <sub>CC</sub> – 0.3 |      | V   |
|                                                                       | I <sub>OH</sub> = –4 mA                                                         | 1.65V           | 1.29                  |     |     | 1.2                   |     | 1.05                  |      |     |
|                                                                       | I <sub>OH</sub> = –8 mA                                                         | 2.3V            | 1.9                   |     |     | 1.7                   |     | 1.55                  |      |     |
|                                                                       | I <sub>OH</sub> = –12 mA                                                        | 2.7V            | 2.2                   |     |     | 2.2                   |     | 2.05                  |      |     |
|                                                                       |                                                                                 | 3V              | 2.4                   |     |     | 2.4                   |     | 2.25                  |      |     |
|                                                                       | I <sub>OH</sub> = –24 mA                                                        | 3V              | 2.3                   |     |     | 2.2                   |     | 2                     |      |     |
| V <sub>OL</sub>                                                       | I <sub>OL</sub> = 100 μA                                                        | 1.65V to 3.6V   | 0.1                   |     |     | 0.2                   |     | 0.3                   |      | V   |
|                                                                       | I <sub>OL</sub> = 4 mA                                                          | 1.65V           | 0.24                  |     |     | 0.45                  |     | 0.6                   |      |     |
|                                                                       | I <sub>OL</sub> = 8 mA                                                          | 2.3V            | 0.3                   |     |     | 0.7                   |     | 0.75                  |      |     |
|                                                                       | I <sub>OL</sub> = 12 mA                                                         | 2.7V            | 0.4                   |     |     | 0.4                   |     | 0.6                   |      |     |
|                                                                       | I <sub>OL</sub> = 24 mA                                                         | 3V              | 0.55                  |     |     | 0.55                  |     | 0.8                   |      |     |
| I <sub>I</sub>                                                        | V <sub>I</sub> = 5.5 V or GND                                                   | 3.6V            | ±1                    |     |     | ±5                    |     | ±20                   |      | μA  |
| I <sub>CC</sub>                                                       | V <sub>I</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0                     | 3.6V            | 1                     |     |     | 10                    |     | 40                    |      | μA  |
| ΔI <sub>CC</sub>                                                      | One input at V <sub>CC</sub> – 0.6 V,<br>Other inputs at V <sub>CC</sub> or GND | 2.7V to 3.6V    | 500                   |     |     | 500                   |     | 5000                  |      | μA  |
| C <sub>i</sub>                                                        | V <sub>I</sub> = V <sub>CC</sub> or GND                                         | 3.3V            | 5                     |     |     |                       |     |                       |      | pF  |

## 5.8 Switching Characteristics, SN54LVC08A

over recommended operating free-air temperature range (unless otherwise noted) (see [Load Circuit and Voltage Waveforms](#))

| PARAMETER       | FROM<br>(INPUT) | TO<br>(OUTPUT) | V <sub>CC</sub> | SN54LVC08A         |     | UNIT |
|-----------------|-----------------|----------------|-----------------|--------------------|-----|------|
|                 |                 |                |                 | –55°C to<br>+125°C |     |      |
|                 |                 |                |                 | MIN                | MAX |      |
| t <sub>pd</sub> | A or B          | Y              | 2.7V            | 4.8                |     | ns   |
|                 |                 |                | 3.3V ± 0.3V     | 1                  | 4.1 |      |

## 5.9 Switching Characteristics, SN74LVC08A

over recommended operating free-air temperature range (unless otherwise noted) (see [Load Circuit and Voltage Waveforms](#))


| PARAMETER          | FROM<br>(INPUT) | TO<br>(OUTPUT) | V <sub>CC</sub> | SN74LVC08A            |     |     |                   |     |                    | UNIT |     |
|--------------------|-----------------|----------------|-----------------|-----------------------|-----|-----|-------------------|-----|--------------------|------|-----|
|                    |                 |                |                 | T <sub>A</sub> = 25°C |     |     | −40°C to<br>+85°C |     | −40°C to<br>+125°C |      |     |
|                    |                 |                |                 | MIN                   | TYP | MAX | MIN               | MAX | MIN                |      | MAX |
| t <sub>pd</sub>    | A or B          | Y              | 1.8V ± 0.15V    | 1                     | 5   | 9.3 | 1                 | 9.8 | 1                  | 11.3 | ns  |
|                    |                 |                | 2.5V ± 0.2V     | 1                     | 2.9 | 6.4 | 1                 | 6.9 | 1                  | 9    |     |
|                    |                 |                | 2.7V            | 1                     | 3   | 4.6 | 1                 | 4.8 | 1                  | 6    |     |
|                    |                 |                | 3.3V ± 0.3V     | 1                     | 2.6 | 3.9 | 1                 | 4.1 | 1                  | 5.5  |     |
| t <sub>sk(o)</sub> |                 |                | 3.3V ± 0.3V     |                       |     |     | 1                 |     | 1.5                |      | ns  |

## 5.10 Operating Characteristics


T<sub>A</sub> = 25°C

| PARAMETER       |                                        | TEST<br>CONDITIONS | V <sub>CC</sub> | TYP | UNIT |
|-----------------|----------------------------------------|--------------------|-----------------|-----|------|
| C <sub>pd</sub> | Power dissipation capacitance per gate | f = 10 MHz         | 1.8 V           | 7   | pF   |
|                 |                                        |                    | 2.5 V           | 9.8 |      |
|                 |                                        |                    | 3.3 V           | 10  |      |

## 5.11 Typical Characteristics

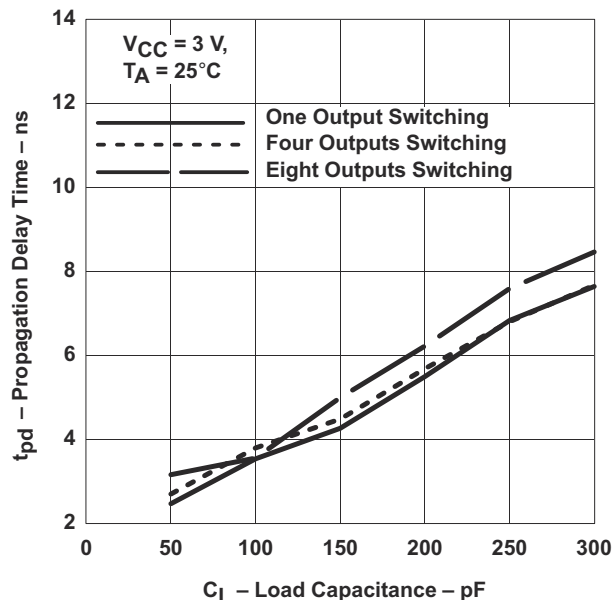


**Figure 5-1. Propagation Delay (Low to High Transition)  
vs Load Capacitance**

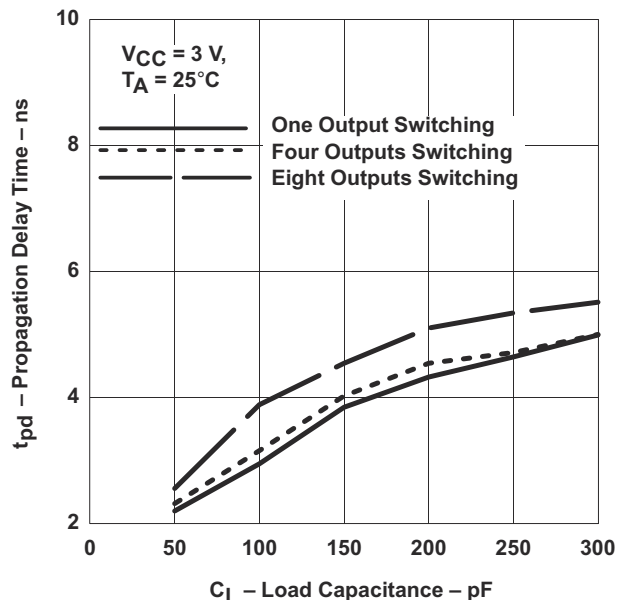

**Figure 5-2. Propagation Delay (High to Low Transition)  
vs Load Capacitance**

## 6 Parameter Measurement Information





### Load Circuit and Voltage Waveforms

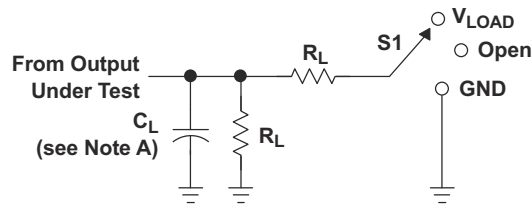

LOAD CIRCUIT

| TEST              | S1         |
|-------------------|------------|
| $t_{PLH}/t_{PHL}$ | Open       |
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |

| $V_{CC}$                         | INPUTS   |                      | $V_M$      | $V_{LOAD}$        | $C_L$ | $R_L$        | $V_D$  |
|----------------------------------|----------|----------------------|------------|-------------------|-------|--------------|--------|
|                                  | $V_I$    | $t_r/t_f$            |            |                   |       |              |        |
| $1.8\text{ V} \pm 0.15\text{ V}$ | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 1 k $\Omega$ | 0.15 V |
| $2.5\text{ V} \pm 0.2\text{ V}$  | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 500 $\Omega$ | 0.15 V |
| 2.7 V                            | 2.7 V    | $\leq 2.5\text{ ns}$ | 1.5 V      | 6 V               | 50 pF | 500 $\Omega$ | 0.3 V  |
| $3.3\text{ V} \pm 0.3\text{ V}$  | 2.7 V    | $\leq 2.5\text{ ns}$ | 1.5 V      | 6 V               | 50 pF | 500 $\Omega$ | 0.3 V  |

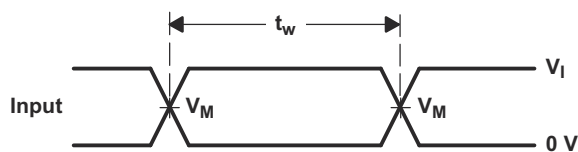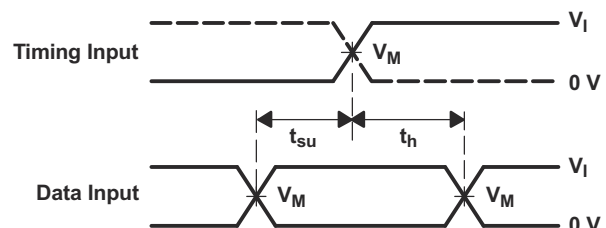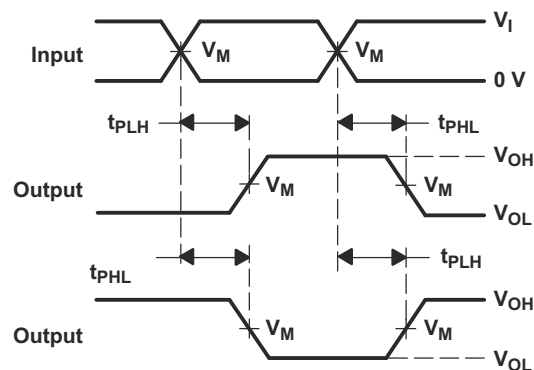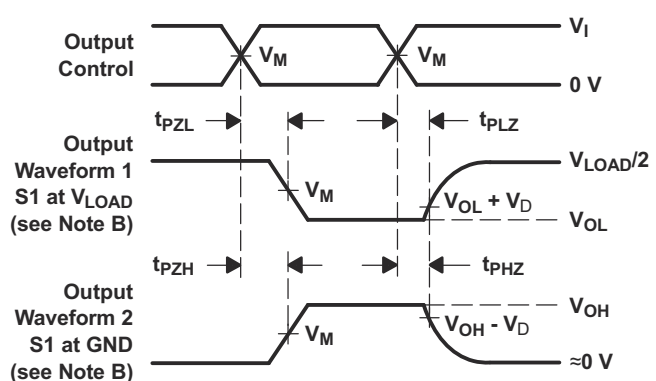VOLTAGE WAVEFORMS  
PULSE DURATIONVOLTAGE WAVEFORMS  
SETUP AND HOLD TIMESVOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES  
INVERTING AND NONINVERTING OUTPUTSVOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES  
LOW- AND HIGH-LEVEL ENABLING

- NOTES: A.  $C_L$  includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10\text{ MHz}$ ,  $Z_O = 50\text{ W}$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
- H. All parameters and waveforms are not applicable to all devices.

## 7 Detailed Description

### 7.1 Overview

The SN74LVC08 device contains four 2-input positive AND gate device and performs the Boolean function  $Y = A \times B$ . This device is useful when multiple AND function is used in the system.

### 7.2 Functional Block Diagram




Figure 7-1. Logic Diagram, Each Gate (Positive Logic)

### 7.3 Feature Description

#### 7.3.1 Balanced High-Drive CMOS Push-Pull Outputs

A balanced output allows the device to sink and source similar currents. The high drive capability of this device creates fast edges into light loads so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. It is important for the power output of the device to be limited to avoid thermal runaway and damage due to over-current. The electrical and thermal limits defined the in the [Section 5.1](#) must be followed at all times.

#### 7.3.2 Standard CMOS Inputs

Standard CMOS inputs are high impedance and are typically modelled as a resistor in parallel with the input capacitance given in the [Section 5.6](#) and [Section 5.7](#). The worst case resistance is calculated with the maximum input voltage, given in the [Section 5.1](#), and the maximum input leakage current, given in the [Section 5.6](#) and [Section 5.7](#), using ohm's law ( $R = V \div I$ ).

Signals applied to the inputs need to have fast edge rates, as defined by  $\Delta t/\Delta v$  in [Section 5.3](#) and [Section 5.4](#) to avoid excessive currents and oscillations. If a slow or noisy input signal is required, a device with a Schmitt-trigger input should be utilized to condition the input signal prior to the standard CMOS input.

#### 7.3.3 Clamp Diodes

The inputs to this device have negative clamping diodes. The outputs to this device have both positive and negative clamping diodes as shown in [Figure 7-2](#).

**CAUTION**

Voltages beyond the values specified in the [Section 5.1](#) table can cause damage to the device. The input negative-voltage and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

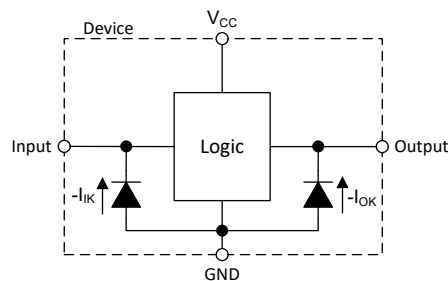


Figure 7-2. Electrical Placement of Clamping Diodes for Each Input and Output

### 7.3.4 Over-voltage Tolerant Inputs

Input signals to this device can be driven above the supply voltage so long as they remain below the maximum input voltage value specified in the [Section 5.1](#).

## 7.4 Device Functional Modes

[Table 7-1](#) lists the functional modes for the SN54LVC08A and SN74LVC08A devices.

**Table 7-1. Truth Table**

| INPUTS |   | OUTPUT |
|--------|---|--------|
| A      | B | Y      |
| L      | L | L      |
| L      | H | L      |
| H      | L | L      |
| H      | H | H      |

## 8 Application and Implementation


### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The SN74LVC08A is used to drive CMOS device and used for implementing AND logic. The LVC family can support current drive of about 24 mA at 3-V  $V_{CC}$ . The inputs for SN74LVC08A are 5.5-V tolerant allowing it to translate down to  $V_{CC}$ .

### 8.2 Typical Application

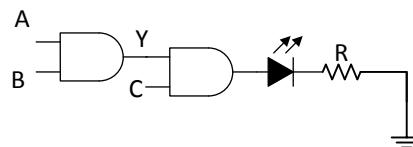

**Figure 8-1. Three Input AND Gate Implementation and Driving LED**

#### 8.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Take care to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads so routing and load conditions should be considered to prevent ringing.



#### 8.2.2 Detailed Design Procedure

SN74LVC08A contains four AND gates in one package which can be used for individual AND function or to implement complex Boolean logic. [Figure 8-1](#) shows an example of implementing 3input AND function. AB are inputs for AND gate which are connected to another AND gate.  $Z = A \times B \times C$ . SN74LVC08A support high drive current of 24 mA which can be used to drive LEDs of even Drive low current signal FETs, an example is shown in [Figure 8-1](#) TI recommends to use a series resistance to limit the current. If  $V_{CC}$  is 3 V, and LED current should be 10 mA, and the forward-voltage of LED is 2.5 V, then R as shown in [Figure 8-1](#) is calculated using [Equation 1](#):

$$R = (V_{CC} - V_{LED}) / I \quad (1)$$

$$R = (3 - 2.5) / 0.01 = 50 \, \Omega$$

### 8.2.3 Application Curves

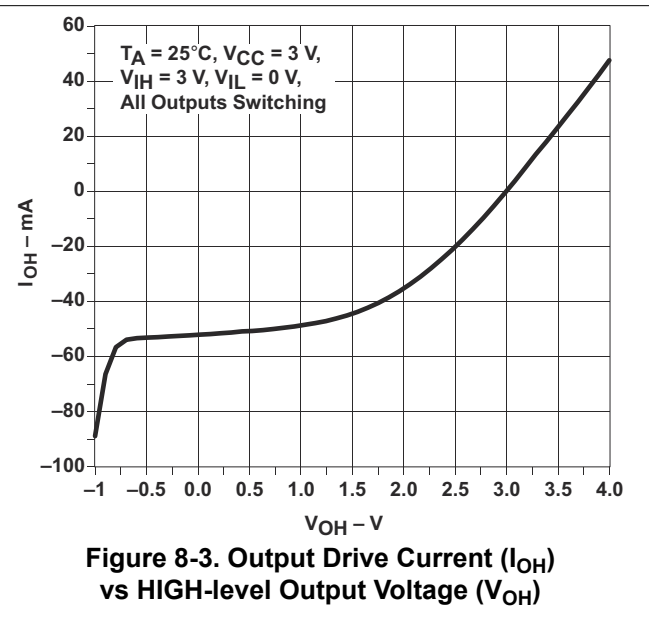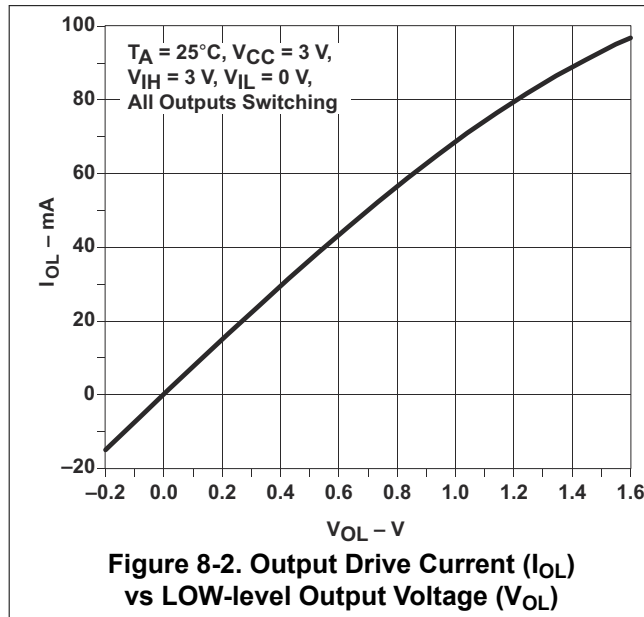

### Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the [Recommended Operating Conditions](#) table.

The  $V_{CC}$  pin must have a good bypass capacitor to prevent power disturbance. TI recommends to use a 0.1- $\mu$ F capacitor. It is ok to parallel multiple bypass capacitors to reject different frequencies of noise. 0.1- $\mu$ F and 1- $\mu$ F capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power pin as possible for best results.

## 8.3 Layout


### 8.3.1 Layout Guidelines

When using multiple bit logic devices, inputs should not float. In many cases, functions or parts of functions of digital logic devices are unused. Some examples are when only two inputs of a triple-input AND gate are used, or when only 3 of the 4-buffer gates are used. Such input pins should not be left unconnected because the undefined voltages at the outside connections result in undefined operational states.


Specified in [Figure 8-4](#) are rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or VCC, whichever makes more sense or is more convenient.

Even low data rate digital signals can have high frequency signal components due to fast edge rates. When a PCB trace turns a corner at a 90° angle, a reflection can occur. A reflection occurs primarily because of the change of width of the trace. At the apex of the turn, the trace width increases to 1.414 times the width. This increase upsets the transmission-line characteristics, especially the distributed capacitance and self-inductance of the trace which results in the reflection. Not all PCB traces can be straight and therefore some traces must turn corners. [Figure 8-5](#) shows progressively better techniques of rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.

### 8.3.2 Layout Examples

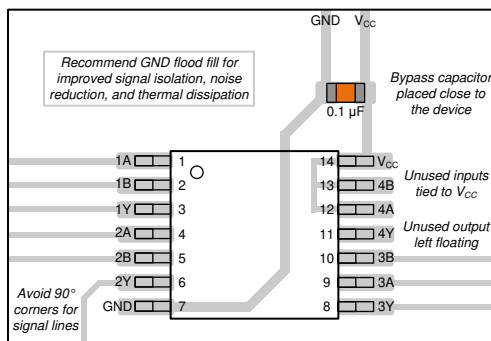

**Figure 8-4. Example Layout**

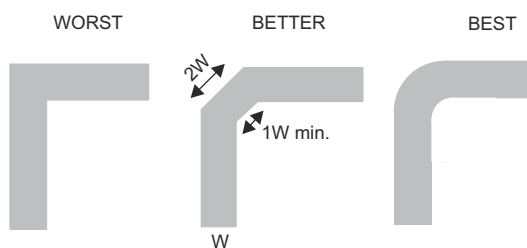

**Figure 8-5. Trace Example**

## 9 Device and Documentation Support

### 9.1 Documentation Support (Analog)

#### 9.1.1 Related Documentation

For related documentation see the following:

[Implications of Slow or Floating CMOS Inputs](#), SCBA004

#### 9.1.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to order now.

**Table 9-1. Related Links**

| PARTS      | PRODUCT FOLDER             | ORDER NOW                  | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| SN54LVC08A | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| SN74LVC08A | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

#### 9.3.1 Community Resources

### 9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 9.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 10

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

### Changes from Revision V (May 2024) to Revision W (July 2024)

**Page**

- Updated thermal values for D package from RθJA = 98.6 to 127.8, RθJC(top) = 56.0 to 81.9, RθJB = 53.3 to 84.4, ΨJT = 16.4 to 39.6, ΨJB = 53.0 to 83.9, RθJC(bot) = N/A, all values in °C/W ..... **6**

| <b>Changes from Revision U (March 2024) to Revision V (May 2024)</b>                                                                                                                                                                                                | <b>Page</b> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • Updated R $\theta$ JA values: DB = 112.8 to 140.4, PW = 127.7 to 150.8, RGY = 51.1 to 92.1, NS = 95.1 to 123.8; updated DB, PW, RGY, and NS packages for R $\theta$ JC(top), R $\theta$ JB, $\Psi$ JT, $\Psi$ JB, and R $\theta$ JC(bot), all values in °C/W..... | <b>6</b>    |

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)                      |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|------------------------------------------|
| <a href="#">5962-9753401Q2A</a> | Active        | Production           | LCCC (FK)   20  | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-<br>9753401Q2A<br>SNJ54LVC<br>08AFK |
| <a href="#">5962-9753401QCA</a> | Active        | Production           | CDIP (J)   14   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9753401QC<br>A<br>SNJ54LVC08AJ      |
| <a href="#">5962-9753401QDA</a> | Active        | Production           | CFP (W)   14    | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9753401QD<br>A<br>SNJ54LVC08AW      |
| <a href="#">SN74LVC08ABQAR</a>  | Active        | Production           | WQFN (BQA)   14 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ABQAR.A                | Active        | Production           | WQFN (BQA)   14 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| <a href="#">SN74LVC08AD</a>     | Active        | Production           | SOIC (D)   14   | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08AD.B                   | Active        | Production           | SOIC (D)   14   | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| <a href="#">SN74LVC08ADBR</a>   | Active        | Production           | SSOP (DB)   14  | 2000   LARGE T&R      | Yes         | NIPDAU   NIPDAU                      | Level-1-260C-UNLIM                | -40 to 125   | LC08A                                    |
| SN74LVC08ADBR.A                 | Active        | Production           | SSOP (DB)   14  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                                    |
| SN74LVC08ADBR.B                 | Active        | Production           | SSOP (DB)   14  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                                    |
| SN74LVC08ADBRE4                 | Active        | Production           | SSOP (DB)   14  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                                    |
| SN74LVC08ADE4                   | Active        | Production           | SOIC (D)   14   | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ADG4                   | Active        | Production           | SOIC (D)   14   | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| <a href="#">SN74LVC08ADR</a>    | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ADR.A                  | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ADR.B                  | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ADRE4                  | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| <a href="#">SN74LVC08ADRG3</a>  | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ADRG3.B                | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| <a href="#">SN74LVC08ADRG4</a>  | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ADRG4.B                | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| <a href="#">SN74LVC08ADT</a>    | Active        | Production           | SOIC (D)   14   | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| SN74LVC08ADT.B                  | Active        | Production           | SOIC (D)   14   | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |
| <a href="#">SN74LVC08ANSR</a>   | Active        | Production           | SOP (NS)   14   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                                   |

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)                 |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|-------------------------------------|
| SN74LVC08ANSR.A                 | Active        | Production           | SOP (NS)   14   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                              |
| SN74LVC08ANSR.B                 | Active        | Production           | SOP (NS)   14   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                              |
| SN74LVC08ANSRE4                 | Active        | Production           | SOP (NS)   14   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LVC08A                              |
| <a href="#">SN74LVC08APW</a>    | Active        | Production           | TSSOP (PW)   14 | 90   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APW.B                  | Active        | Production           | TSSOP (PW)   14 | 90   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWG4                  | Active        | Production           | TSSOP (PW)   14 | 90   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| <a href="#">SN74LVC08APWR</a>   | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWR.A                 | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWR.B                 | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWRE4                 | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| <a href="#">SN74LVC08APWRG3</a> | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWRG3.B               | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| <a href="#">SN74LVC08APWRG4</a> | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWRG4.A               | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWRG4.B               | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| <a href="#">SN74LVC08APWT</a>   | Active        | Production           | TSSOP (PW)   14 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWT.B                 | Active        | Production           | TSSOP (PW)   14 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| SN74LVC08APWTG4                 | Active        | Production           | TSSOP (PW)   14 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | LC08A                               |
| <a href="#">SN74LVC08ARGYR</a>  | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | NIPDAU   NIPDAU                      | Level-2-260C-1 YEAR               | -40 to 125   | LC08A                               |
| SN74LVC08ARGYR.A                | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | LC08A                               |
| SN74LVC08ARGYR.B                | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | LC08A                               |
| SN74LVC08ARGYRG4                | Active        | Production           | VQFN (RGY)   14 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | LC08A                               |
| <a href="#">SNJ54LVC08AFK</a>   | Active        | Production           | LCCC (FK)   20  | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9753401Q2A<br>SNJ54LVC08AFK    |
| <a href="#">SNJ54LVC08AJ</a>    | Active        | Production           | CDIP (J)   14   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9753401QC<br>A<br>SNJ54LVC08AJ |
| <a href="#">SNJ54LVC08AW</a>    | Active        | Production           | CFP (W)   14    | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9753401QD<br>A<br>SNJ54LVC08AW |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN54LVC08A, SN74LVC08A :**

- Catalog : [SN74LVC08A](#)
- Automotive : [SN74LVC08A-Q1](#), [SN74LVC08A-Q1](#)
- Enhanced Product : [SN74LVC08A-EP](#), [SN74LVC08A-EP](#)
- Military : [SN54LVC08A](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Enhanced Product - Supports Defense, Aerospace and Medical Applications
- Military - QML certified for Military and Defense Applications


## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LVC08ABQAR  | WQFN         | BQA             | 14   | 3000 | 180.0              | 12.4               | 2.8     | 3.3     | 1.1     | 4.0     | 12.0   | Q1            |
| SN74LVC08ADBR   | SSOP         | DB              | 14   | 2000 | 330.0              | 16.4               | 8.35    | 6.6     | 2.4     | 12.0    | 16.0   | Q1            |
| SN74LVC08ADR    | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74LVC08ADRG3  | SOIC         | D               | 14   | 2500 | 330.0              | 16.8               | 6.5     | 9.5     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74LVC08ADRG4  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74LVC08ADT    | SOIC         | D               | 14   | 250  | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74LVC08ANSR   | SOP          | NS              | 14   | 2000 | 330.0              | 16.4               | 8.45    | 10.55   | 2.5     | 12.0    | 16.2   | Q1            |
| SN74LVC08APWR   | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74LVC08APWRG3 | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74LVC08APWRG4 | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74LVC08APWT   | TSSOP        | PW              | 14   | 250  | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74LVC08ARGYR  | VQFN         | RGY             | 14   | 3000 | 330.0              | 12.4               | 3.75    | 3.75    | 1.15    | 8.0     | 12.0   | Q1            |
| SN74LVC08ARGYR  | VQFN         | RGY             | 14   | 3000 | 330.0              | 12.4               | 3.75    | 3.75    | 1.15    | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

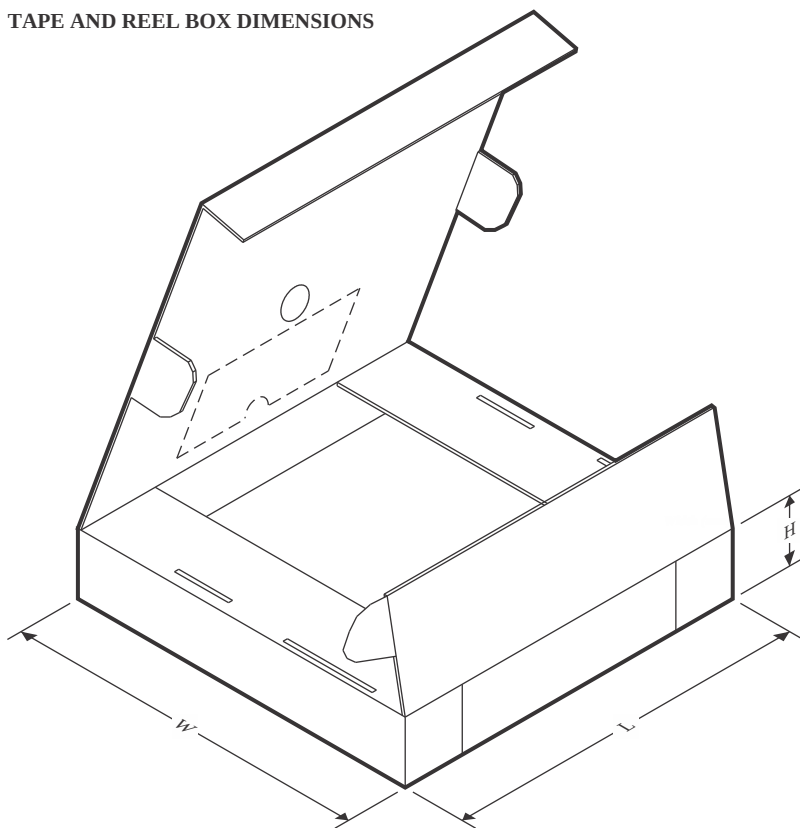


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LVC08ABQAR  | WQFN         | BQA             | 14   | 3000 | 210.0       | 185.0      | 35.0        |
| SN74LVC08ADBR   | SSOP         | DB              | 14   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LVC08ADR    | SOIC         | D               | 14   | 2500 | 353.0       | 353.0      | 32.0        |
| SN74LVC08ADRG3  | SOIC         | D               | 14   | 2500 | 364.0       | 364.0      | 27.0        |
| SN74LVC08ADRG4  | SOIC         | D               | 14   | 2500 | 353.0       | 353.0      | 32.0        |
| SN74LVC08ADT    | SOIC         | D               | 14   | 250  | 213.0       | 191.0      | 35.0        |
| SN74LVC08ANSR   | SOP          | NS              | 14   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LVC08APWR   | TSSOP        | PW              | 14   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LVC08APWRG3 | TSSOP        | PW              | 14   | 2000 | 364.0       | 364.0      | 27.0        |
| SN74LVC08APWRG4 | TSSOP        | PW              | 14   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LVC08APWT   | TSSOP        | PW              | 14   | 250  | 353.0       | 353.0      | 32.0        |
| SN74LVC08ARGYR  | VQFN         | RGY             | 14   | 3000 | 353.0       | 353.0      | 32.0        |
| SN74LVC08ARGYR  | VQFN         | RGY             | 14   | 3000 | 360.0       | 360.0      | 36.0        |


**TUBE**


\*All dimensions are nominal

| Device          | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 5962-9753401Q2A | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| 5962-9753401QDA | W            | CFP          | 14   | 25  | 506.98 | 26.16  | 6220   | NA     |
| SN74LVC08AD     | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LVC08AD.B   | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LVC08ADE4   | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LVC08ADG4   | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LVC08APW    | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| SN74LVC08APW.B  | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| SN74LVC08APWG4  | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| SNJ54LVC08AFK   | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| SNJ54LVC08AW    | W            | CFP          | 14   | 25  | 506.98 | 26.16  | 6220   | NA     |

**D0014A****PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

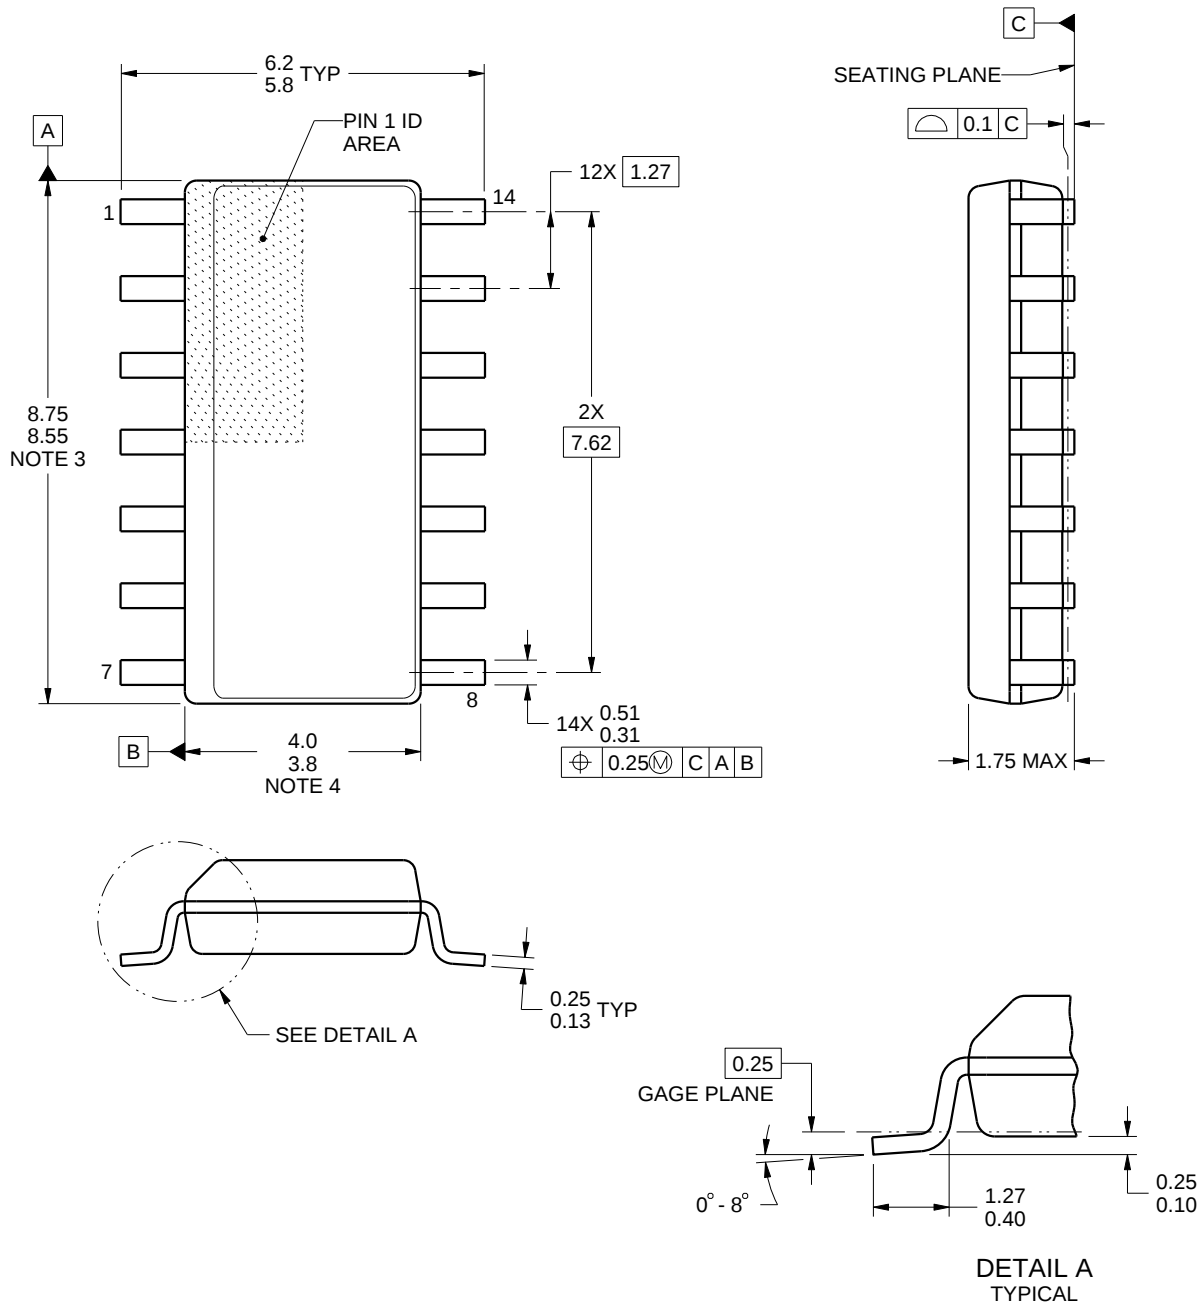

4220718/A 09/2016

**NOTES:**


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

# EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

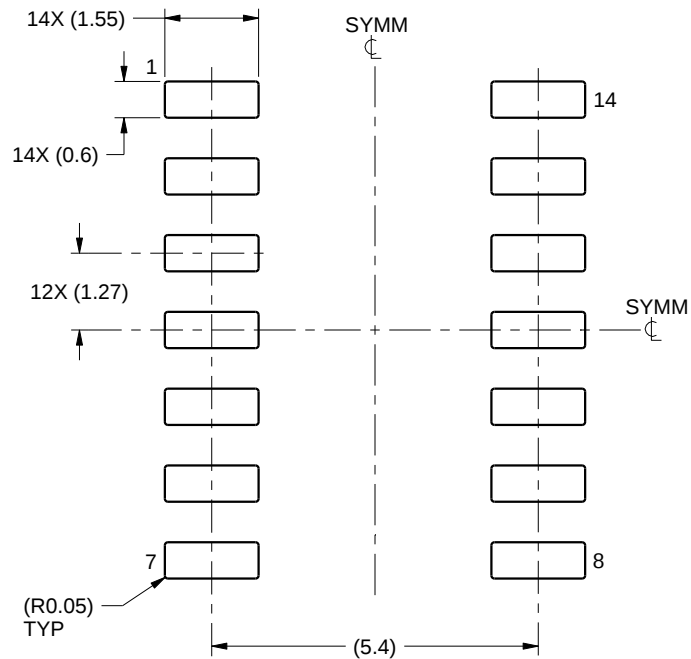

LAND PATTERN EXAMPLE  
SCALE:8X

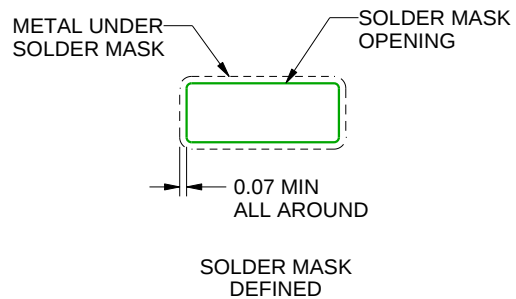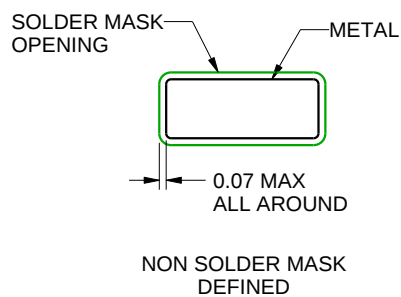

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

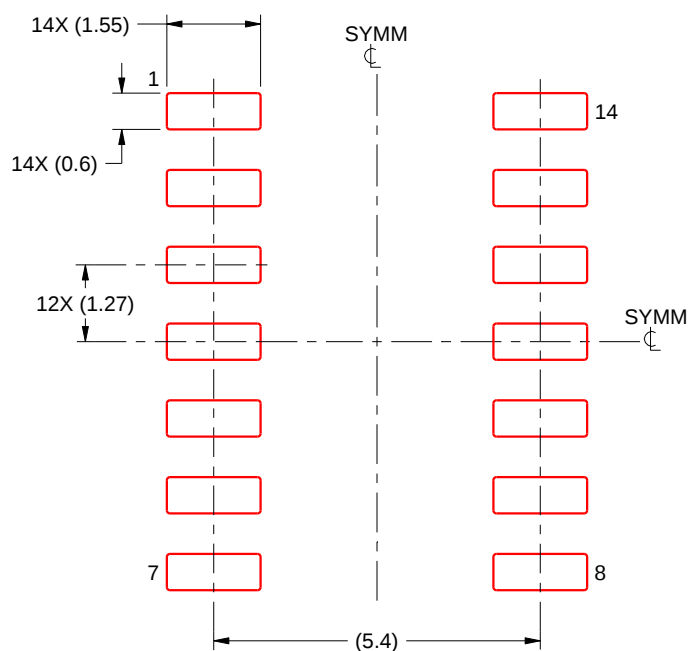

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## GENERIC PACKAGE VIEW


**BQA 14**


**WQFN - 0.8 mm max height**

2.5 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

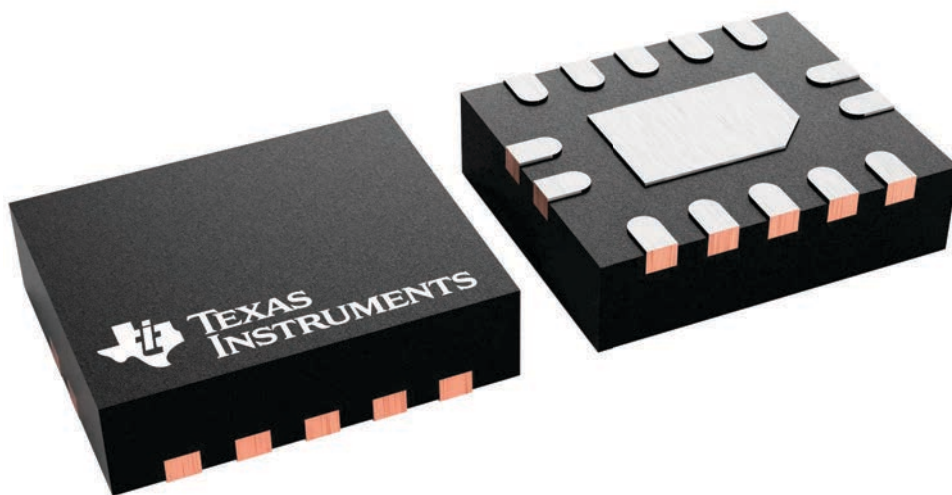


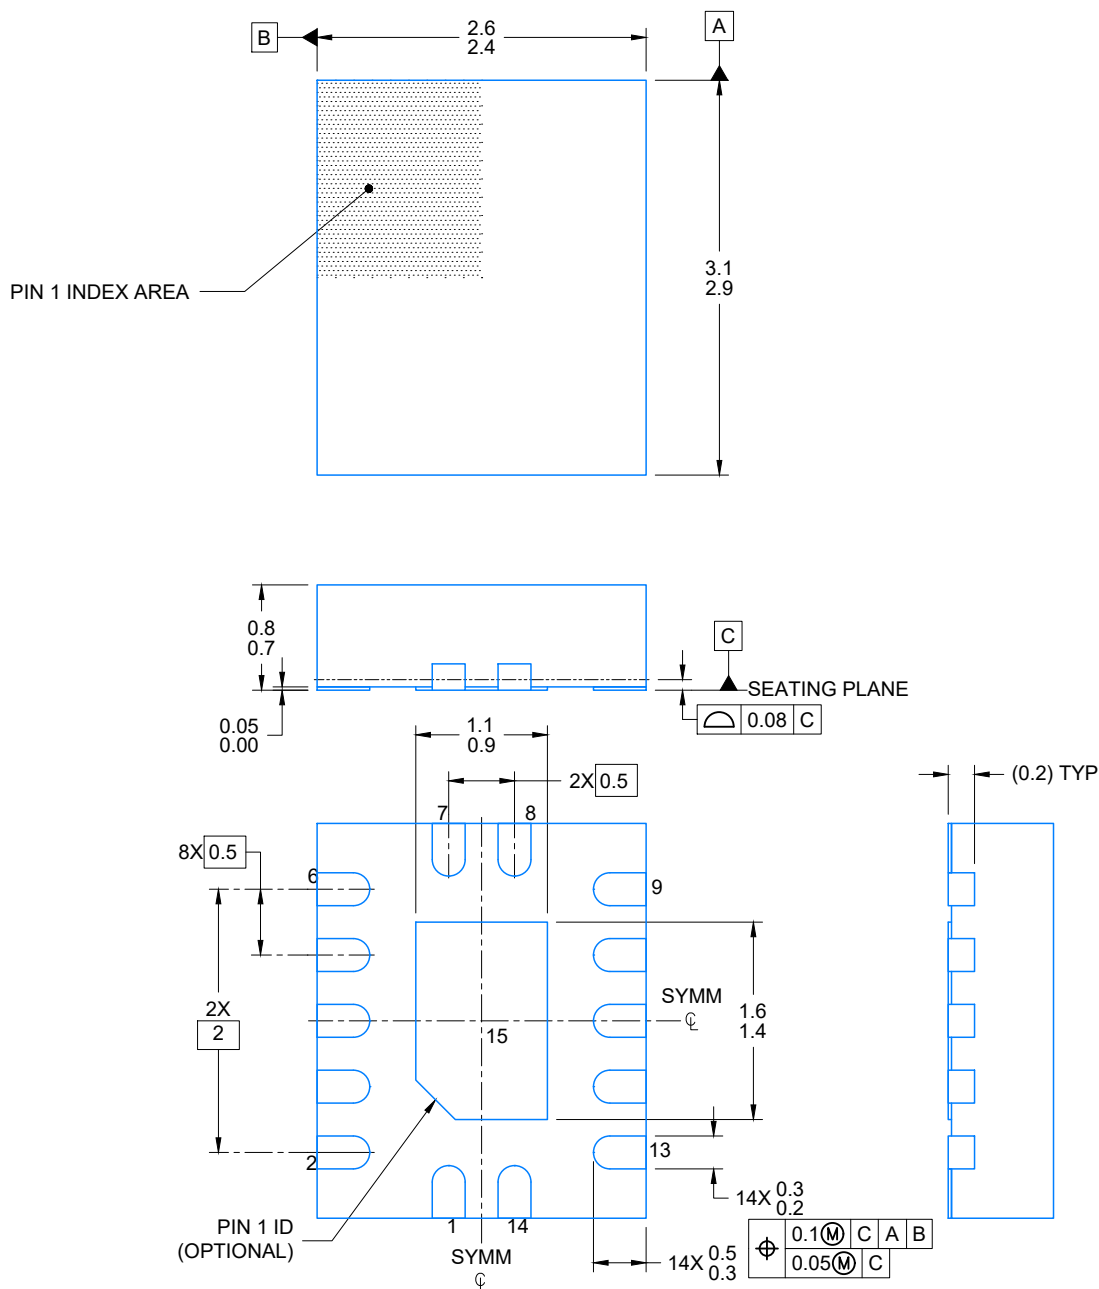

4224636/A 11/2018

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

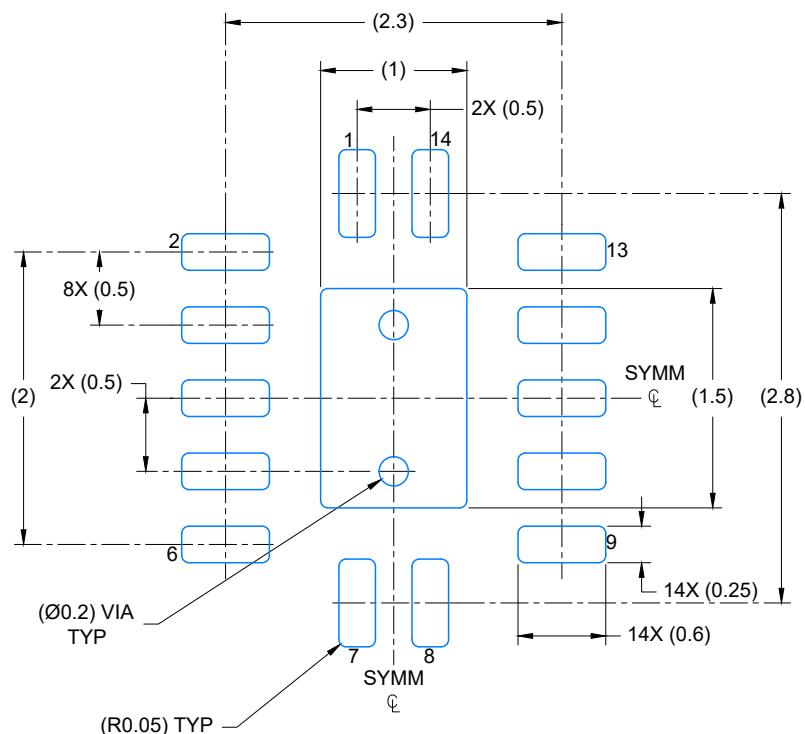

## LAND PATTERN EXAMPLE

EXPOSED METAL SHOWN


SCALE: 20X

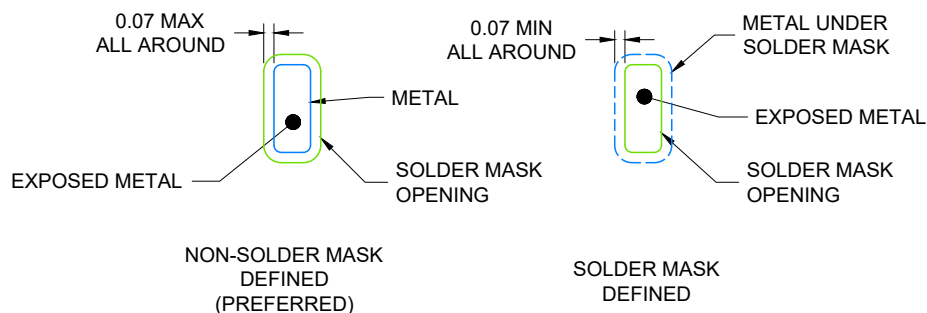

4224636/A 11/2018

## NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

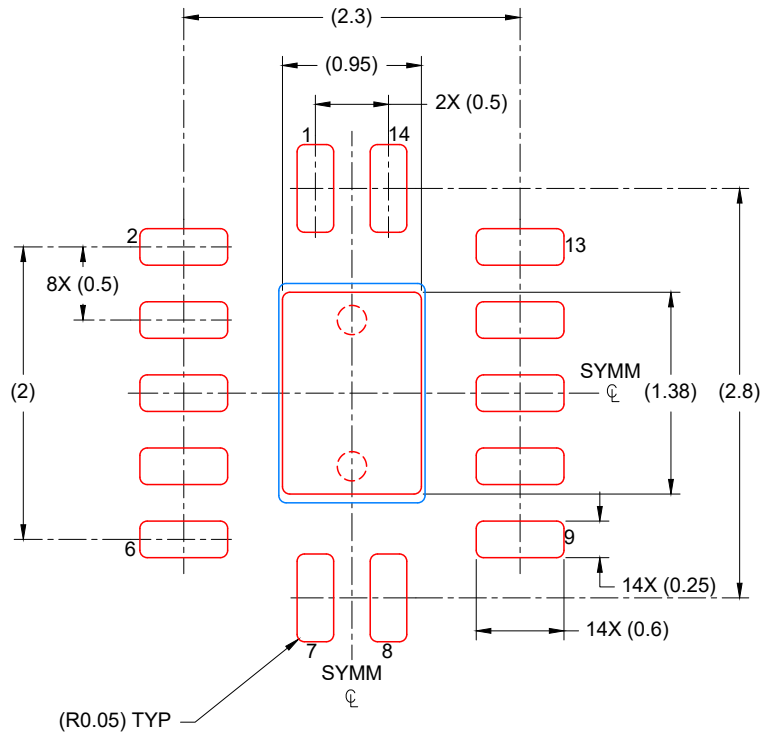

SOLDER PASTE EXAMPLE  
 BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
 88% PRINTED COVERAGE BY AREA  
 SCALE: 20X

4224636/A 11/2018

NOTES: (continued)


6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE


14-PINS SHOWN


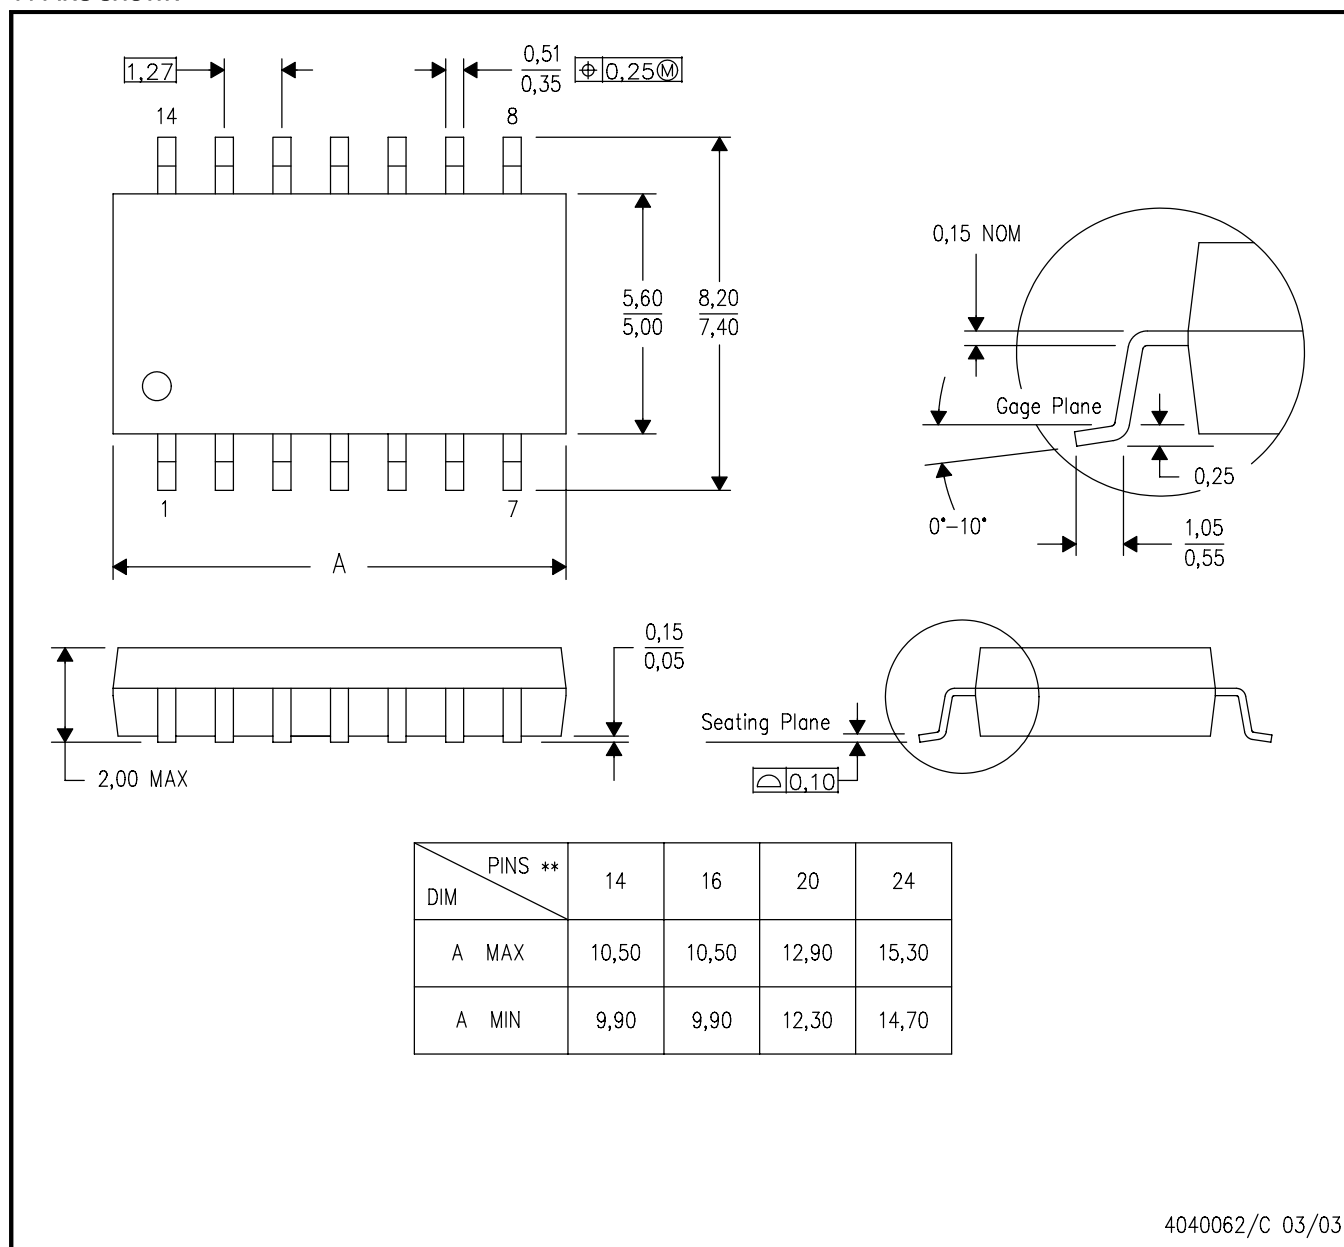


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

W (R-GDFP-F14)

CERAMIC DUAL FLATPACK

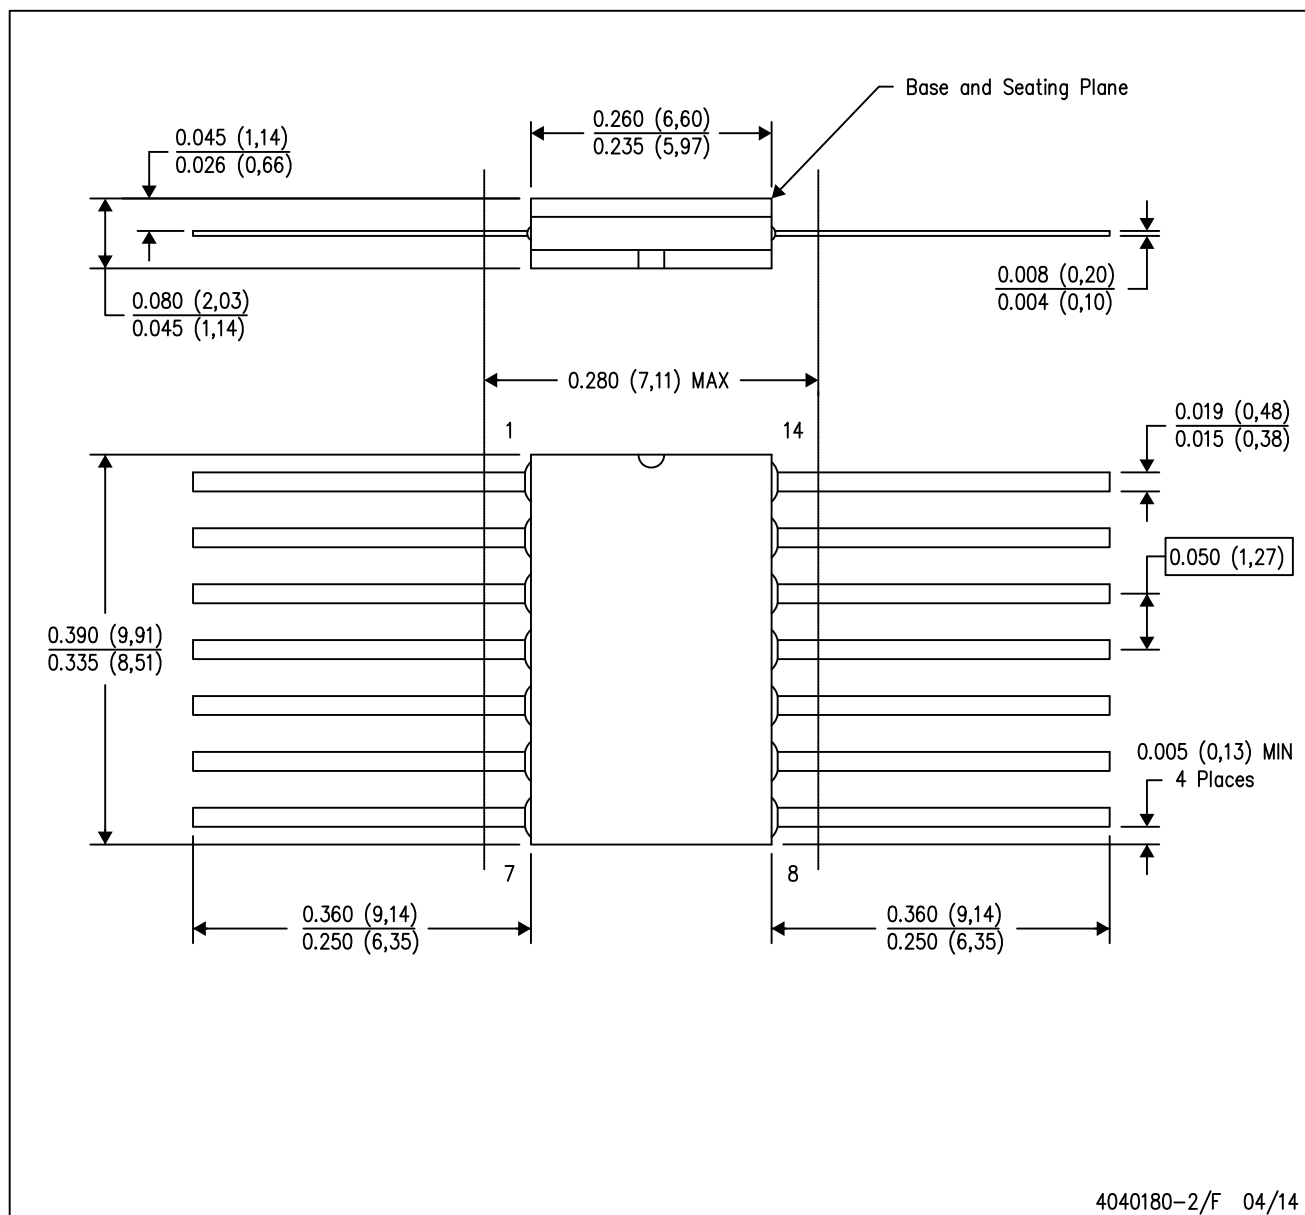

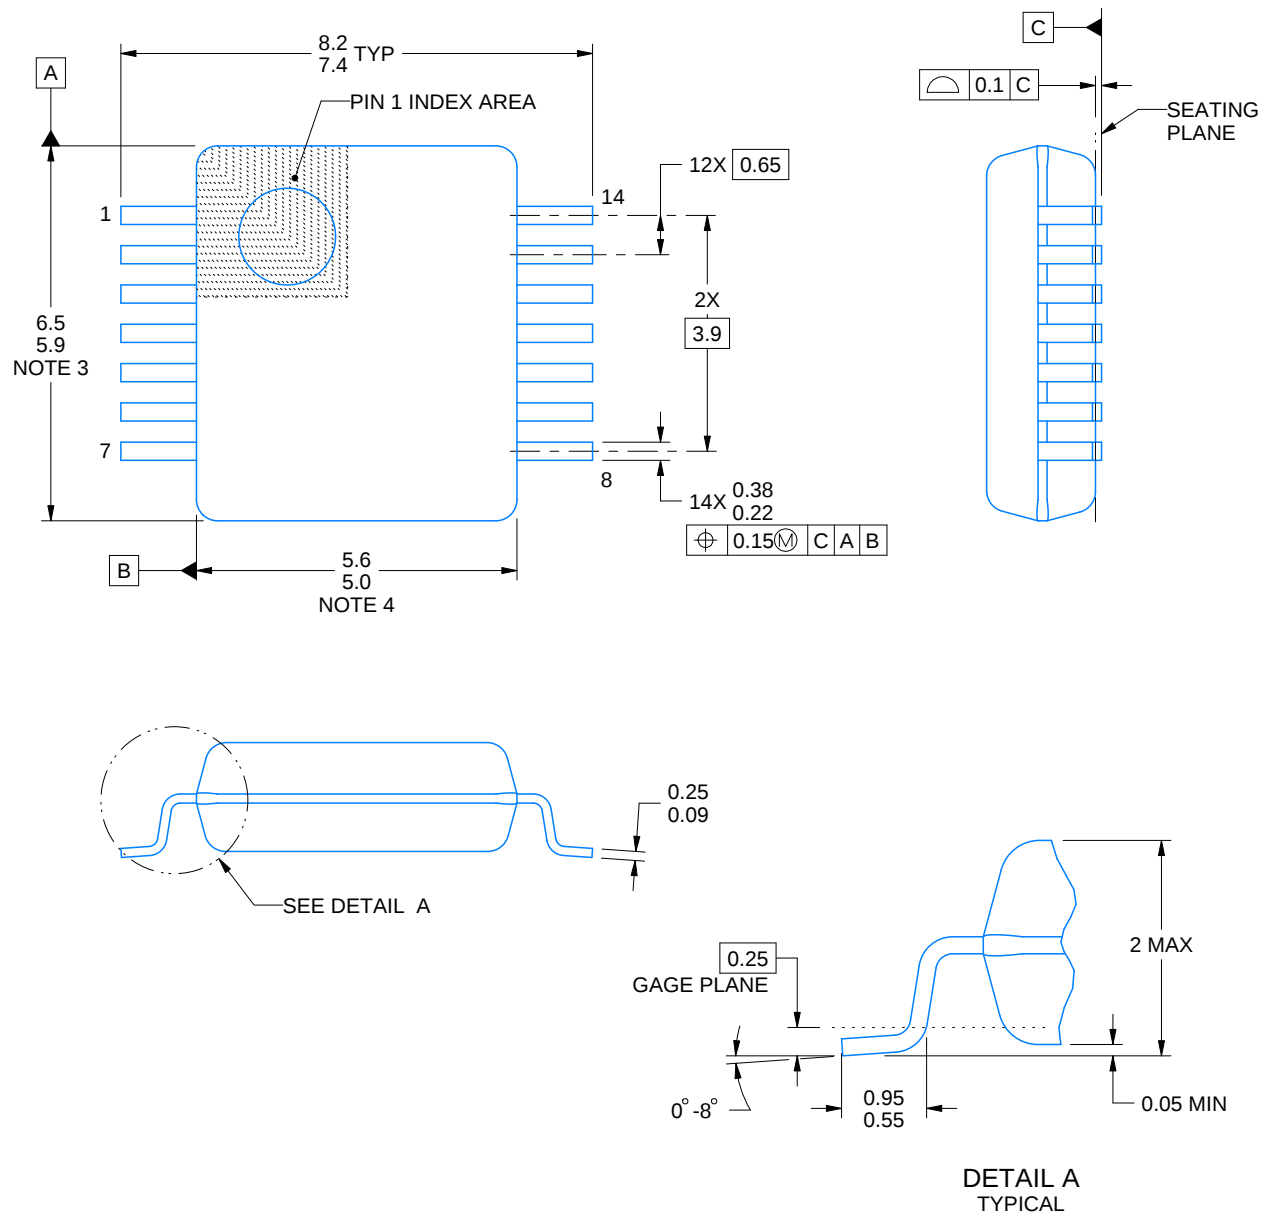

4220762/A 05/2024

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-150.

# EXAMPLE BOARD LAYOUT



DB0014A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

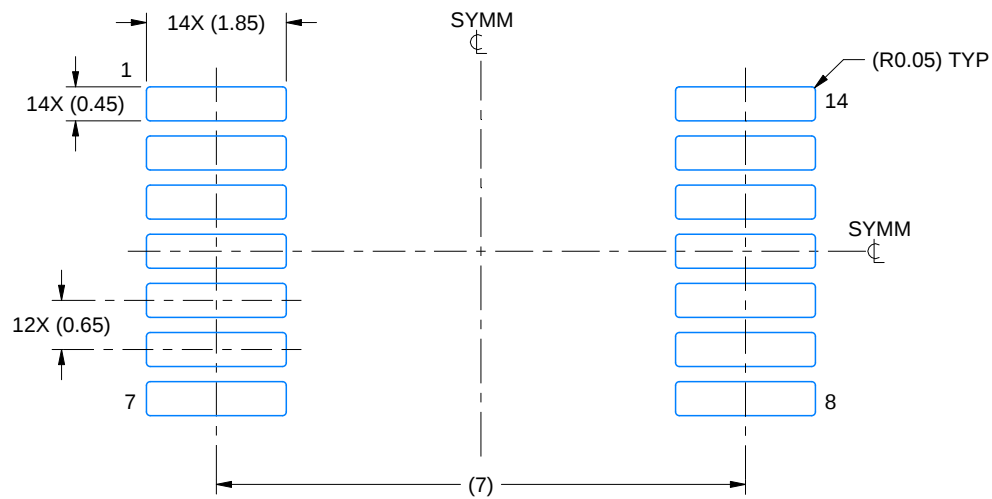

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

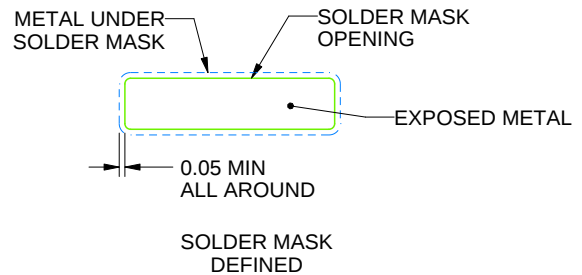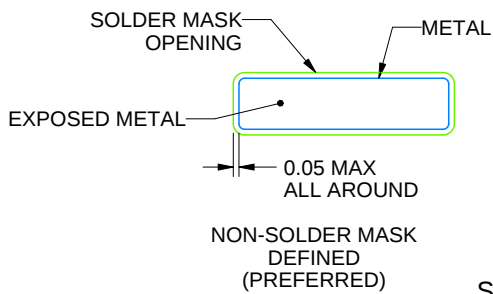

SOLDER MASK DETAILS

4220762/A 05/2024

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.


6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DB0014A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

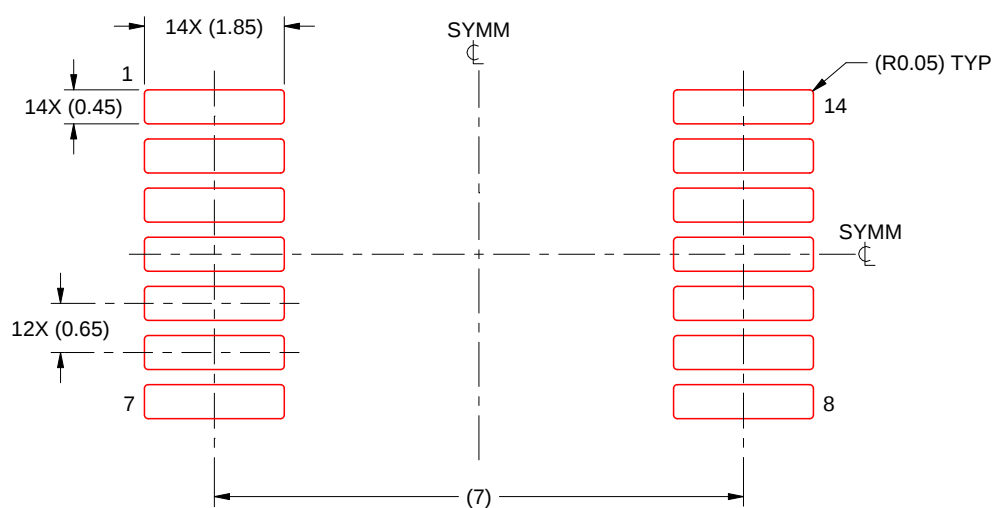

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220762/A 05/2024

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## GENERIC PACKAGE VIEW


**FK 20**

**LCCC - 2.03 mm max height**

8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

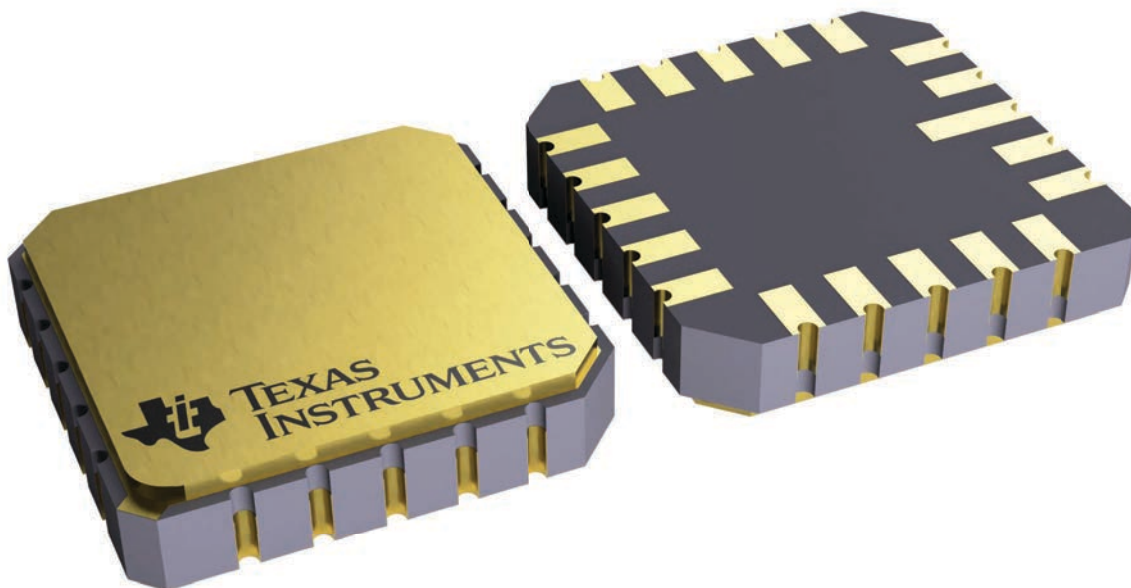


4229370VA\

**J 14**

## GENERIC PACKAGE VIEW


**CDIP - 5.08 mm max height**

CERAMIC DUAL IN LINE PACKAGE

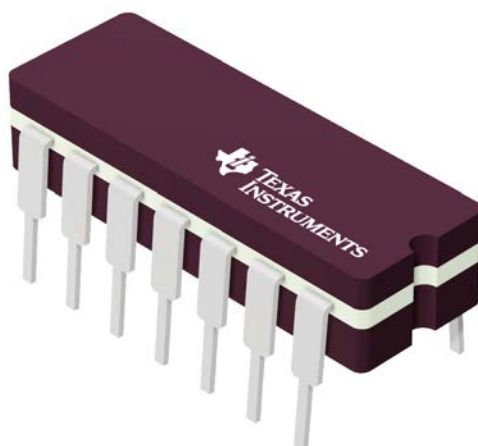


Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4040083-5/G

**J0014A****PACKAGE OUTLINE****CDIP - 5.08 mm max height**

CERAMIC DUAL IN LINE PACKAGE

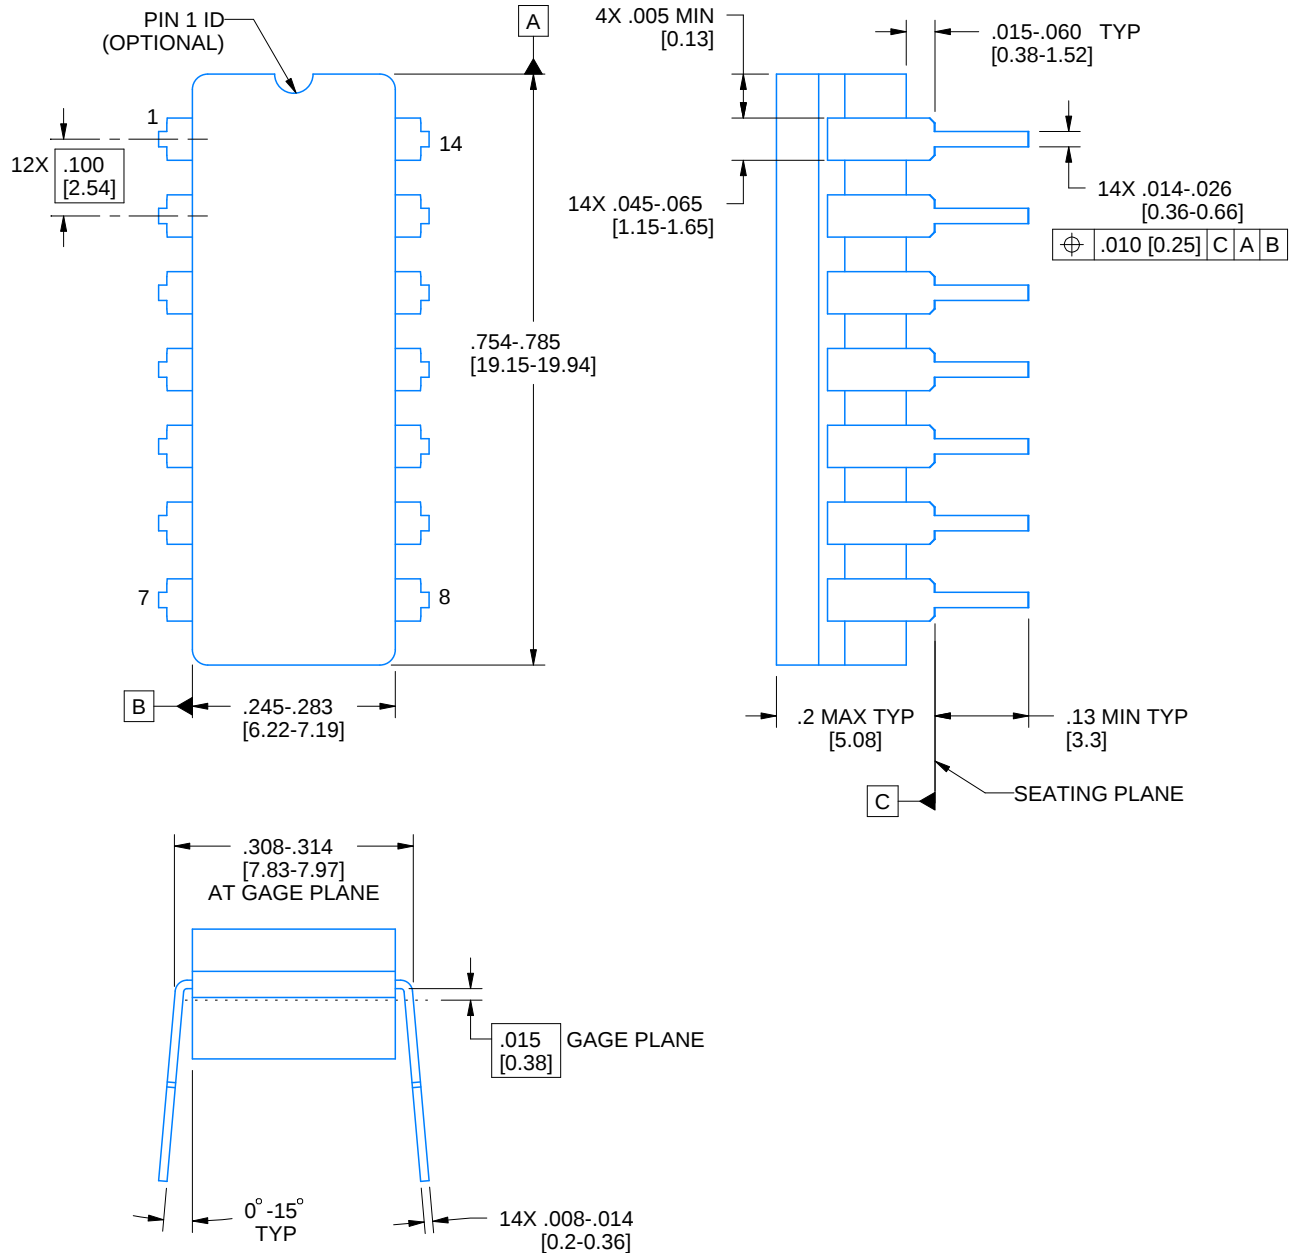

4214771/A 05/2017

**NOTES:**

1. All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This package is hermetically sealed with a ceramic lid using glass frit.
4. Index point is provided on cap for terminal identification only and on press ceramic glass frit seal only.
5. Falls within MIL-STD-1835 and GDIP1-T14.




**PW0014A**

## PACKAGE OUTLINE

**TSSOP - 1.2 mm max height**

SMALL OUTLINE PACKAGE

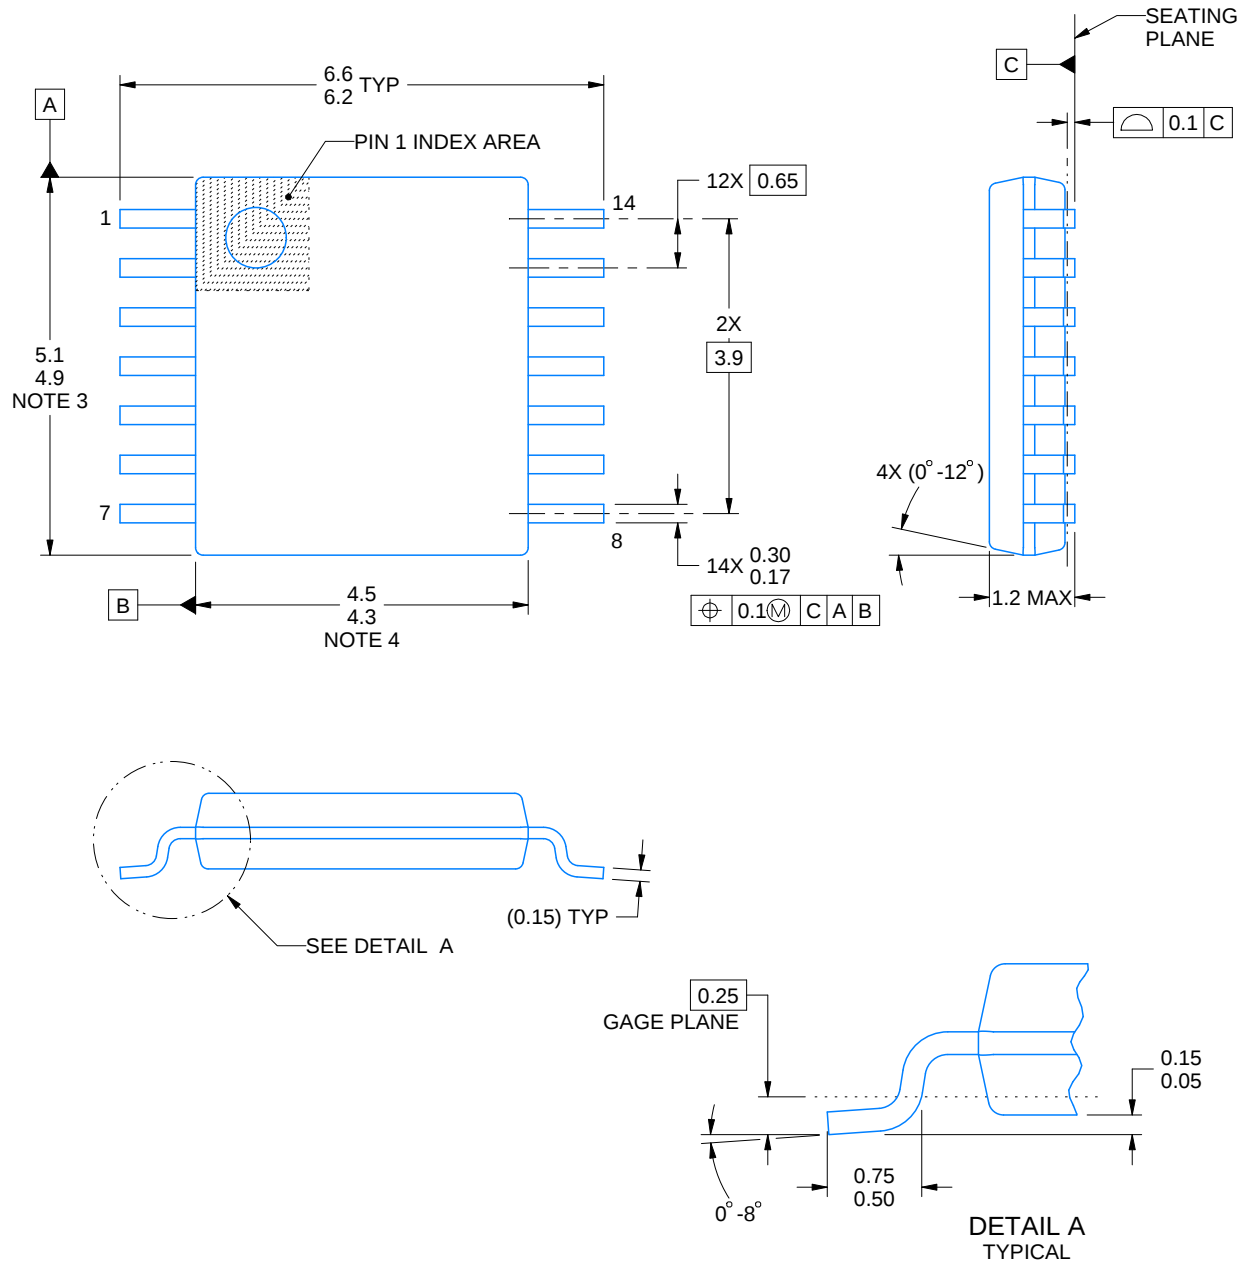

4220202/B 12/2023

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT



PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

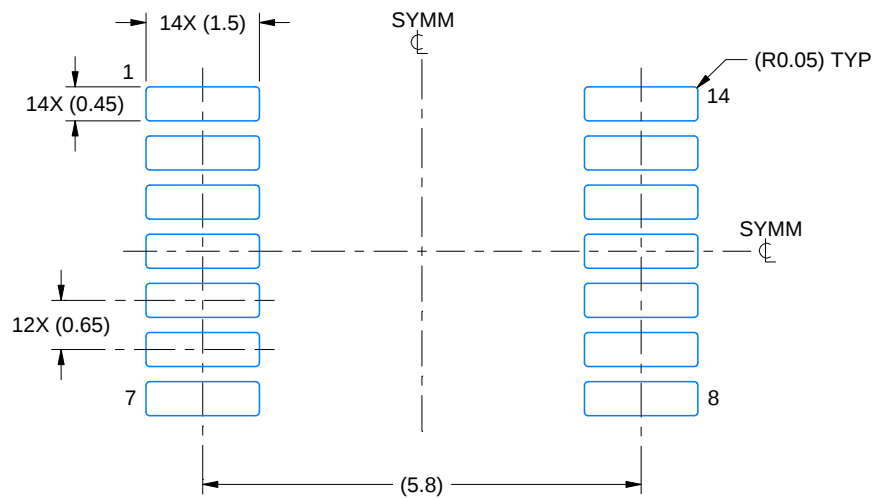

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

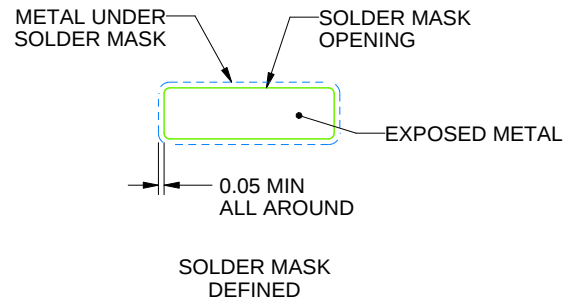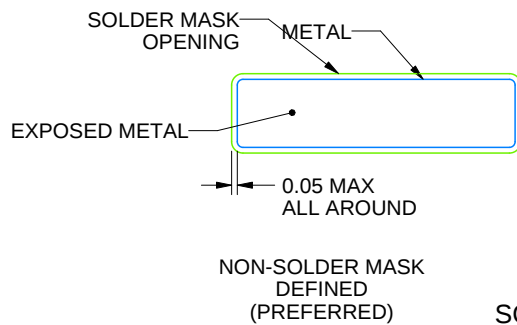

SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

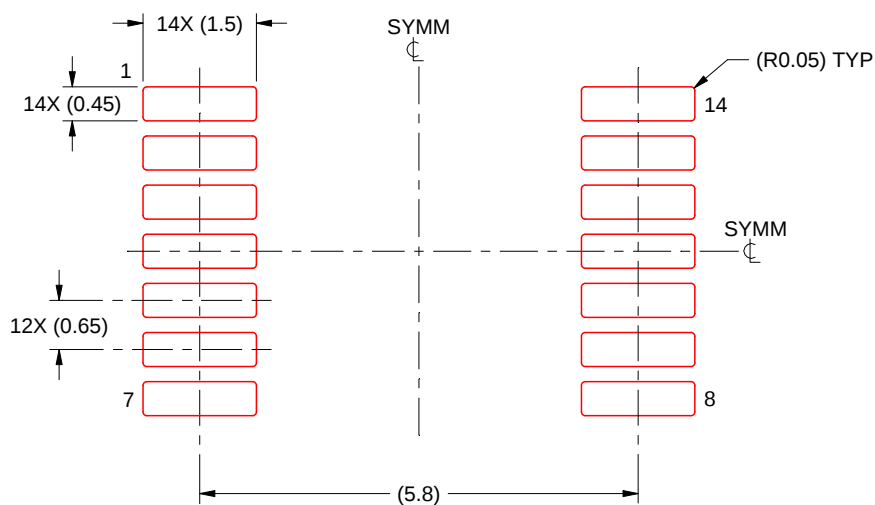

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## GENERIC PACKAGE VIEW


**RGY 14**

**VQFN - 1 mm max height**

3.5 x 3.5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

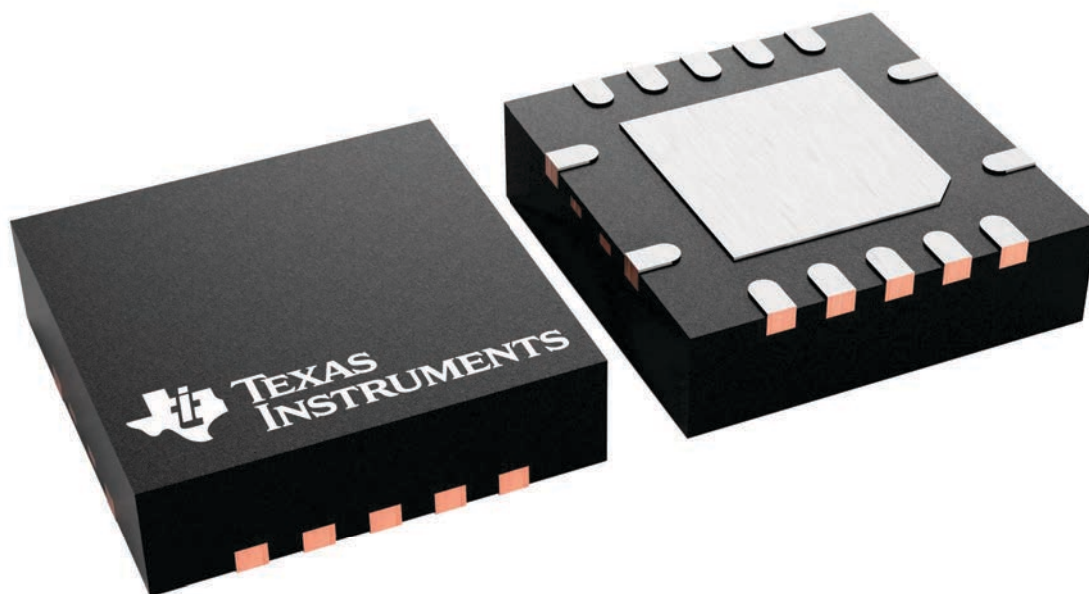

4231541/A



### VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.




# EXAMPLE STENCIL DESIGN

RGY0014A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

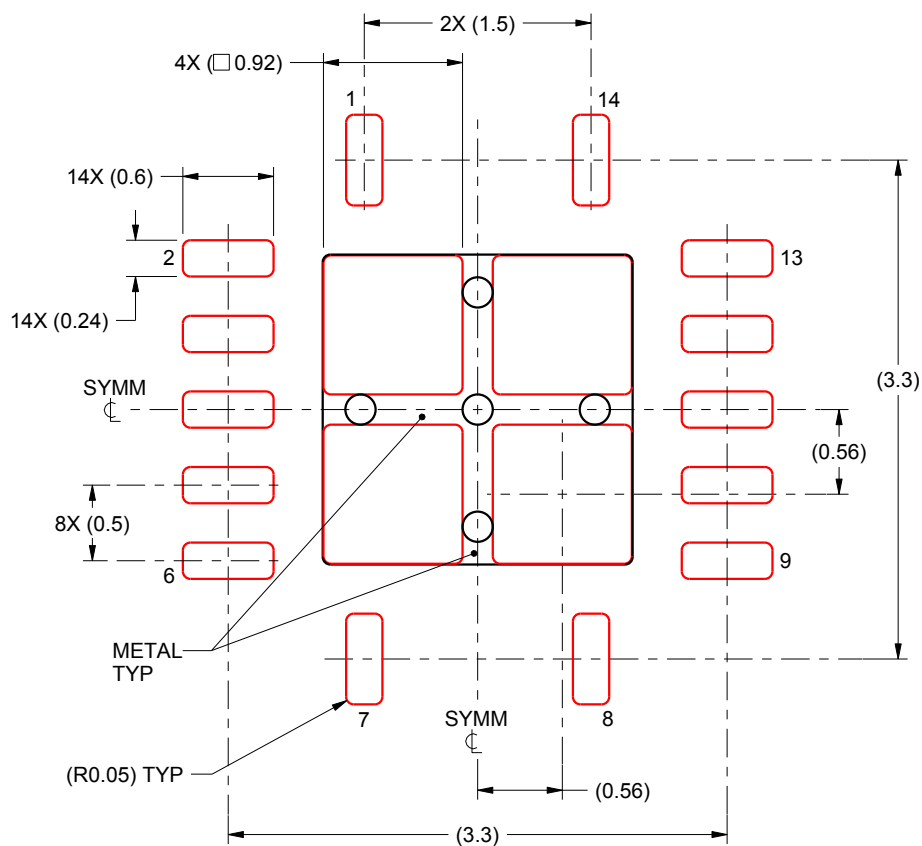

**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
80% PRINTED SOLDER COVERAGE BY AREA  
SCALE:20X

4219040/A 09/2015

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated