

SN74HC4852-Q1 Automotive Dual 4-to-1 Channel Analog Multiplexer/Demultiplexer With Injection-Current Effect Control

1 Features

- Qualified for automotive applications
- Injection current cross-coupling <1mV/mA (see [Figure 8-1](#))
- Low crosstalk between switches
- Pin compatible with SN74HC4052, SN74LV4052A, and CD4052B
- 2V to 5.5V V_{CC} operation
- Latch-up performance exceeds 100mA per JESD 78, Class II

2 Applications

- Analog signal switching or multiplexing:
 - Signal gating, modulator, squelch control, demodulator, chopper, commutating switch
- Digital signal switching and multiplexing
 - Audio and video signal routing
- Transmission-gate logic implementation
- Analog-to-digital and digital-to-analog conversion
- Digital control of frequency, impedance, phase, and analog-signal gain
- Motor speed control
- Battery chargers
- DC-DC converter

3 Description


This dual 4-to-1 CMOS analog multiplexer/demultiplexer is pin compatible with the 4052 function and also features injection-current effect control. This feature has excellent value in automotive applications where voltages in excess of normal supply voltages are common.

The injection-current effect control allows signals at disabled analog input channels to exceed the supply voltage without affecting the signal of the enabled analog channel. This eliminates the need for external diode/resistor networks typically used to keep the analog channel signals within the supply voltage range.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
SN74HC4852-Q1	PW (TSSOP, 16)	5mm × 6.4mm

- (1) For more information, see [Section 11](#).
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.

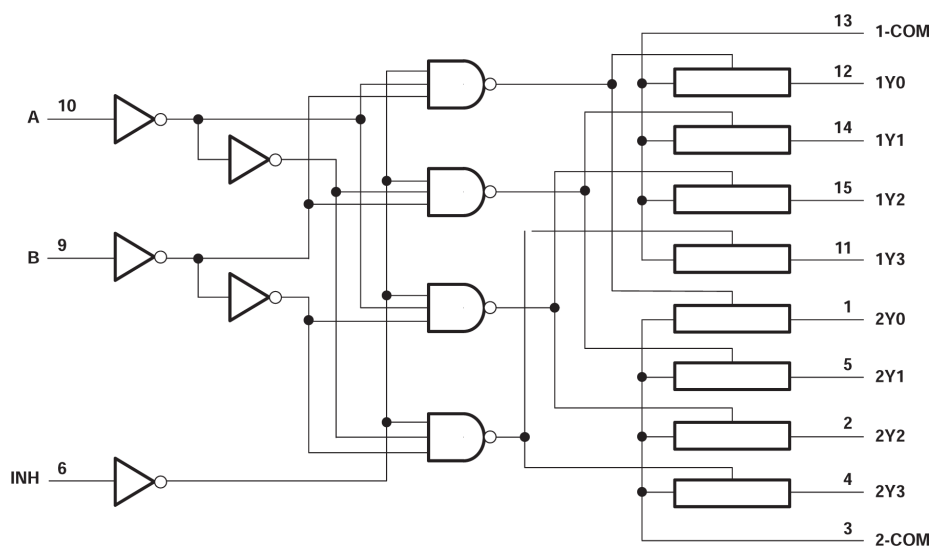


Functional Diagram

Table of Contents

1 Features	1	7 Detailed Description	11
2 Applications	1	7.1 Functional Block Diagram.....	11
3 Description	1	8 Application and Implementation	12
4 Pin Configuration and Functions	2	8.1 Application Information.....	12
5 Specifications	3	9 Device and Documentation Support	14
5.1 Absolute Maximum Ratings.....	3	9.1 Receiving Notification of Documentation Updates....	14
5.2 ESD Ratings.....	3	9.2 Support Resources.....	14
5.3 Thermal Information: SN74HC485x-Q1.....	3	9.3 Trademarks.....	14
5.4 Recommended Operating Conditions.....	4	9.4 Electrostatic Discharge Caution.....	14
5.5 Electrical Characteristics.....	5	9.5 Glossary.....	14
5.6 Timing Characteristics.....	6	10 Revision History	14
5.7 Injection Current Coupling.....	6	11 Mechanical, Packaging, and Orderable Information	14
6 Parameter Measurement Information	7		

4 Pin Configuration and Functions



NC – No internal connection

Figure 4-1. PW Package, 16-Pin TSSOP (Top View)

Table 4-1. Function Table

INPUTS			ON CHANNEL
INH	B	A	
L	L	L	1Y0, 2Y0
L	L	H	1Y1, 2Y1
L	H	L	1Y2, 2Y2
L	H	H	1Y3, 2Y3
H	X	X	None

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)^{(1) (2)}

		MIN	MAX	UNIT
V_{CC}	Supply voltage	−0.5	6	V
V_{SEL} or V_{EN}	Logic control input pin voltage ($\overline{EN}$, A0, A1, A2)	−0.5	$V_{CC}+0.5V$	V
V_S or V_D	Source or drain voltage (Sx, D)	−0.5	$V_{CC}+0.5V$	V
I_{IK}	Input clamp current ($V_I < 0$ or $V_I > V_{CC}$)	−20	20	mA
I_{IOK}	I/O diode current ($V_{IO} < 0$ or $V_{IO} > V_{CC}$)	−20	20	mA
I_T	Switch through current ($V_{IO} = 0$ to V_{CC})	−25	25	mA
I_{GND}	Continuous current through V_{CC} or GND	−50	50	mA
T_{stg}	Storage temperature	−65	150	°C
T_J	Junction temperature		150	

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If briefly operating outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

5.2 ESD Ratings

				VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 ⁽¹⁾	All pins	±2000	V
		Charged device model (CDM), per AEC Q100-011	All pins	±750	

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

5.3 Thermal Information: SN74HC485x-Q1

THERMAL METRIC ⁽¹⁾		SN74HC485x-Q1	UNIT
		PW (TSSOP)	
		PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	139.6	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

5.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage		2		5.5	V
V_{IH}	Input logic high	2V	1.5			V
		2.5V	2.1			
		3.3V	2.3			
		4.5V	3.15			
		5.5V	4.2			
V_{IL}	Input logic low	2V	0		0.5	V
		2.5V	0		0.7	
		3.3V	0		0.8	
		4.5V	0		0.95	
		5.5V	0		1.05	
V_{SEL} or V_{EN}	Logic control input pin voltage ($\overline{EN}$, A0, A1, A2)		0		V_{CC}	V
V_S or V_D	Signal path input/output voltage (source or drain pin) (Sx, D)		0		V_{CC}	V
$\Delta t/\Delta v$	Input transition rise or fall time	$V_{CC} = 2V$			1000	ns
		$V_{CC} = 3V$			800	
		$V_{CC} = 3.3V$			700	
		$V_{CC} = 4.5V$			500	
		$V_{CC} = 5.5V$			400	
T_A	Ambient temperature		–40		125	°C

5.5 Electrical Characteristics

At specified $V_{CC} \pm 10\%$

Typical values measured at nominal V_{CC} .

PARAMETER		TEST CONDITIONS	V _{CC}	Operating free-air temperature (T _A)									UNIT
				25°C			−40°C to 85°C			−40°C to 125°C			
				MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
R _{ON}	On-state switch resistance	V _S = 0V to V _{CC} I _{SD} = 0.5mA	2V	500	650	670	700	Ω					
			3V	215	280	320	360						
			3.3V	210	270	305	345						
			4.5V	160	210	240	270						
ΔR _{ON}	On-state switch resistance matching between inputs	V _S = V _{CC} / 2 I _{SD} = 0.5mA	2V	4	20	24	26	Ω					
			3V	2	14	16	18						
			3.3V	2	14	16	18						
			4.5V	2	10	14	18						
I _I	Control input current	V _I = V _{CC} or GND	5V	±0.1		±0.1		±1		μA			
I _{S(OFF)}	Off-state switch leakage current (any one channel)	Switch Off V _{INH} =V _{IH} V _D = V _{CC} / GND V _S = GND / V _{CC}	5V	±0.1		±0.5		±1		μA			
	Off-state switch leakage current (common channel)			±0.2		±2		±4		μA			
I _{S(ON)}	Channel on-state leakage current	Switch Off V _{INH} =V _{IL} V _D = V _{CC} / GND V _S = GND / V _{CC}	5V	±0.1		±0.5		±1		μA			
I _{DD}	V _{CC} supply current	Logic inputs = 0V or V _{CC}	5V	2		5		10		μA			
C _{IC}	Control input capacitance	A, B, C, INH		3.5 10		10		10		pF			
C _{IS}	Common terminal capacitance	Switch off		22 40		40		40		pF			
C _{OS}	Switch terminal capacitance	Switch off		6.7 15		15		15		pF			
C _{PD}	Power Dissipation Capacitance	No Load t _r = t _f = 1ns f = 1MHz	3.3V	32						pF			
			5V	37									

5.6 Timing Characteristics

At specified $V_{CC} \pm 10\%$

Typical values measured at nominal V_{CC} .

PARAMETER		TEST CONDITIONS	V _{CC}	Operating free-air temperature (T _A)									UNIT
				25°C			−40°C to 85°C			−40°C to 125°C			
				MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
SWITCHING CHARACTERISTICS ⁽¹⁾													
t _{PD}	Propagation delay	C _L = 50pF Sx to D, D to Sx	2V	7	19.5	33	6	34	6	35	ns		
			3V	3.6	12	17.5	2.5	19	2.5	20.5			
			3.3V	3.9	11	15.5	2.5	17	2.5	18.5			
			5V	2.3	8.6	13	2.1	13.8	2	15.2			
t _{TRAN}	Transition-time between inputs	R _L = 10kΩ, C _L = 50pF Ax to D, Ax to Sx	2V	25	44	94	25	103	25	103	ns		
			3V	20	30	63		67		67			
			3.3V	18	23	51		54		54			
			5V	15	18	43	15	46	15	46			
t _{ON(EN)}	Turnon-time from enable	R _L = 10kΩ, C _L = 50pF EN to D, EN to Sx	2V	15	39	64	13.8	75	12.5	75	ns		
			3V	7.9	30	45	6.2	50	5.5	55			
			3.3V	7	26.5	42.5	6.4	47.5	5.4	52.5			
			5V	4	24	40	4.3	45	3.4	50			
t _{OFF(EN)}	Turnoff time from enable	R _L = 10kΩ, C _L = 50pF EN to D, EN to Sx	2V	26	48.4	100	25	105	25	115	ns		
			3V	15	21	90	14	100	14	110			
			3.3V	12	15	85	11	95	11	105			
			5V	24.5	41.4	80	24.2	90	24	100			

(1) $t_{PLH}/t_{PHL} = t_{PD}$ propagation delay time, $t_{PZH}/t_{PZL} = t_{ON(EN)}$ enable delay time, $t_{PHZ}/t_{PLZ} = t_{OFF(EN)}$ disable delay time, t_{PLH}/t_{PHL} Channel select = t_{TRAN}

5.7 Injection Current Coupling

At specified $V_{CC} \pm 10\%$

Typical values measured at nominal V_{CC} and $T_A = 25^\circ\text{C}$.

PARAMETER		V _{CC}	TEST CONDITIONS	-40°C to 125°C			UNIT
				MIN	TYP	MAX	
INJECTION CURRENT COUPLING							
ΔV _{OUT}	Maximum shift of output voltage of enabled analog input ⁽¹⁾	3.3V	R _S ≤ 3.9kΩ	I _{INJ} ≤ 1mA	0.05	1	mV
		5V			0.1	1	
		3.3V		I _{INJ} ≤ 10mA	0.345	5	
		5V			0.067	5	
		3.3V	R _S ≤ 20kΩ	I _{INJ} ≤ 1mA	0.05	2	
		5V			0.11	2	
		3.3V		I _{INJ} ≤ 10mA	0.05	20	
		5V			0.024	20	

(1) I_{INJ} = total current injected into all disabled channels

6 Parameter Measurement Information

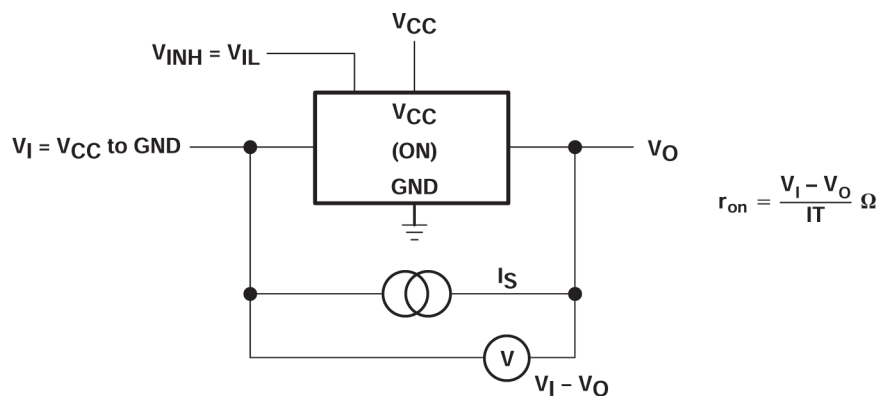


Figure 6-1. On-State Resistance Test Circuit

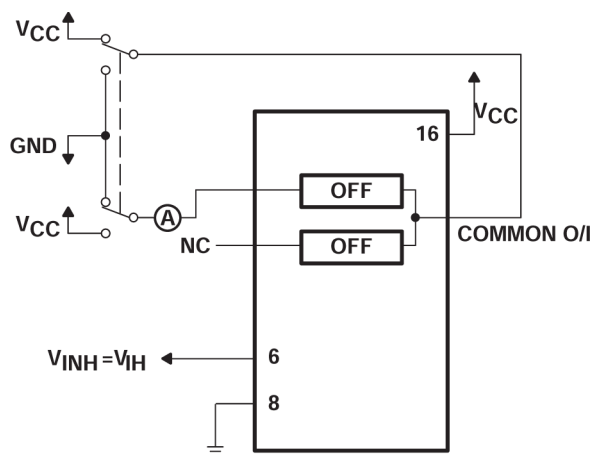


Figure 6-2. Maximum Off-Channel Leakage Current, Any One Channel, Test Setup

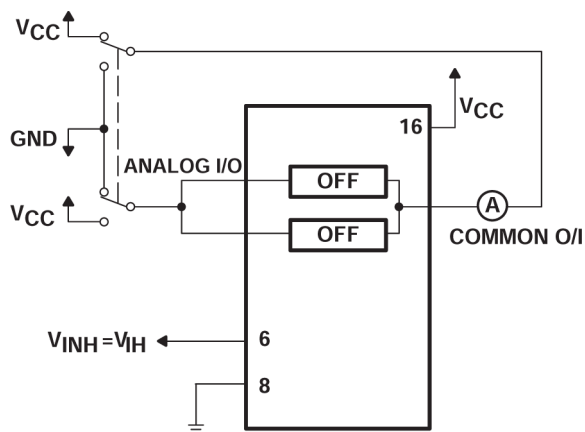


Figure 6-3. Maximum Off-Channel Leakage Current, Common Channel, Test Setup

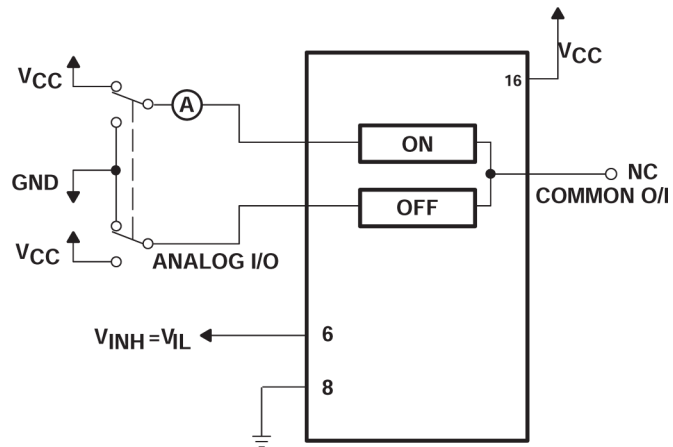


Figure 6-4. Maximum On-Channel Leakage Current, Channel to Channel, Test Setup

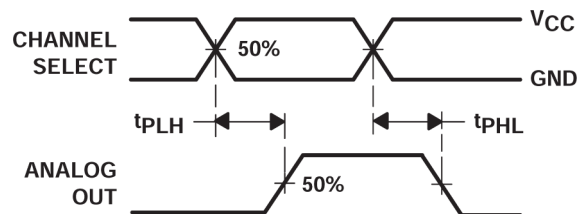


Figure 6-5. Propagation Delays, Channel Select to Analog Out

†

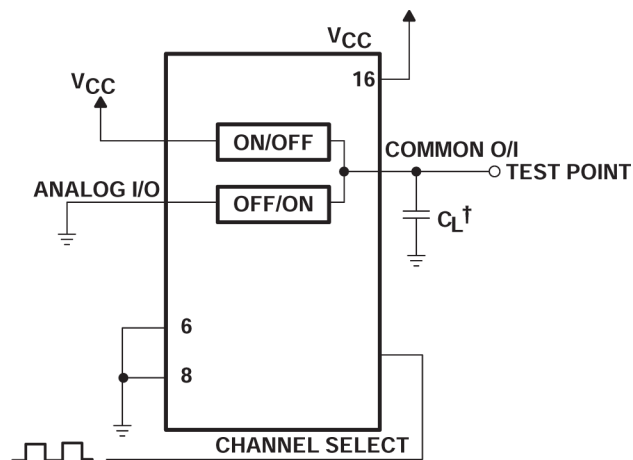


Figure 6-6. Propagation Delay, Channel Select to Analog Out, Test Setup

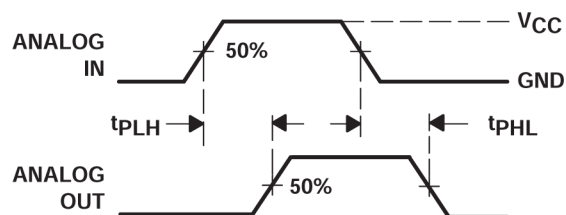
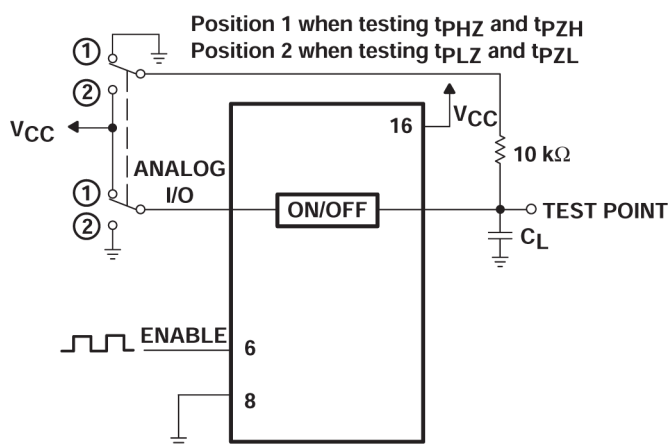
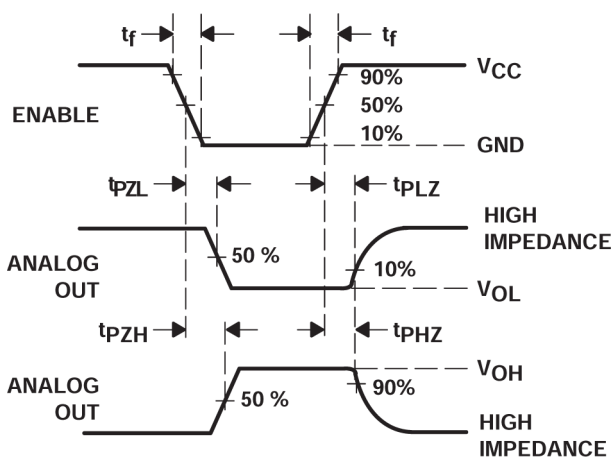
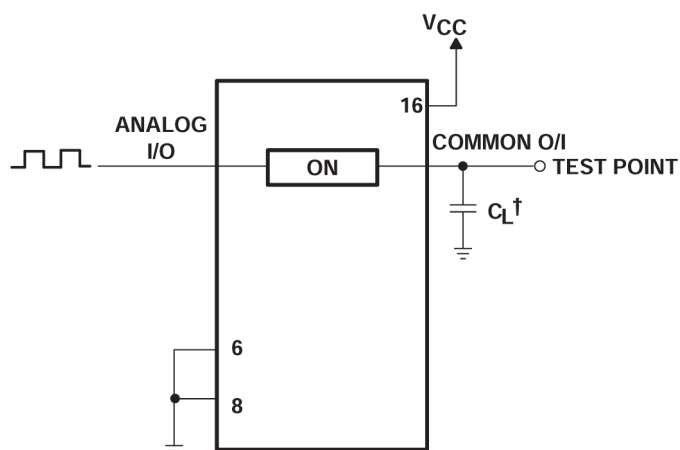


Figure 6-7. Propagation Delays, Analog in to Analog Out

[†] Includes all probe and jig capacitance




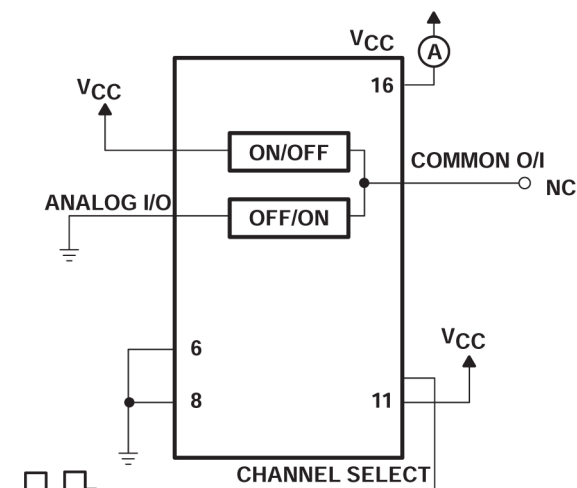


Figure 6-11. Power-Dissipation Capacitance, Test Setup

7 Detailed Description

7.1 Functional Block Diagram

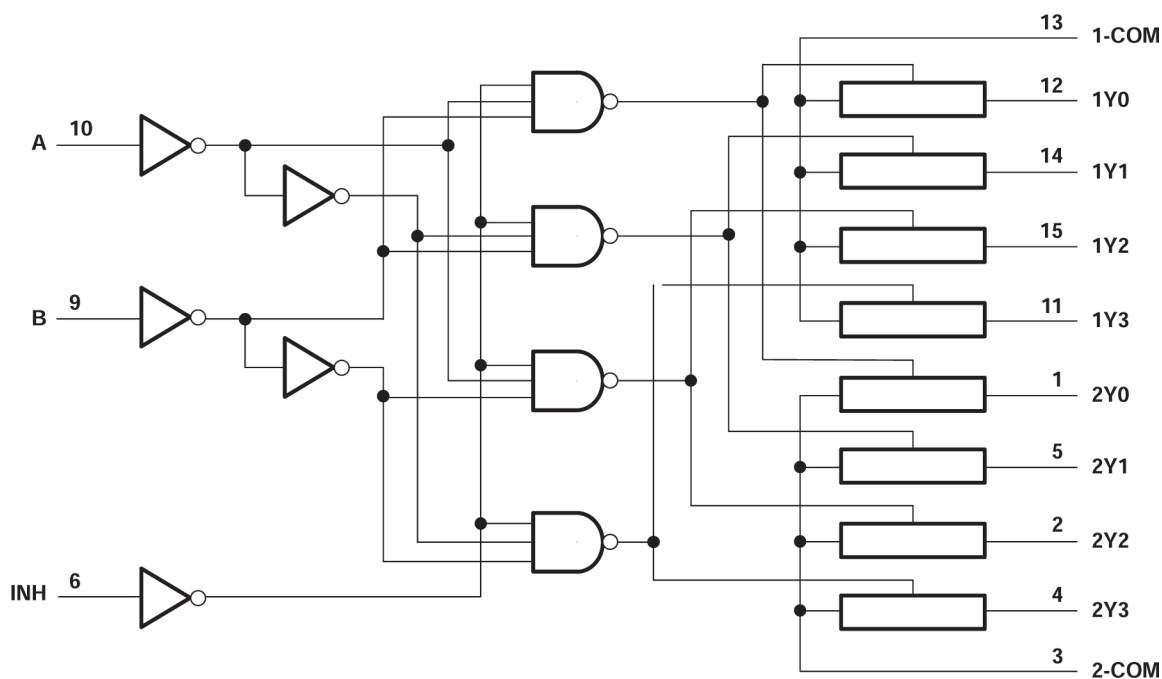

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

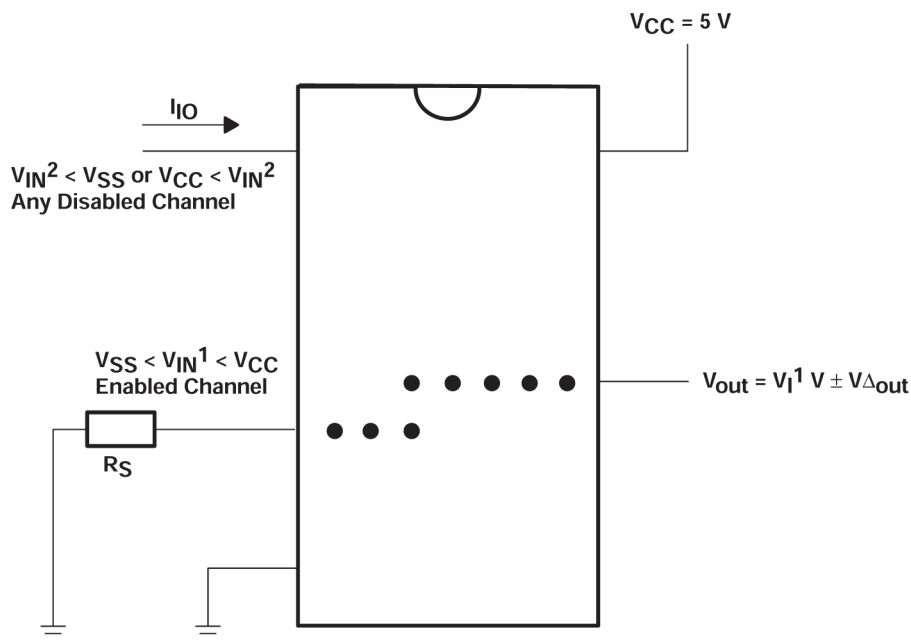


Figure 8-1. Injection-Current Coupling Specification

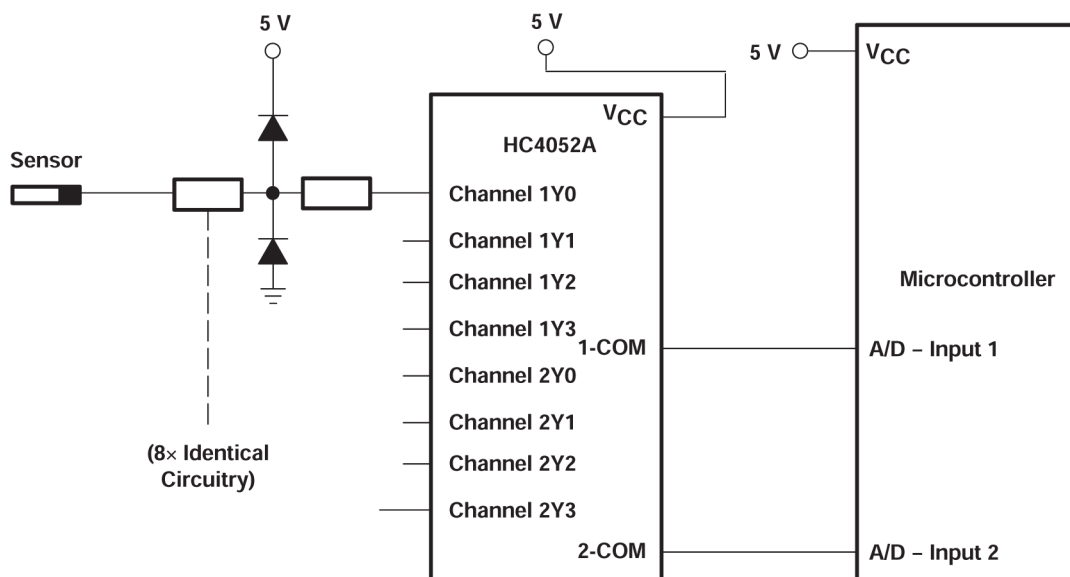


Figure 8-2. Actual Technology Requires 32 Passive Components and One Extra 6-v Regulator to Suppress Injection Current into a Standard HC4052 Multiplexer

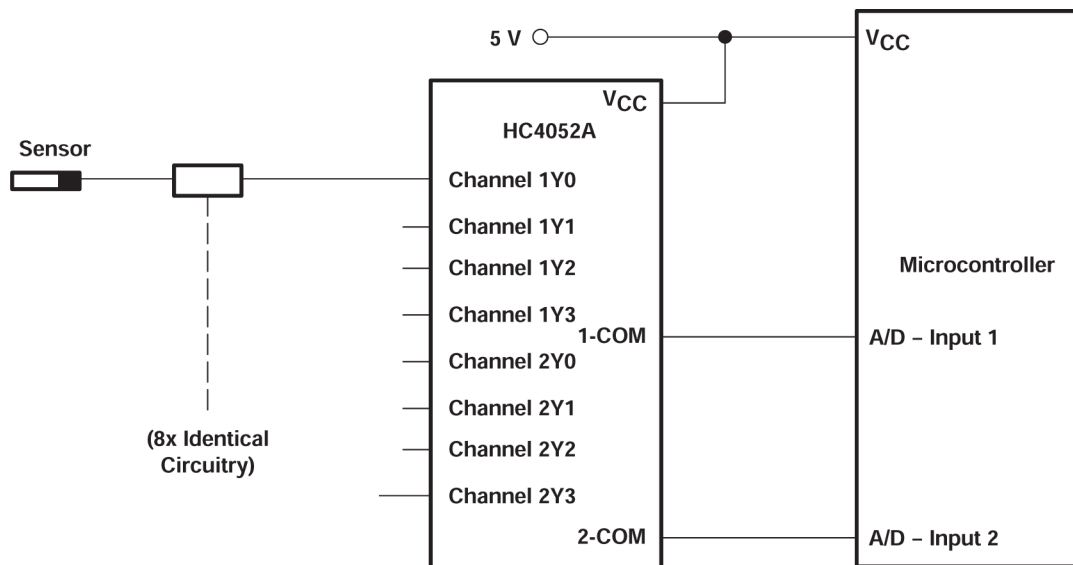


Figure 8-3. Solution by Applying the HC4852 Multiplexer

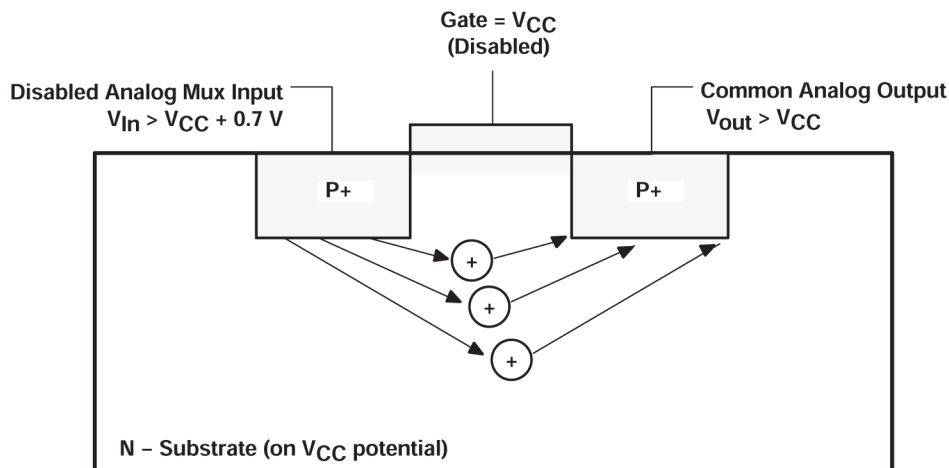


Figure 8-4. Diagram of Bipolar Coupling Mechanism (Appears If V_{in} Exceeds V_{CC} , Driving Injection Current into the Substrate)

9 Device and Documentation Support

9.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

9.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

9.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (December 2006) to Revision B (June 2024)	Page
• Changed VCC ABS Max from 7V to 6V.....	3
• Changed RθJA	3
• Recommended supply changed from 6V to 5.5V and all test conditions using 6V were removed.....	4
• Changed tpd, ttran, tON, tOFF parameters.....	6

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
SN74HC4852QDRQ1	NRND	Production	SOIC (D) 16	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HC4852Q
SN74HC4852QDRQ1.A	NRND	Production	SOIC (D) 16	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HC4852Q
SN74HC4852QPWRQ1	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HC4852Q
SN74HC4852QPWRQ1.A	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HC4852Q

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74HC4852-Q1 :

- Catalog : [SN74HC4852](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION



*All dimensions are nominal



Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74HC4852QPWRQ1	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74HC4852QPWRQ1	TSSOP	PW	16	2000	353.0	353.0	32.0

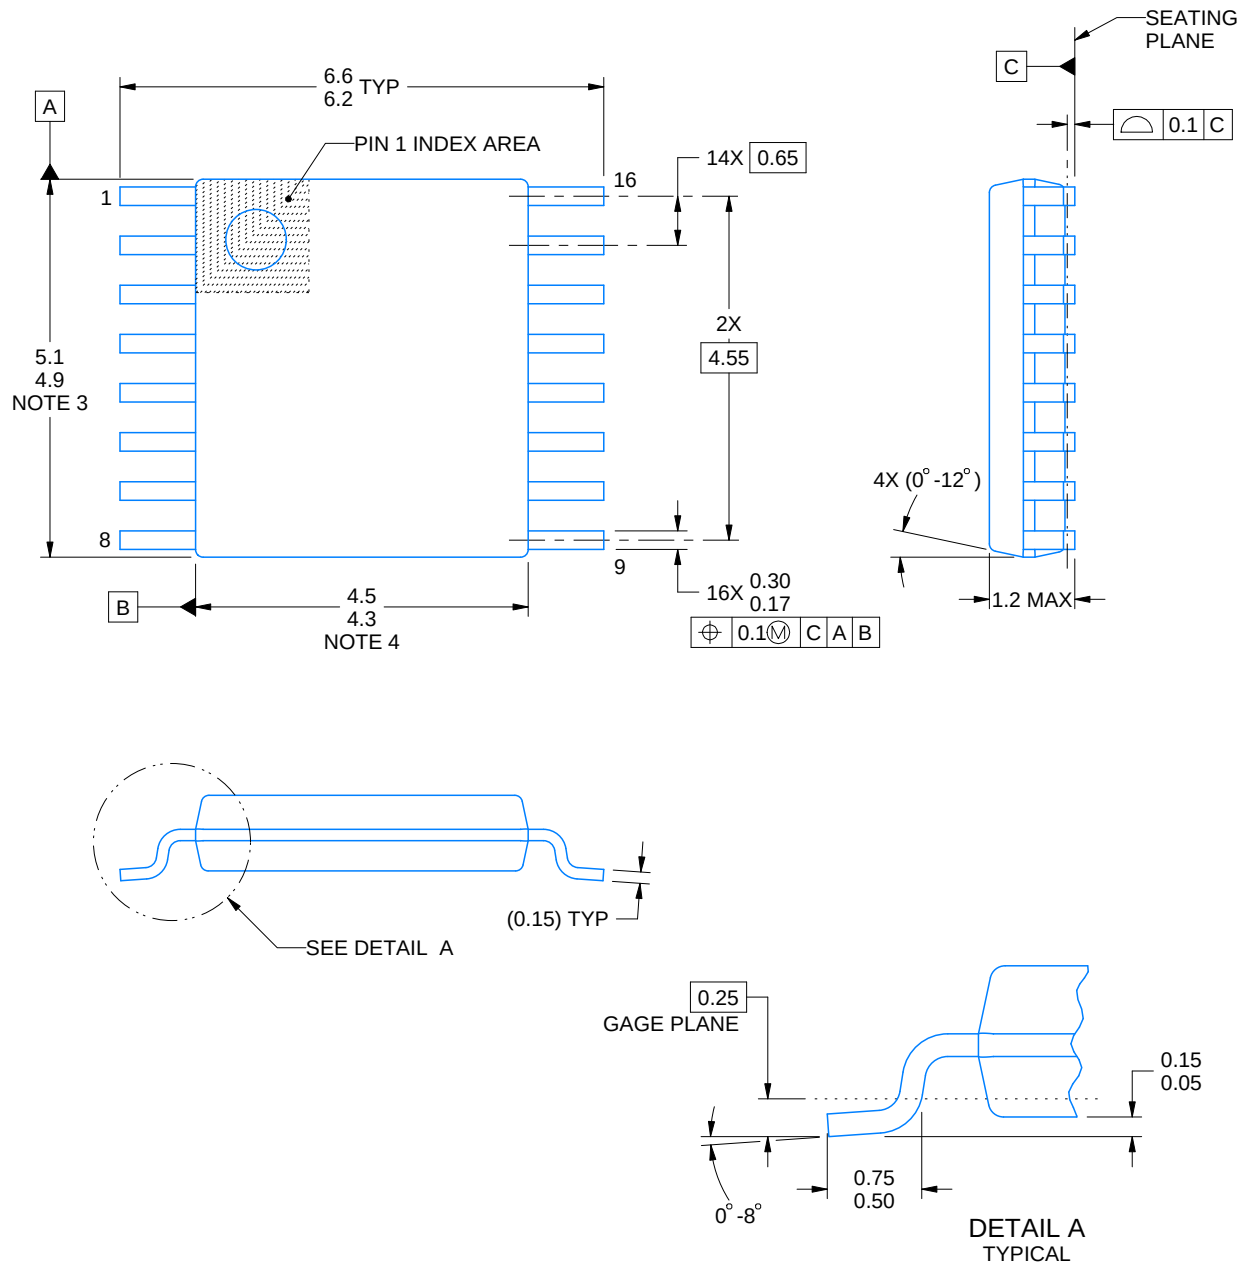

4220204/B 12/2023

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT


PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

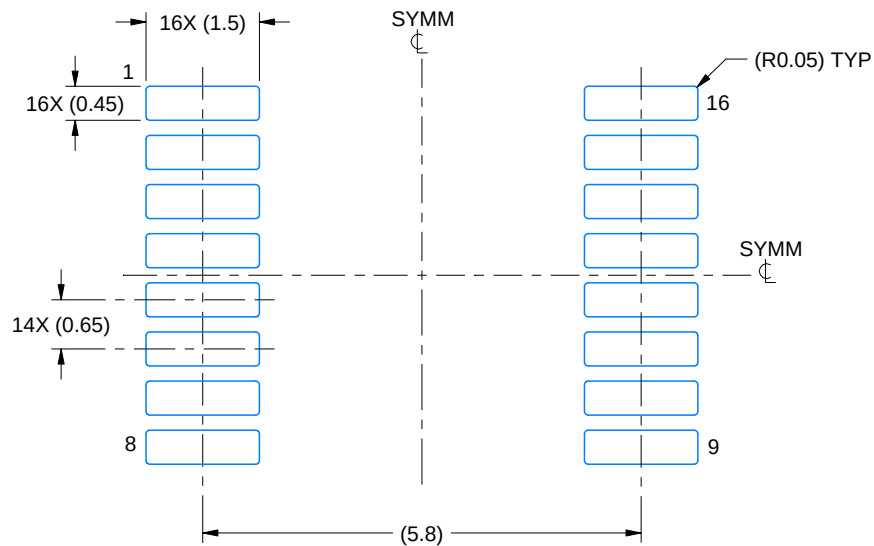

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

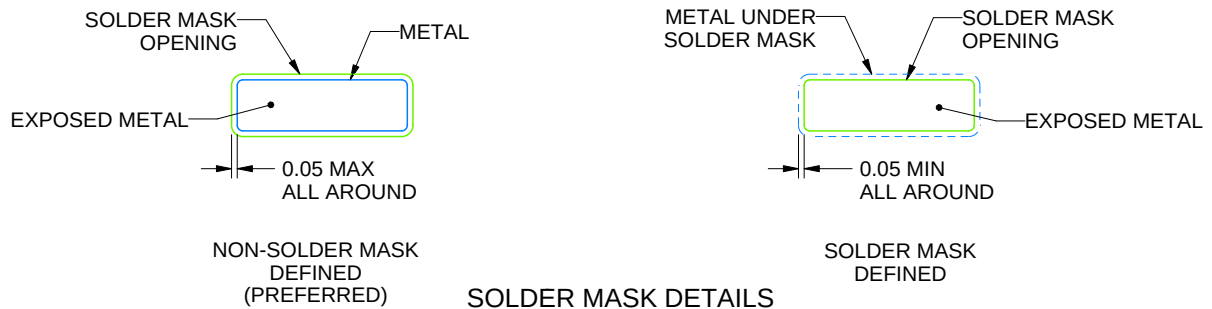

4220204/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

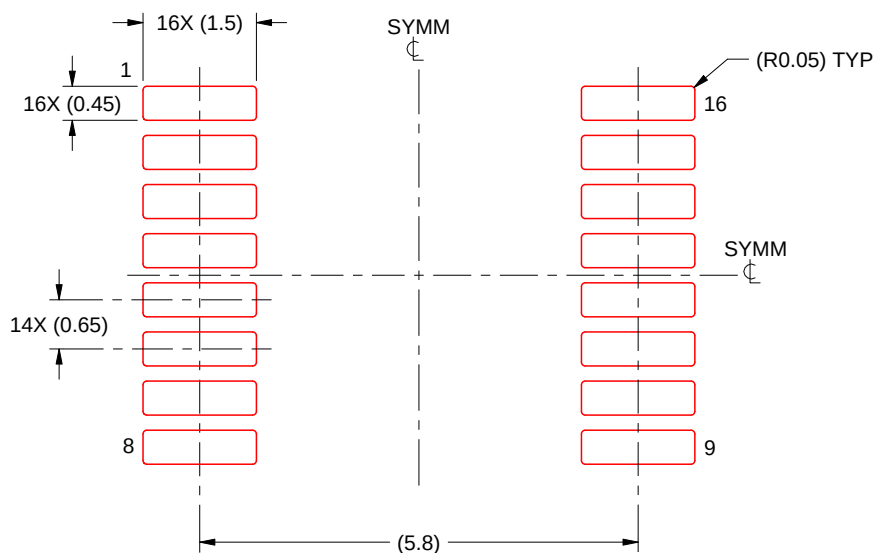

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X


4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE

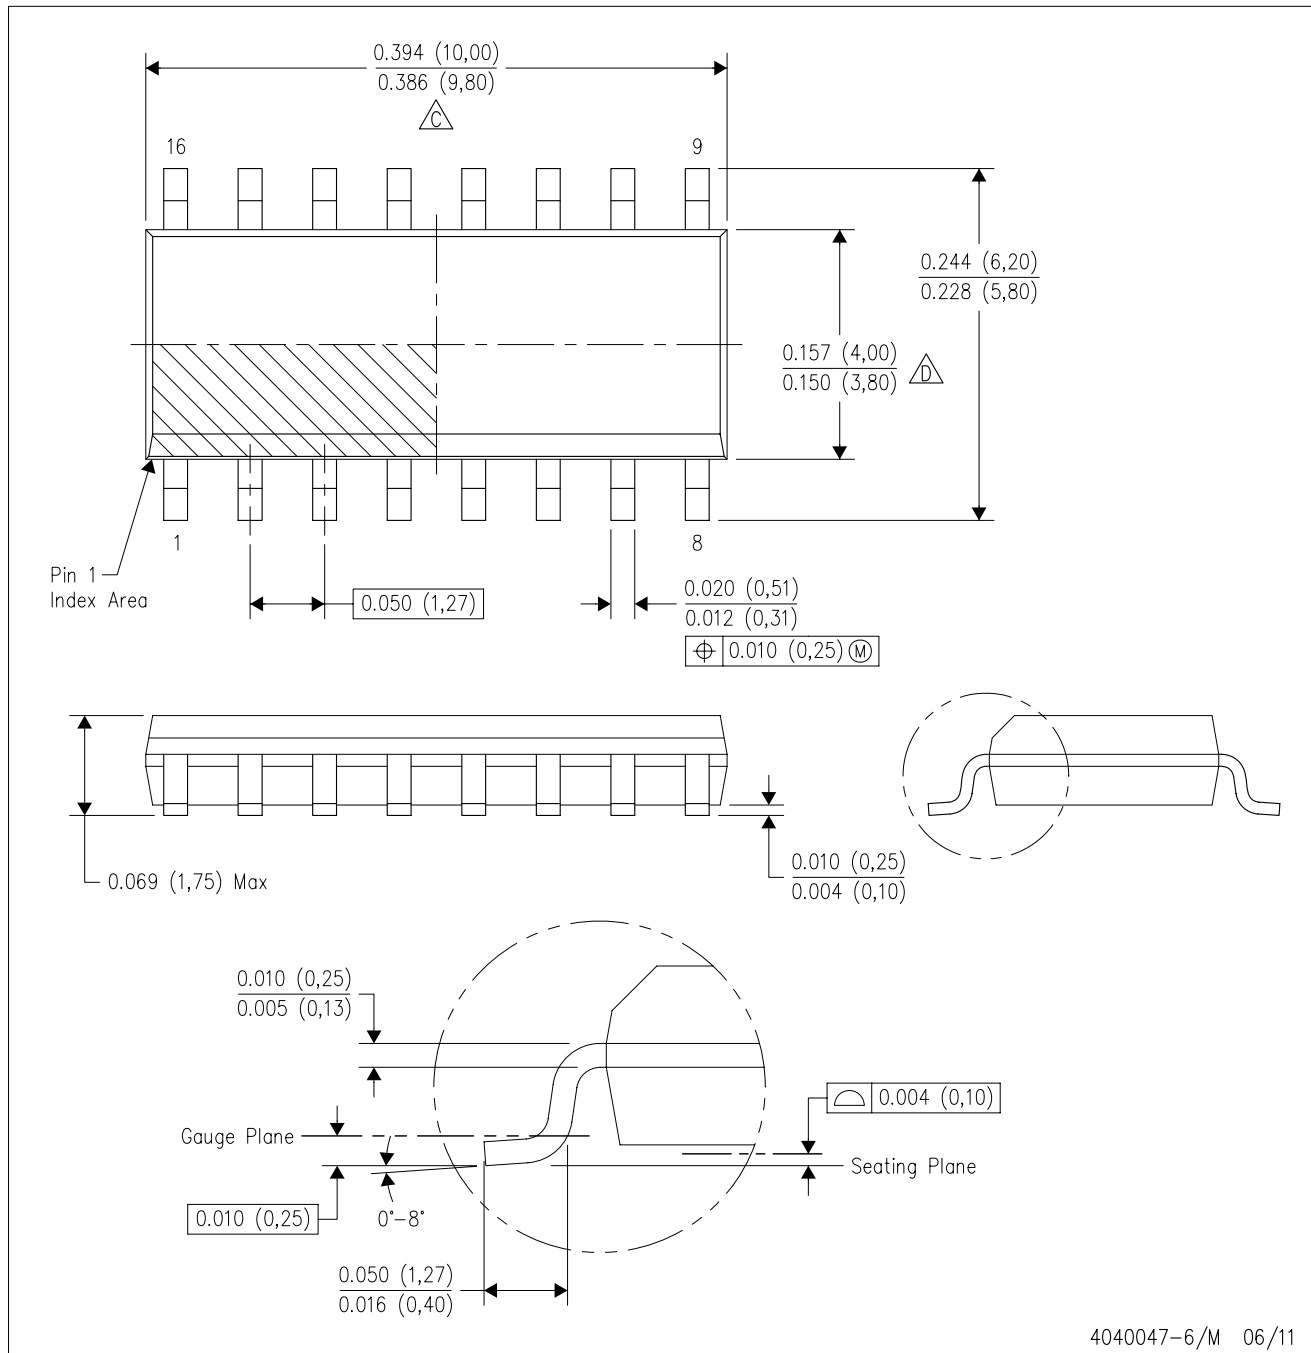

4040047-6/M 06/11

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AC.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025