







SN74LV8T594 SCLS902 - FEBRUARY 2024

# SN74LV8T594 Octal Shift Register with Output Registers

## 1 Features

- Latching logic with known power-up state provides consistent start-up behavior
- Wide operating range of 1.65V to 5.5V
- 5.5V tolerant input pins
- Single-supply voltage translator (refer to LVxT Enhanced Input Voltage):
  - Up translation:
    - 1.2V to 1.8V
    - 1.5V to 2.5V
    - 1.8V to 3.3V
    - 3.3V to 5.0V
  - Down translation:
    - 5.0V, 3.3V, 2.5V to 1.8V
    - 5.0V, 3.3V to 2.5V
    - 5.0V to 3.3V
- Up to 150Mbps with 5V or 3.3V  $V_{CC}$
- Supports standard function pinout
- Latch-up performance exceeds 250mA per JESD 17

## 2 Applications

- Digital signage
- Controlling an indicator LED
- Increase the number of outputs on a microcontroller

## 3 Description


The SN74LV8T594 device contains an 8-bit, serialin, parallel-out shift register. Each parallel output of the shift register is fed through a storage register before reaching the primary device outputs (QA through Q<sub>H</sub>). Separate clocks (SRCLK and RCLK) and direct overriding clear (SRCLR and RCLR) inputs are provided for both the shift and storage registers, allowing for loading data separately from sending it to the outputs. Additionally, the last output of the internal shift register is sent directly to the output Q<sub>H'</sub> providing a method to daisy-chain multiple shift registers.

The input is designed with a reduced threshold circuit to support up translation when the supply voltage is larger than the input voltage. Additionally, the 5V tolerant input pins enable down translation when the input voltage is larger than the supply voltage. The output level is always referenced to the supply voltage (V<sub>CC</sub>) and supports 1.8V, 2.5V, 3.3V, and 5V CMOS levels.

### **Package Information**

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>	BODY SIZE (NOM) <sup>(3)</sup>	
SN74LV8T594	PW (TSSOP, 16)	5mm × 6.4mm	5 mm × 4.4mm	
311/41/01/394	BQB (WQFN, 16)	3.5mm × 2.5mm	3.5mm × 2.5mm	

- (1) For more information, see Section 12.
- The package size (length × width) is a nominal value and (2)includes pins, where applicable.
- The body size (length × width) is a nominal value and does not include pins.

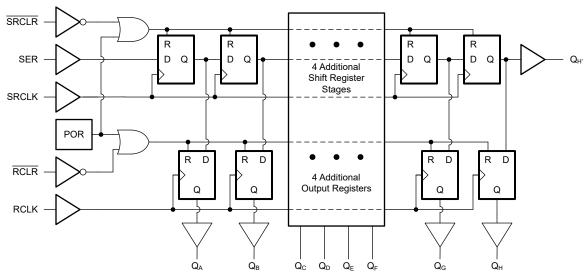

Simplified Logic Diagram (Positive Logic)



# **Table of Contents**

1 Features	1	8.1 Balanced CMOS Push-Pull Outputs	11
2 Applications		8.2 Latching Logic with Known Power-Up State	11
3 Description	1	8.3 LVxT Enhanced Input Voltage	12
4 Pin Configuration and Functions	3	8.4 Clamp Diode Structure	12
5 Specifications	4	9 Application and Implementation	14
5.1 Absolute Maximum Ratings	4	9.1 Application Information	. 14
5.2 ESD Ratings	. 4	9.2 Typical Application	
5.3 Thermal Information		9.3 Power Supply Recommendations	
5.4 Recommended Operating Conditions	4	9.4 Layout	
5.5 Electrical Characteristics	5	10 Device and Documentation Support	18
5.6 Timing Characteristics	6	10.1 Documentation Support	18
5.7 Switching Characteristics	7	10.2 Receiving Notification of Documentation Updates	18
5.8 Noise Characteristics	8	10.3 Support Resources	18
6 Parameter Measurement Information	9	10.4 Trademarks	
7 Detailed Description	10	10.5 Electrostatic Discharge Caution	18
7.1 Overview	10	10.6 Glossary	18
7.2 Functional Block Diagram	10	11 Revision History	. 18
7.3 Device Functional Modes	10	12 Mechanical, Packaging, and Orderable	
8 Feature Description	11	Information	18
·			



# **4 Pin Configuration and Functions**




Figure 4-1. PW Package, 16-Pin TSSOP (Top View)




Figure 4-2. BQB Package, 16-Pin WQFN (Transparent Top View)

Table 4-1. Pin Functions

	PIN	TVDE(1)	DESCRIPTION
NAME	NO.	TYPE <sup>(1)</sup>	DESCRIPTION
Q <sub>B</sub>	1	0	Q <sub>B</sub> output
Q <sub>C</sub>	2	0	Q <sub>C</sub> output
$Q_D$	3	0	Q <sub>D</sub> output
Q <sub>E</sub>	4	0	Q <sub>E</sub> output
Q <sub>F</sub>	5	0	Q <sub>F</sub> output
$Q_{G}$	6	0	Q <sub>G</sub> output
Q <sub>H</sub>	7	0	Q <sub>H</sub> output
GND	8	G	Ground
Q <sub>H</sub> '	9	0	Serial output, can be used for cascading
SRCLR	10	I	Shift register clear, active low
SRCLK	11	I	Shift register clock, rising edge triggered
RCLK	12	I	Output register clock, rising edge triggered
RCLR	13	I	Storage register clear, active low
SER	14	Į.	Serial input
$Q_A$	15	0	Q <sub>A</sub> output
V <sub>CC</sub>	16	Р	Positive supply

<sup>(1)</sup> I = Input, O = Output, I/O = Input or Output, G = Ground, P = Power



## **5 Specifications**

## 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage range		-0.5	7	V	
VI	Input voltage range <sup>(2)</sup>		-0.5	7	V	
Vo	Voltage range applied to any outp	ut in the high-impedance or power-off state <sup>(2)</sup>	-0.5	7	V	
Vo	Output voltage range <sup>(2)</sup>	output voltage range <sup>(2)</sup>				
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < -0.5V		-20	mA	
I <sub>OK</sub>	Output clamp current	$V_{O}$ < -0.5V or $V_{O}$ > $V_{CC+}$ 0.5V		±20	mA	
Io	Continuous output current	V <sub>O</sub> = 0 to V <sub>CC</sub>		±25	mA	
	Continuous output current through	n V <sub>CC</sub> or GND		±75	mA	
TJ	Junction temperature	Junction temperature				
T <sub>stg</sub>	Storage temperature		-65	150	°C	

<sup>(1)</sup> Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If briefly operating outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.

(2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

### 5.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	\/
V <sub>(ESD)</sub>	discharge	Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	±1000	٧

<sup>(1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

### 5.3 Thermal Information

	THERMAL METRIC <sup>(1)</sup>	BQB (WQFN)	PW (TSSOP)	UNIT
	THERMAL METRICA	16 PINS	16 PINS	UNII
$R_{\theta JA}$	Junction-to-ambient thermal resistance	91.8	135.9	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	87.7	70.3	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	61.6	81.3	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	11.9	22.5	°C/W
$Y_{JB}$	Junction-to-board characterization parameter	61.4	80.8	°C/W
R <sub>0JC(bot)</sub>	Junction-to-case (bottom) thermal resistance	39.4	N/A	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

### 5.4 Recommended Operating Conditions

Submit Document Feedback

over operating free-air temperature range (unless otherwise noted)

Specification	Description	Condition	MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage		1.65	5.5	V
VI	Input voltage	0	5.5	V	
Vo	Output voltage		0	V <sub>CC</sub>	V

Product Folder Links: SN74LV8T594

<sup>(2)</sup> JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

# **5.4 Recommended Operating Conditions (continued)**

over operating free-air temperature range (unless otherwise noted)

Specification	Description	Condition	MIN	MAX	UNIT		
		V <sub>CC</sub> = 1.65V to 2V	1.1				
.,	Himb lavel import valtage	V <sub>CC</sub> = 2.25V to 2.75V	1.28		\ /		
VIН	High-level input voltage	V <sub>CC</sub> = 3V to 3.6V	1.45		V		
/ <sub>IL</sub>		V <sub>CC</sub> = 4.5V to 5.5V	2				
		V <sub>CC</sub> = 1.65V to 2V		0.51			
V <sub>IL</sub>	Low-Level input voltage	V <sub>CC</sub> = 2.25V to 2.75V		0.65			
		V <sub>CC</sub> = 3V to 3.6V		0.75	V		
		Variable   Variable	0.8				
12		V <sub>CC</sub> = 1.65V to 2V		±8			
0	Output current	V <sub>CC</sub> = 2.25V to 2.75V		±15	mA		
		V <sub>CC</sub> = 3V to 5.5V		±25	V		
Δt/Δν	Input transition rise or fall rate	V <sub>CC</sub> = 1.65V to 5.5V		20	ns/V		
Δt/ΔV <sub>CC</sub> <sup>(1)</sup>	Safe supply ramp rate for POR	V <sub>CC</sub> = 1.65V to 5.5V	6	200000	µs/V		
Γ <sub>A</sub>	Operating free-air temperature	•	-40	125	°C		

V<sub>CC</sub> must start ramping below V<sub>POR(min)</sub> and rise above V<sub>POR(max)</sub> to allow proper reset functionality. Refer to Electrical Characteristics for details.

## 5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

DARAMETER	TEST CONDITIONS	V	TA	= 25°C		-40°C	to 125	°C	LINUT
PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
	I <sub>OH</sub> = -50μA	1.65V to 5.5V	V <sub>CC</sub> – 0.1			V <sub>CC</sub> – 0.1			
	I <sub>OH</sub> = -2mA	1.65V to 2V	1.28	1.7 (1)		1.21			
V <sub>OH</sub>	I <sub>OH</sub> = -3mA	2.25V to 2.75V	2	2.4 <sup>(1)</sup>		1.93			V
VОН	I <sub>OH</sub> = -5.5mA	3V to 3.6V	2.6	3.08		2.49			
	I <sub>OH</sub> = -8mA	4.5V to 5.5V	4.1	4.65		3.95		0.1 0.25 0.2 0.25 0.35 ±1	
V <sub>OL</sub>	I <sub>OL</sub> = 50μA	1.65V to 5.5V			0.1			0.1	
	I <sub>OL</sub> = 2mA	1.65V to 2V		0.1 <sup>(1)</sup>	0.2			0.25	
$V_{OL}$	I <sub>OL</sub> = 3mA	2.25V to 2.75V		0.1(1)	0.15			0.2	V
V <sub>OL</sub>	I <sub>OL</sub> = 5.5mA	3V to 3.6V		0.2(1)	0.2			0.25	
	I <sub>OL</sub> = 8mA	4.5V to 5.5V		0.3(1)	0.3			0.35	
I <sub>1</sub>	V <sub>I</sub> = 0V or V <sub>CC</sub>	0V to 5.5V			±0.1			±1	μΑ
I <sub>CC</sub>	V <sub>I</sub> = 0V or V <sub>CC</sub> , I <sub>O</sub> = 0; open on loading	1.65V to 5.5V			2			20	μΑ
I	One input at 0.3V or 3.4V, other inputs at 0 or $V_{CC}$ , $I_{O} = 0$	5.5V			1.35			1.5	mA
ΔICC	One input at 0.3V or 1.1V, other inputs at 0 or $V_{CC}$ , $I_{O} = 0$	1.8V			10			20	μA
I <sub>OZ</sub>	$V_O = V_{CC}$ or GND and $V_{CC} = 5.5V$	5.5V			±0.25			±2.5	μA
C <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	5V		4	10			10	pF
Co	V <sub>O</sub> = V <sub>CC</sub> or GND	5V		3					pF
C <sub>PD</sub>	No load, F = 1MHz	5V		129					pF



## **5.5 Electrical Characteristics (continued)**

over operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	T <sub>A</sub> = 25°C			-40°C to 125°C			UNIT
		TEST CONDITIONS	V CC	MIN	TYP	MAX	MIN	TYP	MAX	CIVIT
	V <sub>POR</sub>	V <sub>CC</sub> ramp rate of 6μs/V to 100ms/V	1.65V to 5.5V	0.3		1.5	0.3		1.5	V

<sup>(1)</sup> Typical value at nearest nominal voltage (1.8V, 2.5V, 3.3V, and 5V)

## **5.6 Timing Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	DESCRIPTION	CONDITION	V <sub>CC</sub>	T <sub>A</sub> = 25°C	-40°( 85°		-40°C to 125°C		UNIT
				MIN MAX	MIN	MAX	MIN	MAX	
t <sub>H</sub>	Hold time	SER after SRCLK↑	1.8V	0	0		0		ns
		SER before SRCLK↑	1.8V	7.9	9.8		9.8		ns
4	Setup time	SRCLK↑ before RCLK↑	1.8V	8.1	10.1		10.1		ns
t <sub>SU</sub>		SRCLR high (inactive) before SRCLK↑	1.8V	2.2	3		3		ns
		SRCLR low before RCLK↑	1.8V	8.9	11.2		11.2		ns
•	Pulse duration	RCLK or SRCLK high or low	1.8V	5.9	7		7		ns
$t_W$	Puise duration	RCLR or SRCLR low	1.8V	6.5	8.3		8.3		ns
t <sub>H</sub>	Hold time	SER after SRCLK↑	2.5V	0	0		0		ns
		SER before SRCLK↑	2.5V	4.6	5.9		5.9		ns
•	Setup time	SRCLK↑ before RCLK↑	2.5V	3.9	5.3		5.3		ns
t <sub>SU</sub>	Setup time	SRCLR high (inactive) before SRCLK↑	2.5V	1.1	1.7		1.7		ns
		SRCLR low before RCLK↑	CLK↑     2.5V     1.1     1.7     1.7     n       2.5V     5.1     6.6     6.6     n       2.5V     4.3     4.3     4.3     n       2.5V     4.3     5.2     5.2     n       3.3V     0     0     0     n	ns					
t <sub>W</sub>	Pulse duration	RCLK or SRCLK high or low	2.5V	4.3	4.3		4.3		ns
	i dise duration	RCLR or SRCLR low	2.5V	4.3	5.2		5.2		ns
t <sub>H</sub>	Hold time	SER after SRCLK↑	3.3V	0	0		0		ns
		SER before SRCLK↑	3.3V	3.2	4		4		ns
4	Setup time	SRCLK↑ before RCLK↑	3.3V	2.5	3.2		3.2		ns
t <sub>SU</sub>	Setup time	SRCLR high (inactive) before SRCLK↑	3.3V	0.7	1		1		ns
		SRCLR low before RCLK↑	3.3V	3.6	4.5		4.5		ns
•	Pulse duration	RCLK or SRCLK high or low	3.3V	4.3	4.3		4.3		ns
t <sub>W</sub>	Puise duration	RCLR or SRCLR low	3.3V	4.3	4.3		4.3		ns
t <sub>H</sub>	Hold time	SER after SRCLK↑	5V	0	0		0		ns
		SER before SRCLK↑	5V	1.3	1.8		1.8		ns
t	Sotup time	SRCLK↑ before RCLK↑	5V	1.6	2.1		2.1		ns
t <sub>SU</sub>	Setup time	SRCLR high (inactive) before SRCLK↑	5V	0.5	0.7		0.7		ns
		SRCLR low before RCLK↑	5V	1.6	2.1		2.1		ns
4	Dula a duration	RCLK or SRCLK high or low	5V	4.3	4.3		4.3		ns
$t_W$	Pulse duration	RCLR or SRCLR low	5V	4.3	4.3		4.3		ns

Product Folder Links: SN74LV8T594



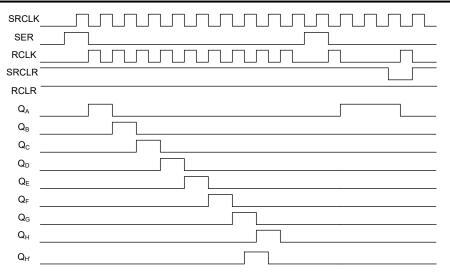


Figure 5-1. Timing Diagram

# **5.7 Switching Characteristics**

over operating free-air temperature range(unless otherwise noted). See #i#Parameter Measurement Information

PARAMETER	FROM	то	V	T,	4 = 25°C		-40°C to 85	5°C	-40°C to 12	5°C	UNIT	
PARAMETER	(INPUT)	(OUTPUT)	V <sub>CC</sub>	MIN	TYP	MAX	MIN TYP	MAX	MIN TYP	MAX	UNII	
C <sub>L</sub> = 15pF								-				
			1.8V	46.3	60		39.4		39.4		MHz	
_	SRCLK or		2.5V	66.2	85.8		56.4		56.4		MHz	
F <sub>MAX</sub>	RCLK		3.3V	94.5	122.5		80.5		80.5		MHz	
			5V	135	175		115		115		MHz	
			1.8V		9.9	20.4	1	23.5	1	23.5	ns	
<b>T</b>	SRCLK		2.5V		7.6	12.1	1	14.6	1	14.6	ns	
T <sub>PLH</sub>		Q <sub>H'</sub>	3.3V		5.9	9.3	1	11	1	11	ns	
			5V		4.5	8	1	9.1	1	9.1	ns	
			1.8V		9.9	23.9	1	26.9	1	26.9	ns	
т	CDCLK		2.5V		7.6	13.1	1	15.8	1	15.8	ns	
T <sub>PHL</sub>	SRCLK	Q <sub>H'</sub>	3.3V		5.9	9.1	1	11.1	1	11.1	ns	
			5V		4.5	6.9	1	8.3	1		ns	
				1.8V		9.9	24.5	1	27.8	1	27.8	ns
<b>T</b>	SRCLR		2.5V		7.6	14.3	1	17.2	1	17.2	ns	
T <sub>PHL</sub>	SKCLK	Q <sub>H'</sub>	3.3V		5.9	10.3	1	12.4	1	12.4	ns	
			5V		4.5	7	1	8.5	1	8.5	ns	
			1.8V		9.4	27	1	28.5	1	29.4	ns	
<b>T</b>	DCLK	0.0	2.5V		7.3	22.2	1	23.2	1	23.9	ns	
T <sub>PLH</sub>	RCLK	Q <sub>A</sub> -Q <sub>H</sub>	3.3V		5.6	20.9	1	21.7	1	22.2	ns	
			5V		4.3	21.3	1	21.8	1	22.2	ns	
			1.8V		9.4	23.9	1	26.8	1	26.8	ns	
т	BCLK		2.5V		7.3	12.9	1	15.7	1	15.7	ns	
T <sub>PHL</sub>	RCLK	Q <sub>A</sub> -Q <sub>H</sub>	3.3V		5.6	9	1	11	1	11	ns	
			5V		4.3	6.8	1	8.1	1	8.1	ns	



## **5.7 Switching Characteristics (continued)**

over operating free-air temperature range(unless otherwise noted). See #i#Parameter Measurement Information

DADAMETED	FROM	то	\ ,,	T <sub>A</sub> = 25°C			-40°C to 8	5°C	-40°C	UNIT	
PARAMETER	(INPUT)	(OUTPUT)	V <sub>cc</sub>	MIN	TYP	MAX	MIN TYP	MAX	MIN	TYP MAX	UNII
			1.8V		9.9	25	1	29.3	1	29.3	ns
$T_PHL$	DOLD.		2.5V		7.6	14.2	1	17.7	1	17.7	ns
	RCLR	Q <sub>A</sub> -Q <sub>H</sub>	3.3V		5.9	10.2	1	12.6	1	12.6	ns
			5V		4.5	7	1	8.6	1	8.6	ns
C <sub>L</sub> = 50pF				I		1					
			1.8V	38.11	48		32.6		32.6		MHz
Г	SRCLK or		2.5V	58.8	68.6		46.6		46.6		MHz
F <sub>MAX</sub>	RCLK		3.3V	84	98		66.5		66.5		MHz
			5V	120	140		95		95		MHz
			1.8V		14.1	25.2	1	28.7	1	28.7	ns
<b>-</b>	ODOLK		2.5V		10.8	15.1	1	17.9	1	17.9	ns
T <sub>PLH</sub>	SRCLK	Q <sub>H</sub> '	3.3V		8.3	11.4	1	13.5	1	13.5	ns
			5V		6.4	9.5	1	10.9	1	10.9	ns
	SRCLK	Q <sub>H</sub> '	1.8V		14.1	28.8	1	32.1	1	32.1	ns
<b>-</b>			2.5V		10.8	16.8	1	19.7	1	19.7	ns
T <sub>PHL</sub>			3.3V		8.3	12.2	1	14.4	1	14.4	ns
			5V		6.4	9.3	1	10.9	1	10.9	ns
	SRCLR		1.8V		14.1	29.5	1	33	1	33	ns
т			2.5V		10.8	18	1	21.1	1	21.1	ns
T <sub>PHL</sub>		Q <sub>H'</sub>	3.3V		8.3	13.4	1	15.7	1	15.7	ns
			5V		6.4	9.4	1	11.1	1	11.1	ns
			1.8V		12.3	52.3	1	53.6	1	54.2	ns
<b>-</b>	DOLK		2.5V		9.5	47.6	1	48.5	1	49.1	ns
T <sub>PLH</sub>	RCLK	Q <sub>A</sub> -Q <sub>H</sub>	3.3V		7.3	46.3	1	47	1	47.3	ns
			5V		5.6	46.3	1	46.5	1	46.9	ns
			1.8V		12.3	28.9	1	32.1	1	32.1	ns
<b>-</b>	DOL I		2.5V		9.5	16.8	1	19.7	1	19.7	ns
T <sub>PHL</sub>	RCLK	Q <sub>A</sub> -Q <sub>H</sub>	3.3V		7.3	12.2	1	14.3	1	14.3	ns
			5V		5.6	9.3	1	10.9	1	10.9	ns
			1.8V		14.5	30	1	34.3	1	34.3	ns
<b>-</b>	DOLE.		2.5V		11.2	17.9	1	21.5	1	21.5	ns
T <sub>PHL</sub>	RCLR	Q <sub>A</sub> -Q <sub>H</sub>	3.3V		8.6	13.2	1	15.8	1	15.8	ns
			5V		6.6	9.2	1	11.1	1	11.1	ns

## 5.8 Noise Characteristics

VCC = 5V, CL = 50pF, TA = 25°C

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
V <sub>OL(P)</sub>	Quiet output, maximum dynamic V <sub>OL</sub>		0.5	0.8	V
V <sub>OL(V)</sub>	Quiet output, minimum dynamic V <sub>OL</sub>		-0.1	-0.8	V
V <sub>OH(V)</sub>	Quiet output, minimum dynamic V <sub>OH</sub>		2.8		V
V <sub>IH(D)</sub>	High-level dynamic input voltage	2.3			V
V <sub>IL(D)</sub>	Low-level dynamic input voltage			1	V

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated




### **6 Parameter Measurement Information**

Phase relationships between waveforms were chosen arbitrarily for the examples listed in the following table. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1MHz,  $Z_O = 50\Omega$ ,  $t_t < 2.5$  ns.

For clock inputs,  $f_{\text{max}}$  is measured when the input duty cycle is 50%.

The outputs are measured individually with one input transition per measurement.



(1) C<sub>L</sub> includes probe and test-fixture capacitance.

Figure 6-1. Load Circuit for Push-Pull Outputs




Figure 6-3. Voltage Waveforms, Setup and Hold Times




Figure 6-5. Voltage Waveforms, Input and Output Transition Times





Figure 6-2. Voltage Waveforms, Pulse Duration



(1) The greater between  $t_{\text{PLH}}$  and  $t_{\text{PHL}}$  is the same as  $t_{\text{pd}}$ .

Figure 6-4. Voltage Waveforms Propagation Delays



Noise values measured with all other outputs simultaneously switching.

Figure 6-6. Voltage Waveforms, Noise

## 7 Detailed Description

## 7.1 Overview


The SN74LV8T594 is an 8-bit shift register that feeds an 8-bit D-type storage register. Both the shift register clock (SRCLK) and storage register clock (RCLK) are positive-edge triggered. If both clocks are connected together, then the shift register always is one clock pulse ahead of the storage register.

The internal shift register has an active-low asynchronous clear input (SRCLR) to force all registers into the low state.

The output register has an active-low asynchronous clear input (RCLR) to force all registers into the low state.

The  $Q_{H'}$  output provides a direct connection to the last stage of the internal shift register. This signal can be fed into another shift register device as the serial data input to create a cascade of shift registers.

## 7.2 Functional Block Diagram

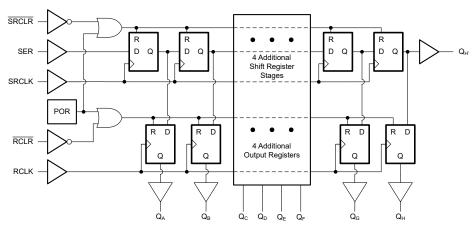

### 7.3 Device Functional Modes

Function Table lists the functional modes of the SN74LV8T594.

**Table 7-1. Function Table** 

		INPUTS(	l)		FUNCTION
SER	SRCLK	SRCLR	RCLK	RCLR	FUNCTION
Х	Х	Х	Х	L	Output register is cleared; all values set to low state.
Х	Х	L	Х	Х	Shift register is cleared; all values set to low state.
L	1	Н	х	х	First bit of the internal shift register set to low state.  Each subsequent register stores the data from the previous register.
Н	1	Н	х	х	First bit of the internal shift register set to high state.  Each subsequent register stores the data from the previous register.
Х	L, H, ↓	н	1	х	Values from internal shift register are loaded into the output register Internal shift register values are not modified.
L	↑ <sup>(2)</sup>	н	↑ <sup>(2)</sup>	Н	Values from the internal shift register are loaded into the output register, then the first bit of the internal shift register is set to the low state.  Each subsequent shift register stores the data from the previous register.

Submit Document Feedback



		INPUTS <sup>(1</sup>	1)		FUNCTION						
SER	SRCLK	SRCLR	RCLK	RCLR	FUNCTION						
Н	<b>†</b> (2)	н	↑ <sup>(2)</sup>	Н	Values from the internal shift register are loaded into the output register, then the first bit of the internal shift register is set to the high state.  Each subsequent shift register stores the data from the previous register.						

**Table 7-1. Function Table (continued)** 

- (1) H = High Voltage Level, L = Low Voltage Level, X = Do not Care
- (2) For this mode of operation, SRCLK and RCLK are directly connected together.

Table 7-2. Latched Logic Power-Up State

Latch or Register	Power-Up State <sup>(1)</sup>
Internal shift registers (A — H)	L
Output registers (Q <sub>A</sub> — Q <sub>H</sub> )	L

(1) For requirements to provide known power-up state, see Section 8.2

## 8 Feature Description

## 8.1 Balanced CMOS Push-Pull Outputs

This device includes balanced CMOS push-pull outputs. The term *balanced* indicates that the device can sink and source similar currents. The drive capability of this device may create fast edges into light loads, so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. It is important to limit the output power of the device to avoid damage due to overcurrent. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

Unused push-pull CMOS outputs should be left disconnected.

### 8.2 Latching Logic with Known Power-Up State

This device includes latching logic circuitry. Latching circuits commonly include D-type latches and D-type flip-flops, but include all logic circuits that act as volatile memory. In typical logic devices, the output state of each latching circuit is unknown after power is initially applied; however, this device includes an added Power On Reset (POR) circuit which sets the states of all included latching circuits during the power-up ramp prior to the device starting normal functionality.




Figure 8-1. Supply (V<sub>CC</sub>) Ramp Characteristics for Known Power-Up State

Figure 8-1 shows a correct supply voltage turn-on ramp and defines values used in the *Recommended Operating Conditions* and *Electrical Characteristics* tables.

Prior to starting the power-on ramp, the supply must be completely off  $(V_{CC} \le V_{POR(min)})$ .

The supply voltage must ramp at a rate within the range provided in the *Recommended Operating Conditions* table.

The output state of each latching logic circuit only remains stable as long as power is applied to the device  $(V_{CC} \ge V_{POR(max)})$ .

Variation from these recommendations will result in the device having an unknown power-up state.

### 8.3 LVxT Enhanced Input Voltage

The SN74LV8T594 belongs to TI's LVxT family of logic devices with integrated voltage level translation. This family of devices was designed with reduced input voltage thresholds to support up-translation, and inputs tolerant of signals with up to 5.5V levels to support down-translation. For proper functionality, input signals must remain at or above the specified  $V_{IL(MIN)}$  level for a HIGH input state, and at or below the specified  $V_{IL(MAX)}$  for a LOW input state. Figure 8-2 shows the typical  $V_{IH}$  and  $V_{II}$  levels for the LVxT family of devices, as well as the voltage levels for standard CMOS devices for comparison.

The inputs are high impedance and are typically modeled as a resistor in parallel with the input capacitance given in the *Electrical Characteristics*. The worst case resistance is calculated with the maximum input voltage, given in the Absolute Maximum Ratings, and the maximum input leakage current, given in the Electrical Characteristics, using Ohm's law (R = V ÷ I).

Input signals must transition between valid logic states quickly, as defined by the input transition rate in the Recommended Operating Conditions table. Failing to meet this specification will result in excessive power consumption and could cause oscillations. More details can be found in the *Implications of Slow or Floating* CMOS Inputs application report.

Do not leave inputs floating at any time during operation. Unused inputs must be terminated at a valid high or low voltage level. If a system will not be actively driving an input at all times, then a pull-up or pull-down resistor can be added to provide a valid input voltage during these times. The resistor value will depend on multiple factors; however, a  $10k\Omega$  resistor is recommended and will typically meet all requirements.

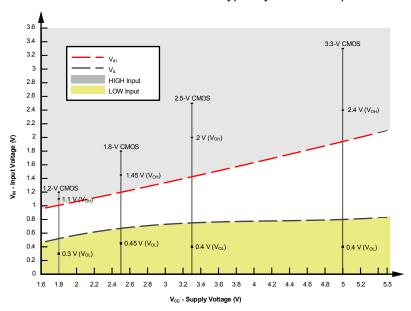


Figure 8-2. LVxT Input Voltage Levels

## 8.4 Clamp Diode Structure

As Figure 8-3 shows, the outputs to this device have both positive and negative clamping diodes, and the inputs to this device have negative clamping diodes only.

#### CAUTION

Voltages beyond the values specified in the Absolute Maximum Ratings table can cause damage to the device. The input and output voltage ratings may be exceeded if the input and output clampcurrent ratings are observed.

Product Folder Links: SN74LV8T594






Figure 8-3. Electrical Placement of Clamping Diodes for Each Input and Output



## 9 Application and Implementation

#### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

## 9.1 Application Information

In this application, the SN74LV8T594 is used to control seven-segment displays. Utilizing the serial output and combining a few of the input signals, this implementation reduces the number of I/O pins required to control the displays from sixteen to four. Unlike other I/O expanders, the SN74LV8T594 does not need a communication interface for control. It can be easily operated with simple GPIO pins.

There is no practical limitation to how many SN74LV8T594 devices can be cascaded. To add more, the serial output will need to be connected to the following serial input and the clocks will need to be connected accordingly. With separate control for the shift registers and output registers, the desired digit can be displayed while the data for the next digit is loaded into the shift register. See the application note, *Designing with Shift Registers*, for solutions to common design challenges around cascading shift registers.

At power-up, the initial state of the shift registers and output registers are unknown. To give them a defined state, both registers need to be cleared. An RC network can be connected to the  $\overline{SRCLR}$  and  $\overline{RCLR}$  pins as shown to initialize the shift and output registers to all zeros.

## 9.2 Typical Application

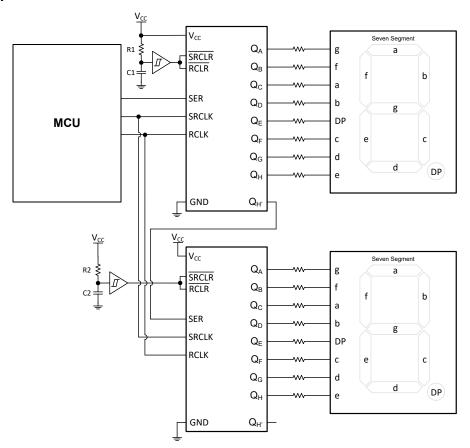


Figure 9-1. Typical Application Block Diagram

Product Folder Links: SN74LV8T594



### 9.2.1 Design Requirements

#### 9.2.1.1 Power Considerations

Ensure the desired supply voltage is within the range specified in the *Recommended Operating Conditions*. The supply voltage sets the device's electrical characteristics as described in the *Electrical Characteristics*.

The positive voltage supply must be capable of sourcing current equal to the total current to be sourced by all outputs of the SN74LV8T594 plus the maximum static supply current,  $I_{CC}$ , listed in the *Electrical Characteristics* and any transient current required for switching. The logic device can only source as much current as is provided by the positive supply source. Be sure not to exceed the maximum total current through  $V_{CC}$  listed in the *Absolute Maximum Ratings*.

The ground must be capable of sinking current equal to the total current to be sunk by all outputs of the SN74LV8T594 plus the maximum supply current, I<sub>CC</sub>, listed in the *Electrical Characteristics*, and any transient current required for switching. The logic device can only sink as much current as can be sunk into its ground connection. Be sure not to exceed the maximum total current through GND listed in the *Absolute Maximum Ratings*.

The SN74LV8T594 can drive a load with a total capacitance less than or equal to 50pF while still meeting all of the data sheet specifications. Larger capacitive loads can be applied; however, it is not recommended to exceed 50pF.

The SN74LV8T594 can drive a load with total resistance described by  $R_L \ge V_O$  /  $I_O$ , with the output voltage and current defined in the *Electrical Characteristics* table with  $V_{OH}$  and  $V_{OL}$ . When outputting in the high state, the output voltage in the equation is defined as the difference between the measured output voltage and the supply voltage at the  $V_{CC}$  pin.

Total power consumption can be calculated using the information provided in *CMOS Power Consumption and Cpd Calculation*.

Thermal increase can be calculated using the information provided in *Thermal Characteristics of Standard Linear* and Logic (SLL) Packages and Devices.

#### **CAUTION**

The maximum junction temperature,  $T_{J(max)}$  listed in the *Absolute Maximum Ratings*, is an additional limitation to prevent damage to the device. Do not violate any values listed in the *Absolute Maximum Ratings*. These limits are provided to prevent damage to the device.

### 9.2.1.2 Input Considerations

Input signals must cross  $V_{IL(max)}$  to be considered a logic LOW, and  $V_{IH(min)}$  to be considered a logic HIGH. Do not exceed the maximum input voltage range found in the *Absolute Maximum Ratings*.

Unused inputs must be terminated to either  $V_{CC}$  or ground. These can be directly terminated if the input is completely unused, or they can be connected with a pull-up or pull-down resistor if the input is to be used sometimes, but not always. A pull-up resistor is used for a default state of HIGH, and a pull-down resistor is used for a default state of LOW. The resistor size is limited by drive current of the controller, leakage current into the SN74LV8T594, as specified in the *Electrical Characteristics*, and the desired input transition rate. A 10-k $\Omega$  resistor value is often used due to these factors.

The SN74LV8T594 has CMOS inputs and thus requires fast input transitions to operate correctly, as defined in the *Recommended Operating Conditions* table. Slow input transitions can cause oscillations, additional power consumption, and reduction in device reliability.

Refer to the *Feature Description* section for additional information regarding the inputs for this device.



### 9.2.1.3 Output Considerations

The positive supply voltage is used to produce the output HIGH voltage. Drawing current from the output will decrease the output voltage as specified by the  $V_{OH}$  specification in the *Electrical Characteristics*. The ground voltage is used to produce the output LOW voltage. Sinking current into the output will increase the output voltage as specified by the  $V_{OL}$  specification in the *Electrical Characteristics*.

Push-pull outputs that could be in opposite states, even for a very short time period, should never be connected directly together. This can cause excessive current and damage to the device.

Two channels within the same device with the same input signals can be connected in parallel for additional output drive strength.

Unused outputs can be left floating. Do not connect outputs directly to V<sub>CC</sub> or ground.

Refer to Feature Description section for additional information regarding the outputs for this device.

## 9.2.2 Detailed Design Procedure

- Add a decoupling capacitor from V<sub>CC</sub> to GND. The capacitor needs to be placed physically close to the device and electrically close to both the V<sub>CC</sub> and GND pins. An example layout is shown in the *Layout* section
- 2. Ensure the capacitive load at the output is ≤ 50pF. This is not a hard limit; by design, however, it will optimize performance. This can be accomplished by providing short, appropriately sized traces from the SN74LV8T594 to one or more of the receiving devices.
- 3. Ensure the resistive load at the output is larger than  $(V_{CC} / I_{O(max)})\Omega$ . Doing this will prevent the maximum output current from the *Absolute Maximum Ratings* from being violated. Most CMOS inputs have a resistive load measured in M $\Omega$ ; much larger than the minimum calculated previously.
- 4. Thermal issues are rarely a concern for logic gates; the power consumption and thermal increase, however, can be calculated using the steps provided in the application report, *CMOS Power Consumption and Cpd Calculation*.

### 9.2.3 Application Curves

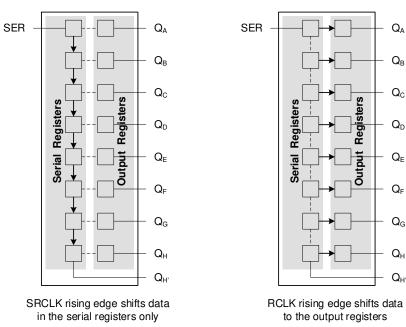


Figure 9-2. Simplified Functional Diagram Showing Clock Operation



### 9.3 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions*. Each  $V_{CC}$  terminal should have a good bypass capacitor to prevent power disturbance. A  $0.1\mu F$  capacitor is recommended for this device. It is acceptable to parallel multiple bypass capacitors to reject different frequencies of noise. The  $0.1\mu F$  and  $1\mu F$  capacitors are commonly used in parallel. As shown in the following layout example, install the bypass capacitor as close to the power terminal as possible for best results.

## 9.4 Layout

### 9.4.1 Layout Guidelines

When using multiple-input and multiple-channel logic devices inputs must not ever be left floating. In many cases, functions or parts of functions of digital logic devices are unused; for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such unused input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. All unused inputs of digital logic devices must be connected to a logic high or logic low voltage, as defined by the input voltage specifications, to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, the inputs are tied to GND or V<sub>CC</sub>, whichever makes more sense for the logic function or is more convenient.

### 9.4.2 Layout Example

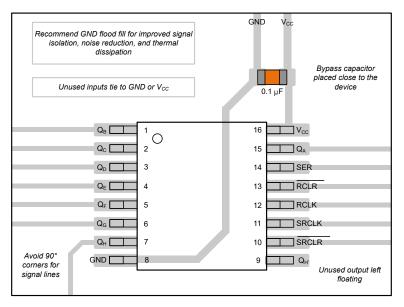


Figure 9-3. Example Layout for the SN74LV8T594 in TSSOP



## 10 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

### **10.1 Documentation Support**

#### 10.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, CMOS Power Consumption and Cpd Calculation application report
- · Texas Instruments, Designing With Logic application report
- Texas Instruments, Thermal Characteristics of Standard Linear and Logic (SLL) Packages and Devices application report

## 10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 10.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

### 10.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 10.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 10.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

## 11 Revision History

DATE	REVISION	NOTES				
February 2024	*	Initial Release				

### 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: SN74LV8T594

www.ti.com 9-Nov-2025

### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
SN74LV8T594BQBR	Active	Production	WQFN (BQB)   16	3000   LARGE T&R	Yes	SELECTIVE AG (TOP SIDE)	Level-1-260C-UNLIM	-40 to 125	LVT594
SN74LV8T594BQBR.A	Active	Production	WQFN (BQB)   16	3000   LARGE T&R	Yes	SELECTIVE AG (TOP SIDE)	Level-1-260C-UNLIM	-40 to 125	LVT594
SN74LV8T594PWR	Active	Production	TSSOP (PW)   16	3000   LARGE T&R	Yes	NIPDAU   SN	Level-1-260C-UNLIM	-40 to 125	LVT594
SN74LV8T594PWR.A	Active	Production	TSSOP (PW)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVT594

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

#### OTHER QUALIFIED VERSIONS OF SN74LV8T594:

Automotive: SN74LV8T594-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 25-Sep-2024

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LV8T594BQBR	WQFN	BQB	16	3000	180.0	12.4	2.8	3.8	1.2	4.0	12.0	Q1
SN74LV8T594PWR	TSSOP	PW	16	3000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

www.ti.com 25-Sep-2024



### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LV8T594BQBR	WQFN	BQB	16	3000	210.0	185.0	35.0
SN74LV8T594PWR	TSSOP	PW	16	3000	353.0	353.0	32.0

2.5 x 3.5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



INSTRUMENTS www.ti.com

PLASTIC QUAD FLAT PACK-NO LEAD



### NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.



PLASTIC QUAD FLAT PACK-NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLAT PACK-NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.





SMALL OUTLINE PACKAGE



### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025