







TCA9548A-Q1 SCPS273C - MAY 2019 - REVISED JUNE 2023

TCA9548A-Q1 Automotive 8-Channel I²C Switch with Reset

1 Features

- AEC-Q100 (grade 1): Qualified for automotive applications
- **Functional Safety-Capable**
 - Documentation available to aid in functional safety system design
- 1-to-8 Bidirectional translating switches
- I²C Bus and SMBus compatible
- Active-low reset input
- Three address pins, allowing up to eight TCA9548A-Q1 devices on the I²C bus
- Channel selection through an I²C Bus, in any combination
- Power up with all switch channels deselected
- Low R_{ON} switches
- Allows voltage-level translation between 1.8 V, 2.5 V, 3.3 V, and 5 V buses
- No glitch on power up
- Supports hot insertion
- Low quiescent current
- Operating power-supply voltage range of 1.65 V to 5.25 V
- 5 V tolerant Inputs
- 0 to 400 kHz clock frequency
- Latch-up performance exceeds 100 mA per JESD 78, class II

2 Applications

- Infotainment
- Body and control
- Routers (telecom switching equipment)
- Factory automation
- Products with I²C target address conflicts (such as multiple, identical temperature sensors)

3 Description

The TCA9548A-Q1 device has eight bidirectional translating switches that can be controlled through the I²C bus. The SCL/SDA upstream pair fans out to eight downstream pairs, or channels. Any individual SCn/SDn channel or combination of channels can be selected, determined by the contents of the programmable control register. These downstream channels can be used to resolve I²C target address conflicts. For example, if eight identical digital temperature sensors are needed in the application, one sensor can be connected at each channel: 0-7.


The system controller can reset the TCA9548A-Q1 in the event of a time-out or other improper operation by asserting a low in the RESET input. Similarly, the power-on reset deselects all channels and initializes the I²C/SMBus state machine. Asserting RESET causes the same reset and initialization to occur without powering down the part. This allows recovery should one of the downstream I²C buses get stuck in a low state.

The pass gates of the switches are constructed so that the VCC pin can be used to limit the maximum high voltage, which is passed by the TCA9548A-Q1. Limiting the maximum high voltage allows the use of different bus voltages on each pair, so that 1.8 V, 2.5 V or 3.3 V parts can communicate with 5 V parts, without any additional protection. External pullup resistors pull the bus up to the desired voltage level for each channel. All I/O pins are 5 V tolerant.

Package information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
TCA9548A-Q1	VQFN (24)	4 mm × 4 mm

- For all available packages, see the orderable addendum at the end of the data sheet.
- The package size (length × width) is a nominal value and (2)includes pins, where applicable.

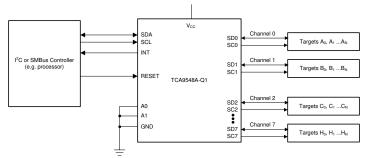

Simplified application diagram



Table of Contents

1 Features	1	8 Detailed Description	11
2 Applications	1	8.1 Overview	
3 Description		8.2 Functional Block Diagram	12
4 Revision History	<mark>2</mark>	8.3 Feature Description	
5 Pin Configuration and Functions		8.4 Device Functional Modes	
6 Specifications		8.5 Programming	
6.1 Absolute Maximum Ratings		9 Layout	
6.2 ESD Ratings		9.1 Layout Guidelines	
6.3 Recommended Operating Conditions		9.2 Layout Example	
6.4 Thermal Information		10 Device and Documentation Support	
6.5 Electrical Characteristics	<mark>5</mark>	10.1 Documentation Support	
6.6 I ² C Interface Timing Requirements		10.2 Receiving Notification of Documentation	
6.7 Reset Timing Requirements		10.3 Support Resources	•
6.8 Switching Characteristics		10.4 Trademarks	
6.9 Typical Characteristics		10.5 Electrostatic Discharge Caution	
7 Parameter Measurement Information		10.6 Glossary	
4 Revision History NOTE: Page numbers for previous revisions m	-		
Changes from Revision B (October 2021) to	Revision	n C (June 2023)	Page
 Changed the Device Information to Package 	e Informa	tion table	
 Added T_J Max Junction Temperature for V_C 			
		S V in the Recommended Operating Condition	
 Added I_{CC} Standby Mode at 85°C to 125°C 			
Added 100 Startdby Mode at 65 G to 125 G		otrical Griaracteristics	
Changes from Revision A (November 2019)	to Revisi	ion B (October 2021)	Page
Added feature: Functional Safety-Capable .		, , , , , , , , , , , , , , , , , , , ,	
 Added grade 1 to the automotive feature, an 			1



5 Pin Configuration and Functions




Figure 5-1. RGE Package, 24-Pin VQFN, Top View

Table 5-1. Pin Functions

F	PIN		Table 5-1. Pin Functions
NAME	QFN (RGE)	TYPE	DESCRIPTION
A0	22	1	Address input 0. Connect directly to V _{CC} or ground
A1	23	1	Address input 1. Connect directly to V _{CC} or ground
A2	18	1	Address input 2. Connect directly to V _{CC} or ground
GND	9	_	Ground
RESET	24	I	Active-low reset input. Connect to V _{CC} or V _{DPUM} ⁽¹⁾ through a pull-up resistor, if not used
SD0	1	I/O	Serial data 0. Connect to V _{DPU0} ⁽¹⁾ through a pull-up resistor
SC0	2	I/O	Serial clock 0. Connect to V _{DPU0} ⁽¹⁾ through a pull-up resistor
SD1	3	I/O	Serial data 1. Connect to V _{DPU1} ⁽¹⁾ through a pull-up resistor
SC1	4	I/O	Serial clock 1. Connect to V _{DPU1} ⁽¹⁾ through a pull-up resistor
SD2	5	I/O	Serial data 2. Connect to V _{DPU2} ⁽¹⁾ through a pull-up resistor
SC2	6	I/O	Serial clock 2. Connect to V _{DPU2} ⁽¹⁾ through a pull-up resistor
SD3	7	I/O	Serial data 3. Connect to V _{DPU3} ⁽¹⁾ through a pull-up resistor
SC3	8	I/O	Serial clock 3. Connect to V _{DPU3} ⁽¹⁾ through a pull-up resistor
SD4	10	I/O	Serial data 4. Connect to V _{DPU4} ⁽¹⁾ through a pull-up resistor
SC4	11	I/O	Serial clock 4. Connect to V _{DPU4} ⁽¹⁾ through a pull-up resistor
SD5	12	I/O	Serial data 5. Connect to V _{DPU5} ⁽¹⁾ through a pull-up resistor
SC5	13	I/O	Serial clock 5. Connect to V _{DPU5} ⁽¹⁾ through a pull-up resistor
SD6	14	I/O	Serial data 6. Connect to V _{DPU6} ⁽¹⁾ through a pull-up resistor
SC6	15	I/O	Serial clock 6. Connect to V _{DPU6} ⁽¹⁾ through a pull-up resistor
SD7	16	I/O	Serial data 7. Connect to V _{DPU7} ⁽¹⁾ through a pull-up resistor
SC7	17	I/O	Serial clock 7. Connect to V _{DPU7} ⁽¹⁾ through a pull-up resistor
SCL	19	I/O	Serial clock bus. Connect to V _{DPUM} ⁽¹⁾ through a pull-up resistor
SDA	20	I/O	Serial data bus. Connect to V _{DPUM} ⁽¹⁾ through a pull-up resistor
VCC	21	Power	Supply voltage

⁽¹⁾ V_{DPUX} is the pull-up reference voltage for the associated data line. V_{DPUM} is the controller I²C reference voltage and V_{DPU0}-V_{DPU7} are the target channel reference voltages.



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT
V _{CC}	Supply voltage		-0.5	7	V
VI	Input voltage ⁽²⁾		-0.5	7	V
II	Input current		-20	20	mA
Io	Output current		-25		mA
I _{CC}	Supply current		-100	100	mA
T _{stg}	Storage temperature		-65	150	°C
т.	May Junation Tomporature	V _{CC} ≤ 3.6 V		130	°C
TJ	Max Junction Temperature	V _{CC} ≤ 5.25V		90	°C

⁽¹⁾ Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

6.2 ESD Ratings

			VALUE	UNIT
V	Electrostatio discharge	Human body model (HBM), per AEC Q100-002 ⁽¹⁾ HBM ESD Classification Level 2	±2000	V
V _(ESD)	Charged-device model (CDM), per AEC Q100-011 CDM ESD Classification Level C6		±1000	v

⁽¹⁾ AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

			MIN	MAX	UNIT
V _{CC}	Supply voltage	-40 °C ≤ T _A ≤ 85 °C	1.65	5.25	V
V _{IH}	High-level input voltage	SCL, SDA	0.7 × V _{CC}	6	V
V IH		A2-A0, RESET	0.7 × V _{CC}	V _{CC} + 0.5	V
.,	Low-level input voltage	SCL, SDA	-0.5	0.3 × V _{CC}	V
V _{IL}		A2-A0, RESET	-0.5	0.3 × V _{CC}	V
T _A	Operating free-air temperature	1.65 V ≤ V _{CC} ≤ 5.25 V	-40	85	°C
T _A	Operating free-air temperature	1.65 V ≤ V _{CC} ≤ 3.6 V	-40	125	°C

6.4 Thermal Information

		TCA9548A	
	THERMAL METRIC ⁽¹⁾	RGE (VQFN)	UNIT
		24 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	57.2	°C/W
R _{0JC(top)}	Junction-to-case (top) thermal resistance	62.5	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	34.4	°C/W
ΨЈТ	Junction-to-top characterization parameter	3.8	°C/W
ΨЈВ	Junction-to-board characterization parameter	34.4	°C/W
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	15.5	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

Product Folder Links: TCA9548A-Q1

ibmit Document Feedback

⁽²⁾ The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.



6.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted), see note (1)

	PARAMETE	ER	TEST CONDITIONS	V _{CC}	MIN	TYP	MAX	UNIT
V _{PORR}	Power-on reset vol	ltage, V _{CC} rising	No load, V _I = V _{CC} or GND ⁽⁴⁾			1.2	1.5	٧
V _{PORF}	Power-on reset vol	ltage, V _{CC} falling ⁽²⁾	No load, V _I = V _{CC} or GND ⁽⁴⁾		0.8	1		V
				5 V		3.6		
			4.5 V to 5.25 V	2.6		4.5		
				3.3 V		1.9		
\ /	Curitab autout valta		V = V = 100 ···	3 V to 3.6 V	1.6		2.8	V
$V_{o(sw)}$	Switch output volta	ige	$V_{i(sw)} = V_{CC}$, $I_{SWout} = -100 \mu A$	2.5 V		1.5		V
				2.3 V to 2.7 V	1.1		2	
				1.8 V		1.1		
OL				1.65 V to 1.95 V	0.6		1.25	
	CDA		V _{OL} = 0.4 V	1 65 V to 5 25 V	3	6		ma A
IOL	SDA		V _{OL} = 0.6 V	- 1.65 V to 5.25 V	5	9		mA
	SCL, SDA				-1		1	
	SC7-SC0, SD7-S	D0	V = V = CND(4)	4.05.1/4- 5.05.1/	-1		1	
l _l	A2-A0		$V_I = V_{CC} \text{ or } GND^{(4)}$	1.65 V to 5.25 V	-1		1	μA
	RESET				-1		1	
				5.25 V		50	80	
		$f_{SCL} = 400 \text{ kHz}$ $V_{I} = V_{CC} \text{ or } GND^{(4)}, I_{O} = 0$	V V OND(4) I O	3.6 V		20	35	
	Operating mode $f_{SCL} = 400 \text{ kHz}$ $f_{SCL} = 100 \text{ kHz}$		$V_1 = V_{CC}$ or $GND^{(4)}$, $I_0 = 0$	2.7 V		11	20	
			1.65 V		6	10		
		ode		5.25 V		9	30	-
			$V_1 = V_{CC}$ or $GND^{(4)}$, $I_0 = 0$	3.6 V		6	15	
		f _{SCL} = 100 kHz		2.7 V		4	8	
				1.65 V		2	4	
	Low inp			5.25 V		0.2	4	
		Low inputs $V_1 = GND^{(4)}$, $I_0 = 0$	40	3.6 V		0.1	2	
			$V_1 = GND^{(4)}, I_0 = 0$	2.7 V		0.1	2	
Icc				1.65 V		0.1	1	μΑ
		High inputs		5.25 V		0.2	4	
				3.6 V		0.1	2	
			$V_I = V_{CC}, I_O = 0$	2.7 V		0.1	2	
	Standby mode			1.65 V		0.1	1	
				3.6 V		1	2	
		Low inputs	$V_1 = V_{CC}$ or GND, $I_0 = 0$, 85°C to 125°C	2.7 V		0.7	1.5	
				1.65 V		0.4	1	
				3.6 V		1	2	
		High inputs	$V_1 = V_{CC}$ or GND, $I_0 = 0$, 85°C to 125°C	2.7 V		0.7	1.5	
				1.65 V		0.4	2	
A.1	Supply-current	COL CDA	SCL or SDA input at 0.6 V, Other inputs at V _{CC} or GND ⁽⁴⁾	4.05.7/4- 5.05.7/		3	20	
ΔI _{CC}	change	SCL, SDA	SCL or SDA input at $V_{CC} - 0.6 \text{ V}$, Other inputs at V_{CC} or $\text{GND}^{(4)}$	1.65 V to 5.25 V	3	20	μA	
	A2-A0		V = V or CND(4)			4	5	
Ci	RESET		$V_I = V_{CC} \text{ or } GND^{(4)}$	1.65 V to 5.25 V		4	5	pF
	SCL		V _I = V _{CC} or GND ⁽⁴⁾ , Switch OFF			20	28	⊢ .
0 (3)	SDA			4.05.1/: 5.05.::		20	28	
C _{io(off)} (3)	SC7-SC0, SD7-S	D0	V _I = V _{CC} or GND ⁽⁴⁾ , Switch OFF	1.65 V to 5.25 V		5.5	7.5	pF



6.5 Electrical Characteristics (continued)

over recommended operating free-air temperature range (unless otherwise noted), see note (1)

	PARAMETER	TEST CONDITIONS	V _{CC}	MIN	TYP	MAX	UNIT
	R _{ON} Switch-on resistance	$V_O = 0.4 \text{ V}, I_O = 15 \text{ mA}$	4.5 V to 5.25 V	4	10	25	
D.			3 V to 3.6 V	5	12	35	
KON		V _O = 0.4 V, I _O = 10 mA	2.3 V to 2.7 V	7	15	45	Ω
			1.65 V to 1.95 V	10	25	70	

- For operation between specified voltage ranges, refer to the worst-case parameter in both applicable ranges. (1)
- (2)
- The power-on reset circuit resets the I^2C bus logic with $V_{CC} < V_{PORF}$. $C_{io(ON)}$ depends on internal capacitance and external capacitance added to the SCn lines when channels(s) are ON. RESET = V_{CC} (held high) when all other input voltages, V_I = GND.

6.6 I²C Interface Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 7-1)

			MIN	MAX	UNIT
STANDARD	MODE		•	•	
f _{scl}	I ² C clock frequency		0	100	kHz
t _{sch}	I ² C clock high time		4		μs
t _{scl}	I ² C clock low time		4.7		μs
t _{sp}	I ² C spike time			50	ns
t _{sds}	I ² C serial-data setup time		250		ns
t _{sdh}	I ² C serial-data hold time		0(1)		μs
t _{icr}	I ² C input rise time			1000	ns
t _{icf}	I ² C input fall time			300	ns
t _{ocf}	I ² C output (SDn) fall time (10 pF to 400 pF bus)		300	ns
t _{buf}	I ² C bus free time between stop and start		4.7		μs
t _{sts}	I ² C start or repeated start condition setup		4.7		μs
t _{sth}	I ² C start or repeated start condition hold		4		μs
t _{sps}	I ² C stop condition setup		4		μs
t _{vdL(Data)}	Valid-data time (high to low) ⁽²⁾	SCL low to SDA output low valid		1	μs
t _{vdH(Data)}	Valid-data time (low to high) ⁽²⁾	SCL low to SDA output high valid		0.6	μs
t _{vd(ack)}	Valid-data time of ACK condition	ACK signal from SCL low to SDA output low		1	μs
C _b	I ² C bus capacitive load			400	pF
FAST MODE					
f _{scl}	I ² C clock frequency		0	400	kHz
t _{sch}	I ² C clock high time		0.6		μs
t _{scl}	I ² C clock low time		1.3		μs
t _{sp}	I ² C spike time			50	ns
t _{sds}	I ² C serial-data setup time		100		ns
t _{sdh}	I ² C serial-data hold time		0(1)		μs
t _{icr}	I ² C input rise time		20	300	ns
t _{icf}	I ² C input fall time		20 × (V _{CC} / 5.5 V)	300	ns
t _{ocf}	I ² C output (SDn) fall time (10 pF to 400 pF bus)	20 × (V _{CC} / 5.5 V)	300	ns
t _{buf}	I ² C bus free time between stop and start		1.3		μs
t _{sts}	I ² C start or repeated start condition setup		0.6		μs
t _{sth}	l ² C start or repeated start condition hold		0.6		μs
t _{sps}	I ² C stop condition setup		0.6		μs
t _{vdL(Data)}	Valid-data time (high to low) ⁽²⁾	SCL low to SDA output low valid		1	μs
t _{vdH(Data)}	Valid-data time (low to high) ⁽²⁾	SCL low to SDA output high valid		0.6	μs

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated

6.6 I²C Interface Timing Requirements (continued)

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 7-1)

				MAX	UNIT
t _{vd(ack)}		ACK signal from SCL low to SDA output low		1	μs
C _b	I ² C bus capacitive load			400	pF

⁽¹⁾ A device internally must provide a hold time of at least 300 ns for the SDA signal (referred to the V_{IH} min of the SCL signal), to bridge the undefined region of the falling edge of SCL.

6.7 Reset Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER	MIN	MAX	UNIT
t _{W(L)}	Pulse duration, RESET low	6		ns
t _{REC(STA)}	Recovery time from RESET to start	0		ns

6.8 Switching Characteristics

over recommended operating free-air temperature range, C_L ≤100 pF (unless otherwise noted) (see Figure 7-1)

	PARAMETER		FROM (INPUT)	TO (OUTPUT)	MIN I	MAX	UNIT
t _{pd} (1)	Propagation delay time	$R_{ON} = 20 \Omega, C_L = 15 pF$	SDA or SCL	SDn or SCn	0.3		ns
'pd `	Tropagation delay time	$R_{ON} = 20 \Omega, C_L = 50 pF$	SDA OF SCL	SDII 01 SOII		1	115
t _{rst} (2)	RESET time (SDA clear)		RESET	SDA		500	ns


⁽¹⁾ The propagation delay is the calculated RC time constant of the typical ON-state resistance of the switch and the specified load capacitance, when driven by an ideal voltage source (zero output impedance).

⁽²⁾ Data taken using a 1 k Ω pull-up resistor and 50 pF load (see Figure 7-2)

⁽²⁾ t_{rst} is the propagation delay measured from the time the RESET pin is first asserted low to the time the SDA pin is asserted high, signaling a stop condition. It must be a minimum of t_{WL}.




6.9 Typical Characteristics

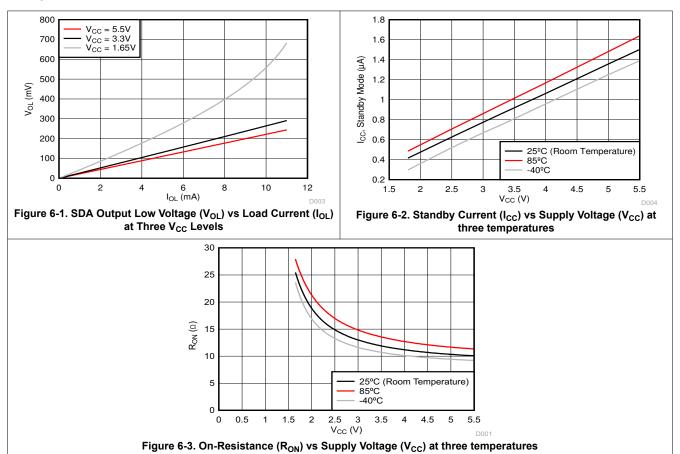




7 Parameter Measurement Information



SDA LOAD CONFIGURATION

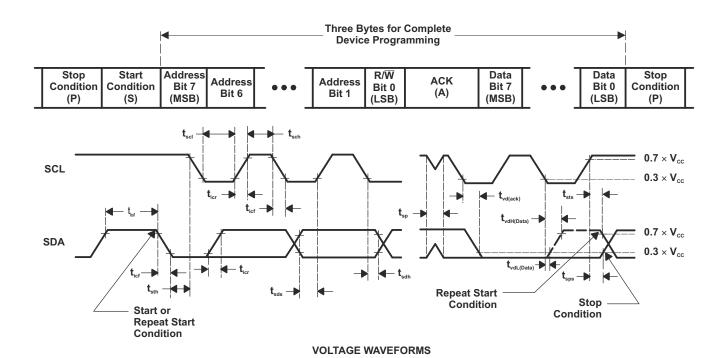


BYTE	DESCRIPTION
1	I ² C address
2, 3	P-port data


- A. C_L includes probe and jig capacitance.
- B. All inputs are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_t/t_f ≤ 30 ns.
- C. Not all parameters and waveforms are applicable to all devices.

Figure 7-1. I²C Load Circuit and Voltage Waveforms





SDA LOAD CONFIGURATION

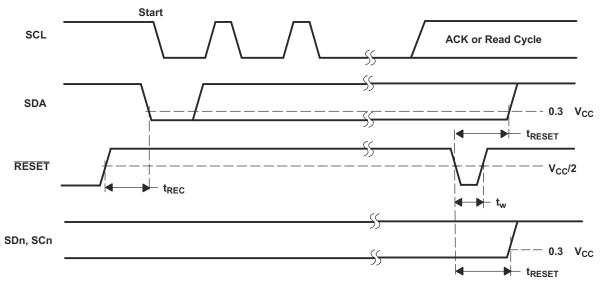

- A. C_L includes probe and jig capacitance.
- B. All inputs are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_0 = 50 Ω , $t_r/t_f \leq$ 30 ns.
- C. I/Os are configured as inputs.
- D. Not all parameters and waveforms are applicable to all devices.

Figure 7-2. Reset Load Circuit and Voltage Waveforms

Submit Document Feedback



8 Detailed Description

8.1 Overview

The TCA9548A-Q1 is an 8-channel, bidirectional translating I²C switch. The controller SCL/SDA signal pair is directed to eight channels of target devices, SC0/SD0-SC7/SD7. Any individual downstream channel can be selected as well as any combination of the eight channels.


The device offers an active-low $\overline{\text{RESET}}$ input which resets the state machine and allows the TCA9548A-Q1 to recover if one of the downstream I²C buses get stuck in a low state. The state machine of the device can also be reset by cycling the power supply, V_{CC}, also known as a power-on reset (POR). Both the $\overline{\text{RESET}}$ function and a POR cause all channels to be deselected.

The connections of the I^2C data path are controlled by the same I^2C controller device that is switched to communicate with multiple I^2C targets. After the successful acknowledgment of the target address (hardware selectable by A0, A1, and A2 pins), a single 8-bit control register is written to or read from to determine the selected channels.

The TCA9548A-Q1 may also be used for voltage translation, allowing the use of different bus voltages on each SCn/SDn pair such that 1.8 V, 2.5 V, or 3.3 V parts can communicate with 5 V parts. This is achieved by using external pull-up resistors to pull the bus up to the desired voltage for the controller and each target channel.



8.2 Functional Block Diagram

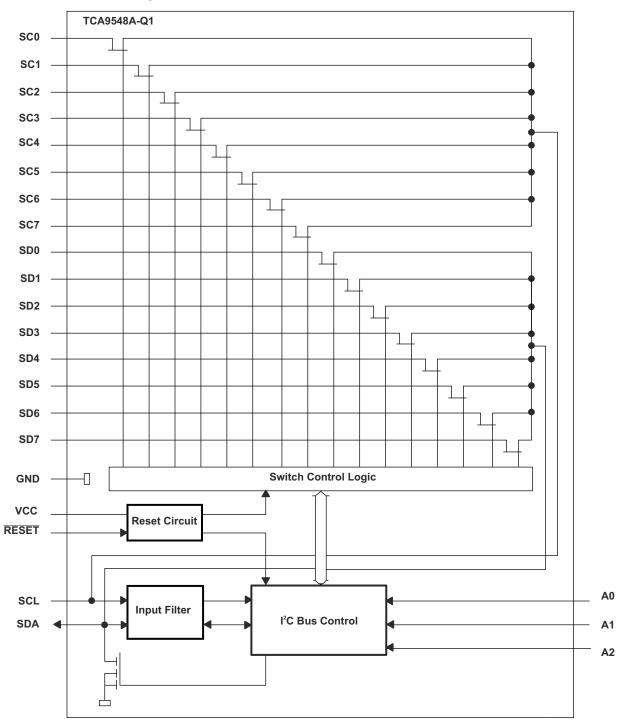

8.3 Feature Description

The TCA9548A-Q1 is an 8-channel, bidirectional translating switch for I²C buses that supports Standard-Mode (100 kHz) and Fast-Mode (400 kHz) operation. The TCA9548A-Q1 features I²C control using a single 8-bit control register in which each bit controls the enabling and disabling of one of the corresponding 8 switch channels for I²C data flow. Depending on the application, voltage translation of the I²C bus can also be achieved using the TCA9548A-Q1 to allow 1.8 V, 2.5 V, or 3.3 V parts to communicate with 5 V parts. Additionally, in the event that communication on the I²C bus enters a fault state, the TCA9548A-Q1 can be reset to resume normal operation using the RESET pin feature or by a power-on reset which results from cycling power to the device.

8.4 Device Functional Modes

8.4.1 RESET Input

The $\overline{\text{RESET}}$ input is an active-low signal that may be used to recover from a bus-fault condition. When this signal is asserted low for a minimum of t_{WL} , the TCA9548A-Q1 resets its registers and I²C state machine and deselects all channels. The $\overline{\text{RESET}}$ input must be connected to V_{CC} through a pull-up resistor.

8.4.2 Power-On Reset

When power is applied to the VCC pin, an internal power-on reset holds the TCA9548A-Q1 in a reset condition until V_{CC} has reached V_{PORR} . At this point, the reset condition is released, and the TCA9548A-Q1 registers and I^2C state machine are initialized to their default states, all zeroes, causing all the channels to be deselected. Thereafter, V_{CC} must be lowered below V_{PORF} to reset the device.

8.5 Programming

8.5.1 I²C Interface

The TCA9548A-Q1 has a standard bidirectional I²C interface that is controlled by a controller device in order to be configured or read the status of this device. Each target on the I²C bus has a specific device address to differentiate between other target devices that are on the same I²C bus. Many target devices require configuration upon startup to set the behavior of the device. This is typically done when the controller accesses internal register maps of the target, which have unique register addresses. A device can have one or multiple registers where data is stored, written, or read.

The physical I^2C interface consists of the serial clock (SCL) and serial data (SDA) lines. Both SDA and SCL lines must be connected to V_{CC} through a pull-up resistor. The size of the pull-up resistor is determined by the amount of capacitance on the I^2C lines. (For further details, see the I^2C Pull-up Resistor Calculation application report. Data transfer may be initiated only when the bus is idle. A bus is considered idle if both SDA and SCL lines are high after a STOP condition (See Figure 8-1 and Figure 8-2).

The following is the general procedure for a controller to access a target device:

- 1. If a controller wants to send data to a target:
 - Controller-transmitter sends a START condition and addresses the target-receiver.
 - · Controller-transmitter sends data to target-receiver.
 - Controller-transmitter terminates the transfer with a STOP condition.
- 2. If a controller wants to receive or read data from a target:
 - Controller-receiver sends a START condition and addresses the target-transmitter.
 - · Controller-receiver sends the requested register to read to target-transmitter.
 - Controller-receiver receives data from the target-transmitter.
 - Controller-receiver terminates the transfer with a STOP condition.

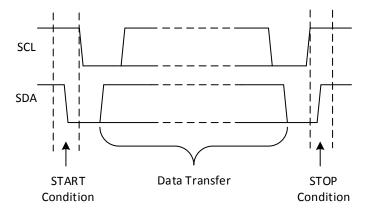


Figure 8-1. Definition of Start and Stop Conditions



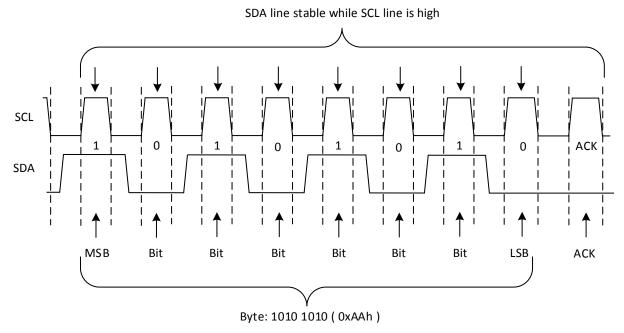


Figure 8-2. Bit Transfer

8.5.2 Device Address

Figure 8-3 shows the address byte of the TCA9548A-Q1.




Figure 8-3. TCA9548A-Q1 Address

The last bit of the target address defines the operation (read or write) to be performed. When it is high (1), a read is selected, while a low (0) selects a write operation.

Table 8-1 shows the TCA9548A-Q1 address reference.

Table 8-1. Address Reference

	INPUTS		20 540 74 5077 4555700
A2	A1	A0	I ² C BUS TARGET ADDRESS
L	L	L	112 (decimal), 70 (hexadecimal)
L	L	Н	113 (decimal), 71 (hexadecimal)
L	Н	L	114 (decimal), 72 (hexadecimal)
L	Н	Н	115 (decimal), 73 (hexadecimal)
Н	L	L	116 (decimal), 74 (hexadecimal)
Н	L	Н	117 (decimal), 75 (hexadecimal)
Н	Н	L	118 (decimal), 76 (hexadecimal)
Н	Н	Н	119 (decimal), 77 (hexadecimal)

8.5.3 Bus Transactions

Data must be sent to and received from the target devices, and this is accomplished by reading from or writing to registers in the target device.

Registers are locations in the memory of the target which contain information, whether it be the configuration information or some sampled data to send back to the controller. The controller must write information to these registers in order to instruct the target device to perform a task.


While it is common to have registers in I²C targets, note that not all target devices have registers. Some devices are simple and contain only 1 register, which may be written to directly by sending the register data immediately after the target address, instead of addressing a register. The TCA9548A-Q1 is example of a single-register device, which is controlled via I²C commands. Since it has 1 bit to enable or disable a channel, there is only 1 register needed, and the controller merely writes the register data after the target address, skipping the register number.

8.5.3.1 Writes

To write on the I^2C bus, the controller sends a START condition on the bus with the address of the target, as well as the last bit (the R/ \overline{W} bit) set to 0, which signifies a write. The target acknowledges, letting the controller know it is ready. After this, the controller starts sending the control register data to the target until the controller has sent all the data necessary (which is sometimes only a single byte), and the controller terminates the transmission with a STOP condition.

There is no limit to the number of bytes sent, but the last byte sent is what is in the register.

Figure 8-4 shows an example of writing a single byte to a target register.



Write to one register in a device

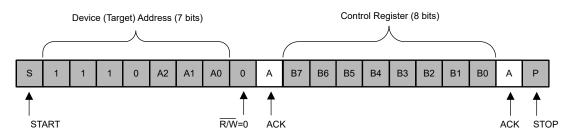


Figure 8-4. Write to Register

8.5.3.2 Reads

Reading from a target is very similar to writing, but the controller sends a START condition, followed by the target address with the R/ \overline{W} bit set to 1 (signifying a read). The target acknowledges the read request, and the controller releases the SDA bus but continues supplying the clock to the target. During this part of the transaction, the controller becomes the controller-receiver, and the target becomes the target-transmitter.

The controller continues to send out the clock pulses, but releases the SDA line so that the target can transmit data. At the end of every byte of data, the controller sends an ACK to the target, letting the target know that it is ready for more data. Once the controller has received the number of bytes it is expecting, it sends a NACK, signaling to the target to halt communications and release the bus. The controller follows this up with a STOP condition.



Figure 8-5 shows an example of reading a single byte from a target register.

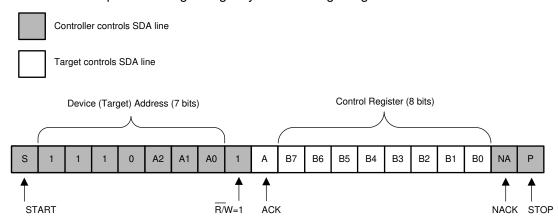


Figure 8-5. Read from Control Register

8.5.4 Control Register

Following the successful acknowledgment of the address byte, the bus controller sends a command byte that is stored in the control register in the TCA9548A-Q1 (see Figure 8-6). This register can be written and read via the I²C bus. Each bit in the command byte corresponds to a SCn/SDn channel and a high (or 1) selects this channel. Multiple SCn/SDn channels may be selected at the same time. When a channel is selected, the channel becomes active after a stop condition has been placed on the I²C bus. This ensures that all SCn/SDn lines are in a high state when the channel is made active, so that no false conditions are generated at the time of connection. A stop condition always must occur immediately after the acknowledge cycle. If multiple bytes are received by the TCA9548A-Q1, it saves the last byte received.

Channel Selection Bits (Read/Write)




Figure 8-6. Control Register

Submit Document Feedback

Table 8-2 shows the TCA9548A-Q1 Command Byte Definition.

Table 8-2. Command Byte Definition

		COMMAND						
B7	В6	B5	B4	В3	B2	B1	В0	COMMAND
X	Х	Х	х	Х	Х	Х	0	Channel 0 disabled
^	_ ^	^	^	^	^	^	1	Channel 0 enabled
X	Х	Х	х	Х	Х	0	Х	Channel 1 disabled
^	^	^	^	^	^	1	^	Channel 1 enabled
X	X	Х	Х	Х	0	- X	Х	Channel 2 disabled
^	^	^	^	^	1	_ ^	^	Channel 2 enabled
X	x	V .	V	0	Х	Х	х	Channel 3 disabled
^	^	^	^	1	^	^	^	Channel 3 enabled
X	х	Х	0	X	X	Х	х	Channel 4 disabled
^	^	^	1		^	^	^	Channel 4 enabled
Х	х	0	х	Х	Х	Х	х	Channel 5 disabled
^	_ ^	1		^	^	^	^	Channel 5 enabled
X	0	Х	Х	Х	Х	Х	х	Channel 6 disabled
^	1	^	^	^	^	^	^	Channel 6 enabled
0	X	Х	Х	Х	Х	Х	Х	Channel 7 disabled
1	_ ^	^	^	^	^	^	_ ^	Channel 7 enabled
0	0	0	0	0	0	0	0	No channel selected, power-up/reset default state

8.5.5 RESET Input

The $\overline{\text{RESET}}$ input is an active-low signal that may be used to recover from a bus-fault condition. When this signal is asserted low for a minimum of t_{WL} , the TCA9548A-Q1 resets its registers and I^2C state machine and deselects all channels. The $\overline{\text{RESET}}$ input must be connected to V_{CC} through a pull-up resistor.

8.5.6 Power-On Reset

When power (from 0 V) is applied to V_{CC} , an internal power-on reset holds the TCA9548A-Q1 in a reset condition until V_{CC} has reached V_{POR} . At that point, the reset condition is released and the TCA9548A-Q1 registers and I^2C state machine initialize to their default states. After that, V_{CC} must be lowered to below V_{POR} and then back up to the operating voltage for a power-reset cycle.



Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

Applications of the TCA9548A-Q1 contain an I^2C (or SMBus) controller device and up to eight I^2C target devices. The downstream channels are ideally used to resolve I^2C target address conflicts. For example, if eight identical digital temperature sensors are needed in the application, one sensor can be connected at each channel: 0-7. When the temperature at a specific location needs to be read, the appropriate channel can be enabled and all other channels switched off, the data can be retrieved, and the I^2C controller can move on and read the next channel.

In an application where the I^2C bus contains many additional target devices that do not result in I^2C target address conflicts, these target devices can be connected to any desired channel to distribute the total bus capacitance across multiple channels. If multiple switches are enabled simultaneously, additional design requirements must be considered (see the *Design Requirements* section and *Detailed Design Procedure* section).

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated



9.2 Typical Application

Figure 9-1 shows an application in which the TCA9548A-Q1 can be used.

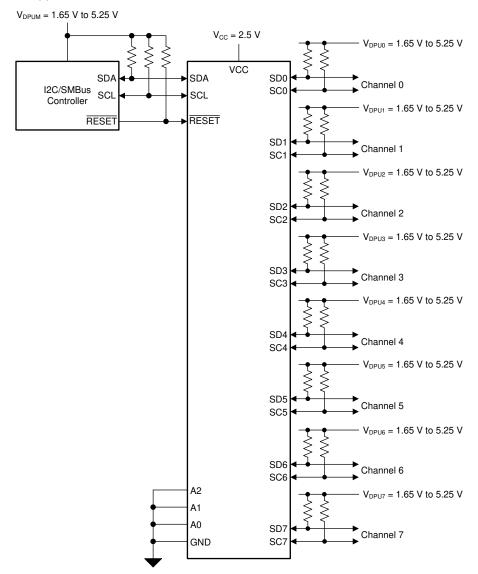


Figure 9-1. Typical Application Schematic

9.2.1 Design Requirements

A typical application of the TCA9548A-Q1 contains one or more data pull-up voltages, V_{DPUX} , one for the controller device (V_{DPUM}) and one for each of the selectable target channels ($V_{DPU0} - V_{DPU7}$). In the event where the controller device and all target devices operate at the same voltage, then $V_{DPUM} = V_{DPUX} = VCC$. In an application where voltage translation is necessary, additional design requirements must be considered to determine an appropriate V_{CC} voltage.

The A0, A1, and A2 pins are hardware selectable to control the target address of the TCA9548A-Q1. These pins may be tied directly to GND or V_{CC} in the application.

If multiple target channels are activated simultaneously in the application, then the total I_{OL} from SCL/SDA to GND on the controller side is the sum of the currents through all pull-up resistors, R_p .

The pass-gate transistors of the TCA9548A-Q1 are constructed such that the V_{CC} voltage can be used to limit the maximum voltage that is passed from one I^2C bus to another.

Figure 9-2 shows the voltage characteristics of the pass-gate transistors (note that the graph was generated using data specified in the *Electrical Characteristics* table). In order for the TCA9548A-Q1 to act as a voltage translator, the V_{pass} voltage must be equal to or lower than the lowest bus voltage. For example, if the main bus is running at 5 V and the downstream buses are 3.3 V and 2.7 V, V_{pass} must be equal to or below 2.7 V to effectively clamp the downstream bus voltages. As shown in Figure 9-2, V_{pass(max)} is 2.7 V when the TCA9548A-Q1 supply voltage is 4 V or lower, so the TCA9548A-Q1 supply voltage could be set to 3.3 V. Pull-up resistors then can be used to bring the bus voltages to their appropriate levels (see Figure 9-1).

9.2.2 Detailed Design Procedure

Once all the targets are assigned to the appropriate target channels and bus voltages are identified, the pull-up resistors, R_p , for each of the buses need to be selected appropriately. The minimum pull-up resistance is a function of V_{DPUX} , $V_{OL,(max)}$, and I_{OL} as shown in Equation 1:

$$R_{p(min)} = \frac{V_{DPUX} - V_{OL(max)}}{I_{OL}}$$
(1)

The maximum pull-up resistance is a function of the maximum rise time, t_r (300 ns for fast-mode operation, f_{SCL} = 400 kHz) and bus capacitance, C_b as shown in Equation 2:

$$R_{p(max)} = \frac{t_r}{0.8473 \times C_b} \tag{2}$$


The maximum bus capacitance for an I^2C bus must not exceed 400 pF for fast-mode operation. The bus capacitance can be approximated by adding the capacitance of the TCA9548A-Q1, $C_{io(OFF)}$, the capacitance of wires, connections and traces, and the capacitance of each individual target on a given channel. If multiple channels are activated simultaneously, each of the targets on all channels contribute to total bus capacitance.

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated



9.2.3 Application Curves

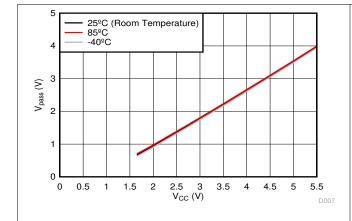




Figure 9-2. Pass-Gate Voltage (V_{pass}) vs Supply Voltage (V_{CC}) at Three Temperature Points

Figure 9-3. Maximum Pull-up Resistance ($R_{p(max)}$) vs Bus Capacitance (C_b)




Figure 9-4. Minimum Pull-up Resistance (R_{p(min)}) vs Pull-up Reference Voltage (V_{DPUX})




Power Supply Recommendations

The operating power-supply voltage range of the TCA9548A-Q1 is 1.65 V to 5.25 V applied at the VCC pin. When the TCA9548A-Q1 is powered on for the first time or anytime the device must be reset by cycling the power supply, the power-on reset requirements must be followed to ensure the I²C bus logic is initialized properly.

9.1 Power-On Reset Requirements

In the event of a glitch or data corruption, TCA9548A-Q1 can be reset to its default conditions by using the power-on reset feature. Power-on reset requires that the device go through a power cycle to be completely reset. This reset also happens when the device is powered on for the first time in an application.

A power-on reset is shown in Figure 9-1.

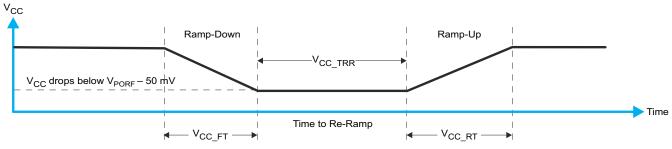

V_{CC} is Lowered Below the POR Threshold, Then Ramped Back Up to V_{CC}

Figure 9-1. Power-On Reset Waveform

Table 9-1 specifies the performance of the power-on reset feature for TCA9548A-Q1 for both types of power-on reset.

PARAMETER MIN MAX UNIT Fall time See Figure 9-1 100 $V_{CC\ FT}$ 1 ms See Figure 9-1 $V_{CC\ RT}$ Rise time 0.1 100 ms Time to re-ramp (when V_{CC} drops below $V_{PORF(min)}$ – 50 mV or See Figure 9-1 40 V_{CC} TRR μs when V_{CC} drops to GND) Level that V_{CC} can glitch down to, but not cause a functional See Figure 9-2 ٧ V_{CC_GH} 1.2 disruption when $V_{CC\ GW} = 1 \mu s$ Glitch width that does not cause a functional disruption when

See Figure 9-2

Table 9-1. Recommended Supply Sequencing and Ramp Rates⁽¹⁾

(1) All supply sequencing and ramp rate values are measured at $T_A = 25$ °C

 $V_{CC\ GH} = 0.5 \times V_{CC}$

Glitches in the power supply can also affect the power-on reset performance of this device. The glitch width (V_{CC_GW}) and height (V_{CC_GH}) are dependent on each other. The bypass capacitance, source impedance, and device impedance are factors that affect power-on reset performance. Figure 9-2 and Table 9-1 provide more information on how to measure these specifications.

Submit Document Feedback

10

us

 V_{CC_GW}

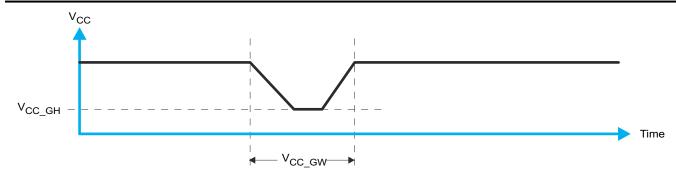


Figure 9-2. Glitch Width and Glitch Height

 V_{POR} is critical to the power-on reset. V_{POR} is the voltage level at which the reset condition is released and all the registers and the I²C/SMBus state machine are initialized to their default states. The value of V_{POR} differs based on the V_{CC} being lowered to or from 0. Figure 9-3 and Table 9-1 provide more details on this specification.

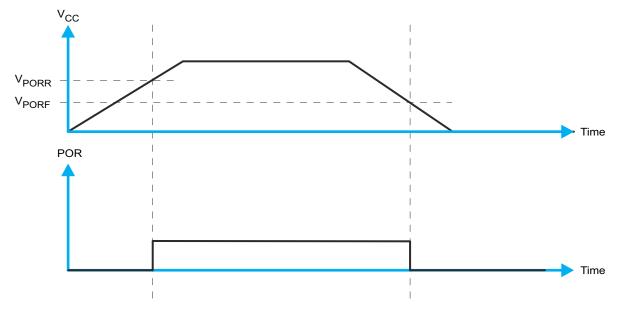


Figure 9-3. V_{POR} Example



9 Layout

9.1 Layout Guidelines

For PCB layout of the TCA9548A-Q1, common PCB layout practices must be followed but additional concerns related to high-speed data transfer such as matched impedances and differential pairs are not a concern for I²C signal speeds. It is common to have a dedicated ground plane on an inner layer of the board and pins that are connected to ground must have a low-impedance path to the ground plane in the form of wide polygon pours and multiple vias. Bypass and decoupling capacitors are commonly used to control the voltage on the VCC pin, using a larger capacitor to provide additional power in the event of a short power supply glitch and a smaller capacitor to filter out high-frequency ripple.

In an application where voltage translation is not required, all V_{DPUX} voltages and V_{CC} could be at the same potential and a single copper plane could connect all of the pull-up resistors to the appropriate reference voltage. In an application where voltage translation is required, V_{DPUM} and $V_{DPU0} - V_{DPU7}$, may all be on the same layer of the board with split planes to isolate different voltage potentials.

To reduce the total I²C bus capacitance added by PCB parasitics, data lines (SCn and SDn) must be a short as possible and the widths of the traces must also be minimized (for example, 5-10 mils depending on copper weight).

9.2 Layout Example

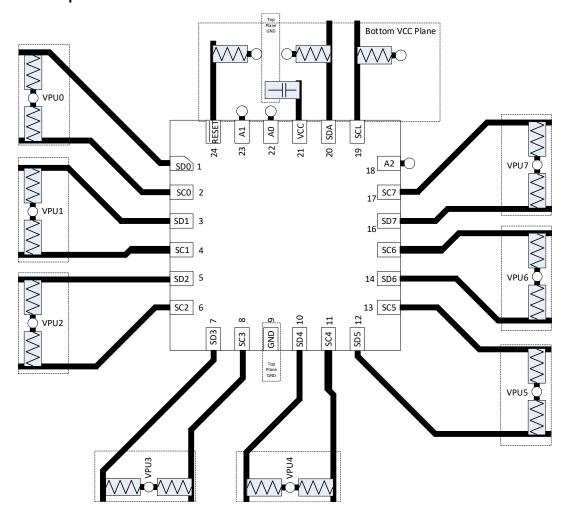


Figure 9-1. Layout Schematic



10 Device and Documentation Support

10.1 Documentation Support

10.1.1 Related Documentation

For related documentation see the following:

- I2C Bus Pull-Up Resistor Calculation
- Maximum Clock Frequency of I2C Bus Using Repeaters
- Introduction to Logic
- Understanding the I2C Bus
- Choosing the Correct I2C Device for New Designs
- TCA9548AEVM User's Guide

10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.3 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

10.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

10.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
TCA9548ARGERQ1	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	T9548A
TCA9548ARGERQ1.B	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	T9548A

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TCA9548A-Q1:

Catalog: TCA9548A

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

NOTE: Qualified Version Definitions:

 $_{\bullet}$ Catalog - TI's standard catalog product

PACKAGE MATERIALS INFORMATION

www.ti.com 9-Jun-2023

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

	Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ĺ	TCA9548ARGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

PACKAGE MATERIALS INFORMATION

www.ti.com 9-Jun-2023



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TCA9548ARGERQ1	VQFN	RGE	24	3000	367.0	367.0	35.0

PLASTIC QUAD FLATPACK - NO LEAD



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4204104/H



PLASTIC QUAD FLATPACK- NO LEAD



NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK- NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Solder mask tolerances between and around signal pads can vary based on board fabrication site.



PLASTIC QUAD FLATPACK- NO LEAD



NOTES: (continued)

Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations..



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025