

# TCAN1044A-Q1 Automotive Fault-Protected CAN FD Transceiver with Standby mode

#### 1 Features

- AEC-Q100 (Grade 1) Qualified for automotive applications
- Meets the requirements of ISO 11898-2:2016 physical layer standard
- **Functional Safety-Capable** 
  - Documentation available to aid in functional safety system design
- Support of classical CAN and optimized CAN FD performance at 2, 5, and 8Mbps
  - Short and symmetrical propagation delays for enhanced timing margin
- TCAN1044AV I/O voltage range supports 1.7V to 5.5V
- Support for 12V and 24V battery applications
- Receiver common mode input voltage: ±12V
- Protection features:
  - Bus fault protection: ±58V
  - Undervoltage protection
  - TXD-dominant time-out (DTO)
    - · Data rates down to 9.2kbps
  - Thermal-shutdown protection (TSD)
- Operating modes:
  - Normal mode
  - Low power standby mode supporting remote wake-up request
- Optimized behavior when unpowered
  - Bus and logic pins are high impedance (no load to operating bus or application)
  - Hot-plug capable: power up/down glitch-free operation on bus and RXD output
- 8-Pin SOIC, small footprint SOT-23 and leadless VSON-8 package with improved automated optical inspection (AOI) capability

# 2 Applications

- Automotive and transportation
  - Body control modules
  - Automotive gateway
  - Advanced driver assistance system (ADAS)
  - Infotainment

# 3 Description

The TCAN1044A-Q1 is a high speed controller area network (CAN) transceiver that meets the physical layer requirements of the ISO 11898-2:2016 highspeed CAN specification.


The transceivers have certified electromagnetic compatibility (EMC) operation making it an ideal choice for classical CAN and CAN FD networks up to 5 megabits per second (Mbps). Up to 8Mbps operation in simpler networks is possible with these devices. The TCAN1044AV-Q1 includes internal logic level translation via the V<sub>IO</sub> pin to allow for interfacing the transceiver I/O's directly to 1.8V, 2.5V, 3.3V, or 5V logic levels. The transceiver supports a low-power standby mode and wake over CAN which is compliant to the ISO 11898-2:2016 defined wake-up pattern (WUP).

The transceivers also include thermal-shutdown TXD-dominant time-out (DTO), supply undervoltage detection, and ±58V bus fault protection. The devices have defined fail-safe behavior in supply undervoltage or floating pin scenarios. These transceivers are not only available in industrystandard SOIC-8 and VSON-8 packages, but also have a space-saving small footprint SOT-23 package option.

**Package Information** 

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>				
	SOIC (D)	4.9mm x 6mm				
TCAN1044A-Q1	VSON (DRB)	3mm x 3mm				
	SOT-23 (DDF)	2.9mm x 2.8mm				

- For more information, see Section 12.
- The package size (length × width) is a nominal value and includes pins, where applicable.

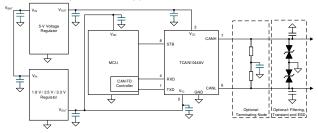

Simplified Schematic



# **Table of Contents**

1 Features	1	8.2 Functional Block Diagram	15
2 Applications	1	8.3 Feature Description	15
3 Description	1	8.4 Device Functional Modes	19
4 Device Comparison	2	9 Application Information Disclaimer	22
5 Pin Configuration and Functions	3	9.1 Application Information	
6 Specifications	4	9.2 Typical Application	
6.1 Absolute Maximum Ratings	4	9.3 System Examples	24
6.2 ESD Ratings	4	9.4 Power Supply Recommendations	24
6.3 ESD Ratings - IEC Specifications	4	9.5 Layout	25
6.4 Recommended Operating Conditions	4	10 Device and Documentation Support	26
6.5 Thermal Characteristics	5	10.1 Receiving Notification of Documentation Update	es <mark>26</mark>
6.6 Supply Characteristics	<u>5</u>	10.2 Support Resources	26
6.7 Dissipation Ratings	6	10.3 Trademarks	26
6.8 Electrical Characteristics	6	10.4 Electrostatic Discharge Caution	26
6.9 Switching Characteristics	8	10.5 Glossary	26
6.10 Typical Characteristics	10	11 Revision History	26
7 Parameter Measurement Information	11	12 Mechanical, Packaging, and Orderable	
8 Detailed Description	14	Information	27
8.1 Overview	14		

# **4 Device Comparison**

# **Table 4-1. Device Comparison Table**

	Table 4 1. Device Companion Table			
Part Number	Low Voltage I/O Logic Support on Pin 5	Pin 8 Mode Selection		
TCAN1044A-Q1	No	Low Power Standby Mode with Remote		
TCAN1044AV-Q1	Yes	Wake		



# **5 Pin Configuration and Functions**



Figure 5-1. DDF Package, 8-Pin SOT (Top View)

Figure 5-2. D Package, 8-Pin SOIC (Top View)




Figure 5-3. DRB Package, 8-Pin VSON (Top View)

**Table 5-1. Pin Functions** 

Pins		Tuno	Description
Name			Description
TXD	1	Digital Input	CAN transmit data input; integrated pull-up
GND	2	GND	Ground connection
V <sub>CC</sub> 3		Supply	5V supply voltage
RXD 4		Digital Output	CAN receive data output, tri-stated when device powered off
NC	5	_	Not internally connected; Devices without V <sub>IO</sub>
V <sub>IO</sub>	5	Supply	I/O supply voltage for devices with suffix 'V'
CANL	6	Bus IO	Low-level CAN bus input/output line
CANH	7	Bus IO	High-level CAN bus input/output line
STB	8	Digital Input	Standby input for mode control; integrated pull-up
Thermal Pad (VSON only) —		_	Connect the thermal pad to any internal PCB ground plane using multiple vias for optimal thermal performance.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



# **6 Specifications**

# **6.1 Absolute Maximum Ratings**

(1)(2)

		MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage	-0.3	6	V
V <sub>IO</sub>	Supply voltage I/O level shifter	-0.3	6	V
V <sub>BUS</sub>	CAN Bus I/O voltage	-58	58	V
$V_{DIFF}$	Max differential voltage between CANH and CANL	-45	45	V
V <sub>Logic_Input</sub>	Logic input terminal voltage	-0.3	6	V
$V_{RXD}$	RXD output terminal voltage range	-0.3	6	V
I <sub>O(RXD)</sub>	RXD output current	-8	8	mA
T <sub>J</sub>	Junction temperature	-40	165	°C
T <sub>STG</sub>	Storage temperature	-65	150	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) All voltage values, except differential I/O bus voltages, are with respect to ground terminal.

6.2 ESD Ratings

					UNIT
			HBM classification level 3A for all pins	±4000	V
V <sub>ESD</sub>	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup>	HBM classification level 3B for global pins CANH and CANL with respect to GND	±10000	V
		Charged-device model (CDM), per AEC Q100-011 CDM classification level C5 for all pins			V

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 ESD Ratings - IEC Specifications

				VALUE	UNIT
	System level Electrostatic discharge		Unpowered contact discharge per ISO 10605 <sup>(1)</sup>	±8000	V
V <sub>ESD</sub>			SAE J2962-2 per ISO 10605 Powered Contact Discharge (2)	±8000	V
		CAN bus terminals to GND	SAE J2962-2 per ISO 10605 Powered Air Discharge <sup>(2)</sup>	±15000	V
	Transient voltage per ISO 7637-2 <sup>(3)</sup>		Pulse 1	-100	V
			Pulse 2a	75	V
$V_{Tran}$			Pulse 3a	-150	V
			Pulse 3b	100	V
	Transient voltage per ISO 7637-3 <sup>(4)</sup>		DCC slow transient pulse	±30	V

- (1) Tested according to IEC 62228-3:2019 CAN Transceivers.
- (2) Results given here are specific to the SAE J2962-2 Communication Transceivers Qualification Requirements CAN. Testing performed by OEM approved independent third party, EMC report available upon request.
- (3) Tested according to IEC 62228-3:2019 CAN Transceivers.
- (4) Tested according to SAE J2962-2.

### **6.4 Recommended Operating Conditions**

		MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage	4.5	5	5.5	V
V <sub>IO</sub>	Supply voltage for I/O level shifter	1.7		5.5	V
I <sub>OH(RXD)</sub>	RXD terminal high-level output current, Devices with V <sub>IO</sub>	-1.5			mA



# **6.4 Recommended Operating Conditions (continued)**

		MIN	NOM MAX	UNIT
I <sub>OL(RXD)</sub>	RXD terminal low-level output current, Devices with V <sub>IO</sub>		1.5	mA
I <sub>OH(RXD)</sub>	RXD terminal high-level output current, Devices without V <sub>IO</sub>	-2		mA
I <sub>OL(RXD)</sub>	RXD terminal low-level output current, Devices without V <sub>IO</sub>		2	mA
T <sub>J</sub>	Operating junction temperature	-40	150	°C

### 6.5 Thermal Characteristics

	THERMAL METRIC(1)	TCAN1044Ax-Q1			
THERMAL METRIC		D (SOIC)	DDF (SOT)	DRB (VSON)	UNIT
R <sub>0JA</sub>	Junction-to-ambient thermal resistance	127.5	122	55.2	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	67.6	63	62.4	°C/W
R <sub>0JB</sub>	Junction-to-board thermal resistance	70.9	42.4	27.5	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	19.3	2.4	2.3	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	70.2	42.2	27.4	°C/W
R <sub>0JC(bot)</sub>	Junction-to-case (bottom) thermal resistance			11.5	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

# 6.6 Supply Characteristics

Over recommended operating conditions with T<sub>J</sub> = -40°C to 150°C (unless otherwise noted)

	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
		Dominant	STB = 0 V, TXD = 0 V $R_L$ = 60 $\Omega$ , $C_L$ = open See Figure 7-1		45	70	mA
	Supply current		STB = 0 V, TXD = 0 V $R_L$ = 50 $\Omega$ , $C_L$ = open See Figure 7-1		49	80	mA
	Normal mode	Recessive	STB = 0 V, TXD = $V_{CC}$ or $V_{IO}$ $R_L$ = 50 $\Omega$ , $C_L$ = open See Figure 7-1		4.5	7.5	mA
I <sub>cc</sub>		Dominant with bus fault	STB = 0 V, TXD = 0 V CANH = CANL = ±25 V R <sub>L</sub> = open, C <sub>L</sub> = open See Figure 7-1			130	mA
	Supply current Standby mode Devices with V <sub>IO</sub>		$ \begin{aligned} &STB = TXD = V_{IO} \\ &R_{L} = 50 \; \Omega, \; C_{L} = open \\ &See \; Figure \; 7-1 \end{aligned} $			1.5	μА
	Supply current Standby mode Devices without V <sub>IO</sub>		STB = TXD = $V_{CC}$ $R_L$ = 50 $\Omega$ , $C_L$ = open See Figure 7-1			15	μА
	I/O supply current Normal mode	Dominant	STB = 0 V, TXD = 0 V RXD floating		125	300	μΑ
I <sub>IO</sub>	I/O supply current Normal mode	Recessive	STB = 0 V, TXD = 0 V RXD floating		25	48	μΑ
	I/O supply current Standby mode		STB = V <sub>IO,</sub> TXD = 0 V RXD floating		8.5	14	μΑ
LIV	Rising undervoltage detection	on on V <sub>CC</sub> for prot	ected mode		4.2	4.4	V
Ovcc	Falling undervoltage detection on V <sub>CC</sub> for protected mode		3.5	4	4.25	V	
V <sub>HYS(UVCC)</sub>	Hysteresis voltage on UV <sub>CC</sub>				200		mV
UV <sub>CC</sub>	Rising undervoltage detection	on on V <sub>IO</sub> (Device	s with V <sub>IO</sub> )		1.56	1.65	V
OVVIO	Falling undervoltage detecti	on on V <sub>IO</sub> (Device	es with V <sub>IO</sub> )	1.4	1.51	1.59	V
V <sub>HYS(UVIO)</sub>	Hysteresis voltage on UV <sub>IO</sub>				40		mV



6.7 Dissipation Ratings

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Average power dissipation Normal mode	$V_{CC}$ = 5 V, $V_{IO}$ = 1.8 V, $T_J$ = 27°C, $R_L$ = 60 Ω, $C_{L\_RXD}$ = 15 pF TXD input = 250 kHz 50% duty cycle square wave		95		mW
		$V_{CC}$ = 5 V, $V_{IO}$ = 3.3 V, $T_{J}$ = 27°C, $R_{L}$ = 60 Ω, $C_{L,RXD}$ = 15 pF TXD input = 250 kHz 50% duty cycle square wave		95		mW
P <sub>D</sub>		$\begin{array}{l} V_{CC}=5~\text{V, V}_{IO}=5~\text{V, T}_{J}=27^{\circ}\text{C, R}_{L}=60~\Omega, \\ C_{L~RXD}=15~\text{pF} \\ TXD~\text{input}=250~\text{kHz}~50\%~\text{duty cycle square} \\ wave \end{array}$		95		mW
LD		$\begin{array}{l} V_{CC} = 5.5 \text{ V, } V_{IO} = 1.8 \text{ V, } T_J = 150 ^{\circ}\text{C, } R_L = 60\Omega, \\ C_{L\_RXD} = 15 \text{ pF} \\ TXD \text{ input = 2.5 MHz 50\% duty cycle square} \\ wave \end{array}$		120		mW
		$\begin{array}{l} V_{CC} = 5.5 \text{ V, } V_{IO} = 3.3 \text{ V, } T_{J} = 150 ^{\circ}\text{C, } R_{L} = 60 \Omega, \\ C_{L} _{RXD} = 15 \text{ pF} \\ TXD \text{ input } = 2.5 \text{ MHz } 50\% \text{ duty cycle square} \\ wave \end{array}$		120		mW
		$\begin{array}{l} V_{CC} = 5.5 \text{ V, } V_{IO} = 5 \text{ V, } T_{J} = 150 ^{\circ}\text{C, } R_{L} = 60 \Omega, \\ C_{L\_RXD} = 15 \text{ pF} \\ TXD \text{ input} = 2.5 \text{ MHz} 50\% \text{ duty cycle square} \\ wave \end{array}$		120		mW
T <sub>TSD</sub>	Thermal shutdown temperature		175	195	210	°C
T <sub>TSD(HYS)</sub>	Thermal shutdown hysteresis			12		

# **6.8 Electrical Characteristics**

Over recommended operating conditions with  $T_J$  = -40°C to 150°C (unless otherwise noted)

	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Driver Elec	ctrical Characteristics						
	Dominant output voltage	CANH	STB = 0 V, TXD = 0 V	2.75		4.5	V
$V_{O(DOM)}$	Normal mode	CANL	50 Ω ≤ RL ≤ 65 Ω, CL = open, RCM = open See Figure 7-2 and Figure 8-3	0.5		2.25	٧
V <sub>O(REC)</sub>	Recessive output voltage Normal mode	CANH and CANL	$\begin{split} \text{STB = 0 V, TXD = V}_{\text{IO}} \\ \text{R}_{\text{L}} &= \text{open (no load), R}_{\text{CM}} = \text{open} \\ \text{See Figure 7-2 and Figure 8-3} \end{split}$	2	0.5 V <sub>CC</sub>	3	V
V <sub>SYM</sub>	Driver symmetry (V <sub>O(CANH)</sub> + V <sub>O(CANL)</sub> )/V <sub>CC</sub>		STB = 0 V, TXD = 250 kHz, 1 MHz, 2.5 MHz $R_L$ = 60 $\Omega$ , $C_{SPLIT}$ = 4.7 nF, $C_L$ = open, $R_{CM}$ = open See Figure 7-2 and Figure 9-2	0.9		1.1	V/V
V <sub>SYM_DC</sub>	DC output symmetry (V <sub>CC</sub> - V <sub>O(CANL)</sub> )		STB = 0 V $R_L$ = 60 $\Omega$ , $C_L$ = open See Figure 7-2 and Figure 8-3	-400		400	mV
			$\begin{aligned} &STB = 0 \; V, \; TXD = 0 \; V \\ &50 \; \Omega \leq R_L \leq 65 \; \Omega, \; C_L = open \\ &See \; Figure \; 7\text{-}2 \; and \; Figure \; 8\text{-}3 \end{aligned}$	1.5		3	V
$V_{OD(DOM)}$	Differential output voltage Normal mode Dominant  CANH - CANL	CANH - CANL	$\begin{aligned} &STB = 0 \; V, \; TXD = 0 \; V \\ &45 \; \Omega \leq R_L \leq 70 \; \Omega, \; C_L = open \\ &See \; Figure \; 7\text{-}2 \; and \; Figure \; 8\text{-}3 \end{aligned}$	1.4		3.3	V
			$\begin{aligned} \text{STB = 0 V, TXD = 0 V} \\ \text{R}_{\text{L}} &= 2240 \ \Omega, \ \text{C}_{\text{L}} &= \text{open} \\ \text{See Figure 7-2 and Figure 8-3} \end{aligned}$	1.5		5	V
V	Differential output voltage Normal mode Recessive	CANIL CANI	STB = 0 V, TXD = $V_{IO}$ $R_L$ = 60 $\Omega$ , $C_L$ = open See Figure 7-2 and Figure 8-3	-120		12	mV
V <sub>OD(REC)</sub>		$\begin{aligned} &STB = 0 \; V, \; TXD = V_{IO} \\ &R_{L} = open, \; C_{L} = open \\ &See \; Figure \; 7-2 \; and \; Figure \; 8-3 \end{aligned}$	-50		50	mV	



# **6.8 Electrical Characteristics (continued)**

Over recommended operating conditions with  $T_J = -40^{\circ}\text{C}$  to 150°C (unless otherwise noted)

	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNI
		CANH	STB = V <sub>IO</sub>	-0.1		0.1	V
V <sub>O(STB)</sub>	Bus output voltage Standby mode	CANL	R <sub>L</sub> = open	-0.1		0.1	V
, ,	Standby mode	CANH - CANL	See Figure 7-2 and Figure 8-3	-0.2		0.2	V
logge pour	Short-circuit steady-state o dominant	utput current,	STB = 0 V, TXD = 0 V V <sub>(CANH)</sub> = -15 V to 40 V, CANL = open See Figure 7-7 and Figure 8-3	-115			m
OS(SS_DOM)	Normal mode		STB = 0 V, TXD = 0 V V <sub>(CAN_L)</sub> = -15 V to 40 V, CANH = open See Figure 7-7 and Figure 8-3			115	m.
OS(SS_REC)	Short-circuit steady-state o recessive Normal mode	utput current,	$\begin{aligned} &STB = 0 \; V, \; TXD = V_{IO} \\ &-27 \; V \leq V_{BUS} \leq 32 \; V, \; where \; V_{BUS} = CANH \\ &= CANL \\ &See \; Figure \; 7-7 \; and \; Figure \; 8-3 \end{aligned}$	<b>-</b> 5		5	m
Receiver Ele	ectrical Characteristics						
V <sub>IT</sub>	Input threshold voltage Normal mode		STB = 0 V -12 V ≤ V <sub>CM</sub> ≤ 12 V See Figure 7-3 and Table 8-6	500		900	m
V <sub>IT(STB)</sub>	Input threshold Standby mode		$STB = V_{IO}$ -12 V $\leq$ V <sub>CM</sub> $\leq$ 12 V See Figure 7-3 and Table 8-6	400		1150	m
$V_{DOM}$	Dominant state differential Normal mode	input voltage range	STB = 0 V -12 V ≤ V <sub>CM</sub> ≤ 12 V See Figure 7-3 and Table 8-6	0.9		9	\
$V_{REC}$	Recessive state differential input voltage range Normal mode		STB = 0 V -12 V ≤ V <sub>CM</sub> ≤ 12 V See Figure 7-3 and Table 8-6	-4		0.5	,
V <sub>DOM(STB)</sub>	Dominant state differential input voltage range Standby mode		$STB = V_{IO}$ -12 V $\leq$ V <sub>CM</sub> $\leq$ 12 V See Figure 7-3 and Table 8-6	1.15		9	,
V <sub>REC(STB)</sub>	Recessive state differential input voltage range Standby mode		$STB = V_{IO}$ -12 V $\leq$ V <sub>CM</sub> $\leq$ 12 V See Figure 7-3 and Table 8-6	-4		0.4	,
$V_{HYS}$	Hysteresis voltage for input Normal mode	threshold	STB = 0 V -12 V ≤ V <sub>CM</sub> ≤ 12 V See Figure 7-3 and Table 8-6		115		n
V <sub>CM</sub>	Common-mode range Normal and standby modes	S	See Figure 7-3 and Table 8-6	-12		12	,
LKG(IOFF)	Unpowered bus input leaka	ige current	CANH = CANL = 5 V, V <sub>CC</sub> = V <sub>IO</sub> = GND			5	μ
21	Input capacitance to ground	d (CANH or CANL)	TVD = V (1)			20	p
P <sub>ID</sub>	Differential input capacitand	ce	$- TXD = V_{IO} ^{(1)}$			10	F
R <sub>ID</sub>	Differential input resistance		OTD 01/ TVD 1/ (1)	40		90	k
R <sub>IN</sub>	Single-ended input resistan (CANH or CANL)	ice	STB = 0 V, TXD = $V_{IO}$ (1) -12 V $\leq$ $V_{CM} \leq$ 12 V	20		45	k
$R_{IN(M)}$	Input resistance matching [1 – (R <sub>IN(CANH)</sub> / R <sub>IN(CANL)</sub> )]	× 100 %	V <sub>(CAN_H)</sub> = V <sub>(CAN_L)</sub> = 5 V	-1		1	(
TXD Termina	al (CAN Transmit Data Inpu	t)					
/ <sub>IH</sub>	High-level input voltage		Devices without V <sub>IO</sub>	0.7 V <sub>CC</sub>			١,
/ <sub>IH</sub>	High-level input voltage		Devices with V <sub>IO</sub>	0.7 V <sub>IO</sub>			
/ <sub>IL</sub>	Low-level input voltage		Devices without V <sub>IO</sub>			0.3 V <sub>CC</sub>	
/ <sub>IL</sub>	Low-level input voltage		Devices with V <sub>IO</sub>			0.3 V <sub>IO</sub>	_
IH	High-level input leakage cu	rrent	TXD = V <sub>CC</sub> = V <sub>IO</sub> = 5.5 V	-2.5	0	1	1
IL	Low-level input leakage cui	rent	TXD = 0 V V <sub>CC</sub> = V <sub>IO</sub> = 5.5 V	-200	-100	-20	ı
LKG(OFF)	Unpowered leakage curren	t	TXD = 5.5 V V <sub>CC</sub> = V <sub>IO</sub> = 0 V	-1	0	1	ŀ
	Input capacitance		$V_{IN} = 0.4 \times \sin(2 \times \pi \times 2 \times 10^6 \times t) + 2.5 \text{ V}$		5		F

# 6.8 Electrical Characteristics (continued)

Over recommended operating conditions with  $T_J = -40^{\circ}\text{C}$  to 150°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V <sub>OH</sub>	High-level output voltage	I <sub>O</sub> = -2 mA Devices without V <sub>IO</sub> See Figure 7-3	0.8 V <sub>CC</sub>			V
V <sub>OH</sub>	High-level output voltage	$I_{O}$ = -1.5 mA Devices with $V_{IO}$ See Figure 7-3	0.8 V <sub>IO</sub>			V
V <sub>OL</sub>	Low-level output voltage	I <sub>O</sub> = 2 mA Devices without V <sub>IO</sub> See Figure 7-3			0.2 V <sub>CC</sub>	V
V <sub>OL</sub>	Low-level output voltage	I <sub>O</sub> = 1.5mA Devices with V <sub>IO</sub> See Figure 7-3			0.2 V <sub>IO</sub>	V
I <sub>LKG(OFF)</sub>	Unpowered leakage current	RXD = 5.5 V V <sub>CC</sub> = V <sub>IO</sub> = 0 V	-1	0	1	μA
STB Termi	nal (Standby Mode Input)		•			
V <sub>IH</sub>	High-level input voltage	Devices without V <sub>IO</sub>	0.7 V <sub>CC</sub>			V
V <sub>IH</sub>	High-level input voltage	Devices with V <sub>IO</sub>	0.7 V <sub>IO</sub>			V
V <sub>IL</sub>	Low-level input voltage	Devices without V <sub>IO</sub>			0.3 V <sub>CC</sub>	V
V <sub>IL</sub>	Low-level input voltage	Devices with V <sub>IO</sub>			0.3 V <sub>IO</sub>	V
I <sub>IH</sub>	High-level input leakage current	V <sub>CC</sub> = V <sub>IO</sub> = STB = 5.5 V	-2		2	μA
I <sub>IL</sub>	Low-level input leakage current	STB = 0 V V <sub>CC</sub> = V <sub>IO</sub> = 5.5 V,	-20		-2	μA
I <sub>LKG(OFF)</sub>	Unpowered leakage current	STB = 5.5V V <sub>CC</sub> = V <sub>IO</sub> = 0 V	-1	0	1	μA

<sup>(1)</sup>  $V_{IO} = V_{CC}$  in non-V variants of device

# **6.9 Switching Characteristics**

Over recommended operating conditions with  $T_J$  = -40°C to 150°C (unless otherwise noted).

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Device Switchin	ng Characteristics					
t <sub>PROP(LOOP1)</sub>	Total loop delay Driver input (TXD) to receiver output (RXD), recessive to dominant	STB = 0 V, $V_{IO}$ = 2.8 V to 5.5 V $R_L$ = 60 Ω, $C_L$ = 100 pF, $C_{L(RXD)}$ = 15 pF See Figure 7-4		125	210	ns
t <sub>PROP(LOOP1)</sub>	Total loop delay Driver input (TXD) to receiver output (RXD), recessive to dominant	STB = 0 V, $V_{IO}$ = 1.7 V $R_L$ = 60 $\Omega$ , $C_L$ = 100 pF, $C_{L(RXD)}$ = 15 pF See Figure 7-4		165	255	ns
t <sub>PROP(LOOP2)</sub>	Total loop delay Driver input (TXD) to receiver output (RXD), dominant to recessive	STB = 0 V, $V_{IO}$ = 2.8 V to 5.5 V $R_L$ = 60 $\Omega$ , $C_L$ = 100 pF, $C_{L(RXD)}$ = 15 pF See Figure 7-4		150	210	ns
t <sub>PROP(LOOP2)</sub>	Total loop delay Driver input (TXD) to receiver output (RXD), dominant to recessive	STB = 0 V, $V_{IO}$ = 1.7 V $R_L$ = 60 $\Omega$ , $C_L$ = 100 pF, $C_{L(RXD)}$ = 15 pF See Figure 7-4		180	255	ns
t <sub>MODE</sub>	Mode change time, from normal to standby or from standby to normal	See Figure 7-5			20	μs
t <sub>WK_FILTER</sub>	Filter time for a valid wake-up pattern	See Figure 8-5	0.5		1.8	μs
t <sub>WK_TIMEOUT</sub>	Bus wake-up timeout	See Figure 6-5	0.8		6	ms
Driver Switchin	g Characteristics				•	
t <sub>pHR</sub>	Propagation delay time, high TXD to driver recessive (dominant to recessive)			80		ns
t <sub>pLD</sub>	Propagation delay time, low TXD to driver dominant (recessive to dominant)	STB = 0 V R <sub>I</sub> = 60 Ω, C <sub>I</sub> = 100 pF		70		ns
t <sub>sk(p)</sub>	Pulse skew ( tpHR - tpLD )	See Figure 7-2		14		ns
t <sub>R</sub>	Differential output signal rise time	1		28		ns
t <sub>F</sub>	Differential output signal fall time	1		50		ns
t <sub>TXD_DTO</sub>	Dominant timeout	See Figure 7-6	1.2		4.0	ms



# **6.9 Switching Characteristics (continued)**


Over recommended operating conditions with  $T_J = -40^{\circ}\text{C}$  to 150°C (unless otherwise noted).

	PARAMETER	TEST CONDITIONS	MIN	TYP MAX	UNIT
Receiver Swit	ching Characteristics				
t <sub>pRH</sub>	Propagation delay time, bus recessive input to high output (dominant to recessive)			81	ns
t <sub>pDL</sub>	Propagation delay time, bus dominant input to low output (recessive to dominant)	STB = 0 V C <sub>L(RXD)</sub> = 15 pF See Figure 7-3		66	ns
t <sub>R</sub>	RXD output signal rise time	See Figure 7-3		10	ns
t <sub>F</sub>	RXD output signal fall time			10	ns
FD Timing Ch	aracteristics				
	Bit time on CAN bus output pins t <sub>BIT(TXD)</sub> = 500 ns		450	525	ns
t <sub>BIT(BUS)</sub>	Bit time on CAN bus output pins $t_{BIT(TXD)} = 200 \text{ ns}$		160	205	ns
	Bit time on CAN bus output pins $t_{BIT(TXD)} = 125 \text{ ns}^{(1)}$		85	130	ns
	Bit time on RXD output pins t <sub>BIT(TXD)</sub> = 500 ns	STB = 0 V	410	540	ns
t <sub>BIT(RXD)</sub>	Bit time on RXD output pins t <sub>BIT(TXD)</sub> = 200 ns	$R_L = 60 \Omega$ , $C_L = 100 pF$ , $C_{L(RXD)} = 15 pF$ $\Delta t_{REC} = t_{BIT(RXD)} - t_{BIT(BUS)}$	130	210	ns
	Bit time on RXD output pins t <sub>BIT(TXD)</sub> = 125 ns <sup>(1)</sup>	See Figure 7-4	75	135	ns
	Receiver timing symmetry t <sub>BIT(TXD)</sub> = 500 ns		-50	20	ns
$\Delta t_{REC}$	Receiver timing symmetry t <sub>BIT(TXD)</sub> = 200 ns		-40	10	ns
	Receiver timing symmetry t <sub>BIT(TXD)</sub> = 125 ns <sup>(1)</sup>		-40	10	ns

<sup>(1)</sup> Measured during characterization and not an ISO 11898-2:2016 parameter.



# 6.10 Typical Characteristics

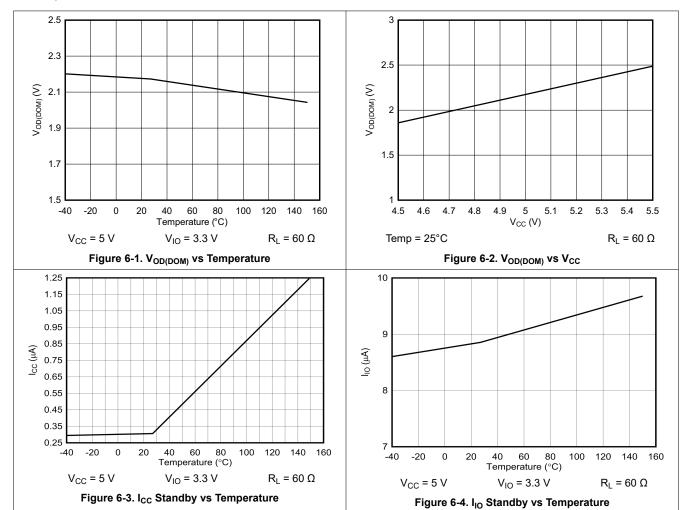



# 7 Parameter Measurement Information

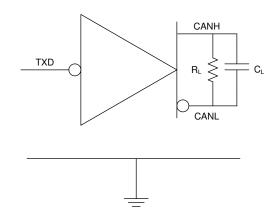


Figure 7-1. I<sub>CC</sub> Test Circuit

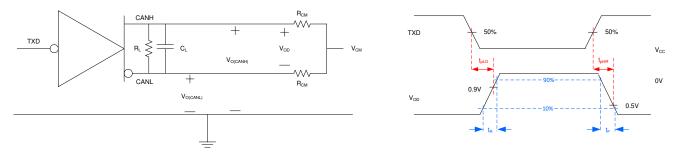


Figure 7-2. Driver Test Circuit and Measurement

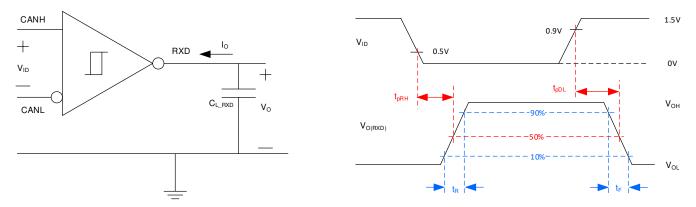


Figure 7-3. Receiver Test Circuit and Measurement



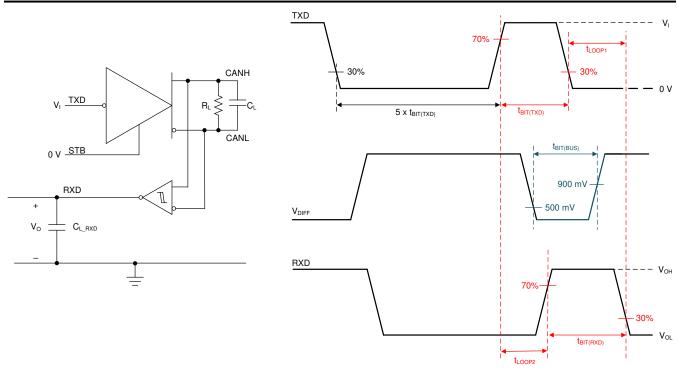


Figure 7-4. Transmitter and Receiver Timing Test Circuit and Measurement

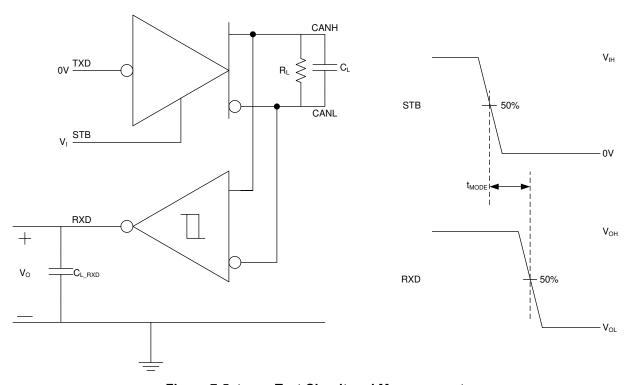


Figure 7-5. t<sub>MODE</sub> Test Circuit and Measurement

Submit Document Feedback

Copyright © 2024 Texas Instruments Incorporated



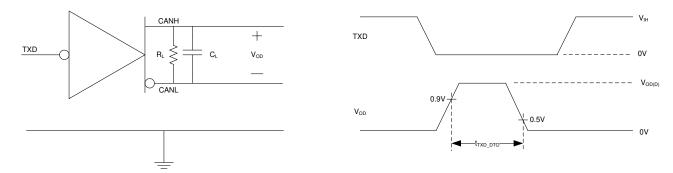


Figure 7-6. TXD Dominant Timeout Test Circuit and Measurement

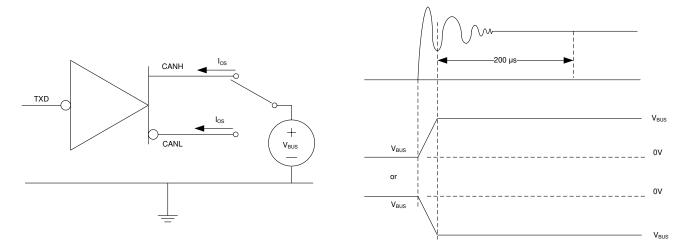


Figure 7-7. Driver Short-Circuit Current Test and Measurement

# 8 Detailed Description

### 8.1 Overview

The TCAN1044A(V)-Q1 devices meet or exceed the specifications of the ISO 11898-2:2016 high speed CAN (Controller Area Network) physical layer standard. The devices have been certified to the requirements of ISO 11898-2:2016 physical layer requirements according to the GIFT/ICT high speed CAN test specification. The transceivers provide a number of different protection features for the stringent automotive system requirements while also supporting CAN FD data rates up to 8Mbps.

The TCAN1044A(V)-Q1 support the following CAN and CAN FD standards:

- · Physical layer:
  - ISO 11898-2:2016 High speed medium access unit
  - ISO 11898-5:2007 High speed medium access unit with low-power mode
  - SAE J2284-1: High Speed CAN (HSC) for Vehicle Applications at 125kbps
  - SAE J2284-2: High Speed CAN (HSC) for Vehicle Applications at 250kbps
  - SAE J2284-3: High Speed CAN (HSC) for Vehicle Applications at 500kbps
  - SAE J2284-4: High-Speed CAN (HSC) for Vehicle Applications at 500kbps with CAN FD Data at 2Mbps
  - SAE J2284-5: High-Speed CAN (HSC) for Vehicle Applications at 500kbps with CAN FD Data at 5Mbps
- EMC Requirements
  - IEC 62228-3 EMC evaluation of transceivers CAN transceivers
  - VeLIO (Vehicle LAN Interoperability and Optimization) CAN and CAN-FD Transceiver Requirements
  - SAE J2962-2 Communication Transceivers Qualification Requirements CAN
- · Conformance test requirements:
  - ISO 16845-2 Road vehicles Controller area network (CAN) conformance test plan Part 2: High-speed medium access unit conformance test plan



# 8.2 Functional Block Diagram

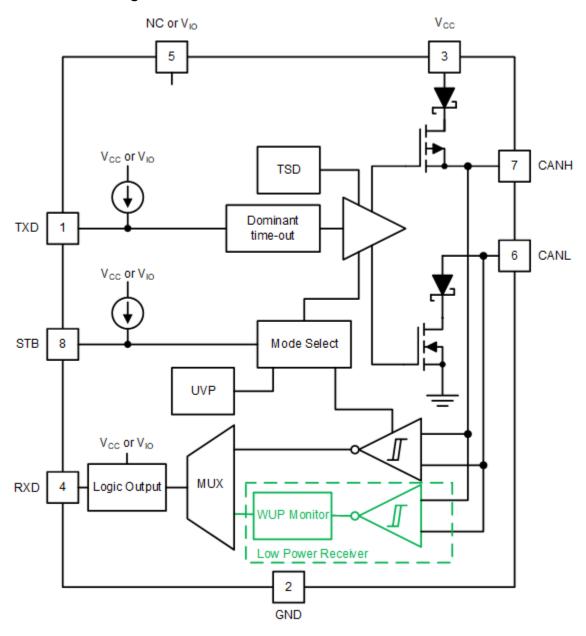


Figure 8-1. Block Diagram

# 8.3 Feature Description

# 8.3.1 Pin Description

# 8.3.1.1 TXD

The TXD input is a logic-level signal, referenced to either  $V_{CC}$  or  $V_{IO}$  from a CAN controller to the transceiver.

## 8.3.1.2 GND

GND is the ground pin of the transceiver. The pin must be connected to the PCB ground.

### 8.3.1.3 V<sub>CC</sub>

 $V_{\text{CC}}$  provides the 5-V power supply to the CAN transceiver.

#### 8.3.1.4 RXD

RXD is the logic-level signal, referenced to either  $V_{CC}$  or  $V_{IO}$ , from the TCAN1044A-Q1 to a CAN controller. This pin is only driven once  $V_{IO}$  is present.

#### 8.3.1.5 V<sub>IO</sub>

The  $V_{IO}$  pin provides the digital I/O voltage to match the CAN controller voltage thus avoiding the requirement for a level shifter. It supports voltages from 1.7 V to 5.5 V providing the widest range of controller support.

#### 8.3.1.6 CANH and CANL

The CANH and CANL pins are the CAN high and CAN low differential bus pins. These pins are internally connected to the CAN transmitter, receiver and the low-power wake-up receiver.

### 8.3.1.7 STB (Standby)

The STB pin is an input pin used for mode control of the transceiver. The STB pin can be supplied from either the system processor or from a static system voltage source. If normal mode is the only intended mode of operation, the STB pin can be tied directly to GND.

#### 8.3.2 CAN Bus States

The CAN bus has two logical states during operation: recessive and dominant. See Figure 8-2 and Figure 8-3.

A dominant bus state occurs when the bus is driven differentially and corresponds to a logic low on the TXD and RXD pins. A recessive bus state occurs when the bus is biased to  $V_{CC}/2$  via the high-resistance internal input resistors ( $R_{IN}$ ) of the receiver and corresponds to a logic high on the TXD and RXD pins.

A dominant state overwrites the recessive state during arbitration. Multiple CAN nodes may be transmitting a dominant bit at the same time during arbitration, and in this case the differential voltage of the bus is greater than the differential voltage of a single driver.

The TCAN1044A(V)-Q1 transceiver implements a low-power standby (STB) mode which enables a third bus state where the bus pins are weakly biased to ground via the high resistance internal resistors of the receiver. See Figure 8-2 and Figure 8-3.


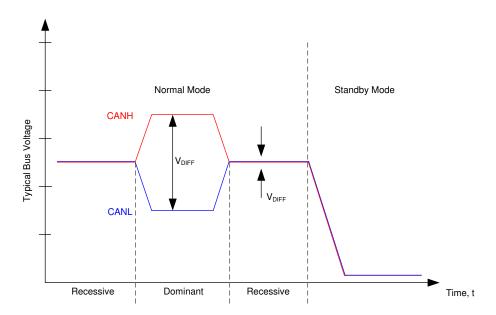


Figure 8-2. Bus States

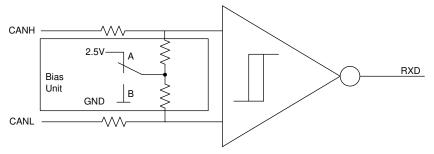

A. A - Normal Mode B - Standby Mode

Figure 8-3. Simplified Recessive Common Mode Bias Unit and Receiver

#### 8.3.3 TXD Dominant Timeout (DTO)

During normal mode, the only mode where the CAN driver is active, the TXD DTO circuit prevents the local node from blocking network communication in the event of a hardware or software failure where TXD is held dominant longer than the timeout period  $t_{TXD\_DTO}$ . The TXD DTO circuit is triggered by a falling edge on TXD. If no rising edge is seen before the timeout period of the circuit,  $t_{TXD\_DTO}$ , the CAN driver is disabled. This frees the bus for communication between other nodes on the network. The CAN driver is reactivated when a recessive signal is seen on the TXD pin, thus clearing the dominant time out. The receiver remains active and biased to  $V_{CC}/2$  and the RXD output reflects the activity on the CAN bus during the TXD DTO fault.

The minimum dominant TXD time allowed by the TXD DTO circuit limits the minimum possible transmitted data rate of the device. The CAN protocol allows a maximum of eleven successive dominant bits (on TXD) for the worst case, where five successive dominant bits are followed immediately by an error frame. The minimum transmitted data rate may be calculated using Equation 1.

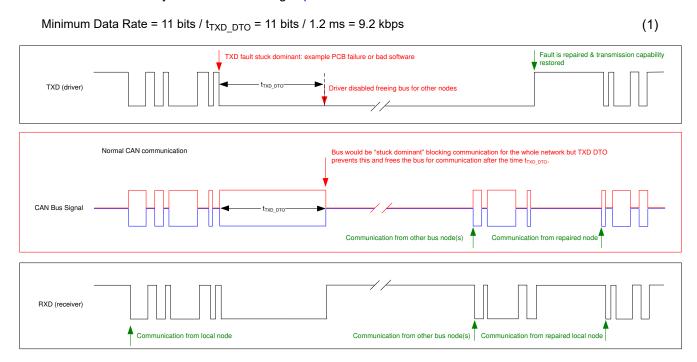


Figure 8-4. Example Timing Diagram for TXD Dominant Timeout

### 8.3.4 CAN Bus short-circuit current limiting

The TCAN1044A(V)-Q1 has several protection features that limit the short-circuit current when a CAN bus line is shorted. These include CAN driver current limiting in the dominant and recessive states and TXD dominant

Copyright © 2024 Texas Instruments Incorporated

state timeout which prevents permanently having the higher short-circuit current of a dominant state in case of a system fault. During CAN communication the bus switches between the dominant and recessive states, thus the short-circuit current may be viewed as either the current during each bus state or as a DC average current. When selecting termination resistors or a common-mode choke for the CAN design the average power rating,  $I_{OS(AVG)}$ , should be used. The percentage dominant is limited by the TXD DTO and the CAN protocol which has forced state changes and recessive bits due to bit stuffing, control fields, and interframe space. These ensure there is a minimum amount of recessive time on the bus even if the data field contains a high percentage of dominant bits.

The average short-circuit current of the bus depends on the ratio of recessive to dominant bits and their respective short-circuit currents. The average short-circuit current may be calculated using Equation 2.

#### Where:

- I<sub>OS(AVG)</sub> is the average short-circuit current
- % Transmit is the percentage the node is transmitting CAN messages
- % Receive is the percentage the node is receiving CAN messages
- % REC Bits is the percentage of recessive bits in the transmitted CAN messages
- % DOM\_Bits is the percentage of dominant bits in the transmitted CAN messages
- I<sub>OS(SS)</sub> REC is the recessive steady state short-circuit current
- I<sub>OS(SS)</sub> DOM is the dominant steady state short-circuit current

This short circuit current and the possible fault cases of the network should be taken into consideration when sizing the power supply used to generate the transceivers  $V_{CC}$  supply.

#### 8.3.5 Thermal Shutdown (TSD)

If the junction temperature of the TCAN1044A(V)-Q1 exceeds the thermal shutdown threshold,  $T_{TSD}$ , the device turns off the CAN driver circuitry and blocks the TXD to bus transmission path. The shutdown condition is cleared when the junction temperature of the device drops below  $T_{TSD}$ . The CAN bus pins are biased to  $V_{CC}/2$  during a TSD fault and the receiver to RXD path remains operational. The TCAN1044A(V)-Q1 TSD circuit includes hysteresis which prevents the CAN driver output from oscillating during a TSD fault.

### 8.3.6 Undervoltage Lockout

The supply pins,  $V_{CC}$  and  $V_{IO}$ , have undervoltage detection that places the device into a protected state. This protects the bus during an undervoltage event on either supply pin.

Table 8-1. Undervoltage Lockout - TCAN1044A-Q1

V <sub>cc</sub>	DEVICE STATE	BUS	RXD PIN
> UV <sub>VCC</sub>	Normal	Per TXD	Mirrors bus
< UV <sub>VCC</sub>	Protected	High impedance	High impedance

Table 8-2. Undervoltage Lockout - TCAN1044AV-Q1

V <sub>cc</sub>	V <sub>IO</sub>	DEVICE STATE	BUS	RXD PIN
> UV <sub>VCC</sub>	> UV <sub>VIO</sub>	Normal	Per TXD	Mirrors bus
< UV <sub>VCC</sub>	> UV <sub>VIO</sub>	STB = High: Standby Mode	Weak biased to GND	V <sub>IO</sub> : Remote wake request See Remote Wake Request via Wake-Up Pattern (WUP) in Standby Mode
		STB =Low: Protected Mode	High impedance	Recessive
> UV <sub>VCC</sub>	< UV <sub>VIO</sub>	Protected	High impedance	High impedance
< UV <sub>VCC</sub>	< UV <sub>VIO</sub>	Protected	High impedance	High impedance

Once the undervoltage condition is cleared and t<sub>MODE</sub> has expired the TCAN1044A-Q1 will transition to normal mode and the host controller can send and receive CAN traffic again

#### 8.3.7 Unpowered Device

The TCAN1044A(V)-Q1 is designed to be a passive or no load to the CAN bus if the device is unpowered. The bus pins were designed to have low leakage currents when the device is unpowered, so the pins do not load the bus. This is critical if some nodes of the network are unpowered while the rest of the of network remains operational.

The logic pins also have low leakage currents when the device is unpowered, so the pins do not load other circuits which may remain powered.

#### 8.3.8 Floating pins

The TCAN1044A(V)-Q1 has internal pull-ups on critical pins which place the device into known states if the pin floats. This internal bias should not be relied upon by design though, especially in noisy environments, but instead should be considered a failsafe protection feature.

When a CAN controller supporting open-drain outputs is used an adequate external pull-up resistor must be chosen. This ensures that the TXD output of the CAN controller maintains acceptable bit time to the input of the CAN transceiver. See Table 8-3 for details on pin bias conditions.

Table 0-0. I III blas					
Pin	Pull-up or Pull-down	Comment			
TXD	Pull-up	Weakly biases TXD towards recessive to prevent bus blockage or TXD DTO triggering			
STB	Pull-up	Weakly biases STB towards low-power standby mode to prevent excessive system power			

Table 8-3. Pin Bias

#### 8.4 Device Functional Modes

#### 8.4.1 Operating Modes

The TCAN1044A(V)-Q1 has two main operating modes; normal mode and standby mode. Operating mode selection is made by applying a high or low level to the STB pin.

Table 6 41 Operating meass						
STB	Device Mode	Driver	Receiver	RXD Pin		
High	Low current standby mode with bus wake-up	Disabled	Low-power receiver and bus monitor enable	High (recessive) until valid WUP is received See Remote Wake Request via Wake-Up Pattern (WUP) in Standby Mode		
Low	Normal Mode	Enabled	Enabled	Mirrors bus state		

Table 8-4. Operating Modes

# 8.4.2 Normal Mode

This is the normal operating mode of the TCAN1044A(V)-Q1. The CAN driver and receiver are fully operational and CAN communication is bi-directional.

The driver is translating a digital input on the TXD input to a differential output on the CANH and CANL bus pins.

The receiver is translating the differential signal from CANH and CANL to a digital output on the RXD output.

#### 8.4.3 Standby Mode

This is the low-power mode of the TCAN1044A(V)-Q1. The CAN driver and main receiver are switched off and bi-directional CAN communication is not possible. The low-power receiver and bus monitor circuits are enabled to allow for RXD wake-up requests via the CAN bus. A wake-up request is output to RXD as shown in Figure 8-5. The local CAN protocol controller should monitor RXD for transitions (high-to-low) and reactivate the device

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



to normal mode by pulling the STB pin low. The CAN bus pins are weakly pulled to GND in this mode; see Figure 8-2 and Figure 8-3.

In standby mode, only the  $V_{IO}$  supply is required therefore the  $V_{CC}$  may be switched off for additional system level current savings.

#### 8.4.3.1 Remote Wake Request via Wake-Up Pattern (WUP) in Standby Mode

The TCAN1044A(V)-Q1 supports a remote wake-up request that is used to indicate to the host controller that the bus is active and the node should return to normal operation.

The device uses the multiple filtered dominant wake-up pattern (WUP) from the ISO 11898-2:2016 standard to qualify bus activity. Once a valid WUP has been received, the wake request is indicated to the controller by a falling edge and low period corresponding to a filtered dominant on the RXD output of the TCAN1044A(V)-Q1.

The WUP consists of a filtered dominant pulse, followed by a filtered recessive pulse, and finally by a second filtered dominant pulse. The first filtered dominant initiates the WUP, and the bus monitor then waits on a filtered recessive; other bus traffic does not reset the bus monitor. Once a filtered recessive is received the bus monitor is waiting for a filtered dominant and again, other bus traffic does not reset the bus monitor. Immediately upon reception of the second filtered dominant the bus monitor recognizes the WUP and drives the RXD output low every time an additional filtered dominant signal is received from the bus.

For a dominant or recessive to be considered filtered, the bus must be in that state for more than the  $t_{WK\_FILTER}$  time. Due to variability in  $t_{WK\_FILTER}$  the following scenarios are applicable. Bus state times less than  $t_{WK\_FILTER(MIN)}$  are never detected as part of a WUP and thus no wake request is generated. Bus state times between  $t_{WK\_FILTER(MIN)}$  and  $t_{WK\_FILTER(MAX)}$  may be detected as part of a WUP and a wake-up request may be generated. Bus state times greater than  $t_{WK\_FILTER(MAX)}$  are always detected as part of a WUP, and thus a wake request is always generated. See Figure 8-5 for the timing diagram of the wake-up pattern.

The pattern and  $t_{WK\_FILTER}$  time used for the WUP prevents noise and bus stuck dominant faults from causing false wake-up requests while allowing any valid message to initiate a wake-up request.

The ISO 11898-2:2016 standard has defined times for a short and long wake-up filter time. The  $t_{WK\_FILTER}$  timing for the device has been picked to be within the minimum and maximum values of both filter ranges. This timing has been chosen such that a single bit time at 500 kbps, or two back-to-back bit times at 1 Mbps triggers the filter in either bus state. Any CAN frame at 500 kbps or less would contain a valid WUP.

For an additional layer of robustness and to prevent false wake-ups, the device implements a wake-up timeout feature. For a remote wake-up event to successfully occur, the entire WUP must be received within the timeout value  $t \le t_{WK\_TIMEOUT}$ . If not, the internal logic is reset and the transceiver remains in its current state without waking up. The full pattern must then be transmitted again, conforming to the constraints mentioned in this section. See Figure 8-5 for the timing diagram of the wake-up pattern with wake timeout feature.

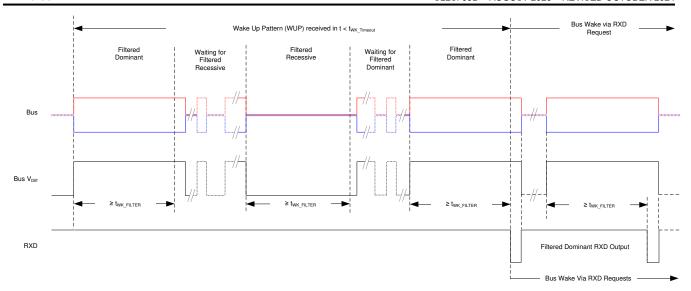


Figure 8-5. Wake-Up Pattern (WUP) with t<sub>WK\_TIMEOUT</sub>

### 8.4.4 Driver and Receiver Function

The TCAN1044A-Q1 logic I/Os support CMOS levels with respect to either  $V_{CC}$  for 5V systems (TCAN1044A-Q1) or  $V_{IO}$  for compatibility with MCUs that support 1.8V, 2.5V, 3.3V, or 5V systems (TCAN1044AV-Q1).

**Table 8-5. Driver Function Table** 

Device Mode	TXD Input <sup>(1)</sup>	Bus	Driven Bus State <sup>(2)</sup>		
Device wode	1 XD IIIput	CANH	CANL	Driven bus State	
Normal	Low	High	Low	Dominant	
Nomai	High or open	High impedance	High impedance	Biased recessive	
Standby	X	High impedance	High impedance	Biased to ground	

<sup>(1)</sup> X = irrelevant

Table 8-6. Receiver Function Table Normal and Standby Mode

Device Mode	CAN Differential Inputs V <sub>ID</sub> = V <sub>CANH</sub> - V <sub>CANL</sub>	Bus State	RXD Pin
	V <sub>ID</sub> ≥ 0.9V	Dominant	Low
Normal	0.5V < V <sub>ID</sub> < 0.9V	Undefined	Undefined
	V <sub>ID</sub> ≤ 0.5V	Recessive	High
	V <sub>ID</sub> ≥ 1.15V	Dominant	High
Standby	0.4V < V <sub>ID</sub> < 1.15V	Undefined	Low if a remote wake event occurred
	V <sub>ID</sub> ≤ 0.4V	Recessive	See Figure 8-5
Any	Open (V <sub>ID</sub> ≈ 0V)	Open	High

<sup>(2)</sup> For bus state and bias see Figure 8-2 and Figure 8-3

# 9 Application Information Disclaimer

#### **Note**

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

# 9.1 Application Information

## 9.2 Typical Application

The TCAN1044A(V)-Q1 transceiver can be used in applications with a host controller or FPGA that includes the link layer portion of the CAN protocol. Figure 9-1 shows a typical configuration for 5V controller applications. The bus termination is shown for illustrative purposes.

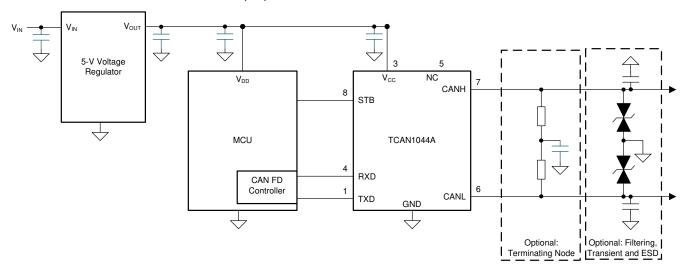


Figure 9-1. Transceiver Application Using 5V IO Connections

## 9.2.1 Design Requirements

#### 9.2.1.1 CAN Termination

Termination may be a single  $120\Omega$  resistor at each end of the bus, either on the cable or in a terminating node. If filtering and stabilization of the common-mode voltage of the bus is desired then split termination may be used, see Figure 9-2. Split termination improves the electromagnetic emissions behavior of the network by filtering higher-frequency common-mode noise that may be present on the differential signal lines.

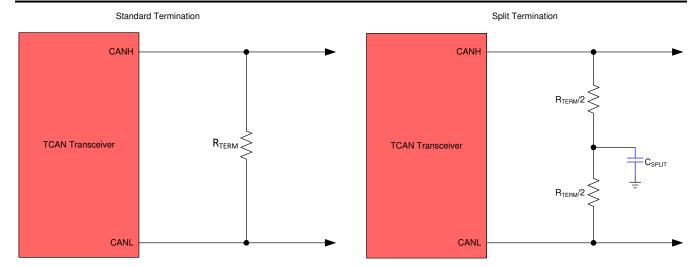


Figure 9-2. CAN Bus Termination Concepts

## 9.2.2 Detailed Design Procedures

### 9.2.2.1 Bus Loading, Length and Number of Nodes

A typical CAN application may have a maximum bus length of 40 meters and maximum stub length of 0.3m. However, with careful design, users can have longer cables, longer stub lengths, and many more nodes to a bus. A high number of nodes requires a transceiver with high input impedance such as the TCAN1044A(V)-Q1

Many CAN organizations and standards have scaled the use of CAN for applications outside the original ISO 11898-2 standard. They made system level trade off decisions for data rate, cable length, and parasitic loading of the bus. Examples of these CAN systems level specifications are ARINC 825, CANopen, DeviceNet, SAE J2284, SAE J1939, and NMEA 2000.

A CAN network system design is a series of tradeoffs. In the ISO 11898-2:2016 specification the driver differential output is specified with a bus load that can range from  $50\Omega$  to  $65\Omega$  where the differential output must be greater than 1.5V. The TCAN1044A(V)-Q1 family is specified to meet the 1.5V requirement down to  $50\Omega$  and is specified to meet 1.4V differential output at  $45\Omega$  bus load. The differential input resistance of the TCAN1044A(V)-Q1 is a minimum of  $40k\Omega$ . If 100 TCAN1044A(V)-Q1 transceivers are in parallel on a bus, this is equivalent to a 400- $\Omega$  differential load in parallel with the nominal  $60\Omega$  bus termination which gives a total bus load of approximately  $52\Omega$ . Therefore, the TCAN1044A(V)-Q1 family theoretically supports over 100 transceivers on a single bus segment. However, for a CAN network design margin must be given for signal loss across the system and cabling, parasitic loadings, timing, network imbalances, ground offsets, and signal integrity. Thus a practical maximum number of nodes is often lower. Bus length may also be extended beyond 40 meters by careful system design and data rate tradeoffs. For example, CANopen network design guidelines allow the network to be up to 1km with changes in the termination resistance, cabling, less than 64 nodes and significantly lowered data rate.

This flexibility in CAN network design is one of the key strengths of the various extensions and additional standards that have been built on the original ISO 11898-2 CAN standard. However, when using this flexibility the CAN network system designer must take the responsibility of good network design to ensure robust network operation.

Please refer to the application report SLLA270: Controller Area Network Physical layer requirements. This document discusses in detail all system design physical layer parameters.



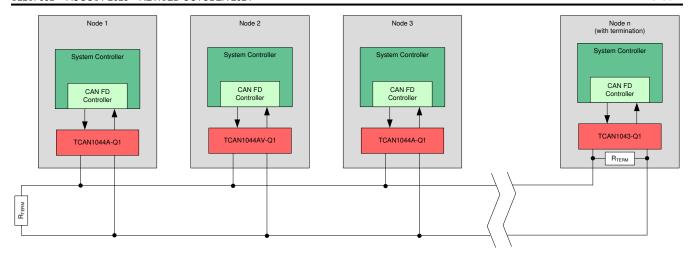


Figure 9-3. Typical CAN Bus

# 9.3 System Examples

The TCAN1044AV-Q1 CAN transceiver is typically used in applications with a host controller or FPGA that includes the link layer portion of the CAN protocol. A 1.8V, 2.5V, or 3.3V application is shown in Figure 9-4. The bus termination is shown for illustrative purposes.

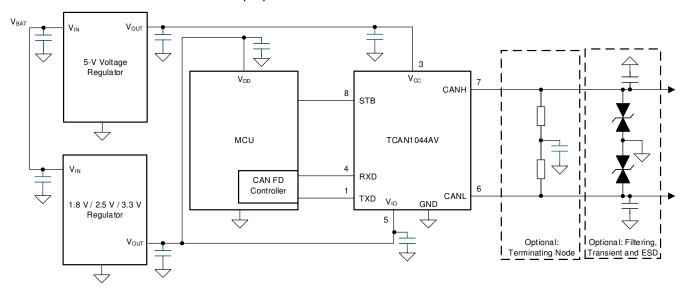


Figure 9-4. Typical Transceiver Application Using 1.8V, 2.5V, 3.3V IO Connections

# 9.4 Power Supply Recommendations

The TCAN1044A-Q1 transceiver is designed to operate with a main V<sub>CC</sub> input voltage supply range between 4.5V and 5.5V.

The TCAN1044AV-Q1 implements an IO level shifting supply input, V<sub>IO</sub>, designed for a range between 1.8V and 5.5V.

Both the  $V_{\text{CC}}$  and  $V_{\text{IO}}$  inputs must be well regulated. In addition to the power supply filtering a decoupling capacitance, typically 100nF, should be placed near the CAN transceiver's main V<sub>CC</sub> and V<sub>IO</sub> supply pins.

## 9.5 Layout

Robust and reliable CAN node design may require special layout techniques depending on the application and design requirements. Since transient disturbances have high frequency content and a wide bandwidth, high-frequency layout techniques should be applied during PCB design.

### 9.5.1 Layout Guidelines

- Place the protection and filtering circuitry close to the bus connector, J1, to prevent transients, ESD, and noise from propagating onto the board. This layout example shows a optional transient voltage suppression (TVS) diode, D1, which may be implemented if the system-level requirements exceed the specified rating of the transceiver. This example also shows optional bus filter capacitors C4 and C5.
- Design the bus protection components in the direction of the signal path. Do not force the transient current to divert from the signal path to reach the protection device.
- Decoupling capacitors should be placed as close as possible to the supply pins V<sub>CC</sub> and V<sub>IO</sub> of transceiver.
- Use at least two vias for supply and ground connections of bypass capacitors and protection devices to minimize trace and via inductance.

#### Note

High-frequency current follows the path of least impedance and not the path of least resistance.

This layout example shows how split termination could be implemented on the CAN node. The termination is split into two resistors, R2 and R3, with the center or split tap of the termination connected to ground via capacitor C3. Split termination provides common mode filtering for the bus. See Section 9.2.1.1, Section 8.3.4, and Equation 2 for information on termination concepts and power ratings needed for the termination resistor(s).

#### 9.5.2 Layout Example

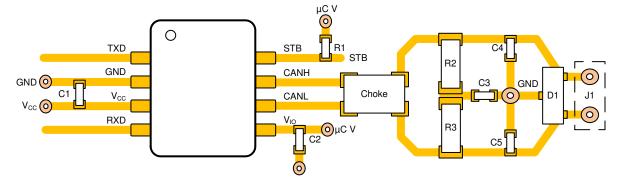


Figure 9-5. Layout Example



# 10 Device and Documentation Support

# 10.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on Notifications to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

# **10.2 Support Resources**

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 10.3 Trademarks

TI E2E<sup>™</sup> is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

## 10.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

# 10.5 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

### 11 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

С	Changes from Revision C (December 2021) to Revision D (October 2024)				
•	Deleted part number TCAN1044AV-Q1 from the data sheet title and header information	1			
•	Changed the Device Information table to the Package Information table	1			
С	hanges from Revision B (October 2021) to Revision C (December 2021)	Page			
•	Changed I <sub>CC</sub> (mA) to I <sub>CC</sub> (µA) in Figure 6-3	10			
• _	Changed I <sub>IO</sub> (mA) to I <sub>IO</sub> (μA) in Figure 6-4	10			
С	hanges from Revision A (July 2021) to Revision B (October 2021)	Page			
•	Deleted Product Preview from the D and DDF packages in the Device Information table	1			
c	hanges from Revision * (February 2021) to Revision A (July 2021)	Page			
_	Changed the document status from: Advanced Information to: Production data				
	Changes the accument states from Autorota mornation to Production actual				



# 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback

www.ti.com 8-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
TCAN1044ADDFRQ1	Active	Production	SOT-23-THIN (DDF)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	2HGF
TCAN1044ADDFRQ1.A	Active	Production	SOT-23-THIN (DDF)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	2HGF
TCAN1044ADRBRQ1	Active	Production	SON (DRB)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 150	1044A
TCAN1044ADRBRQ1.A	Active	Production	SON (DRB)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 150	1044A
TCAN1044ADRQ1	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	1044A
TCAN1044ADRQ1.A	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	1044A
TCAN1044AVDDFRQ1	Active	Production	SOT-23-THIN (DDF)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	2HHF
TCAN1044AVDDFRQ1.A	Active	Production	SOT-23-THIN (DDF)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	2HHF
TCAN1044AVDRBRQ1	Active	Production	SON (DRB)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 150	1044AV
TCAN1044AVDRBRQ1.A	Active	Production	SON (DRB)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 150	1044AV
TCAN1044AVDRQ1	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	1044AV
TCAN1044AVDRQ1.A	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	1044AV

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



# **PACKAGE OPTION ADDENDUM**

www.ti.com 8-Nov-2025

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 24-Jul-2025

# TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TCAN1044ADDFRQ1	SOT-23- THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TCAN1044ADRBRQ1	SON	DRB	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q1
TCAN1044ADRQ1	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TCAN1044AVDDFRQ1	SOT-23- THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TCAN1044AVDRBRQ1	SON	DRB	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q1
TCAN1044AVDRQ1	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1



www.ti.com 24-Jul-2025



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TCAN1044ADDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TCAN1044ADRBRQ1	SON	DRB	8	3000	367.0	367.0	35.0
TCAN1044ADRQ1	SOIC	D	8	2500	353.0	353.0	32.0
TCAN1044AVDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TCAN1044AVDRBRQ1	SON	DRB	8	3000	367.0	367.0	35.0
TCAN1044AVDRQ1	SOIC	D	8	2500	353.0	353.0	32.0



PLASTIC SMALL OUTLINE



# NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.



PLASTIC SMALL OUTLINE



NOTES: (continued)

- 4. Publication IPC-7351 may have alternate designs.
- 5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



PLASTIC SMALL OUTLINE



NOTES: (continued)

- 6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 7. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE INTEGRATED CIRCUIT



# NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.






Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4203482/L



PLASTIC QUAD FLAT PACK- NO LEAD

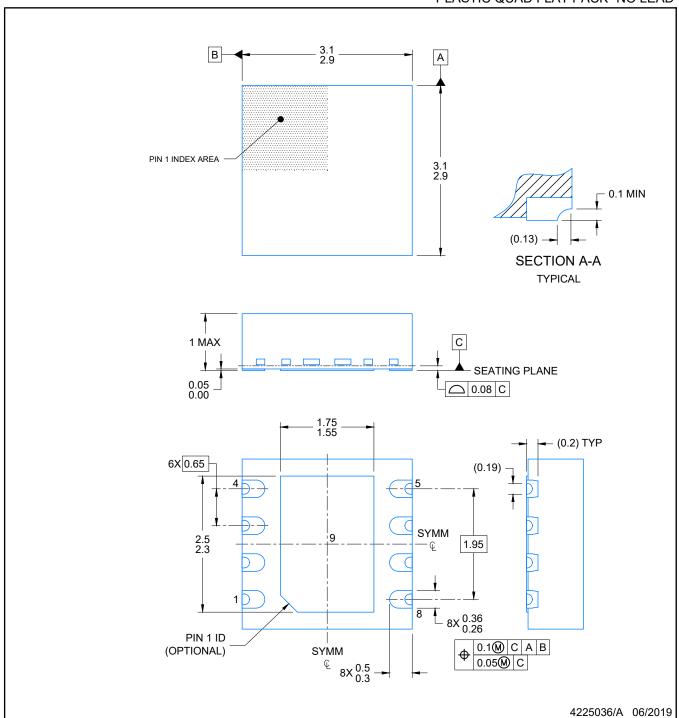


## NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.



PLASTIC QUAD FLAT PACK- NO LEAD

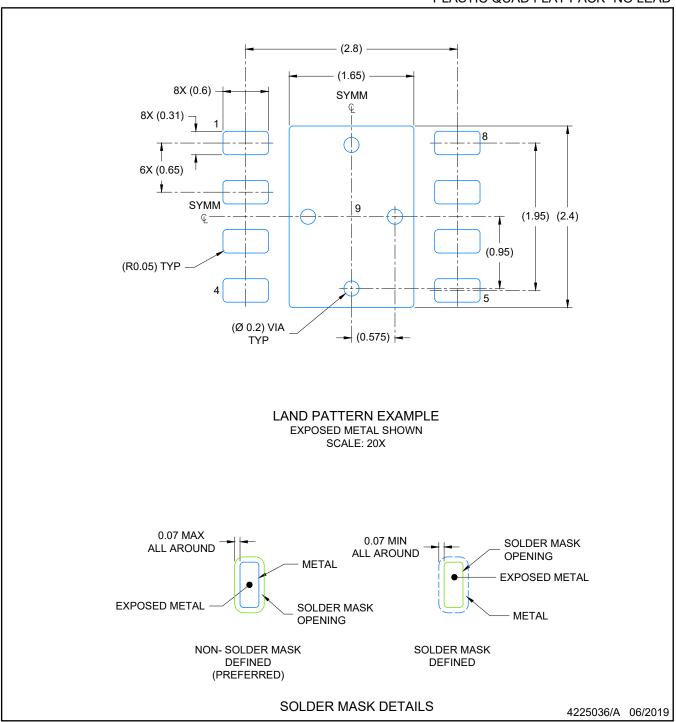


NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLAT PACK- NO LEAD

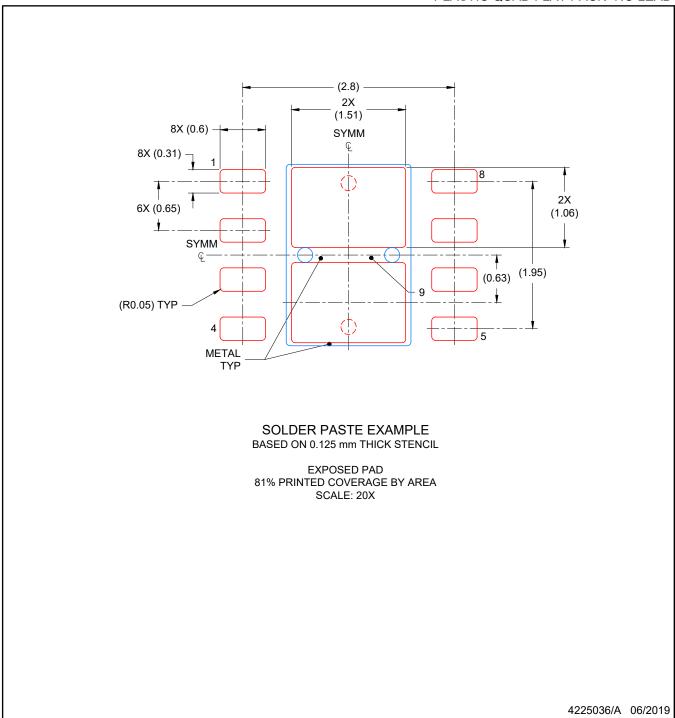

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025