





TPS3430 SBVS366A - JULY 2018 - REVISED OCTOBER 2021

TPS3430 Window Watchdog Timer with Programmable Reset Delay

1 Features

- Factory-programmed precision watchdog timers:
 - ±2.5% Accurate watchdog timeout and watchdog reset delays typical at 25°C
- Watchdog disable feature
- User-programmable watchdog timeout
- User-programmable watchdog reset delay
- Input voltage range: VDD = 1.6 V to 6.5 V
- Low supply current: $I_{DD} = 10 \mu A$ (typical)
- Open-drain output
- Small 3-mm × 3-mm, 10-Pin VSON package
- Junction operating temperature range: -40°C to +125°C

2 Applications

- Smart display
- Battery pack: e-bike/e-scooter/light electric vehicle (LEV)
- Circuit breaker (ACB, MCCB, VCB)
- eBike / pedelec
- AC charging (pile) station
- Multifunction relay
- Vision computer

3 Description


The TPS3430 is a standalone window watchdog timer with programmable watchdog window and programmable watchdog reset delay for a wide variety of applications. The TPS3430 window watchdog achieves 2.5% timing accuracy (typical at 25°C) and the watchdog output (WDO) reset delay can be set by factory-programmed default delay settings, or programmed by an external capacitor. The watchdog can be disabled via the SET pins to avoid undesired watchdog timeouts during the development process or during power on.

The TPS3430 is available in a small 3.00-mm × 3.00-mm, 10-pin VSON package.


Device Information

PART NUMBER	PACKAGE (1)	BODY SIZE (NOM)		
TPS3430	VSON (10)	3.00 mm × 3.00 mm		

For all available packages, see the orderable addendum at (1) the end of the data sheet.

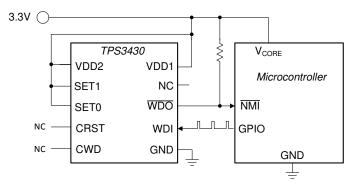

Window Watchdog Timer Circuit



Normalized Watchdog Timeout Accuracy Over Temperature (SET0 = 1, SET1 = 1, CWD = NC)



Table of Contents

1 Features	1 7.4 Device Functional Modes	15
2 Applications		16
3 Description		
4 Revision History		
5 Pin Configuration and Functions	3 9 Power Supply Recommendations	26
6 Specifications		
6.1 Absolute Maximum Ratings		
6.2 ESD Ratings		
6.3 Recommended Operating Conditions		
6.4 Thermal Information	5 11.1 Device Support	28
6.5 Electrical Characteristics		
6.6 Timing Requirements	11.3 Receiving Notification of Documentation Updates	28
6.7 Timing Diagrams		28
6.8 Typical Characteristics	9 11.5 Trademarks	28
7 Detailed Description1		28
7.1 Overview1		
7.2 Functional Block Diagrams1	10 12 Mechanical, Packaging, and Orderable	
7.3 Feature Description1		28
•		

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

С	hanges from Revision * (July 2018) to Revision A (October 2021)	Page
•	Updated the numbering format for tables, figures, and cross-references throughout the document	1
•	Removed "±15% Accurate Watchdog Timeout and Watchdog Reset Delays Over Temperature"	1
•	Removed "15% timing accuracy (–40°C to +125°C), "	1
	Updated ESD Ratings	4
	Updated I _{CWD} min and max spec	5
	Updated V _{CWD} min and max spec	5
	Added a footnote to for t _{INIT}	6
•	Changed minimum and maximum specifications of 2nd, 5th, 6th, and 8th rows of two parameter	6
•	Changed minimum and maximum specifications of 2nd and last rows of two parameter	6
•	Updated WDO delay time values for various capacitors in Watchdog Reset Delay Time for Common Id	leal
	Capacitor Values table	16
•	Changed minimum and maximum specifications for NC SETx 01 setting for both upper and lower water boundaries, 10 k Ω to VDD SETx 00 and 01 settings for lower watchdog boundary, and 10 k Ω to VDD SETx 00 and 01 settings for lower watchdog boundary, and 10 k Ω to VDD SETx 00 and 01 settings for lower watchdog boundary, and 10 k Ω to VDD SETx 00 and 01 settings for lower watchdog boundary, and 10 k Ω to VDD SETx 00 and 01 settings for lower watchdog boundary, and 10 k Ω to VDD SETx 00 and 01 settings for lower watchdog boundary.	_
	11 setting for both upper and lower watchdog boundaries in Factory-Programmed Watchdog Timing ta	ble18
•	Updated twDU min and max values for all capacitors	18
•	Updated two min and max boundry values from 0.85 and 1.15 to 0.905 and 1.095 respectively	18



5 Pin Configuration and Functions




Figure 5-1. DRC Package 3-mm × 3-mm VSON-10 Top View

Table 5-1. Pin Functions

PIN I/O		1/0	DESCRIPTION
NAME	NO.	1/0	DESCRIPTION
VDD1	1	I	Supply voltage pin. For noisy systems, connecting a 0.1-µF bypass capacitor is recommended.
CWD	and ground. Furthermore, this pin can also be connected by a 10-kΩ resistor to VDD, or leaving uncount (NC) further enables the selection of the preset watchdog timeouts; see the Section 6.6 table. When using a capacitor, the TPS3430 determines the window watchdog upper boundary with Equation		When using a capacitor, the TPS3430 determines the window watchdog upper boundary with Equation 4. The lower watchdog boundary is set by the SET pins, see and Table 8-5 the Section 8.1.2 section for additional
SET0	3	I	Logic input. SET0, SET1, and CWD select the watchdog window ratios, timeouts, and disable the watchdog; see the <i>Section 6.6</i> table.
CRST	Programmable watchdog reset delay pin. Connect a capacitor between this pin and GND to program the watchdog reset delay period. This pin can also be connected by a 10-kΩ pull-up resistor to VDD, or left unconnected (NC) for various factory programmed watchdog reset delay options; see the Section 8.1.1 section. When using an external capacitor, use Equation 1 to determine the watchdog reset delay.		watchdog reset delay period. This pin can also be connected by a 10-k Ω pull-up resistor to VDD, or left unconnected (NC) for various factory programmed watchdog reset delay options; see the <i>Section 8.1.1</i> section.
GND	5	— Ground pin	
SET1	6	Logic input. SET0, SET1, and CWD select the watchdog window ratios, timeouts, and disable the watchdog; see the Section 6.6 table.	
WDI	lower (t _{WDL(max)}) and upper (t _{WDU(min)}) window boundaries in order for WDO to not assert. During power pulses to WDI are ignored before t _{RST} expires and the watchdog is disabled. When the watchdog is not in use, the SET pins can be used to disable the watchdog. The input at WDI is ignored when WDO is low (asserted) and also when the watchdog is disabled. If the watchdog is disabled.		Watchdog input. A falling transition (edge) must occur at this pin within the watchdog timeout between the lower (t _{WDL(max)}) and upper (t _{WDL(min)}) window boundaries in order for WDO to not assert. During power up, all pulses to WDI are ignored before t _{RST} expires and the watchdog is disabled. When the watchdog is not in use, the SET pins can be used to disable the watchdog. The input at WDI is ignored when WDO is low (asserted) and also when the watchdog is disabled. If the watchdog is disabled, then WDI cannot be left unconnected and must be driven to either VDD or GND.
WDO	Watchdog open-drain active-low output. Connect \(\overline{WDO}\) with a 1-kΩ to 100-kΩ resistor to VDD or another power supply. \(\overline{WDO}\) goes low (asserts) when a watchdog timeout occurs. When a watchdog timeout occur \(\overline{WDO}\) goes low (asserts) for the set \(\overline{WDO}\) reset delay (t _{RST}). When the watchdog is disabled, \(\overline{WDO}\) remain logic high regardless of WDI.		
NC	9	NC This pin is no-connect and must be left floating.	
VDD2	DD2 10 Connect this pin to VDD1. The device will not function properly if VDD1 and VDD2 are not externally connected.		, , , , , , , , , , , , , , , , , , , ,
Thermal pa	ad	_	Connect the thermal pad to a large-area ground plane. The thermal pad is internally connected to GND.



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Supply voltage range	VDD1, VDD2	-0.3	7	V
Output voltage range	WDO	-0.3	7	V
Voltago rangos	SET0, SET1, WDI,	-0.3	7	V
Voltage ranges	CWD, CRST	-0.3	VDD + 0.3 ⁽³⁾	V
Output pin current	WDO		±20	mA
Input current (all pins)			±20	mA
Continuous total power dissipation		See Se	ection 6.4	
	Operating junction, T _J ⁽²⁾	-40	150	
Temperature	Operating free-air temperature, T _A ⁽²⁾	-40	150	°C
	Storage, T _{stg}	-65	150	

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- (2) T_J = T_A as a result of the low dissipated power in this device.
- (3) The absolute maximum rating is V_{DD} + 0.3 V or 7.0 V, whichever is smaller.

6.2 ESD Ratings

			VALUE	UNIT
	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±4000	V	
V _(ESD)	Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±1000	V

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
VDD1, VDD2	Supply pin voltage	1.6		6.5	V
V _{SET0}	SET0 pin voltage	0		6.5	V
V _{SET1}	SET1 pin voltage	0		6.5	V
C _{CRST}	WD reset delay capacitor	0.1 ⁽¹⁾		1000(1)	nF
R _{CRST}	Pull-up resistor to VDD	9	10	11	kΩ
C _{CWD}	Watchdog timing capacitor	0.1 ⁽²⁾		1000(2)	nF
CWD	Pull-up resistor to VDD	9	10	11	kΩ
R _{PU}	Pull-up resistor, WDO	1	10	100	kΩ
I _{WDO}	Watchdog output current			10	mA
T _J	Junction Temperature	-40		125	°C

- (1) Using a C_{CRST} capacitor of 0.1 nF or 1000 nF gives a reset delay of 703 μs or 3.22 seconds, respectively.
- (2) Using a C_{CWD} capacitor of 0.1 nF or 1000 nF gives a t_{WDU(typ)} of 62.74 ms or 77.45 seconds, respectively.

Submit Document Feedback

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.



6.4 Thermal Information

		TPS3430	
	THERMAL METRIC ⁽¹⁾	DRC (VSON)	UNIT
		10 PINS	
R _{0JA}	Junction-to-ambient thermal resistance	50.9	
R _{0JC(top)}	Junction-to-case (top) thermal resistance	50.6	
R _{θJB}	Junction-to-board thermal resistance	25.4	°C/W
ΨЈТ	Junction-to-top characterization parameter	1.2	C/VV
Ψ _{JB}	Junction-to-board characterization parameter	25.5	
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	7.3	

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.

6.5 Electrical Characteristics

at 1.6 V \leq V_{DD} \leq 6.5 V over the operating temperature range of -40° C \leq T_J \leq +125 $^{\circ}$ C (unless otherwise noted); typical values are at T_J = 25 $^{\circ}$ C

are at 1j –	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
GENERAL C	HARACTERISTICS	1201 201121110110				
VDD1,VDD2 (1) (3)	Supply voltage		1.6		6.5	V
I _{DD}	Supply current			10	19	μΑ
V _{POR} (2)	Power-on reset voltage	V _{OL(MAX)} = 0.25 V			0.8	V
I _{CRST}	CRST pin charge current	CRST = 0.5 V	337	375	413	nA
V _{CRST}	CRST pin threshold voltage		1.192	1.21	1.228	V
WINDOW WA	ATCHDOG FUNCTION					
I _{CWD}	CWD pin charge current	CWD = 0.5 V	347	375	403	nA
V _{CWD}	CWD pin threshold voltage		1.196	1.21	1.224	V
V _{OL}	WDO output low	VDD = 5 V, I _{SINK} = 3 mA			0.4	V
I _D	WDO output leakage current	VDD = 1.6 V, V _{WDO} = 6.5 V			1	μA
V _{IL}	Low-level input voltage (SET0, SET1)				0.25	V
V _{IH}	High-level input voltage (SET0, SET1)		0.8			V
V _{IL(WDI)}	WDO output low				0.3 × V _{DD}	V
V _{IH(WDI)}	WDO output leakage current		0.8 × V _{DD}			V

When V_{DD} falls below V_{UVLO} , WDI is ignored When V_{DD} falls below V_{POR} , \overline{WDO} is undefined. During power-on, V_{DD} must be a minimum 1.6 V for at least 300 μ s.



6.6 Timing Requirements


at 1.6 V \leq V_{DD} \leq 6.5 V over the operating temperature range of -40° C \leq T_A, T_J \leq +125 $^{\circ}$ C (unless otherwise noted); the open-drain pullup resistors are 10 k Ω for each output; typical values are at T_J = 25 $^{\circ}$ C

<u>'</u>		2 Ioi each output, typical values are at 15 – 25 C	MIN	TYP	MAX	UNIT
GENERA	L					
t _{INIT}	CWD, CRST pin evaluation	period ⁽¹⁾		381		μs
t _{SET}	Time required between chan	ging SET0 and SET1 pins		500		μs
	SET0, SET1 pin setup time			1		μs
	Startup delay ⁽³⁾			300		μs
DELAY F	UNCTION	,			1	
	Matabala a masat dalah	CRST = NC	170	200	230	ms
t _{RST}	Watchdog reset delay	CRST = 10 kΩ to VDD	8.5	10	11.5	ms
WINDOW	WATCHDOG FUNCTION					
	Window watchdog ratio of	CWD = programmable, SET0 = 0, SET1 = 0 ⁽²⁾		1/8		
WD ratio		CWD = programmable, SET0 = 1, SET1 = 1 ⁽²⁾		1/2		
		CWD = programmable, SET0 = 0, SET1 = 1 ⁽²⁾ (4)		3/4		
	Window watchdog lower boundary	CWD = NC, SET0 = 0, SET1 = 0	19.1	22.5	25.9	ms
		CWD = NC, SET0 = 0, SET1 = 1	1.48	1.85	2.22	ms
		CWD = NC, SET0 = 1, SET1 = 0	Watchdog disabled		disabled	
		CWD = NC, SET0 = 1, SET1 = 1	680	800	920	ms
t _{WDL}		CWD = 10 k Ω to VDD, SET0 = 0, SET1 = 0	7.65	9.0	10.35	ms
		CWD = 10 k Ω to VDD, SET0 = 0, SET1 = 1	7.65	9.0	10.35	ms
		CWD = 10 k Ω to VDD, SET0 = 1, SET1 = 0	Watchdog disabled			
		CWD = 10 k Ω to VDD, SET0 = 1, SET1 = 1	1.48	1.85	2.22	ms
		CWD = NC, SET0 = 0, SET1 = 0	46.8	55.0	63.3	ms
		CWD = NC, SET0 = 0, SET1 = 1	23.375	27.5	31.625	ms
		CWD = NC, SET0 = 1, SET1 = 0		Watchdog	disabled	
	Window watchdog upper	CWD = NC, SET0 = 1, SET1 = 1	1360	1600	1840	ms
t _{WDU}	boundary	CWD = 10 k Ω to VDD, SET0 = 0, SET1 = 0	92.7	109.0	125.4	ms
		CWD = 10 k Ω to VDD, SET0 = 0, SET1 = 1	165.8	195.0	224.3	ms
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 1, SET1 = 0		Watchdog	disabled	
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 1, SET1 = 1	9.35	11.0	12.65	ms
t _{WD-setup}	Setup time required for device	e to respond to changes on WDI after being enabled		150		μs
	Minimum WDI pulse duration	1		50		ns
t _{WD-del}	WDI to WDO delay			50		ns

- (1) Refer to Section 8.1.2.2
- (2) 0 refers to VSET ≤ VIL, 1 refers to VSET ≥ VIH.
- (3) During power-on, VDD must be a minimum 1.6 V for at least 300 μs
- (4) If this watchdog ratio is used, then tWDL(max) can overlap tWDU(min).



6.7 Timing Diagrams

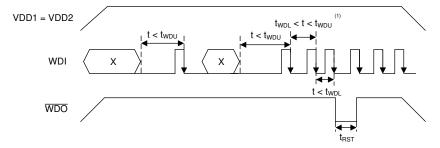

A. See Figure 6-2 for WDI timing requirements.

Figure 6-1. Timing Diagram

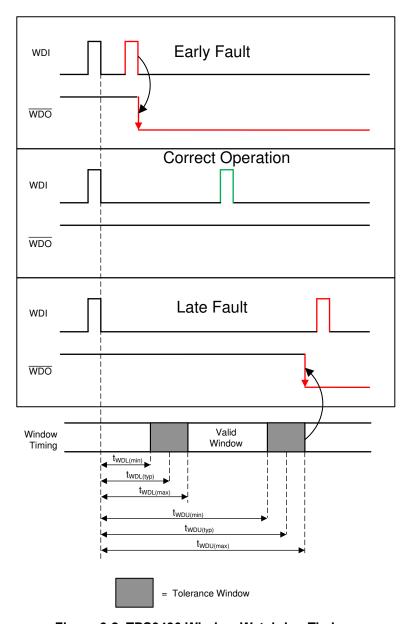


Figure 6-2. TPS3430 Window Watchdog Timing



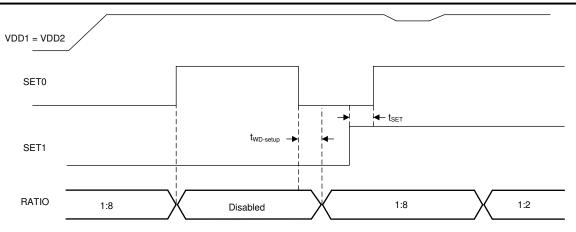


Figure 6-3. Changing SET0 and SET1 Pins

6.8 Typical Characteristics

all curves are taken at $T_A = 25^{\circ}\text{C}$ with 1.6 V \leq V_{DD} \leq 6.5 V (unless otherwise noted)

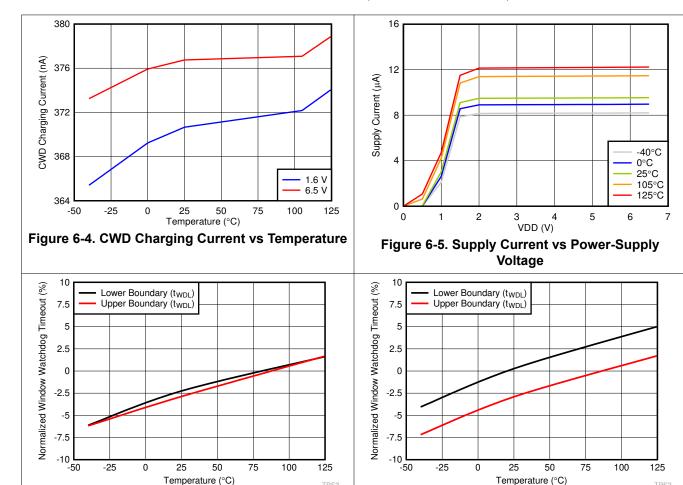


Figure 6-6. Normalized Watchdog Timeout Accuracy Over Temperature (SET0 = 1, SET1 = 1, CWD = NC)

Figure 6-7. Normalized Watchdog Timeout Accuracy Over Temperature (SET0 = 1, SET1 = 1, CWD = $10k\Omega$ to VDD)




7 Detailed Description

7.1 Overview

The TPS3430 is a high-accuracy programmable window watchdog timer with watchdog disable feature that achieves 15% watchdog timing accuracy over the specified temperature range of –40°C to +125°C.

7.2 Functional Block Diagrams

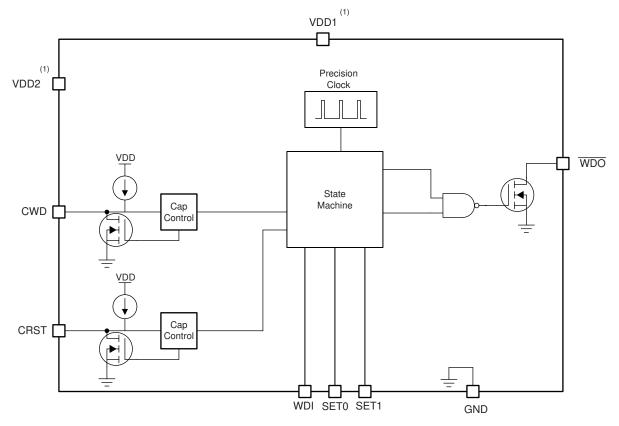

A. VDD1 and VDD2 are not internally connected and must be connected externally for the device to function.

Figure 7-1. TPS3430 Block Diagram

7.3 Feature Description

7.3.1 CRST

The CRST pin provides the user the functionality of both high-precision, factory-programmed watchdog reset delay timing options and user-programmable watchdog reset delay timing. The CRST pin can be pulled up to VDD through a resistor, have an external capacitor to ground, or can be left unconnected. The configuration of the CRST pin is re-evaluated by the device every time the voltage on VDD comes up. The pin evaluation is controlled by an internal state machine that determines which option is connected to the CRST pin. The sequence of events takes 381 μ s (t_{INIT}) to determine if the CRST pin is left unconnected, pulled up through a resistor, or connected to a capacitor. If the CRST pin is being pulled up to VDD, then a 10-k Ω pull-up resistor is required.

7.3.2 Window Watchdog

7.3.2.1 SET0 and SET1

When changing the SET0 or SET1 pins, there are two cases to consider: enabling and disabling the watchdog, and changing the SET0 or SET1 pins when the watchdog is enabled. In case 1 where the watchdog is being enabled or disabled, the changes take effect immediately. However, in case 2, a WDO fault event must occur in order for the changes to take place.

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

7.3.2.1.1 Enabling the Window Watchdog

The TPS3430 features the ability to enable and disable the watchdog timer. This feature allows the user to start with the watchdog timer disabled and then enable the watchdog timer using the SET0 and SET1 pins. The ability to enable and disable the watchdog is useful to avoid undesired watchdog trips during initialization and shutdown. When the SETx pins are changed to disable the watchdog timer, changes on the pins are responded to immediately (as shown in Figure 7-2). When the watchdog goes from disabled to enabled, there is a 150 µs (t_{WD-setup}) transition period where the device does not respond to changes on WDI. After this 150-µs period, the device begins to respond to changes on WDI again.


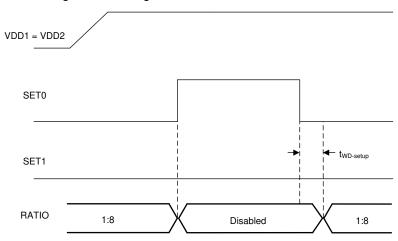


Figure 7-2. Enabling the Watchdog Timer

7.3.2.1.2 Disabling the Watchdog Timer When Using the CRST Capacitor

When using the TPS3430 with fixed timing options, if the watchdog is disabled and reenabled while $\overline{\text{WDO}}$ is asserted (logic low) the watchdog performs as described in the Section 7.3.2.1.1 section. However, if there is a capacitor on the CRST pin, and the watchdog is disabled and reenabled when $\overline{\text{WDO}}$ is asserted (logic low), then the watchdog behaves as shown in Figure 7-3. When the watchdog is disabled, $\overline{\text{WDO}}$ goes high impedance (logic high). However, when the watchdog is enabled again, the t_{RST} period must expire before the watchdog resumes normal operation.

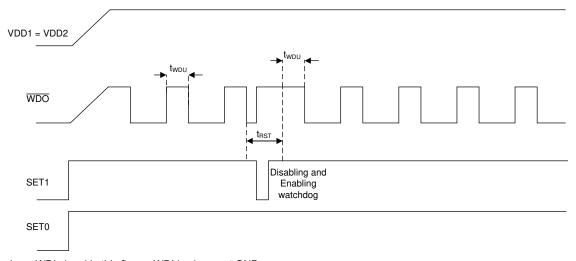

There is no WDI signal in this figure, WDI is always at GND.

Figure 7-3. Enabling and Disabling the Watchdog Timer During a WDO Reset Event

7.3.2.1.3 SET0 and SET1 During Normal Watchdog Operation

The SET0 and SET1 pins can be used to control the window watchdog ratio of the lower boundary to the upper boundary. There are four possible modes for the watchdog (see Table 8-5): disabled, 1:8 ratio, 3:4 ratio, and 1:2 ratio. If SET0 = 1 and SET1 = 0, then the watchdog is disabled. When the watchdog is disabled $\overline{\text{WDO}}$ does not assert, and the TPS3430 ignores all inputs to WDI. The SET0 and SET1 pins can be changed when the device is operational, but cannot be changed at the same time. If these pins are changed when the device is operational, then there must be a 500- μ s (t_{SET}) delay between switching the two pins. If the SET0 and SET1 are used to change the reset timing, then a reset event must occur before the new timing condition is latched. This reset can be triggered by bringing VDD below V_{UVLO} . Figure 7-4 shows how the SET0 and SET1 pins do not change the watchdog timing option until a reset event has occurred.

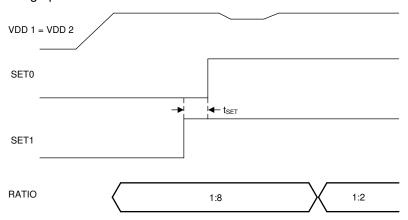


Figure 7-4. Changing SET0 and SET1 Pins



7.3.3 Window Watchdog Timer

This section provides information for the window watchdog modes of operation. A window watchdog is typically employed in safety critical applications where a traditional watchdog timer is inadequate. In a traditional watchdog, there is a maximum time in which a pulse must be issued to prevent the reset from occurring. However, in a window watchdog the pulse must be issued between a maximum lower window time $(t_{WDL(max)})$ and the minimum upper window time $(t_{WDU(min)})$ set by the CWD pin and the SET0 and SET1 pins. Table 8-5 describes how t_{WDU} can be used to calculate the timing of t_{WDL} . The t_{WDL} timing can also be changed by adjusting the SET0 and SET1 pins. Figure 7-5 shows the valid region for a WDI pulse to be issued to prevent the \overline{WDO} from being triggered and being pulled low.

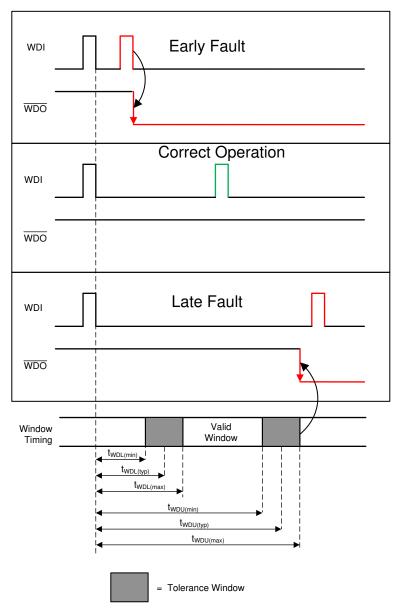


Figure 7-5. TPS3430 Window Watchdog Timing



7.3.3.1 CWD

The CWD pin provides the user the functionality of both high-precision, factory-programmed watchdog timeout options and user-programmable watchdog timeout. The TPS3430 features three options for setting the watchdog window: connecting a capacitor to the CWD pin, connecting CWD to a pull-up resistor to VDD, and leaving the CWD pin unconnected. The configuration of the CWD pin is evaluated by the device every time the voltage on VDD rises above $V_{DD\ (min)}$. The pin evaluation is controlled by an internal state machine that determines which option is connected to the CWD pin. The sequence of events takes 381 μ s (t_{INIT}) to determine if the CWD pin is left unconnected, pulled up through a resistor, or connected to a capacitor. If the CWD pin is being pulled up to VDD using a pull-up resistor, then a 10-k Ω resistor is required.

7.3.3.2 WDI Functionality

WDI is the watchdog timer input that controls the \overline{WDO} output. The WDI input is triggered by the falling edge of the input signal. For the first pulse, the watchdog acts as a traditional watchdog timer; thus, the first pulse must be issued before $t_{WDU(min)}$. After the first pulse, to ensure proper functionality of the watchdog timer, always issue the WDI pulse within the window of $t_{WDL(max)}$ and $t_{WDU(min)}$. If the pulse is issued in this region, then \overline{WDO} remains unasserted. Otherwise, the device asserts \overline{WDO} , putting the \overline{WDO} pin into a low-impedance state.

The watchdog input (WDI) is a digital pin. To ensure there is no increase in I_{DD} , drive the WDI pin to either VDD or GND at all times. Putting the pin to an intermediate voltage can cause an increase in supply current (I_{DD}) because of the architecture of the digital logic gates. When \overline{WDO} is asserted, the watchdog is disabled and all signals input to WDI are ignored until the \overline{WDO} reset delay expires. When \overline{WDO} is no longer asserted, the device resumes normal operation and no longer ignores the signal on WDI. If the watchdog is disabled, drive the WDI pin to either VDD or GND.

7.3.3.3 WDO Functionality

The TPS3430 features a programmable window watchdog timer with an programmable watchdog output (\overline{WDO}). The watchdog output can flag a fault whenever the watchdog input is outside of the watchdog window. When \overline{WDO} is not asserted (high), the \overline{WDO} signal maintains normal operation. When asserted, \overline{WDO} remains down for t_{RST} and WDI is ignored during the watchdog reset delay. When the watchdog is disabled, \overline{WDO} remains high regardless of WDI.

Product Folder Links: TPS3430



7.4 Device Functional Modes

Table 7-1 summarizes the functional modes of the TPS3430.

Table 7-1. Device Functional Modes

VDD	WDI	WDO
V _{DD} < V _{POR}	_	_
V _{POR} < V _{DD} < V _{DD (min)}	V _{POR} < V _{DD} < V _{DD (min)} Ignored	
	$t_{\text{WDL(max)}} \le t_{\text{pulse}} \stackrel{\text{(1)}}{=} \le t_{\text{WDU(min)}}$	High
$V_{DD} \ge V_{DD \text{ (min)}}$	$t_{WDL(max)} > t_{pulse}$ (1)	Low
	$t_{\text{WDU(min)}} < t_{\text{pulse}} $ (1)	Low

⁽¹⁾ Where t_{pulse} is the time between falling edges on WDI.

7.4.1 V_{DD} is Below V_{POR} ($V_{DD} < V_{POR}$)

When V_{DD} is less than V_{POR} , \overline{WDO} is undefined and can be either high or low. The state of \overline{WDO} largely depends on the load that the \overline{WDO} pin is experiencing.

7.4.2 V_{DD} is Above V_{POR} And Below $V_{DD \ (min)}$ ($V_{POR} < V_{DD} < V_{DD \ (min)}$)

When V_{DD} is above V_{POR} and below $V_{DD \ (min)}$, the watchdog is disabled, \overline{WDO} is logic high and WDI is ignored.

7.4.3 Normal Operation (V_{DD} ≥ V_{DD (min)})

When V_{DD} is greater than or equal to $V_{DD\ (min)}$, the \overline{WDO} signal is determined by WDI if the watchdog is enabled. During power up, the watchdog is disabled until t_{RST} expires. While the watchdog is enabled, the first falling edge on WDI must occur before $t_{WDU(max)}$ to prevent \overline{WDO} from asserting. If the first falling edge on WDI occurs after $t_{WDU(max)}$, \overline{WDO} is asserted (active and low) for t_{RST} . If any falling edge after the first falling edge occurs on WDI before $t_{WDU(min)}$ or after $t_{WDU(max)}$, \overline{WDO} is asserted (active and low) for t_{RST} .

Copyright © 2021 Texas Instruments Incorporated

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

The following sections describe in detail proper device implementation, depending on the final application requirements.

8.1.1 CRST Delay

The TPS3430 features three options for setting the reset delay (t_{RST}): connecting a capacitor to the CRST pin, connecting a pull-up resistor to VDD, and leaving the CRST pin unconnected. Figure 8-1 shows a schematic drawing of all three options. To determine which option is connected to the CRST pin, an internal state machine controls the internal pulldown device and measures the pin voltage. This sequence of events takes 381 μ s (t_{INIT}) to determine which timing option is used. Every time \overline{WDO} is asserted, the state machine determines what is connected to the pin.

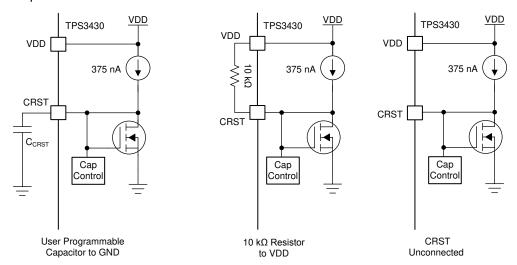


Figure 8-1. CRST Charging Circuit

8.1.1.1 Factory-Programmed Watchdog Reset Delay Timing

To use the factory-programmed timing options, the CRST pin must either be left unconnected or pulled up to VDD through a $10-k\Omega$ pull-up resistor. Using these options enables a high-precision, 15% accurate reset delay timing, as shown in Table 8-1.

Table 8-1. Watchdog Reset Delay Time for Factory-Programmed Timing

CRST	W	DO DELAY TIME (t _{RS}	т)	UNIT
CRST	MIN	TYP	MAX	UNII
NC	170	200	230	ms
10 kΩ to VDD	8.5	10	11.5	ms

8.1.1.2 CRST Programmable Watchdog Reset Delay

The TPS3430 uses a CRST pin charging current (I_{CRST}) of 375 nA. When using an external capacitor, the rising WDO delay time can be set to any value between 700 μ s (C_{CRST} = 100 pF) and 3.2 seconds (C_{CRST} = 1 μ F).

Product Folder Links: TPS3430

The typical ideal capacitor value needed for a given delay time can be calculated using Equation 1, where C_{CRST} is in microfarads and t_{RST} is in seconds:

$$t_{RST} = 3.22 \times C_{CRST} + 0.000381$$
 (1)

To calculate the minimum and maximum watchdog reset delay time use Equation 2 and Equation 3, respectively.

$$t_{RST(min)} = 2.8862 \times C_{CRST} + 0.000324$$
 (2)

$$t_{RST(max)} = 3.64392 \times C_{CRST} + 0.000438$$
 (3)

The slope of Equation 1 is determined by the time the CRST charging current (I_{CRST}) takes to charge the external capacitor up to the CRST comparator threshold voltage (V_{CRST}). When \overline{WDO} is asserted, the capacitor is discharged through the internal CRST pulldown resistor. When the \overline{WDO} conditions are cleared, the internal precision current source is enabled and begins to charge the external capacitor; when $V_{CRST} = 1.21 \text{ V}$, \overline{WDO} is unasserted. Note to minimize the difference between the calculated \overline{WDO} delay time and the actual \overline{WDO} delay time, use a use a high-quality ceramic dielectric COG, X5R, or X7R capacitor and minimize parasitic board capacitance around this pin. Table 8-2 lists the watchdog reset delay time ideal capacitor values for C_{CRST} .

C _{CRST}	WDC	UNIT		
	MIN ⁽¹⁾	TYP	MAX ⁽¹⁾	ONII
100 pF	0.61	0.70	0.80	ms
1 nF	3.21	3.61	4.08	ms
10 nF	29.2	32.6	36.8	ms
100 nF	289	323	364	ms
1 μF	2886	3227	3644	ms

⁽¹⁾ Minimum and maximum values are calculated using ideal capacitors.

8.1.2 CWD Functionality

The TPS3430 features three options for setting the watchdog window: connecting a capacitor to the CWD pin, connecting a pull-up resistor to VDD, and leaving the CWD pin unconnected. Figure 8-2 shows a schematic drawing of all three options. If this pin is connected to VDD through a $10-k\Omega$ pull-up resistor or left unconnected (high impedance), then the factory-programmed watchdog timeouts are enabled; see the *Section 6.6* table. Otherwise, the watchdog timeout can be adjusted by placing a capacitor from the CWD pin to ground.

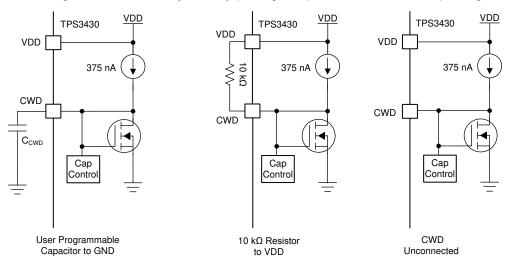


Figure 8-2. CWD Charging Circuit

8.1.2.1 Factory-Programmed Timing Options

If using the factory-programmed timing options (listed in Table 8-3), the CWD pin must either be unconnected or pulled up to VDD through a 10-k Ω pull-up resistor. Using these options enables high-precision, factory-programmed watchdog timing.

Table 8-3. Factory-Programmed Watchdog Timing

INPUT			WATCHDOG LOW	ER BOUNDAR	RY (t _{WDL})	WATCHDOG UP	RY (t _{WDU})	UNIT	
CWD	CWD SET0 SET		MIN	TYP	MAX	MIN	TYP	MAX	ONIT
	0	0	19.1	22.5	25.9	46.8	55.0	63.3	ms
NC	0	1	1.48	1.85	2.22	23.375	27.5	31.625	ms
INC	1	0	Watchdog disabled			Watch			
	1	1	680	800	920	1360	1600	1840	ms
	0	0	7.65	9.0	10.35	92.7	109.0	125.4	ms
10 kΩ to VDD	0	1	7.65	9.0	10.35	165.8	195.0	224.3	ms
10 KΩ to VDD	1	0	Watcho	dog disabled		Watch			
	1	1	1.48	1.85	2.22	9.35	11.0	12.65	ms

8.1.2.2 CWD Adjustable Capacitor Watchdog Timeout

Adjustable capacitor timing is achievable by connecting a capacitor to the CWD pin. If a capacitor is connected to CWD, then a 375-nA constant-current source charges C_{CWD} until V_{CWD} = 1.21 V. The TPS3430 determines the window watchdog upper boundary with the formula given in Equation 4, where C_{CWD} is in microfarads and t_{WDU} is in seconds.

$$t_{WDU(typ)} = 77.4 \times C_{CWD} + 0.055$$
 (4)

The TPS3430 is designed and tested using C_{CWD} capacitors between 100 pF and 1 μ F. Note that Equation 4 is for ideal capacitors, capacitor tolerances cause the actual device timing to vary. For the most accurate timing, use ceramic capacitors with COG dielectric material. As shown in Table 8-4, when using the minimum capacitor of 100 pF, the watchdog upper boundary is 62.74 ms; whereas with a 1- μ F capacitor, the watchdog upper boundary is 77.455 seconds. If a C_{CWD} capacitor is used, Equation 4 can be used to set t_{WDU} the window watchdog upper boundary. The window watchdog lower boundary is dependent on the SET0 and SET1 pins because these pins set the window watchdog ratio of the lower boundary to upper boundary; Table 8-5 shows how t_{WDU} can be used to calculate t_{WDU} based on the SET0 and SET1 pins.

Table 8-4. twDU Values for Common Ideal Capacitor Values

•	WATCHDO	UNIT		
C _{CWD}	MIN ⁽¹⁾	TYP	MAX ⁽¹⁾	UNIT
100 pF	56.77	62.74	68.7	ms
1 nF	119.82	132.4	144.98	ms
10 nF	750	829	908	ms
100 nF	7054	7795	8536	ms
1 μF	70096	77455	84814	ms

(1) Minimum and maximum values are calculated using ideal capacitors.

Table 8-5. Programmable CWD Timing

INP	TUT		WATCHDOG	LOWER BOUN	DARY (t _{WDL})	WATCHDOG U	UNIT				
CWD	SET0	SET1	MIN	TYP	MAX	MIN	TYP	MAX	ONIT		
	0	0	t _{WDU(min)} x 0.125	t _{WDU} x 0.125	t _{WDU(max)} x 0.125	0.905 x t _{WDU(typ)}	t _{WDU(typ)} (1)	1.095 x t _{WDU(typ)}	s		
C _{CWD}	0	1	t _{WDU(min)} x 0.75	t _{WDU} x 0.75	t _{WDU(max)} x 0.75	0.905 x t _{WDU(typ)}	t _{WDU(typ)} (1)	1.095 x t _{WDU(typ)}	s		
CCMD	1	0	W	atchdog disable	d	Wat	chdog disabled	t			
	1	1	t _{WDU(min)} x 0.5	t _{WDU} x 0.5	t _{WDU(max)} x 0.5	0.905 x t _{WDU(typ)}	t _{WDU(typ)} (1)	1.095 x t _{WDU(typ)}	S		

Calculated from Equation 4 using ideal capacitors.

8.2 Typical Applications

8.2.1 Monitoring Microcontroller with Watchdog Timer - Design 1

A basic application for the TPS3430 is shown in Figure 8-8. The TPS3430 is used to monitor the activity of the microcontroller via the WDI pin. Design 1 utilizes the simplest TPS3430 configuration with factory-programmed timing options by leaving the CRST and CWD timing pins floating (NC - no connect)

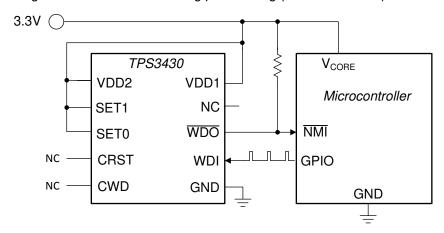


Figure 8-3. Monitoring Microcontroller using a Window Watchdog Timer

8.2.1.1 Design Requirements - Design 1

PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Watchdog Reset delay	Reset delay of 200 ms	Use factory-programmed timing option by leaving CRST as NC. Watchdog reset delay: 170 ms (min), 200 ms (typ), 230 ms (max)
Watchdog window	Functions with a 1-Hz pulse-width modulation (PWM) signal with a 20% duty cycle	Leaving the CWD pin unconnected with SET0 = 1 and SET1 = 1 produces a window with a t _{WDL(max)} of 920 ms and a t _{WDU(min)} of 1360 ms
Output logic voltage	3.3-V Open-Drain	3.3-V Open-Drain
Maximum device current consumption	200 μΑ	10 μA of current consumption, typical worst-case of 199 μA when \overline{WDO} is asserted

8.2.1.2 Detailed Design Procedure - Design 1

8.2.1.2.1 Meeting the Minimum Watchdog Reset Delay - Design 1

To achieve the 200 ms Watchdog Reset Delay requirement, this design simply leaves CRST pin floating (NC - No Connect) to set the Watchdog Reset Delay (t_{RST}) to the factory-programmed delay of 200 ms. Refer to section 8.1.1 CRST Delay to learn more about the factory-programmed timing options and how to program the Watchdog Reset Delay using an external capacitor.

In Figure 8-4 below, the Watchdog Reset Delay of 200 ms is shown by causing a watchdog timing fault. No watchdog pulse comes on WDI within the Watchdog Timeout so $\overline{\text{WDO}}$ activates for t_{RST} of 200 ms. Then after three watchdog faults, a watchdog pulse at 1Hz and 20% duty cycle arrives on WDI causing $\overline{\text{WDO}}$ to deactive and remain high.



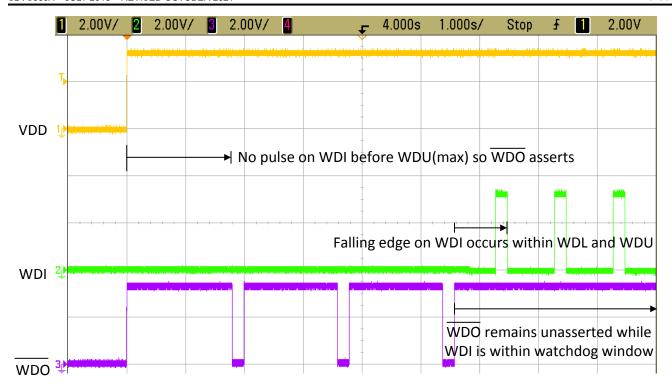


Figure 8-4. Watchdog Fault Caused by Missing WDI Pulse Until WDI pulses Arrive Within Watchdog Window to Deactivate WDO Fault

8.2.1.2.2 Setting the Watchdog Window - Design 1

The Watchdog Window is set via the CWD, SET0, and SET1 pin configurations. To achieve a Watchdog Timeout of 1 second, this design simply leaves CWD pin floating (NC - No Connect) and ties SET0 and SET1 to VDD to set these SET pins to logic high. With this configuration, the Watchdog Lower Boundary $t_{WDL\ (typ)}$ is set for 800ms and the Watchdog Upper Boundary $t_{WDU\ (typ)}$ is set for 1.6 seconds. Refer to Table 6.6 Timing Requirements to see the factory-programmed window watchdog timing configurations.

In Figure 8-5 and Figure 8-6 below, the watchdog window timing is shown by causing watchdog faults from pulses on WDI arriving too early and too late, respectively. When a pulse on WDI arrives too early, that is before $t_{WDL\ (min)}$ or too late, that is after $t_{WDU\ (max)}$, a watchdog fault occurs and \overline{WDO} activates to logic low.



Figure 8-5. Watchdog Fault Caused by WDI Pulse Arriving Too Early (Before t_{WDL (min)})

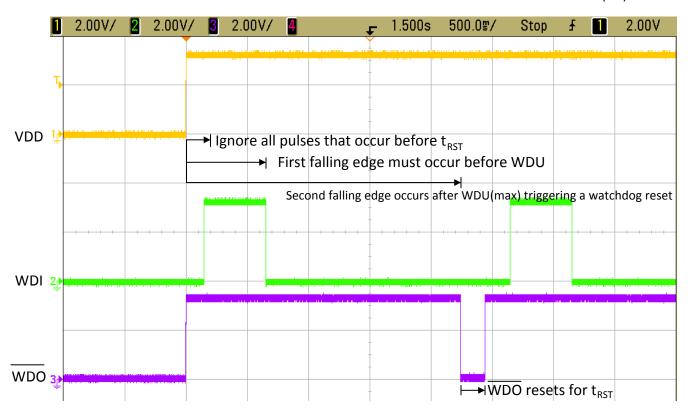


Figure 8-6. Watchdog Fault Caused by WDI Pulse Arriving Too Late (After t_{WDU (max)})

8.2.1.2.3 Calculating the WDO Pull-up Resistor - Design 1

Figure 8-7 shows the TPS3430 uses an open-drain configuration for the \overline{WDO} circuit. When the FET is off, the resistor pulls the drain of the transistor to VDD and when the FET is turned on, the FET attempts to pull the drain to ground, thus creating an effective resistor divider. The resistors in this divider must be chosen to ensure that V_{OL} is below its maximum value. To choose the proper pull-up resistor, there are three key specifications to keep in mind: the pull-up voltage (V_{PU}) , the recommended maximum \overline{WDO} pin current (I_{WDO}) , and V_{OL} . The maximum V_{OL} is 0.4 V, meaning that the effective resistor divider created must be able to bring the voltage on the reset pin below 0.4 V with I_{WDO} kept below 10 mA. For this example, with a V_{PU} of 3.3 V, a resistor must be chosen to keep I_{WDO} below 200 μA because this value is the maximum consumption current allowed. To ensure this specification is met, a pull-up resistor value of 16.5 kΩ is selected, which sinks a maximum of 200 μA when \overline{WDO} is asserted. \overline{WDO} current is at 200 μA and the low-level output voltage is approximately zero.




Figure 8-7. Open-Drain WDO Configuration

8.2.2 Monitoring Microcontroller with a Programmed Window Watchdog Timer - Design 2

A typical application for the TPS3430 is shown in Figure 8-8. The TPS3430 is used to monitor the activity of the microcontroller via the WDI pin.




Figure 8-8. Monitoring Microcontroller Using a Window Watchdog Timer with Programmable Watchdog Reset Delay

8.2.2.1 Design Requirements - Design 2

PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Watchdog Reset delay	Minimum reset delay of 250 ms	Minimum reset delay of 260 ms, reset delay of 322 ms (typical)
Watchdog window	Functions with a 30-Hz pulse-width modulation (PWM) signal with a 50% duty cycle	Leaving the CWD pin unconnected with SET0 = 0 and SET1 = 0 produces a window with a t _{WDL(max)} of 25.9 ms and a t _{WDU(min)} of 46.8 ms
Output logic voltage	1.8-V CMOS	1.8-V CMOS
Maximum device current consumption	200 μΑ	10 μA of current consumption, typical worst-case of 199 μA when \overline{WDO} is asserted

Product Folder Links: TPS3430

8.2.2.2 Detailed Design Procedure - Design 2

8.2.2.2.1 Meeting the Minimum Watchdog Reset Delay - Design 2

The TPS3430 features three options for setting the watchdog reset delay: connecting a capacitor to the CRST pin, connecting a pull-up resistor, and leaving the CRST pin unconnected. If the CRST pin is either unconnected or pulled up the minimum timing requirement cannot be met, thus an external capacitor must be connected to the CRST pin. Because a minimum time is required, the worst-case scenario is a supervisor with a high CRST charging current (I_{CRST}) and a low CRST comparator threshold (V_{CRST}). For applications with ambient temperatures ranging from -40° C to $+125^{\circ}$ C, C_{CRST} can be calculated using $I_{CRST(MAX)}$, $V_{CRST(MIN)}$, and solving for C_{CRST} in Equation 5:

$$C_{RST (MIN)} = \frac{I_{CRST (MAX)}}{V_{CRST (MIN)}} \times (t_{RST} - t_{INIT})$$
(5)

When solving Equation 5, the minimum capacitance required at the CRST pin is 0.086 μ F. If standard capacitors with ±10% tolerances are used, then the minimum CRST capacitor required can be found in Equation 6:

$$C_{RST(min)} = \frac{C_{RST(min)_ideal}}{1 - C_{tolerance}} = \frac{0.086 \ \mu F}{1 - 0.1} \tag{6}$$

Solving Equation 6 where $C_{tolerance}$ is 0.1 or 10%, the minimum C_{CRST} capacitor is 0.096 μ F. This value is then rounded up to the nearest standard capacitor value, so a 0.1- μ F capacitor must be used to achieve this reset delay timing. If voltage and temperature derating are being considered, then also include these values in $C_{tolerance}$.

8.2.2.2.2 Setting the Watchdog Window - Design 2

In this application, the window watchdog timing options are based on the PWM signal that is provided to the TPS3430. A window watchdog setting must be chosen such that the falling edge of the PWM signal always falls within the window. A nominal window must be designed with $t_{WDL(max)}$ less than 33.33 ms and $t_{WDU(min)}$ greater than 33.33 ms. There are several options that satisfy this window option. An external capacitor can be placed on the CWD pin and calculated to have a sufficient window. Another option is to use one of the factory-programmed timing options. An additional advantage of choosing one of the factory-programmed options is the ability to reduce the number of components required, thus reducing overall BOM cost. Leaving the CWD pin unconnected (NC) with SET0 = 0 and SET1 = 0 produces a $t_{WDL(max)}$ of 25.9 ms and a $t_{WDU(min)}$ of 46.8 ms; see Section 8.1.2.

8.2.2.2.3 Calculating the WDO Pull-up Resistor - Design 2

The TPS3430 uses an open-drain configuration for the \overline{WDO} circuit, as shown in Figure 8-7. When the FET is off, the resistor pulls the drain of the transistor to VDD and when the FET is turned on, the FET attempts to pull the drain to ground, thus creating an effective resistor divider. The resistors in this divider must be chosen to ensure that V_{OL} is below its maximum value. To choose the proper pull-up resistor, there are three key specifications to keep in mind: the pull-up voltage (V_{PU}), the recommended maximum \overline{WDO} pin current (I_{WDO}), and V_{OL} . The maximum V_{OL} is 0.4 V, meaning that the effective resistor divider created must be able to bring the voltage on the reset pin below 0.4 V with I_{WDO} kept below 10 mA. For this example, with a V_{PU} of 1.8 V, a resistor must be chosen to keep I_{WDO} below 200 μ A because this value is the maximum consumption current allowed. To ensure this specification is met, a pull-up resistor value of 10 k Ω was selected, which sinks a maximum of 180 μ A when \overline{WDO} is asserted.

8.2.3 Monitoring Microcontroller with a Latching Window Watchdog Timer - Design 3

A safety critical application for the TPS3430 is shown in Figure 8-9. The TPS3430 is used to monitor the activity of the microcontroller via the WDI pin and upon a watchdog fault, this design latches the $\overline{\text{WDO}}$ pin until the device VDD drops below $V_{\text{DD (min)}}$.

Copyright © 2021 Texas Instruments Incorporated

Submit Document Feedback



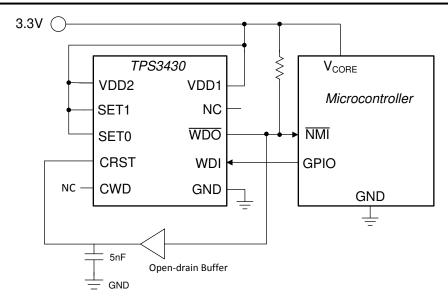


Figure 8-9. Monitoring Microcontroller Using a Latching Window Watchdog Timer

8.2.3.1 Design Requirements - Design 3

PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Watchdog Reset delay	Latch WDO upon watchdog fault	Latching watchdog functionality that keeps WDO logic low when fault occurs
Watchdog window	Functions with a 1-Hz pulse-width modulation (PWM) signal with a 50% duty cycle	Leaving the CWD pin unconnected with SET0 = 1 and SET1 = 1 produces a window with a t _{WDL(max)} of 920 ms and a t _{WDU(min)} of 1360 ms
Output logic voltage	3.3-V Open-Drain	3.3-V Open-Drain
Maximum device current consumption	200 μΑ	10 μA of current consumption, typical worst-case of 199 μA when \overline{WDO} is asserted

8.2.3.2 Detailed Design Procedure - Design 3

8.2.3.2.1 Meeting the Latching Output Requirement - Design 3

To achieve the latching watchdog feature, an open-drain buffer is connected from WDO to CRST with a small value capacitor connected from the Anode of the buffer connected to CRST to GND. The capacitor must be a small value to prevent additional delay when triggering WDO to active low during watchdog fault. A capacitor between 150 pF and 5 nF is recommended.

In Figure 8-10 below, the latching watchdog feature is shown by causing a watchdog fault and observing $\overline{\text{WDO}}$. Because no pulse arrived on WDI within the Watchdog Timeout, $\overline{\text{WDO}}$ activates and goes logic low and remains low. To reset the watchdog, the device must be restarted by dropping VDD below V_{DD} (min).

8.2.3.2.2 Setting the Watchdog Window - Design 3

The Watchdog Window is set via the CWD, SET0, and SET1 pin configurations. To achieve a Watchdog Timeout of 1 second corresponding to a 1-Hz WDI signal, this design simply leaves CWD pin floating (NC - No Connect) and ties SET0 and SET1 to VDD to set the SET pins to logic high. With this configuration, the Watchdog Lower Boundary $t_{WDL\ (typ)}$ is set for 800 ms and the Watchdog Upper Boundary $t_{WDU\ (typ)}$ is set for 1.6 seconds. Refer to Table 6.6 Timing Requirements to see the factory-programmed window watchdog timing configurations.

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

8.2.3.3 Application Curve - Design 3



Figure 8-10. Watchdog Fault Caused by Missing WDI Pulse Shows WDO Latching



9 Power Supply Recommendations

This device is designed to operate from an input supply with a voltage range between 1.6 V and 6.5 V. An input supply capacitor is not required for this device; however, if the input supply is noisy, then good analog practice is to place a 0.1-µF capacitor between the VDD pin and the GND pin. Please be sure to externally connect VDD1 to VDD2 as the device will not function if these pins are not connected.


10 Layout

10.1 Layout Guidelines

Make sure that the connection to the VDD pin is low impedance. Good analog design practice recommends placing a 0.1- μ F ceramic capacitor as near as possible to the VDD pin. If a capacitor is not connected to the CRST pin, then minimize parasitic capacitance on this pin so the \overline{WDO} delay time is not adversely affected.

- Make sure that the connection to the VDD pin is low impedance. Good analog design practice is to place a 0.1-μF ceramic capacitor as near as possible to the VDD pin.
- If a C_{CRST} capacitor or pull-up resistor is used, place these components as close as possible to the CRST pin. If the CRST pin is left unconnected, make sure to minimize the amount of parasitic capacitance on the pin.
- If a C_{CWD} capacitor or pull-up resistor is used, place these components as close as possible to the CWD pin. If the CWD pin is left unconnected, make sure to minimize the amount of parasitic capacitance on the pin.
- Place the pull-up resistor on WDO as close to the pin as possible.

10.2 Layout Example



O Denotes a via.

Figure 10-1. Typical Layout for the TPS3430



11 Device and Documentation Support

11.1 Device Support

11.2 Documentation Support

11.2.1 Related Documentation

For related documentation see the following:

TPS3430EVM Window Watchdog Timer with Programmable Timeout Delay User Guide

11.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.4 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

11.5 Trademarks

TI E2E[™] is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

11.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.7 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: TPS3430

28

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
	(1)	(2)			(5)	(4)	(5)		(0)
TPS3430WDRCR	Active	Production	VSON (DRC) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA
TPS3430WDRCR.A	Active	Production	VSON (DRC) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA
TPS3430WDRCRG4	Active	Production	VSON (DRC) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA
TPS3430WDRCRG4.A	Active	Production	VSON (DRC) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS3430:

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

• Automotive : TPS3430-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

PACKAGE MATERIALS INFORMATION

www.ti.com 18-Jun-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS3430WDRCR	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
TPS3430WDRCRG4	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

PACKAGE MATERIALS INFORMATION

www.ti.com 18-Jun-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS3430WDRCR	VSON	DRC	10	3000	367.0	367.0	35.0
TPS3430WDRCRG4	VSON	DRC	10	3000	367.0	367.0	35.0

3 x 3, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



INSTRUMENTS www.ti.com



PLASTIC SMALL OUTLINE - NO LEAD



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.



PLASTIC SMALL OUTLINE - NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC SMALL OUTLINE - NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025