











TPS51120

SLUS670C - JULY 2005 - REVISED JANUARY 2015

TPS51120 Dual, Synchronous Step-Down Controller With 100-mA Standby Regulators for **Notebook System Power**

Features

- 3.3-V and 5-V 100-mA Bootstrapped Standby Regulators with Independent Enables
- Selectable D-CAP™ Mode Enables Fast Transient Response Less than 100 ns
- Selectable Low Ripple Current Mode
- Less than 1% Internal Reference Accuracy
- Selectable PWM-only/Auto-skip Modes
- Low-side R_{DS(on)} Loss-less Current Sensing
- R_{SENSE} Accurate Current Sense Option
- Internal Soft-Start and Integrated V_{OUT} Discharge **Transistors**
- Integrated 2-V Reference
- Adaptive Gate Drivers with Integrated Boost Diode
- Powergood for Each Channel with Delay Timer
- Fault Disable Mode
- Supply Input Voltage Range: 4.5 V to 28 V

2 Applications

Notebook Computers System Bus and I/O

3 Description

The TPS51120 is a highly sophisticated dual, synchronous step-down controller. It is a full featured controller designed to run directly off a three- or fourcell Li-ion battery and provide high-power and 5-V 3.3-V standby regulation for all the downstream circuitry in a notebook computer system. High-current, 100-mA, 5-V or 3.3-V on-board linear regulators have glitch-free switch over function to SMPS and can be kept alive independently during standby state. The pseudo-constant frequency adaptive on-time control scheme supports full range of current mode operation including simplified loop compensation, ceramic output capacitors as well as seamless transition to reduced frequency operation at light-load condition. Optional D-CAP mode operation optimized for SP-CAP or POSCAP output capacitors allows further reduction of external compensation parts. Dynamic UVP supports VIN line sag without latch off by hitting 5-V UVP. No negative voltage appears at output voltage node during UVLO, UVP, and OCP, OTP or loss of VIN.

The TPS51120 32-pin QFN package is specified from -40°C to 85°C ambient temperature.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPS51120	VQFN (32)	5.00 mm × 5.00 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

Reference Design for D-CAP Mode Converter

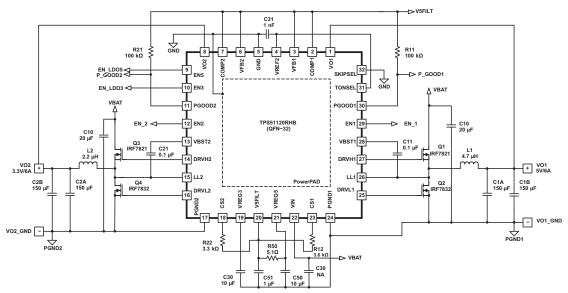




Table of Contents

1	Features 1	7.4 Device Functional Modes	22
2	Applications 1	7.5 Programming	27
3	Description 1	8 Application and Implementation	28
4	Revision History2	8.1 Application Information	28
5	Pin Configuration and Functions	8.2 Typical Application	28
6	Specifications5	9 Power Supply Recommendations	31
٠	6.1 Absolute Maximum Ratings 5	10 Layout 3	31
	6.2 Recommended Operating Conditions	10.1 Layout Guidelines	31
	6.3 Thermal Information	10.2 Layout Example	32
	6.4 Electrical Characteristics 6	11 Device and Documentation Support 3	33
	6.5 Typical Characteristics	11.1 Trademarks	33
7	Detailed Description 15	11.2 Electrostatic Discharge Caution	33
-	7.1 Overview	11.3 Glossary	33
	7.2 Functional Block Diagram	12 Mechanical, Packaging, and Orderable Information	33
	7.3 Feature Description		_

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


Changes from Revision B (Feburary 2007) to Revision C

Page

Added Pin Configuration and Functions section, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation



5 Pin Configuration and Functions

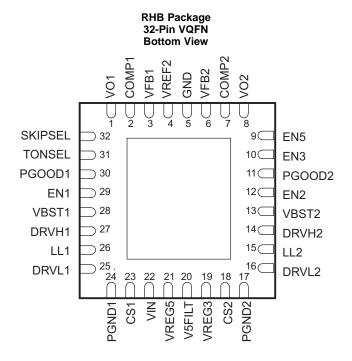

Pin Functions

PII	N		
NAME	NO.	1/0	DESCRIPTION
COMP1	2	0	Loop compensation pin (error amplifier output). Connect RC from this pin to GND for proper loop
COMP2	7	0	compensation with current mode operation. Tie this pin to V5FILT for D-CAP mode operation.
CS1	23	1	Current sense comparator input (-) for resistor sensing scheme. Or, overcurrent trip setting input for
CS2	18	I	R _{DS(on)} current sense scheme if connected to V5FILT through the threshold setting resistor.
DRVH1	27	0	High-side MOSFET gate drive output. Source 3.5 Ω , sink 1.5 Ω , LL-node referenced floating driver. Drive
DRVH2	14	0	voltage corresponds to VBST to LL voltage.
DRVL1	25	0	Rectifying (low-side) MOSFET gate drive output. Source 3.5 Ω , sink 1.5 Ω , PGND referenced driver. Drive
DRVL2	16	0	voltage is VREG5 voltage.
EN1	29	I	Channel 1 and Channel 2 SMPS enable pins. Connect to 5 V to turn on with internal 3-ms soft-start.
EN2	12	I	Slower soft-start is possible by applying an external capacitor from each of these pins to ground to program ramp rate.
EN3	10	I	VREG3, 3.3-V low dropout linear regulator enable pin. Connect to GND to disable. Float or tie to enabled VREG5 to turn on the regulator.
EN5	9	1	VREG5, 5-V low dropout linear regulator enable pin. Connect to GND to disable. Float or tie to VBAT to turn on the regulator.
GND	5	ı	Signal ground pin.
LL1	26	I/O	High-side MOSFET gate driver return. Also serve as current sense comparator input (-) for R _{DS(on)}
LL2	15	I/O	sensing, and input voltage monitor for on-time control circuitry
PGND1	24	I/O	Ground return for rectifying MOSFET gate driver. Connect PGND2, PGND1 and GND strongly together
PGND2	17	I/O	near the source of the rectifying FET or the GND connection of the current sense resistor. Also serve as current sense comparator input (+).
PGOOD1	30	0	Power-good window comparator open drain output. Pull up with resistor to V5FILT or appropriate signal
PGOOD2	11	0	voltage. Current capability is 5-mA. PGOOD goes high 1-ms after VFB is within specified limits. Power bad (terminal goes low) is within 10 µs.
SKIPSEL	32	1	Skip and fault mode selection pin. Refer to Table 5
TONSEL	31	I	On-time selection pin. Refer to Table 1 and Table 5.
V5FILT	20	1	5-V supply input for the entire control circuit. Should be provided from VREG5 via RC filter.



Pin Functions (continued)

PII	PIN						PIN		DESCRIPTION
NAME	NO.	I/O	DESCRIPTION						
VBST1	28	I	Supply Input for High-side MOSFET Driver. Connect capacitor from this pin to respective LL terminal. An						
VBST2	13	I	internal PN diode is connected between VREG5 to each of these pins. User can add external schottky diode if forward drop is critical to drive the power MOSFET.						
VFB1	3	I	SMPS feedback input. Connect the feedback resistor divider here for adjustable outputs. Tie these pins to						
VFB2	6	I	V5FILT or for fixed output option. Refer to Table 5						
VIN	22	- 1	Supply Input for 5-V and 3.3-V linear regulator. Typically connected to VBAT.						
VO1	1	I	These terminals serve four functions: on-time adjustment, output discharge, VREG5, VREG3 switchover						
VO2	8	I	input and feedback inputs for 5-V, 3.3-V fixed-output option. Connect to positive terminal of respective switch mode power supply's output capacitor.						
VREF2	4	0	2-V reference output. Capable of ±50-μA, ±2% over 0 - 85°C temperature range. Bypass to GND by 1-nF ceramic capacitor. Tie this pin to GND disables both SMPS.						
VREG3	19	0	3.3-V, 100-mA low dropout linear regulator output. Bypass to PGND by 10-µF ceramic capacitor. Runs from VIN supply. Shuts off with EN3. Switches over to VO2 when 3.1 V or above is provided.						
VREG5	21	0	5-V, 100-mA low dropout linear regulator output. Bypass to PGND by 10-μF ceramic capacitor. Runs from VIN supply. Internally connected to VBST and DRVL. Shuts off with EN5. Switches over to VO1 when 4.8 V or above is provided.						

Submit Documentation Feedback



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range unless otherwise noted (1)

		MIN	MAX	UNIT
	VBST1, VBST2	-0.3	36	
	VBST1, VBST2 wrt LL	-0.3	6	
Input voltage	VIN, EN5	-0.3	30	V
	SKIPSEL, TONSEL, EN1, EN2, CS1, CS2, V5FILT, VFB1, VFB2, EN3, VO1, VO2	-0.3	6	
	DRVH1, DRVH2	-1	36	
	DRVH1, DRVH2 (wrt LL)	-0.3	6	
Output voltage	LL1, LL2	-1	30	V
Calput Voltage	VREF2, VREG3, VREG5, PGOOD1, PGOOD2, DRVL1, DRVL2, COMP1, COMP2	-0.3	6	
	PGND1, PGND2	-0.3	0.3	
	VREF2		1	
Source/sink current	VBST		100	mA
	VREG5, VREG3 (source only)		200	
T _A Operating ambient terr	perature	-40	85	
T _J Junction temperature		-40	125	°C
Lead temperature 1.6	mm (1/16 inch) from case for 10 seconds		255	
T _{stg} Storage temperature		-55	150	

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. All voltage values are with respect to the network ground terminal unless otherwise noted.

6.2 Recommended Operating Conditions

	1 5	MIN	MAX	UNIT
Input voltage, V5FILT		4.5	5.5	V
_ · · · ·	VBST1, VBST2	-0.1	34	
	VBST1, VBST2 wrt LL	-0.1	5.5	
Input voltage range	VIN, EN5	-0.1	28	V
	SKIPSEL, TONSEL, EN1, EN2, CS1, CS2, V5FILT, VFB1, VFB2, EN3	-0.1	5.5	
	VO1, VO2	-0.1	5.5	
	DRVH1, DRVH2	-0.8	34	
	DRVH1, DRVH2 (wrt LL)	-0.1	5.5	
Output voltage range	LL1, LL2	-0.8	28	V
Output voltage range	VREF2, VREG5, VREG3, PGOOD1, PGOOD2, DRVL1, DRVL2, COMP1, COMP2	-0.1	5.5	V
	PGND1, PGND2	-0.1	0.1	
	VREF2		0.08	
Source/sink current	VBST		50	mA
	VREG5, VREF3 (source only)		100	
Operating ambient tem	perature range, T _A	-40	85	°C



6.3 Thermal Information

	TPS51120	
THERMAL METRIC ⁽¹⁾	RHB	UNIT
	32 PINS	
R _{θJA} Junction-to-ambient thermal resistance	38.5	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.

6.4 Electrical Characteristics

over operating free-air temperature range, $V_{VIN} = 12 \text{ V}$, $V_{VREG5} = V_{V5FILT} = 5 \text{ V}$ (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	S	MIN	TYP	MAX	UNIT	
SUPPLY C	URRENT							
I _{INCCAP}	Supply current	VIN current, VREG5=VREG3=No Load, EN3=EN5=FLOAT, EN1=EN2=5V, CS=5V, COMP connected to Cap	Current mode		750	1500		
I _{INNOCAP}	Supply current	VIN current, VREG5=VREG3=No Load, EN3=EN5=FLOAT; EN1=EN2=5V, CS=5V, COMP=5V	D-CAP mode		700	1400		
I _{IN5(STBY)}	Stand-by current	VIN current, VREG5=No Load EN3=0V, EN5=FLOAT, EN1=EN2=0	5-V only		30	45	μΑ	
I _{IN3(STBY)}	Stand-by current	VIN current, VREG3=No Load EN3=FLOAT, EN5=0, EN1=EN2=0	3.3-V only		12	20		
I _{IN532(STBY)}	Stand-by current	VIN current, VREG5=VREG3=VREI EN3=EN5=FLOAT, EN1=EN2=0	F2=No Load		100	160		
I _{IN(SHDN)}	Shut down current	VIN current, EN3=EN5=EN1=EN2=	0V		10	20		
VOUT and	VREF2 VOLTAGES							
		$V_{FB2} = 3.3 \text{ V}, T_A = 25^{\circ}\text{C}, \text{ No Load}$		3.241	3.300	3.359		
	Output voltage	$V_{FB2} = 3.3 \text{ V}, T_A = 0 \text{ to } 85^{\circ}\text{C}, \text{ No Load}$		3.234	3.300	3.366	V	
		$V_{FB2} = 3.3 \text{ V}, T_A = -40 \text{ to } 85^{\circ}\text{C}, \text{ No Load}$		3.224	3.300	3.376		
V _{OUT}		V _{FB1} = 5 V, T _A = 25°C, No Load		4.910	5.000	5.090		
		$V_{FB1} = 5 \text{ V}, T_A = 0 \text{ to } 85^{\circ}\text{C}, \text{ No Load}$		4.900	5.000	5.100		
		$V_{FB1} = 5 \text{ V}, T_A = -40 \text{ to } 85^{\circ}\text{C}, \text{ No Load}$		4.885	5.000	5.115		
		Adjustable mode output range		1.0		5.5		
V _{ADJ}	Output regulation voltage	Adjustable mode			1.00		V	
		Adjustable mode, T _A = 25°C		-0.9%		0.9%		
V _{ADJ T}	Output regulation voltage tolerance	Adjustable mode, T _A = 0 to 85°C		-1.3%		1.3%		
	tolerance	Adjustable mode, T _A = -40 to 85°C	to 85°C			1.6%		
V _{VREF2}	2-V output regulation voltage	I _{VREF2} ± 50 μA, T _A = 25°C		1.97	2.00	2.03		
	2-V output regulation voltage	I _{VREF2} ± 50 μA, T _A = 0 to 85°C		1.96		2.04	V	
V_{VREF2T}	tolerance	I _{VREF2} ± 50 μA, T _A = -40 to 85°C		1.95		2.05		
	VED in and a second	VFBx=1.02V, COMPx=open			0.02			
I _{VFB} VFB input current		VFBx=1.02V, COMPx=5V			0.02		μΑ	
R _{DISCHARG}	Discharge switch resistance	VOx=0.5V, T _A = 25°C			10	20	Ω	
	VREG3 VOLTAGE							
V _{VREG3}	VREG3 Output Regulation Voltage	$I_{VREG3} = 20 \text{ mA}, 6V < VIN < 28V, T_A = 25^{\circ}C$		3.25	3.30	3.35		
	-	I _{VREG3} = 1 - 50 mA , 6V < VIN < 28	V, T _A = 0 to 85°C	3.21		3.37	V	
V_{VREG3T}	VREG3 Output Voltage Tolerance	I _{VREG3} = 1 - 100 mA , 6V < VIN < 28 85°C		3.16		3.39		
I _{VREG3}	VREG3 Output Current	T _A = 25°C, VREG3=3.14V ⁽¹⁾			170		mA	
00	•	1 **						

Product Folder Links: TPS51120

Copyright © 2005–2015, Texas Instruments Incorporated

⁽¹⁾ Ensured by design. Not production tested.



Electrical Characteristics (continued)

over operating free-air temperature range, $V_{VIN} = 12 \text{ V}$, $V_{VREG5} = V_{V5FILT} = 5 \text{ V}$ (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V	VREG3 Bootstrap Switch	Rising edge of VO2, VREG3 drops to VO2 voltage	2.85		3.10	V
V_{LDO3SW}	Threshold	Hysteresis		120		mV
R _{LDO3SW}	VREG3 Bootstrap Switch Resistance			1.3	3.0	Ω
VREG5 VO	LTAGE					
V_{VREG5}	VREG5 Output Regulation Voltage	I _{VREG5} = 20 mA, 6V < VIN < 28V, TA= 25°C	4.925	5.00	5.075	
V_{VREG5T}	VREG5 Output Voltage Tolerance	$I_{VREG5} = 1 - 50 \text{ mA}$, $6V < VIN < 28V$, $T_A = 0$ to $85^{\circ}C$	4.89		5.11	V
		I_{VREG5} = 1 - 100 mA , 6V < VIN < 28V, $T_{A} \!\!=$ -40 to $85^{\circ} C$	4.80		5.15	
I _{VREG5}	VREG5 Output Current	$T_A = 25$ °C, VREG5=4.75 V ⁽¹⁾		200		mA
V_{LDO5SW}	VREG5 Bootstrap Switch	Rising edge of VO1, VREG5 drops to VO1 voltage	4.30		4.85	V
VLDO5SW	Threshold	Hysteresis		140		mV
R _{LDO5SW}	VREG5 Bootstrap Switch Resistance			1.3	3.0	Ω
TRANSCO	NDUCTANCE AMPLIFIER					
Gm	Gain	T _A = 25°C		280		μS
I _{COMPSINK}	COMP Maximum Sink Current	VFBx=1.05V, COMPx=1.28V	8	12	16	μΑ
I _{COMPSRC}	COMP Maximum Source Current	VFBx=0.95V, COMPx=1.28V	-15	-11	-7	μΛ
V_{COMPHI}	COMP High Clamp Voltage	CSx=0V, VFBx=0.95V	1.26	1.34	1.42	V
V_{COMPLO}	COMP Low Clamp Voltage	CSx=0V, VFBx=1.05V	1.08	1.12	1.20	V
OUTPUT D	PRIVER					
D	DRVH resistance	Source, V _{VBST-DRVH} = 1V		3.5	7	
R _{DRVH}	DRVH resistance	Sink, V _{DRVH-LL} = 1V		1.5	3	0
D	DRVL resistance	Source, V _{VREG5-DRVL} = 1V		3.5	7	Ω
R_{DRVL}		Sink, V _{DRVL-PGND} = 1V		1.5	3	
т	Dead time	DRVH-off to DRVL-on, T _A = 25°C		20		no
T_D	Dead time	DRVL-off to DRVH-on, T _A = 25°C	30	60		ns
V_{DTH}	DRVH-off threshold	LL to GND ⁽¹⁾		2		V
V_{DTL}	DRVL-off threshold	DRVL to GND ⁽¹⁾		1.1		V
INTERNAL	BST DIODE					
V _{FBST}	Forward Voltage	$V_{VREG5-VBST}$, $I_F = 10$ mA, $T_A = 25$ °C	0.7	0.8	0.9	V
I _{RBST}	Reverse Current	VBST = 34 V, VREG5=5V		0.1	1.0	
I _{BST(LEAK)}	VBST Leakage current	VBST=34V, LL=28V, EN3=EN5=EN1=EN2=0V		0.1	1.0	μA
ON-TIME T	IMER, INTERNAL SOFT-START an	d HOUSEKEEPING CLOCK				
T _{ON1a}	On time, 5V, 180 kHz	V _{LL1} =12V, V _{OUT1} =5V, TONSEL=5V, T _A = 25°C	2150	2340	2530	
T _{ON1b}	On time, 5V, 220 kHz	V _{LL1} =12V, V _{OUT1} =5V, TONSEL=FLOAT, T _A = 25°C	1790	1950	2110	
T _{ON1c}	On time, 5V, 280 kHz	V _{LL1} =12V, V _{OUT1} =5V, TONSEL=2V, T _A = 25°C	1370	1490	1610	
T _{ON1d}	On time, 5V, 380 kHz	V _{LL1} =12V, V _{OUT1} =5V, TONSEL=GND, T _A = 25°C	1020	1110	1200	
T _{ON2a}	On time, 3.3V, 270 kHz	V _{LL2} =12V, V _{OUT2} =3.3V, TONSEL=5V, T _A = 25°C	940	1030	1120	
T _{ON2b}	On time, 3.3V, 330 kHz	V _{LL2} ==12V, V _{OUT1} =3.3V, TONSEL=FLOAT, T _A = 25°C	780	850	920	ns
T _{ON2c}	On time, 3.3V, 430 kHz	V _{LL2} ==12V, V _{OUT1} =3.3V, TONSEL=2V, T _A = 25°C	580	650	720	
T _{ON2d}	On time, 3.3V, 580 kHz	V _{LL2} ==12V, V _{OUT1} =3.3V, TONSEL=GND, T _A = 25°C	430	480	530	
T _{ON(MIN)1}	Minimum on time, 5V	T _A = 25°C, TONSEL=GND, V _{LL1} =28V, VO1=1V		70		
T _{ON(MIN)2}	Minimum on time, 3.3V	T _A = 25°C, TONSEL=GND, V _{LL2} =28V, VO2=1V		45		
T _{OFF(MIN)}	Minimum off time	T _A = 25°C, VFB=0.9V, LL=0.5V		480		
T _{SS}	Internal Soft Start Timer	T _A = 25°C, ENx>3V		772		clks



Electrical Characteristics (continued)

over operating free-air temperature range, $V_{VIN} = 12 \text{ V}$, $V_{VREG5} = V_{V5FILT} = 5 \text{ V}$ (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
SL _{SS}	Internal Soft Start Slope	$T_A = 25$ °C, ENx>3V, Slope wrt. VFB $^{(2)}$		0.3		V/ms	
F _{CLK}	HK clock frequency		230	290	350	kHz	
UVLO/LOG	IC THRESHOLD		•				
		EN3, EN5, low to high	0.3	0.6	0.8		
V _{ENLDOH}	LDO enable threshold	Hysteresis		0.2		١,,	
V _{ENLDOFL3}	EN3 pullup voltage	EN3 = FLOAT (OPEN)(2)		1.7		V	
V _{ENLDOFL5}	EN5 pullup voltage	EN5= FLOAT (OPEN)(2)		3.3			
I _{ENLDOFL}	EN3, EN5 pullup current	VENx < 0.5V		1.5	4.0	μΑ	
	\\DEGE = 10.4	Wake up	3.8	4.0	4.2	V	
V _{UV(VREG5)}	VREG5 UVLO threshold	Hysteresis	100	200	300	mV	
		Auto-SKIP Mode Enabled	0		0.7		
V _{SKIPSEL}	SKIPSEL threshold	Auto-SKIP Mode Enabled, Faults Off	1.3		2.2		
		PWM-Only Mode Enabled	2.7		5.5		
		Fast Switching Frequency	0		0.7	V	
.,		Medium Switching Frequency #2	1.3		2.2		
V _{TONSEL}	TONSEL threshold	Medium Switching Frequency #1	2.7		3.0		
		Slow Switching Frequency	4.5		5.5		
	0.412021.720.1021.1	SKIPSEL, TONSEL=0V		1	3		
I _{SEL}	SKIPSEL/TONSEL input current	SKIPSEL, TONSEL=5V		1	2	μA	
V _{ENSWSTAT}	EN1, EN2 SS Start Voltage	BJT Base input, Switcher begins to Track ENx	0.5	0.9	1.2		
V _{ENSWEND}	EN1, EN2 SS End Voltage	'Logic High' Level for Switcher Enable when using Internal Softstart, 0°C ≤ T _A ≤ 85°C		2.75	2.90	V	
I _{ENSW1,2}	EN1, EN2 Pullup Current	EN1, EN2=0.6V	1	2	3	μA	
V _{THVFB1}	VFB1 threshold	5.0V preset output		V5FILT -0.3			
V _{THVFB2}	VFB2 threshold	3.3V preset output		V5FILT -0.3		V	
CURRENT	SENSE	1					
V _{OCL}	Current limit threshold	Resistor sense scheme , V _{PGND - VCS} voltage, PGOOD=Hi	67	80	93	mV	
I _{TRIP}	CS Sink Current	R _{DS(ON)} sense scheme, PGOOD=Hi, T _A = 25°C	9	10	11	μA	
TC _{ITRIP}	I _{TRIP} temperature Coefficient	R _{DS(ON)} sense scheme, On the basis of 25°C		4500		ppm/°	
V_{OCLoff}	OCP Comparator Offset	(V _{VREG5-CS} -V _{PGND-LL}) voltage, V _{VREG5-CS} = 80mV, R _{DS(ON)} sense	-10	0	10		
V _{R(trip)}	Current limit threshold setting range	V _{V5FILT} -V _{CS} voltage	30		150	mV	
V_{ZC}	Zero cross detection Comparator offset	V _{PGNDx} -V _{LLx} voltage, SKIPSEL=0V	-5	1	5		
POWERGO	OOD COMPARATOR						
.,	DOCOD TILL I I I I	Power Bad Threshold	±7%	±10%	±13%		
$V_{TH(PG)}$	PGOOD Threshold	Hysteresis		±5%			
I _{PG(MAX}	PGOOD Sink Current	PGOOD=0.5 V	2.5	5.0		mA	
T _{PGDEL}	PGOOD Delay Timer	Delay for PGOOD in, 'clks'=HK Clock		256		clks	
	LTAGE and OVERVOLTAGE PRO		1			1	
V _{OVP}	VFBx OVP Trip Threshold	OVP detect	110%	115%	120%		
T _{OVPDEL}	VFBx OVP Delay Time			2		ms	
OV. DLL	y . .	T. Control of the con	İ	_		_	

Product Folder Links: TPS51120

(2) Ensured by design. Not production tested.

Copyright © 2005–2015, Texas Instruments Incorporated




Electrical Characteristics (continued)

over operating free-air temperature range, $V_{VIN} = 12 \text{ V}$, $V_{VREG5} = V_{V5FILT} = 5 \text{ V}$ (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
V _{UVP}	VERY LIVE Trip Throubold	UVP detect	65%	70%	75%		
	VFBx UVP Trip Threshold	Hysteresis		6%			
T _{UVPDEL}	VFBx UVP Delay Timer	'clks'=HK Clock		128		clks	
THERMAL SHUTDOWN							
_	Thermal shutdown threshold	Shutdown temperature		145			
T _{SDN1}		Hysteresis		10		°C	



6.5 Typical Characteristics

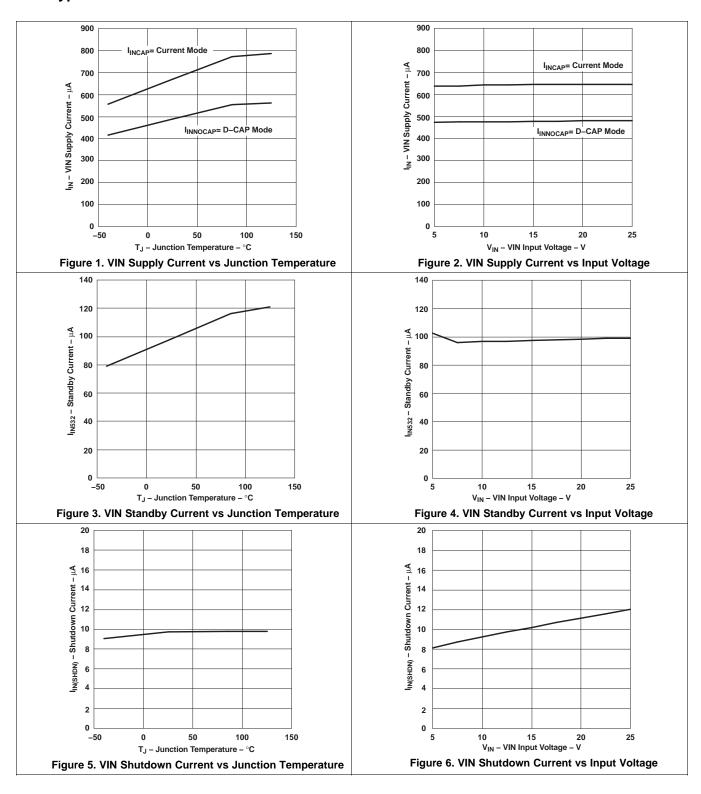


Submit Documentation Feedback

Copyright © 2005–2015, Texas Instruments Incorporated



Typical Characteristics (continued)

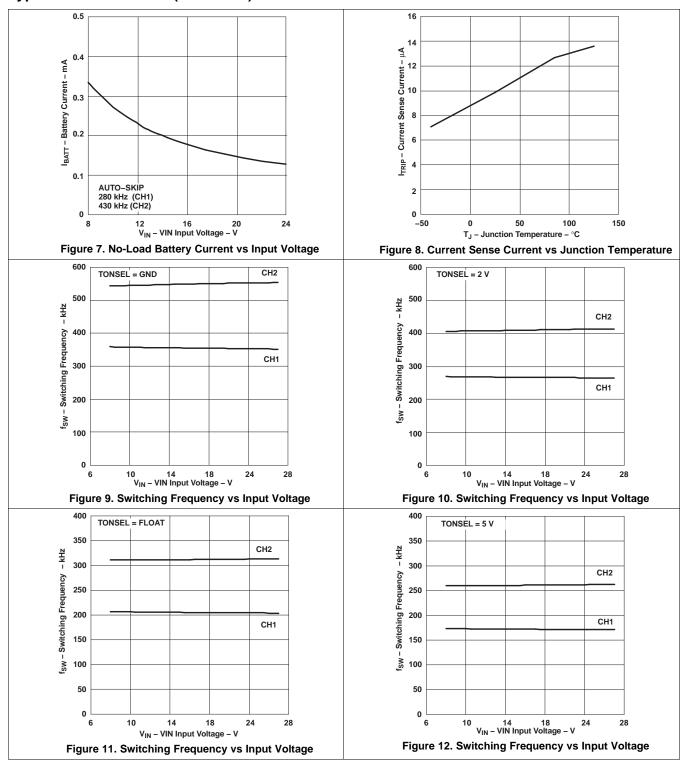


Copyright © 2005–2015, Texas Instruments Incorporated

Submit Documentation Feedback

TEXAS INSTRUMENTS

Typical Characteristics (continued)

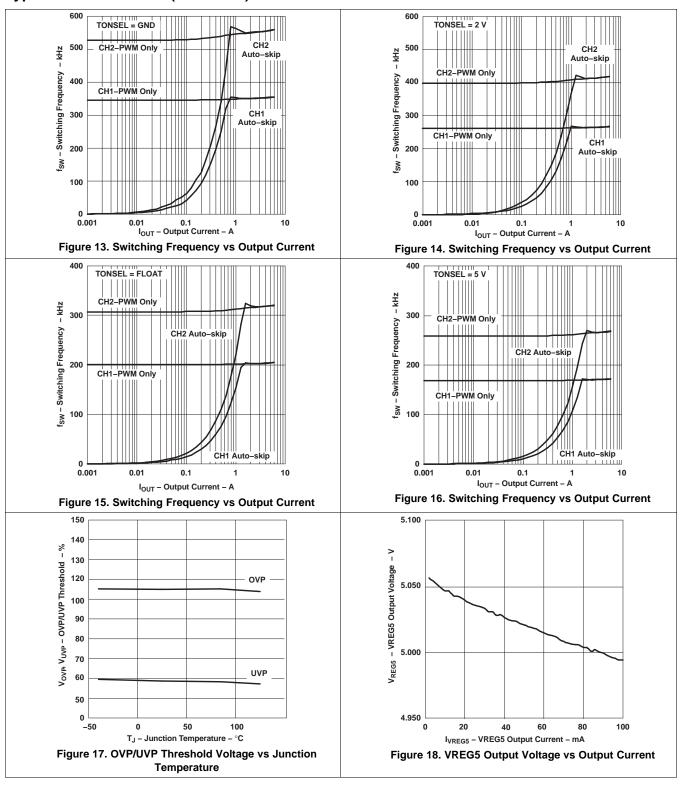


Submit Documentation Feedback

Copyright © 2005–2015, Texas Instruments Incorporated



Typical Characteristics (continued)

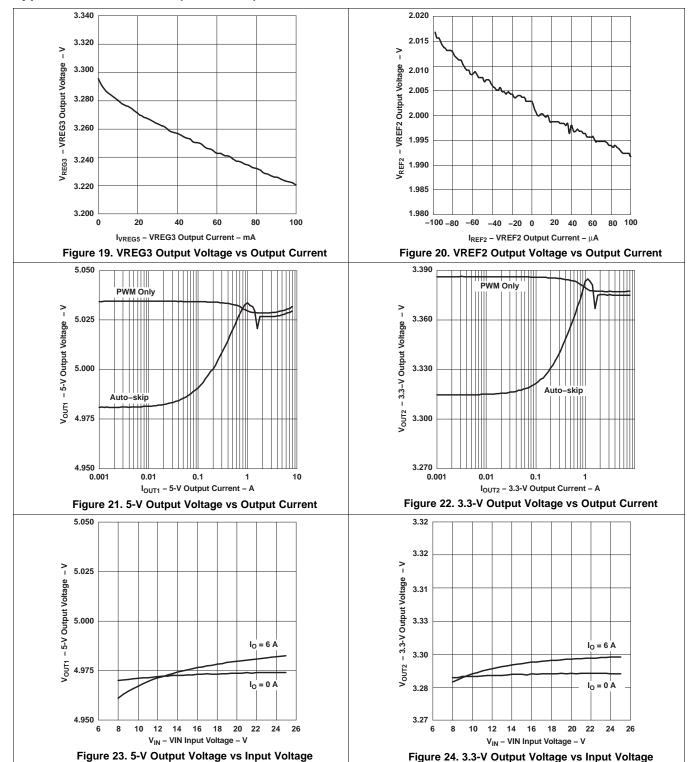



Copyright © 2005–2015, Texas Instruments Incorporated

Submit Documentation Feedback



Typical Characteristics (continued)

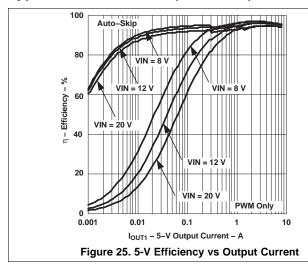

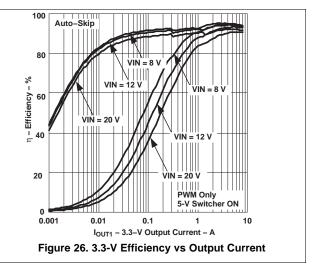



7 Detailed Description

7.1 Overview

The TPS51120 is a highly sophisticated dual synchronous buck controller targeted for notebook I/O and system bus supply solutions. It support both D-CAP mode and current mode. With D-CAP control mode implemented, compensation network can be removed. Besides, the fast transient response also reduced the output capacitance. In case very low output ripple voltage needed, current mode can be implemented with simplified loop compensation and ceramic output capacitors.



7.2 Functional Block Diagram

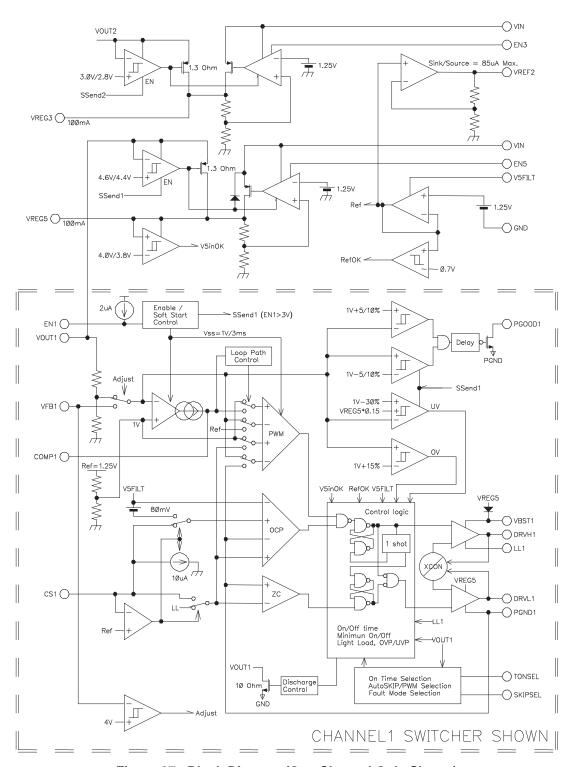


Figure 27. Block Diagram (One Channel Only Shown)

Submit Documentation Feedback



7.3 Feature Description

7.3.1 PWM Operation

The switching mode power supply (SMPS) block of TPS51120 supports an adaptive on time control pulse-width-modulation (PWM). Switching frequency is selectable from four choices. The TPS51120 supports both true current mode control and D-CAP mode control, selectable up to the requirements from system design. All N-channel MOSFET totem-pole architecture is employed for external switches. The synchronous top (high-side) MOSFET is turned on, or is "SET", at the beginning of each cycle. This MOSFET is turned off, or is "RESET" after a constant "on-time" period which is defined by the frequency of customer's choice and input and output voltage ratio. For different control mode, the condition for the top MOSFET turn on again is different.

If current mode is implemented, then the top MOSFET is turned on again if inductor current is reduced to meet both conditions of:

- 1. the current level corresponds to the error amount of output voltage and,
- 2. below the overcurrent limit level

If D-CAP mode is implemented, then the top MOSFET is turned on again when both of below conditions is met:

- 1. the internal or external feedback voltage cross with the internal 1-V reference and,
- 2. the inductor current below the overcurrent limit level

Repeating operation in this manner, the controller regulates the output voltage. The synchronous bottom (lowside) or the rectifying MOSFET is turned on each cycle in the negative phase to the top MOSFET to keep the conduction loss minimum. The rectifying MOSFET turns off on the event reverse inductor current flow is detected. This enables seamless transition to skip mode function so that high efficiency is kept over a broad range of load current. At the beginning of the soft start period, the rectifying MOSFET remains in the off state until the top MOSFET is turned on for at least once.

7.3.2 Adaptive On-Time Control

The TPS51120 employs adaptive on time control scheme and does not have a dedicated oscillator on board. However, it works almost constant frequency over the entire input voltage range (pseudo-constant frequency) by feed-forwarding the input and output voltage into the on-time one-shot timer. The on-time is controlled inverse proportional to the input voltage and proportional to the output voltage so that the duty ratio is kept as V_{OUT}/V_{IN} technically with the same cycle time. The input voltage monitoring is accomplished through sensing the LL node, not at VIN node, during the 'ON' state. This eliminates the influence of the voltage drop across the top MOSFET to the frequency especially in heavy load condition. The VIN pin is not used for the on-time control but used only for the 5 V and 3.3 V regulators' supply. The switching frequency is selectable from four combinations shown in the table below by setting TONSEL pin voltage. This allows the system design to pursue highest efficiency (5 V/180 kHz, 3.3 V/270 kHz), smallest components size (5 V/380 kHz, 3.3 V/580 kHz) or a good balance of both in the medium. Also shown in the table are the typical on-time for each frequency and 5 V, 3.3 V outputs at VIN=12. Output voltage feed-forward is enabled after the output voltage exceeds 1.0 V in order to achieve stable start up.

Table 1. Frequency Selection and Typical On-Time

TONSEL CONNECTION	CH1(LL1=VIN=12 V)		CH2 (LL2=	=VIN=12 V)
	FREQUENCY (kHz)	FREQUENCY (kHz) ON-TIME @ 5 V (ns) FRE		ON-TIME @ 3.3 V (ns)
V5FILT	180	2340	270	1030
FLOAT (OPEN)	220	1950	330	850
VREF2	280	1490	430	650
GND	380	1111	580	480

7.3.3 Light Load Operation

TPS51120 automatically reduces switching frequency at light load condition to maintain high efficiency. This reduction of frequency is achieved smoothly and without an increase in load regulation. Detail operation is described as follows. As the output current decreases from heavy load condition, the inductor current is also reduced and eventually comes to the point that its 'valley' touches zero current, which is the boundary between continuous conduction and discontinuous conduction modes. The rectifying MOSFET is turned off when this zero



inductor current is detected. The on-time is kept the same as that in the heavy load condition. As the load current further decreases, the converter runs in discontinuous conduction mode and it takes longer and longer to discharge the output capacitor to the level that requires next 'ON' cycle. This results in reducing the switching frequency. In reverse, when the output current increases from light load to heavy load, switching frequency increases to the constant predetermined frequency as the inductor current reaches to the continuous conduction. The transition load point to the light load operation $I_{\text{OUT(LL)}}$ (i.e. the threshold between continuous and discontinuous conduction mode) can be calculated as shown in Equation 1.

$$I_{OUT(LL)} = \frac{1}{2 \times L \times f} \times \frac{\left(V_{IN} - V_{OUT}\right) \times V_{OUT}}{V_{IN}}$$
(1)

where f is the PWM switching frequency which is determined by TONSEL pin. Switching frequency versus output current in the light load condition is a function of L, f, V_{IN} and V_{OUT} , but it decreases almost proportional to the output current from the $I_{OUT(LL)}$ given in Equation 1.

7.3.4 Forced PWM Operation

Tying SKIPSEL to V5FILT or leaving it float force the part to operate in continuous conduction mode for entire load range by disabling zero inductor current detection. Switching frequency is kept at the frequency selected by TONSEL input. System designers may want to use this mode to avoid certain frequency in light load condition with the cost of low efficiency. However, please be aware the output has a capability to both sink and source current in this mode. If the output terminal is connected to a voltage source higher than the regulated voltage, the converter sinks current from the output and boosts the charge into the input capacitor. This may cause unexpected high voltage at VIN and may damage the part.

7.3.5 5-V, 100-mA, LDO and Switchover (VREG5)

A 5-V, 100-mA linear regulator is integrated in the TPS51120. This low drop-out (LDO) regulator services the main analog supply rail for the IC and provides the current for the gate drivers. The regulator is a PMOS type with transconductance control and the pole is determined by the value of output capacitance. Typically, the value of this capacitor must be greater than 4.7 μ F. A 10- μ F ceramic capacitor is recommended for a typical design. Current limit and thermal protection are included in the regulator. Additionally, if the VO1 voltage exceeds 4.8 V, then the regulator is switched off and the 5V rails are bootstrapped to the 5-V switcher output, improving the efficiency of the converter. A glitch-free switchover is accomplished. The VREG5 output voltage does not show a short "glitch" down to 4.8 V when this bootstrapping action is taken. The switchover impedance from VO1 to VREG5 is typically 1.3 Ω . Standby current is designed for 30- μ A operation allowing the user to leave the regulator alive while maintaining maximum battery life. The EN5 pin is a high voltage input and can be tied to VBAT or left open to enable the 5-V regulator. This 5-V regulator must be enabled prior to enable switching regulators. Pull EN5 to ground to shut off the regulator. Disabling the regulator does not promise shutting down the switchers once 5 volts is supplied via the bootstrap path. Because switchover occurs, the 5-V switcher MUST be turned off with the LDO in order to shut down the device. EN5 does NOT function as a master disable.

7.3.6 3.3-V, 100-mA, LDO and Switchover (VREG3)

A 3.3-V, 100-mA linear regulator is integrated as a second regulator in the TPS51120. This LDO provides a handy standby supply for 3.3 V 'Always On' voltages in the notebook system. The characteristics of this LDO are identical to the 5V LDO except for the switchover voltage. Apply 10-µF ceramic capacitor from VREG3 to PGND in adjacent to the device. If the VO2 voltage exceeds 3.1 V, then this regulator is switched off and the 3.3 V rail is bootstrapped to the 3.3 V switcher. Note if the VO2 voltage is set higher by external feedback dividers, for example 5 V, that high voltage is presented at VREG3 after switchover. The EN3 pin is a low voltage input that can be tied to V5FILT or left open to enable the 3.3-V regulator. This 3.3-V regulator can be turned on or kept alive independent to the 5-V regulator.

Product Folder Links: TPS51120

Copyright © 2005-2015, Texas Instruments Incorporated



7.3.7 2-V, 50-uA Sink - Source Reference (VREF2)

This is a handy reference for generating auxiliary voltages. The tolerance is $\pm 2\%$ over 50- μ A load and 0°C to 85°C ambient temperature ranges. The four-state logic (SKIPSEL, TONSEL) takes advantage of this reference for additional selection modes. This reference is enabled when both EN3 and EN5 become high, shuts down after both switchers are turned off and VREG5 or VREG3 is shut down. Please refer to Table 3. If this output is forcibly tied down to ground, both SMPS are turned off without latch. Bypass VREF2 pin to GND by a 1-nF capacitor.

7.3.8 Low-Side Driver

The low-side gate driver, DRVL, is designed to drive high current low $R_{DS(on)}$ N-channel MOSFET(s). The maximum drive voltage is 5.5 V which is delivered from VREF5 pin. The instantaneous drive current is supplied from the output capacitor at the VREF5 pin. The average drive current is equal to the FET's gate charge at VGS=5 V times switching frequency. The VREG5 pin voltage may contain high frequency noise due to parasitic inductance by wiring and pointing current flow into the gate capacitor. The drive capability is represented by its internal resistance, which are 3.5 Ω for VREG5 to DRVL and 1.5 Ω for DRVL to PGND. Adaptive dead time control generates delay times between top MOSFET off to bottom MOSFET on, and bottom MOSFET off to top MOSFET on, preventing the totem-pole switches to shoot through. Top MOSFET off is detected as LL-node voltage declining below 2 V. Bottom MOSFET off is detected as DRVL voltage become 1.1 V.

7.3.9 High-Side Driver

The high-side gate driver, DRVH, is designed to drive high current, low $R_{DS(on)}$ N-channel MOSFET(s). When configured as a LL-node referenced floating driver, connect 0.1- μ F ceramic capacitor between corresponding VBST pin and LL pin. A 5-V bias voltage is delivered from VREG5 supply. VBST is internally connected to VREG5 through a high voltage PN diode. This internal diode provides sufficient gate voltage for ordinary 4.5-V drive power MOSFETs and helps reducing external component. However, in the case where the gate bias voltage is critical for driving the top MOSFET, application designer may add an external schottky diode from VREG5 pin to VBST pin. Note schottky diodes have quite high reverse leakage current at high temperature. The instantaneous drive current is supplied by the flying capacitor connected between VBST and LL pins. The average drive current is equal to the gate charge at VGS=5 V times switching frequency. The drive capability is represented by its internal resistance, which are 3.5- Ω for VBST to DRVH and 1.5 Ω for DRVH to LL. The maximum recommended voltage that can be applied between DRVH pin and LL pin is 5.5 V, DRVH pin to PGND pin is 34 V.

7.3.10 Soft-Start

The TPS51120 has an internal 3-ms voltage-servo soft start for each channel. When the EN1 or EN2 pin exceeds 0.9 V, an internal DAC begins ramping up the reference voltage. Smooth control of the output voltage during start up is maintained. However, if a slower soft-start is required, an external capacitor may be tied from the EN1 or EN2 pin to GND. In this case, the TPS51120 charges the external capacitor with the integrated 2- μ A current source. The lower of either the EN voltage slew rate or the internal soft start slew rate dominates the start-up ramp. In addition, if tracking discharge is required, the EN pin can be used to control the output voltage discharge smoothly. An approximate value for the soft start reference voltage as a function of EN voltage is $V_{\text{SSREF}} = (V_{\text{ENX}} - 0.9)/1.5 < 1 \text{ V}$. At the beginning of soft-start period, the rectifying MOSFET maintains an off state until the top MOSFET is turned on for at least once. This prevents high negative current to flow back from the output capacitor in the event of output capacitor pre-charged condition.

7.3.11 Soft-Stop

Discharge mode or 'Soft Stop' is always on during Faults or Disable. In this mode, an event that would cause the switcher to be turned off (EN1 or EN2 low, OVP, UVP, UVLO) causes the output to be discharged through $10-\Omega$ transistor inside the VO terminal. The external rectifying MOSFET is not turned on for the soft off operation to avoid a chance to cause negative voltage at the output. Soft-stop time constant is a function of the output capacitance and the resistance of the discharge transistor. This discharge ensures that, upon restart, the regulated voltage always starts from zero volts. In case a SMPS is restarted before discharge completion, soft-stop is terminated and the switching resumes after the reference level comes back to the remaining output voltage.



7.3.12 Powergood

The TPS51120 has dedicated powergood output for each SMPS, PGOOD1 and PGOOD2. The PGOOD monitors are open drain 5-mA pull down outputs. These outputs are low on startup and stay low until the switcher feedback voltages are within a specified range for 256 clocks or approximately 1 ms. If the VFB pin falls outside the 10% tolerance band, the respective PGOOD pin goes low within microseconds. Then if the VFB pin comes back within 5% of target (1 V) for greater than 1 ms, then the respective PGOOD pin goes high again. The PGOOD pin should be typically pulled up through a 100 k Ω or greater value resistor to the V5FILT pin. Both PGOOD pins go low during fault conditions (Thermal Shutdown, UVLO, UVP, OVP) and Disable.

7.3.13 Current Sensing and Overcurrent Protection

The SMPS has cycle-by-cycle over current limiting. The inductor current is monitored during the rectifying MOSFET is on and the controller does not allow the next ON cycle while the current level is above the trip threshold. In order to provide good accuracy and cost effective solution, TPS51120 supports both of external resistor sensing and MOSFET R_{DS(on)} sensing which are selected by CS terminal connection. For resistor sensing scheme, an appropriate current sensing resistor should be connected between the source terminal of the bottom MOSFET and PGND. CS pin is connected to the bottom MOSFET source terminal node. The inductor current is monitored by the voltage between PGND pin and CS pin. In this scheme, the trip level is fixed value of 80 mV. For R_{DS(on)} sensing scheme, CS terminal is connected to V5FILT through a trip voltage setting resistor R_{TRIP}. In this scheme, CS terminal sinks 10-µA I_{TRIP} current and the trip level is set to the voltage across the R_{TRIP}. The trip level should be in the range of 30 mV to 150 mV. This allows designer to select a variety of MOSFETs for the bottom arm. The inductor current is monitored by the voltage between PGND pin and LL pin so that LL pin should be connected to the drain terminal of the bottom MOSFET. ITRIP has 4500ppm/°C temperature slope, with respect to its 25°C value, to compensate the temperature dependency of the R_{DS(on)}. In either scheme, PGND is used as the positive current sensing node so that PGND pin should be connected to the proper current sensing device, i.e. the sense resistor or the source terminal of the bottom MOSFET. In an overcurrent condition, since the current to the output capacitor is limited while the load drags more, the output voltage tends to go down. It ends up with passing into the undervoltage protection and latches off as both DRVH and DRVL are at low level.

Table 2. Current Sensing Connection

	cs	Threshold	Temperature Coefficient (ppm/°C)	
R _{DS(on)} sensing	V5FILT	I _{TRIP} × R _{TRIP} / R _{DS(on)}	4500	
R _{SENSE} sensing	Bottom FET source node (=R _{SENSE} (-) node)	80 mV / R _{SENSE}	none	

7.3.14 Overvoltage Protection

For over voltage protection (OVP), the TPS51120 monitors VFB voltage. When the VFB voltage is higher than 115% of the target, the OVP comparator output goes high and the circuit latches both switchers. The offending channel is latched DRVH low and DRVL high, the other channel is simply latched as DRVH and DRVL at low. Be aware negative voltage may appear at the output terminal of the offending channel because of LC resonant configured by the power inductor and the output capacitor. The system designer is responsible to this negative voltage if any protection is need. The OVP propagation delay is less than 3 µs.

7.3.15 Undervoltage Protection

For under voltage protection (UVP), the TPS51120 monitors VFB voltage. When the VFB voltage is lower than 70% of the target and the UVP comparator output goes high, the internal UVP delay counter begins count. After the 128 clocks, approximately 0.5 ms, TPS51120 latches off both channels as DRVH and DRVL at low. This function is enabled after the softstart reference has exceeded the internal 1-V reference operation to ensure startup. Please refer to Table 4.



7.3.16 5-V Supply and UVLO Protection

TPS51120 has two 5-V terminals. VREG5 is the output of 5-V linear regulator. This terminal also serves as input pin for the gate driver circuits. Internal switchover FET is connected between this pin and VO1. V5FILT is the V_{CC} supply input for the control circuitry on the chip. Connect with R-C low pass filter from VREG5 to this V5FILT to eliminate spiky high frequency noise. State definition pins such as SKIPSEL, TONSEL, VFB (fixed output case) and COMP (for D-CAP mode) or CS resistors that need stable 5V should refer to V5FILT. The part has 5-V supply under voltage lock out protection (UVLO) to prevent unpredictable operation under insufficient power. The TPS51120 monitors VREG5 voltage. When the VREG5 voltage is lower than UVLO threshold, the SMPS's are shut off. The output discharge or 'soft stop' feature is enabled for the channel one and channel two. However, because the discharge circuit derives its power from the 5-V line, power must be presented long enough to ensure that discharge is complete during shutdown. Also, during power up, the TPS51120 attempts to discharge the output capacitor until the UVLO (on) threshold is reached. A 5-V UVLO is non-latch protection and is automatically resumed up on 5-V recovery.

7.3.17 VIN Line Sag Protection (Dynamic UVP)

Since the TPS51120 serves primarily as system power (i.e. used for generating 3.3 V and 5 V) it is very important that the system not enter UVP if the VIN supply has dropped below 6V. UVP would be caused by the 5-V output dropping due to input line sag. When the VIN pin drops below the 5-V regulator voltage, the 5-V regulator 'tracks' VIN (LDO operation). The UVP threshold is adjusted downward when the VREG5 is below 4.8 V. This ensures that 5-V supply UVLO trips before the latching UVP condition occurs and the system power can recover normally when VIN recovers. This feature is very useful for transient VIN events such as adapter insertion

7.3.18 Thermal Shutdown

The TPS51120 employs thermal shutdown for the switchers at 145°C. This is a non-latch protection with hysteresis of 10°C. Both switching regulators and both internal regulators stop. VREG5 and VREG3 LDOs may not turn on if the part is preheated above the recovery temperature before starting up. Reduce the temperature to or below $T_A = 85$ °C to resume operation safely.

Table 3. Litable Logic States (Vout1-3 V, Vout2-3.3 V)												
EN3	EN1	EN2	VREG5	VREG3	VREF2 ⁽²⁾	SMPS1	SMPS2					
Low	High or Low	High or Low	Off	Off	Off	Off	Off					
Low	High or Low	High or Low	LDO 5 V	Off	Off	Off	Off					
Low-to-High	High or Low	High or Low	Off	LDO 3.3 V	Off	Off	Off					
Low-to-High	Low	Low	LDO 5 V	LDO 3.3 V	On	Off	Off					
High	Low	Low-to-High	LDO 5 V	SW 3.3 V	On	Off	On					
High	Low-to-High	Low	SW 5 V	LDO 3.3 V	On	On	Off					
High	High	High	SW 5 V	SW 3.3 V	On	On	On					
High-to-Low	High	High	SW 5 V	SW 3.3 V	On	On	On					
High	High-to-Low	High-to-Low	LDO 5 V	LDO 3.3 V	On	Off	Off					
High	High-to-Low	High	Off	LDO 3.3 V	Off	Off	Off					
High-to-Low	High	High-to-Low	SW 5 V	Off	On	On	Off					
High-to-Low	Low	High-to-Low	LDO 5 V	Off	Off	Off	Off					
High	Low	Low	Off	LDO 3.3 V	Off	Off	Off					
High-to-Low	Low	Low	LDO 5 V	Off	Off	Off	Off					
	Low Low-to-High Low-to-High High High High High-to-Low High High-to-Low High-to-Low High-to-Low	EN3 EN1 Low High or Low Low-to-High High or Low Low-to-High Low High Low High High High High High High High-to-Low High High-to-Low High High-to-Low High High-to-Low High-to-Low High-to-Low High-to-Low High-to-Low Low High Low	EN3 EN1 EN2 Low High or Low High or Low Low-to-High High or Low Low-to-High Low Low-to-High High Low Low-to-High High High High High High High High High High High High-to-Low High Low High High-to-Low High High-to-Low High Low Low High Low Low	EN3 EN1 EN2 VREG5 Low High or Low High or Low Off Low High or Low High or Low LDO 5 V Low-to-High High or Low Low LDO 5 V High Low Low-to-High LDO 5 V High Low Low-to-High LDO 5 V High High High SW 5 V High High High High SW 5 V High High High High SW 5 V High High High-to-Low High Off High-to-Low High High Off High-to-Low High High Off High-to-Low High High-to-Low SW 5 V High High-to-Low High Off High-to-Low High High-to-Low SW 5 V High-to-Low High High-to-Low SW 5 V High-to-Low Low High High-to-Low Off	EN3 EN1 EN2 VREG5 VREG3 Low High or Low High or Low Off Off Low High or Low High or Low LDO 5 V Off Low-to-High High or Low LDO 5 V LDO 3.3 V Low-to-High Low LDO 5 V LDO 3.3 V High Low-to-High LDO 5 V SW 3.3 V High High High SW 5 V SW 3.3 V High-to-Low High SW 5 V SW 3.3 V High High SW 5 V SW 3.3 V High High-to-Low LDO 5 V LDO 3.3 V High High-to-Low High Off LDO 3.3 V High-to-Low High Off LDO 5 V Off High-to-Low Low High-to-Low LDO 5 V Off High Low Low Off LDO 3.3 V	EN3 EN1 EN2 VREG5 VREG3 VREF2 ⁽²⁾ Low High or Low High or Low Off Off Off Low High or Low LDO 5 V Off Off Low-to-High Low Low LDO 5 V LDO 3.3 V On High Low Low-to-High LDO 5 V SW 3.3 V On High Low-to-High LDO 5 V SW 3.3 V On High High SW 5 V SW 3.3 V On High-to-Low High SW 5 V SW 3.3 V On High High SW 5 V SW 3.3 V On High High SW 5 V SW 3.3 V On High High-to-Low LDO 5 V LDO 3.3 V On High High-to-Low SW 5 V Off On High-to-Low High-to-Low SW 5 V Off On High-to-Low High-to-Low SW 5 V Off Off High	EN3 EN1 EN2 VREG5 VREG3 VREF2 ⁽²⁾ SMPS1 Low High or Low High or Low Off Off Off Off Low High or Low High or Low LDO 5 V Off Off Off Low-to-High Low Low LDO 5 V LDO 3.3 V On Off High Low Low-to-High LDO 5 V SW 3.3 V On Off High Low-to-High Low SW 5 V LDO 3.3 V On On High High SW 5 V SW 3.3 V On On High-to-Low High SW 5 V SW 3.3 V On On High High SW 5 V SW 3.3 V On On High High-to-Low LDO 5 V LDO 3.3 V On Off High High-to-Low High Doff LDO 3.3 V Off Off High-to-Low High-to-Low LDO 5 V Off Off					

Table 3. Enable Logic States (Vout1=5 V, Vout2=3.3 V)

⁽¹⁾ Because of Switch-over, the 5-V switcher MUST be turned off with the LDO in order to shut down the device. EN5 does NOT function as a master DISABLE.

⁽²⁾ Forcing VREF2 output to ground disables SMPS1 and SMPS2 without latch.



Table 4. Protection States (Vout1 = 5 V, Vout2 = 3.3 V)

	DRVH1	DRVL1	DRVH2	DRVL2	PGOOD1 PGOOD2	VREG5	VREG3	VREF2	FOR RESTART
UVPch1	Low	Low	Low	Low	Low/Low	LDO 5 V	LDO 3.3 V	On	Toggle EN1
UVPch2	Low	Low	Low	Low	Low/Low	LDO 5 V	LDO 3.3 V	On	Toggle EN2
OVPch1	Low	High	Low	Low	Low/Low	LDO 5 V	LDO 3.3 V	On	Toggle EN1
OVPch1	Low	Low	Low	High	Low/Low	LDO 5 V	LDO 3.3 V	On	Toggle EN2
Thermal SHDN	Low	Low	Low	Low	Low/Low	Off	Off	Off	Lower Package Temperature
VIN < 5.0	Normal	Normal	Normal	Normal	Low/Normal	SW 5 V	SW 3.3 V	On	Raise VIN
VREG UVLO	Low	Low	Low	Low	Low/Low	LDO but dropping	LDO 3.3 V	On	Raise VIN, Reduce 5V current
OCPch1	Limited Duty	Estended Duty	Normal	Normal	Low/Normal	LDO 5 V	SW 3.3 V	On	Reduce CH1 Current
OCPch2	Normal	Normal	Limited Duty	Estended Duty	Normal/Low	SW 5 V	LDO 3.3 V	On	Reduce CH2 Current
EN1 Low	Low	Low	Normal	Normal	Low/Normal	LDO 5 V	SW 3.3 V	On	Float or tie to VREG5
EN2 Low	Normal	Normal	Low	Low	Normal/Low	SW 5 V	LDO 3.3 V	On	Float or tie to VREG5
EN1, EN2, EN3 Low	Low	Low	Low	Low	Low/Low	LDO 5 V	Off	Off	Float EN3, then float EN1,2 or tie to VREG5
EN5, EN1 Low	Low	Low	Low	Low	Low/Low	Off	LDO 3.3 V	Off	Float EN5 or tie to VBAT, tie EN1 to VREG5

7.4 Device Functional Modes

7.4.1 Current Mode

The current mode scheme is a sequence of feedback control described as follows. The output voltage is monitored at the middle point of voltage divider resistors and fed back to a transconductance amplifier. The amplifier outputs target current level proportional to error amount between the feedback voltage and the internal 1 V reference voltage. The inductor current level is monitored during the off-cycle, when rectifying MOSFET is turned on. The PWM comparator compares the inductor current signal with this target current level that is indicated at the COMP pin voltage. When both signals are equal (at the valley of the current sense signal), the comparator provides the "SET" signal to the gate driver latch. The current mode option has relatively higher flexibility by the external compensation network provided to the COMP pin. And it is suitable for lowest ripple design with output capacitor(s) having ultra-low ESR. When sensing the inductor current, accuracy and cost always trades off. In order to give the circuit designer a choice between these two, TPS51120 supports both of external resistor sensing and MOSFET R_{DS(on)} sensing. Please contact factory for current mode EVM with R_{SENSE} capability.

Product Folder Links: TPS51120

Copyright © 2005-2015, Texas Instruments Incorporated



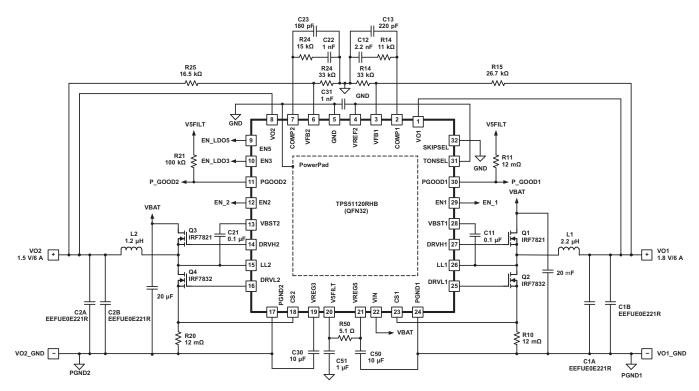


Figure 28. Current Mode, External 1.8-V / 6-A, 1.5-V / 6-A, R_{SENSE} Sensing

7.4.1.1 Current Mode Operation

A buck converter using TPS51120 current mode operation can be partitioned into three portions, a voltage divider, an error amplifier and a switching modulator. By linearizing the s witching modulator, we can derive the transfer function of the whole system. Since current mode scheme directly controls the inductor current, the modulator can be linearized as shown in Figure 29.

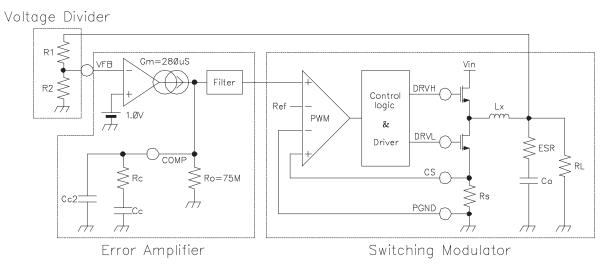


Figure 29. Linearizing the Modulator



Here, the inductor is located inside the local feedback loop and its inductance does not appear in the small signal model. As a result, a modulated current source including the power inductor can be modeled as a current source with its transconductance of $1/R_S$ and the output capacitor represent the modulator portion. This simplified model is applicable in the frequency space up to approximately a half of the switching frequency. One note is, although the inductance has no influence to small signal model, it has influence to the large signal model as it limits slew rate of the current source. This means the buck converter's load transient response, one of the large signal behaviors, can be improved by using smaller inductance without affecting the loop stability.

Total open loop transfer function of the whole system is given by Equation 2.

$$H(s) = H_1(s) \times H_2(s) \times H_3(s)$$
(2)

Assuming RL>>ESR, $R_O>>R_C$ and $C_C>>C_C2$, each transfer function of three block is shown in Equation 3 through Equation 5.

$$H_1(s) = \frac{R_2}{(R_2 + R_1)}$$
 (3)

$$H_{2}(s) = -Gm \times \frac{R_{O} (1 + s \times C_{C} \times R_{C})}{(1 + s \times C_{C} \times R_{O}) (1 + s \times C_{C2} \times R_{C})}$$
(4)

$$H_3(s) = \frac{(1 + s \times C_O \times ESR)}{(1 + s \times C_O \times RL)} \times \frac{RL}{R_S}$$
(5)

There are three poles and two zeros in H(s). Each pole and zero is given by Equation 6 through Equation 10.

$$\omega_{\mathsf{P}1} = \frac{1}{\left(\mathsf{C}_{\mathsf{C}} \times \mathsf{R}_{\mathsf{O}}\right)} \tag{6}$$

$$\omega_{P2} = \frac{1}{\left(C_{O} \times RL\right)} \tag{7}$$

$$\omega_{P3} = \frac{1}{\left(C_{C2} \times R_{C}\right)} \tag{8}$$

$$\omega_{Z1} = \frac{1}{\left(C_C \times R_C\right)} \tag{9}$$

$$\omega_{Z2} = \frac{1}{\left(C_{O} \times ESR\right)} \tag{10}$$

Usually, each frequency of those poles and zeros is lower than the 0 dB frequency, f_0 . However, the f_0 should be kept under 1/3 of the switching frequency to avoid effect of switching circuit delay. The f_0 is given by next equation Equation 11.

$$f_0 = \frac{1}{2\pi} \times \frac{R2}{R1 + R2} \times \frac{Gm}{C_O} \times \frac{R_C}{R_S} = \frac{1}{2\pi} \times \frac{1.0}{V_{OUT}} \times \frac{Gm}{C_O} \times \frac{R_C}{R_S}$$

$$(11)$$

Based on small signal analysis above, the external components can be selected by following manner.

1. **Choose the inductor.**The inductance value should be determined to give the ripple current of approximately 1/4 to 1/2 of maximum output current.

$$L = \frac{1}{I_{\text{IND(ripple)}} \times f} \times \frac{\left(V_{\text{IN(max)}} - V_{\text{OUT}}\right) \times V_{\text{OUT}}}{V_{\text{IN(max)}}} = \frac{2}{I_{\text{OUT(max)}} \times f} \times \frac{\left(V_{\text{IN(max)}} - V_{\text{OUT}}\right) \times V_{\text{OUT}}}{V_{\text{IN(max)}}}$$
(12)

The inductor also needs to have low DCR to achieve good efficiency, as well as enough room above peak inductor current before saturation. The peak inductor current can be estimated in Equation 13.



$$I_{IND(peak)} = \frac{V_{TRIP}}{R_{DS(on)}} + \frac{1}{L \times f} \times \frac{\left(V_{IN(max)} - V_{OUT}\right) \times V_{OUT}}{V_{IN(max)}}$$
(13)

- 2. Choose rectifying (bottom) MOSFET. When R_{DS(on)} sensing scheme is selected, the rectifying MOSFET's on-resistance is used as this R_S so that lower R_{DS(on)} does not always promise better performance. In order to clearly detect inductor current, minimum R_S recommended is to give 15 mV or larger ripple voltage with the inductor ripple current. This promises smooth transition from CCM to DCM or vice versa. Upper side of the R_{DS(on)} is of course restricted by the efficiency requirement, and usually this resistance affects efficiency more at high load conditions. When using external resistor current sensing, there is no restriction for low R_{DS(on)}. However, the current sensing resistance R_S itself affects the efficiency.
- 3. Choose output capacitor(s). If organic semiconductor capacitors (OS-CON) or specialty polymer capacitors (SP-CAP), are used, the ESR to achieve required ripple value at a stable state or transient load condition determines the amount of capacitor(s) need, and capacitance is then enough to satisfy stable operation. The peak-to-peak ripple value can be estimated by ESR times the inductor ripple current for stable state, or ESR times the load current step for a fast transient load response. In case of ceramic capacitor(s), usually ESR is small enough to meet ripple requirement. On the other hand, transient undershoot and overshoot driven by output capacitance becomes the key factor to determine the capacitor(s).
- 4. Determine f_0 and calculate R_C using Equation 14. Note that higher R_C shows faster transient response in cost of unstableness. If the transient response is not enough even with high R_C value, try increasing the output capacitance. Recommended f_0 is f/4.

$$R_{C} \le 2\pi \times f_{0} \times V_{OUT} \times \frac{C_{O}}{Gm} \times R_{S}$$
 (14)

5. Calculate C_{C2}. The purpose of this capacitance is to cancel the zero caused by ESR of the output capacitor. If ceramic capacitor are used, there is no need for C_{C2}.

$$\omega_{z2} = \frac{1}{\left(C_O \times ESR\right)} = \omega_{p3} = \frac{1}{\left(C_{C2} \times R_C\right)}$$

$$C_{C2} = \frac{C_O \times ESR}{R_C}$$
(15)

6. Calculate C_C . Purpose of C_C is to cut DC component to obtain high DC feedback gain. However, as it causes phase delay, another zero to cancel this effect at f_0 frequency is need. This zero, ω_{z1} , is determined by C_C and R_C . Recommended ω_{z1} is 10 times lower to the f_0 frequency.

$$f_{z1} = \frac{1}{2\pi \times C_C \times R_C} = \frac{f_0}{10}$$
 (17)

7. In case of adjustable mode, determine the value of R1 and R2. Recommended R2 value is from 10 k Ω to 20 k Ω . Determine R1 using Equation 18.

$$R_1 = (V_{OUT} - 1.0) \times R_2 \tag{18}$$

7.4.2 D-Cap Mode

The D-CAP mode operation is enabled by tying the COMP pin to V5FILT. In this mode, the PWM comparator monitors the feedback voltage directly and compares the voltage with the internal 1-V reference. When both signals are equal at the valley of the voltage sense signal, the comparator provides the "SET" signal to the top MOSFET gate driver. Because the compensation network is implemented on the part and the output waveform itself is used as the error signal, external circuit design is largely simplified. Another advantage of the D-CAP mode is its inherent fast transient response. A trade-off is a sufficient amount of ESR required in the output capacitor. SPCAP or POSCAP is recommended. The inductor current information is still used in the D-CAP mode for over current protection and light load operation. Do NOT neglect current sensing design in this mode. To summarize, the D-CAP mode is suitable for the lowest external component count with the fastest transient response, but with relatively large ripple voltage. It is easy to design the loop once appropriate output capacitor and inductor current ripple is selected.

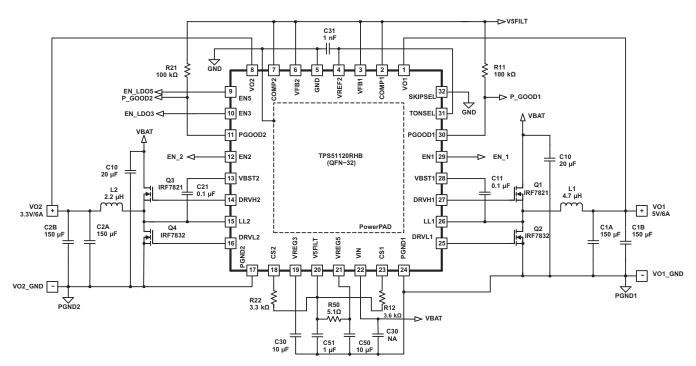


Figure 30. D-Cap Mode, Fixed 5-V / 6-A, 3.3-V/6-A, R_{DS(on)} Sensing

7.4.2.1 D-Cap Mode Operation

A buck converter system using D-CAP mode can be simplified as shown in Figure 31.

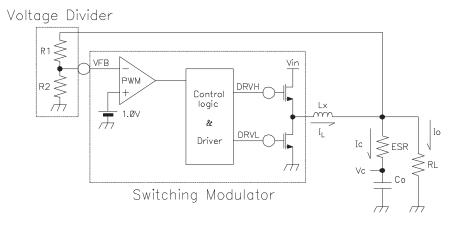


Figure 31. Linearizing the Modulator

The VO voltage is compare with internal reference voltage after divider resistors (Internal resistor mode. For adjustable mode, the comparison is directly at VFB). The PWM comparator determines the timing to turn on top MOSFET. The gain and speed of the comparator is high enough to keep the voltage at the beginning of each on cycle (or the end of off cycle) substantially constant. The DC output voltage may have line regulation due to ripple amplitude that slightly increases as the input voltage increase.

For the loop stability, the 0-dB frequency, f_0 , defined below need to be lower than 1/3 of the switching frequency.

$$f_0 = \frac{1}{2\pi \times \mathsf{ESR} \times \mathsf{C}_\mathsf{O}} \le \frac{f_\mathsf{SW}}{3} \tag{19}$$



As f_0 is determined solely by the output capacitor's characteristics, loop stability of D-CAP mode is determined by the capacitor's chemistry. For example, specialty polymer capacitors (SP-CAP) have Co in the order of several 100 μ F and ESR in range of 10 m Ω . These produce an f_0 in the order of 100 kHz or less and the loop is stable. However, ceramic capacitors have f_0 at more than 700 kHz, which is not suitable for this operational mode.

Although D-CAP mode provides many advantages such as ease-of-use, minimum external components configuration and extremely short response time, due to not employing an error amplifier in the loop, sufficient amount of feedback signal needs to be provided by external circuit to reduce jitter level. The required signal level is approximately 15 mV at comparing point, either the internal or external VFB voltages. The output capacitor's ESR should meet this requirement.

The external components selection is much simple in D-CAP mode.

- 1. Choose inductor based on frequency and acceptable ripple current.
- 2. **Choose output capacitor(s)**. Organic semiconductor capacitor(s) or specialty polymer capacitor(s) are recommended. Determine ESR to meet required ripple voltage above. A quick approximation is shown in Equation 20.

$$ESR = \frac{V_{OUT} \times 0.015}{I_{RIPPLE}}$$
 (20)

7.5 Programming

The TPS51120 has varieties of configurations choice. It is important to tailor appropriately with regard to the system design requirements. Table below shows programming table for the control scheme selection, frequency selection, output voltage selection and skip selection. Faults-off disables UVP, OVP and UVLO. This is mainly intended for debugging purpose. Enable states and possible connections for the LDO's EN3, EN5 pins and SMPS's EN1, EN2 pins are also shown.

Table 5. Function Programming Table

PIN	GND	VREF2	FLOAT	V5FILT
COMP	N/A	N/A	Current Mode (apply R-C network)	D-CAP Mode
TONSEL (CH1/CH2) [kHz]	380 / 580	280 / 430	220 / 330	180 / 270
VFB1	Adjusta	able output (connect to the resistor	divider)	5V fixed output
VFB2	Adjusta	able output (connect to the resistor	divider)	3.3 V fixed output
SKIPSEL	AUTO-SKIP	AUTO-SKIP (FAULTS OFF)	PWM	PWM
EN1, EN2	Switcher Off	Not used	Switcher on	Switcher on
EN3, EN5	LDO Off	Not used	LDO on	LDO on (EN3 only)



8 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The TPS51120 is typically used as a dual-synchronous buck controller, which convert an input voltage ranging from 4.5V to 28 V, to output voltage ranging 1V to 5.5 V, targeted for notebook I/O and low voltage system bus supply solutions.

8.2 Typical Application

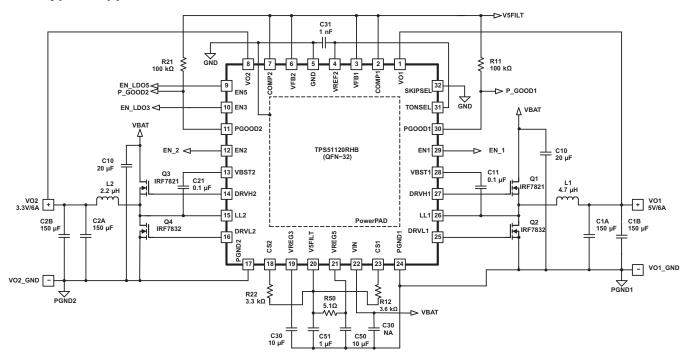


Figure 32. D-Cap Mode, Fixed 5-V / 6-A, 3.3-V/6-A, R_{DS(on)} Sensing

8.2.1 Design Requirements

Table 6. Design Parameters

DESIGN PARAMETER	VALUE			
Input Voltage Range	4.5 V to 28 V			
Channel 1 Output Voltage	5 V			
Channel 1 Output Current	6 A			
Channel 2 Output Voltage	3.3 V			
Channel 2 Output Current	6 A			



8.2.2 Detailed Design Procedure

- 1. **Determine output voltage.** Since 5 V and 3.3 V is the default fixed output voltage, tie VFB1 and VFB2 to V5FILT to choose the internal feedback resistor divider.
- 2. Choose control mode. Tie COMP1 and COMP2 to V5FILT to choose D-CAP control mode.
- 3. **Choose switching frequency.** Tie TONSEL to VREF2, choose 280kHz/430kHz for channel1 and channel2 respectively.
- 4. **Choose the inductor.** To make the inductor ripple current at ½ of maximum output current, calculate inductance according to Equation 12 as below:

$$L1 = \frac{2}{6A \times 280 \text{kHz}} \times \frac{(28V - 5V) \times 5V}{28V} = 4.9 \text{uH}$$
 (21)

$$L2 = \frac{2}{6A \times 430 \text{kHz}} \times \frac{(28V - 3.3V) \times 3.3V}{28V} = 2.2\text{uH}$$
 (22)

4.7-uH and 2.2-uH inductor is chosen for channel1 and channel2 respectively. Check inductor specification, make sure the saturation current is higher than peak inductor current in this application with enough room.

5. **Choose the output capacitor.** To get an acceptable jitter level, approximately 15mV ripple at comparing point is needed. Refer to Equation 20. This require the minimum ESR of output capacitors for channel1 and channel2 is:

ESR1 = (Vout1 × 0.015)
$$\div$$
 lripple1 = (5 V × 0.015) \div 3 A = 25 m Ω (23)

ESR2 = (Vout2 × 0.015) ÷ Iripple2 =
$$(3.3 \text{ V} \times 0.015) \div 3 \text{ A} = 16.5 \text{ m}\Omega$$
 (24)


Choose 2pcs 150-uF/50-m Ω SP-CAP in parallel, the equivalent capacitance and ESR is 300 uF and 25 m Ω , meet above requirement.

0dB frequency f0 calculated as below:


$$f0 = \frac{1}{2\pi \times 25 \text{m}\Omega \times 300 \text{uF}} = 21 \text{kHz}$$
 (25)

F0 is much less than 1/3 of the switching frequency, loop should be stable.


8.2.3 Application Curves

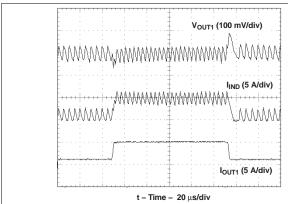



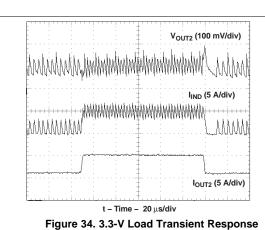



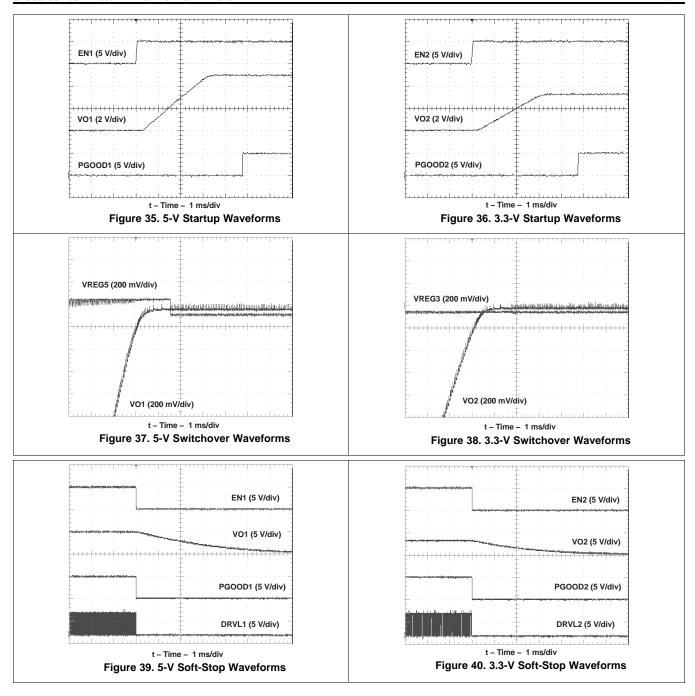

Submit Documentation Feedback

Copyright © 2005–2015, Texas Instruments Incorporated



9 Power Supply Recommendations

The TPS51120 is designed to operate from input supply voltage in the range of 4.5 V to 28 V. Make sure power supply voltage in this range.

10 Layout

10.1 Layout Guidelines

Certain points must be considered before starting a layout work using the TPS51120.

- Connect RC low-pass filter from VREG5 to V5FILT, 1 μF and 5.1 Ω are recommended. Place the filter capacitor close to the device, within 12 mm (0.5 inches) if possible.
- VREG5 and VREG3 require at least 4.7 μF, VREF2 requires a 1-nF ceramic bypass capacitor which should be placed close to the device and traces should be no longer than 10 mm.
- Connect the overcurrent setting resistors from CSx to V5FILT (NOT VREG5) and close to the device, right
 next to the device if possible. The trace from CSx to V5FILT should avoid coupling to high-voltage switching
 node.
- In the case of using adjustable output voltage with an external resistor divider, the discharge path (VOx) should have a dedicated trace to the output capacitor; separate from the output voltage sensing trace, and use 1.5 mm or wider trace with no loops. Make the feedback current setting resistor (the resistor between VFBx to GND) is tied close to the device's GND. Place on the component side and avoid vias between this resistor and the device.
- Connections from the drivers to the respective gate of the high-side or the low-side MOSFET should be as short as possible to reduce stray inductance. Use 0.65 mm (25 mils) or wider trace.
- All sensitive analog traces and components such as VOx, COMPx, VFBx, VREF2, GND, ENx, PGOODx, CSx, V5FILT, TONSEL and SKIPSEL should be placed away from high-voltage switching nodes such as LLx, DRVLx or DRVHx nodes to avoid coupling. Use internal layer(s) as ground plane(s) and shield feedback trace from power traces and components.
- Gather ground terminal of VIN capacitor(s), V_{OUT} capacitor(s) and source of low-side MOSFETs as close as possible. GND (signal ground) and PGNDx (power ground) should be connected strongly together near the device. PCB trace defined as LLx node, which connects to source of high-side MOSFET, drain of low-side MOSFET and high-voltage side of the inductor, should be as short and wide as possible.
- In order to effectively remove heat from the package, prepare thermal land and solder to the package's thermal pad. Three by three or more vias with a 0.33-mm (13mils) diameter connected from the thermal land to the internal ground plane should be used to help dissipation. Do NOT connect PGNDx to this thermal land underneath the package.



10.2 Layout Example

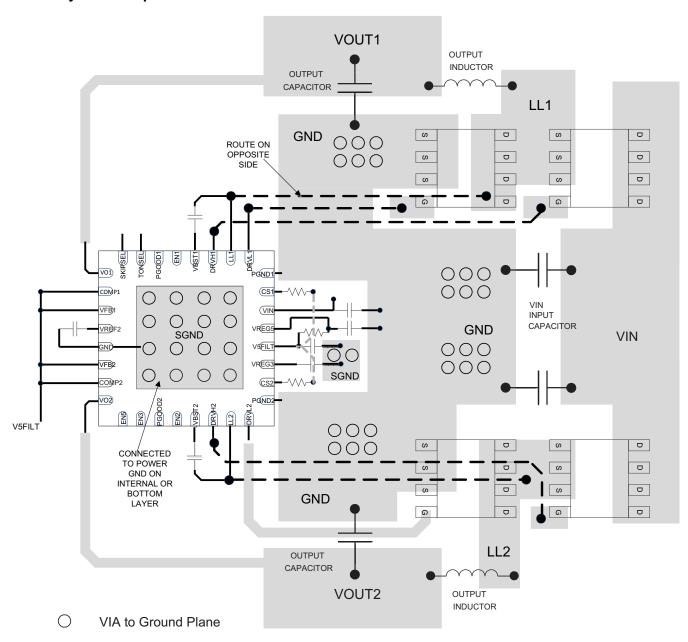


Figure 41. Layout Example

Submit Documentation Feedback



11 Device and Documentation Support

11.1 Trademarks

D-CAP is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

11.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

11.3 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
TPS51120RHBR	Active	Production	VQFN (RHB) 32	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBR.A	Active	Production	VQFN (RHB) 32	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBR.B	Active	Production	VQFN (RHB) 32	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBRG4	Active	Production	VQFN (RHB) 32	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBRG4.A	Active	Production	VQFN (RHB) 32	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBRG4.B	Active	Production	VQFN (RHB) 32	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBT	Active	Production	VQFN (RHB) 32	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBT.A	Active	Production	VQFN (RHB) 32	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBT.B	Active	Production	VQFN (RHB) 32	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120
TPS51120RHBTG4	Active	Production	VQFN (RHB) 32	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TPS 51120

⁽¹⁾ Status: For more details on status, see our product life cycle.

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.



PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

(5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 23-Jul-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS51120RHBR	VQFN	RHB	32	3000	330.0	12.4	5.3	5.3	1.5	8.0	12.0	Q2
TPS51120RHBR	VQFN	RHB	32	3000	330.0	12.4	5.3	5.3	1.1	8.0	12.0	Q2
TPS51120RHBRG4	VQFN	RHB	32	3000	330.0	12.4	5.3	5.3	1.1	8.0	12.0	Q2
TPS51120RHBT	VQFN	RHB	32	250	180.0	12.4	5.3	5.3	1.1	8.0	12.0	Q2

www.ti.com 23-Jul-2025



*All dimensions are nominal

7 till dillitoriolorio di o riorriiridi							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS51120RHBR	VQFN	RHB	32	3000	353.0	353.0	32.0
TPS51120RHBR	VQFN	RHB	32	3000	346.0	346.0	33.0
TPS51120RHBRG4	VQFN	RHB	32	3000	346.0	346.0	33.0
TPS51120RHBT	VQFN	RHB	32	250	210.0	185.0	35.0

5 x 5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4224745/A





PLASTIC QUAD FLATPACK - NO LEAD



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025