

# TPSM843820 4V to 18V Input, 8A Synchronous SWIFT™ Step-Down Converter MicroSiP™ Power Module With Integrated Inductor and Internally Compensated **Advanced Current Mode Control**

### 1 Features

- Fixed-frequency, internally-compensated Advanced Current Mode (ACM) control
- Small form factor 3.5mm × 3.5mm × 1.6mm, 15-pin DFM package MicroSiP<sup>™</sup> power module
- High-efficiency, integrated  $25m\Omega$  and  $6.5m\Omega$ MOSFETs, inductor and basic passives
- 4V to 18V input voltage range
- 0.5V to 1.8V output voltage range
- Three selectable PWM ramp options to optimize the control loop performance
- Five selectable switching frequencies: 500kHz, 750kHz, 1MHz, 1.5MHz, and 2.2MHz
- Synchronizable to an external clock
- 0.5V, ±0.5% voltage reference accuracy over full temperature range
- Selectable soft-start times: 0.5ms, 1ms, 2ms, and
- Monotonic start-up into prebiased outputs
- Selectable current limits to support lower current
- Enable with adjustable input undervoltage lockout
- Power-good output monitor
- Output overvoltage, output undervoltage, input undervoltage, overcurrent, and overtemperature protection
- Pin-to-pin compatible with 3A TPSM843320 6A -TPSM843620
- 40°C to 125°C operating junction temperature

# 2 Applications

- Wireless infrastructure and wired communications equipment
- Optical module
- Test and measurement
- Medical and healthcare
- Aerospace and defense

# 3 Description


TPSM843820 is a highly efficient, small, and flexible synchronous step-down DC-DC converter in a MicroSiP power module package that is easy to use. The module operates up to 18V input with fixedfrequencies that are resistor adjustable by system designer. The embedded IC is internally compensated which reduces external components and design size. The integrated high-frequency capacitor reduces the transient peak at switching node.


The TPSM843820 module employs an internally compensated, fixed-frequency advanced current mode control. The device is capable of providing high efficiency while running at a switching frequency up to 2.2MHz. The fixed frequency controller can operate from 500kHz to 2.2MHz and can be synchronized to an external clock using the SYNC pin. Additional features include a high accuracy voltage reference, selectable soft-start times, monotonic start-up into prebiased outputs, selectable current limits, adjustable UVLO through the EN pin, and a full suite of fault protections.

**Package Information** 

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE (2)	
TPSM843820	SIT (uSiP, 15)	3.50mm × 3.50mm	

- For more information, see Section 10.
- The package size (length × width) is a nominal value and includes pins, where applicable.







# **Table of Contents**

1 Features1	6.4 Device Functional Modes	17
2 Applications 1	7 Application and Implementation	19
3 Description1	7.1 Application Information	
4 Pin Configuration and Functions3	7.2 Typical Applications	
5 Specifications4	7.3 Power Supply Recommendations	
5.1 Absolute Maximum Ratings4	7.4 Layout	29
5.2 ESD Ratings4	8 Device and Documentation Support	
5.3 Recommended Operating Conditions4	8.1 Receiving Notification of Documentation Updates	32
5.4 Thermal Information4	8.2 Support Resources	32
5.5 Electrical Characteristics (Module)4	8.3 Trademarks	
5.6 Typical Characteristics7	8.4 Electrostatic Discharge Caution	32
6 Detailed Description10	8.5 Glossary	32
6.1 Overview10	9 Revision History	
6.2 Functional Block Diagram10	10 Mechanical, Packaging, and Orderable	
6.3 Feature Description10	Information	33



# **4 Pin Configuration and Functions**

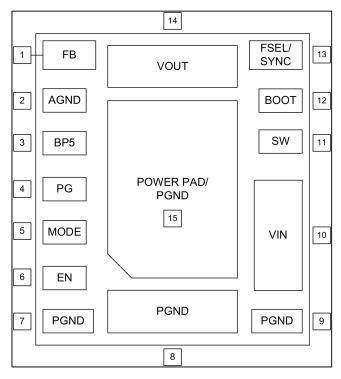


Figure 4-1. SIT Package 15-Pin uSiP (Top View)

**Table 4-1. Pin Functions** 

PI	PIN		DESCRIPTION
NAME	NO.	1176()	DESCRIP HON
FB	1	I	Feedback pin for output voltage regulation. Connect this pin to the midpoint of a resistor divider to set the output voltage.
AGND	2	_	Ground return for internal analog circuits
BP5	3	0	Internal 5V regulator output. Bypass this pin with a 2.2µF capacitor to AGND.
PG	4	0	Open-drain power-good indicator
MODE	5	I	A resistor to ground selects the current limit, soft-start rate, and PWM ramp amplitude.
EN	6	I	Enable pin. Float to enable, enable and disable with an external signal, or adjust the input undervoltage lockout with a resistor divider.
PGND	7, 8, 9	_	Ground return for the power stage. This pin is internally connected to the source of the low-side MOSFET.
VIN	10	I	Input power to the power stage. Low impedance bypassing of these pins to PGND is critical. A 47nF to 100nF capacitor from VIN to PGND close to IC is required.
SW	11	DNC	Switch node of the module, used for monitoring only
воот	12	DNC	Supply for the internal high-side MOSFET gate driver. This pin is monitoring only because the capacitor to SW pin is integrated
SYNC/ FSEL	13	I	Frequency select and external clock synchronization. A resistor to ground sets the switching frequency of the device. An external clock can also be applied to this pin to synchronize the switching frequency.
VOUT	14	0	Buck output voltage. Connect output capacitors to this node.
PAD/ PGND	15	_	Thermal pad connected to PGND

(1) I = input, O = output

# **5 Specifications**

# 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
Input voltage	VIN	-0.3	20	V
Input voltage	VIN to SW, DC	-0.3	20	V
Input voltage	VIN to SW, transient 20ns	-6	25	V
Input voltage	BOOT	-0.3	25	V
Input voltage	BOOT to SW	-0.3	6	V
Input voltage	EN, PGOOD, MODE, SYNC/FSEL, FB	-0.3	6	V
Output voltage	SW, DC	-0.3	20	V
Output voltage	SW, transient 20ns	-5	22	V
Operating junction temperature, T <sub>J</sub>	Operating junction temperature, T <sub>J</sub>	-40	125	°C
Storage temperatur	re, T <sub>stg</sub>	<b>–</b> 55	150	°C

<sup>(1)</sup> Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

## 5.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	V
V <sub>(ESD)</sub>	Electrostatic discharge	Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	±500	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
Input voltage	V <sub>IN</sub>	4	18	V
Input voltage	SYNC/FSEL, EN, PGOOD	-0.1	5.5	V
Output voltage	V <sub>OUT</sub>	0.5	1.8	
Output current	I <sub>OUT</sub>		8	А
T <sub>J</sub>	Operating junction temperature	-40	125	°C
f <sub>SYNC</sub>	External clock frequency	400	2600	kHz

#### 5.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TPSM843x20 uSiP (TI EVM)	UNIT
		15 PINS	
R <sub>0JA</sub>	Junction-to-ambient thermal resistance	29.9	°C/W
ΨЈВ	Junction-to-board characterization parameter	9.82	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

### **5.5 Electrical Characteristics (Module)**

 $T_J = -40$ °C to +125°C,  $V_{VIN} = 4V - 18V$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY VOLTAGE					

Submit Document Feedback

# 5.5 Electrical Characteristics (Module) (continued)

 $T_{JJ} = -40$ °C to +125°C,  $V_{VJN} = 4V - 18V$  (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I <sub>Q(VIN)</sub>	VIN operating non-switching supply current	V <sub>EN</sub> = 1.3V, V <sub>FB</sub> = 550mV, V <sub>VIN</sub> = 12V, 1MHz		1200	1600	μA
I <sub>SD(VIN)</sub>	VIN shutdown supply current	V <sub>EN</sub> = 0V, V <sub>VIN</sub> = 12V		15	25	μA
	VIN UVLO rising threshold	VIN rising	3.9	4	4.1	V
	VIN UVLO hysteresis			150		mV
ENABLE AND UV	LO					
V <sub>EN(rise)</sub>	EN voltage rising threshold	EN rising, enable switching		1.2	1.25	V
V <sub>EN(fall)</sub>	EN voltage falling threshold	EN falling, disable switching	1.05	1.1		V
V <sub>EN(hyst)</sub>	EN voltage hysteresis			100		mV
	EN pin sourcing current	V <sub>EN</sub> = 1.1V	0.4	1.5		μA
	EN pin sourcing current	V <sub>EN</sub> = 1.3V		11.6		μA
INTERNAL LDO B	P5					
V <sub>BP5</sub>	Internal LDO BP5 output voltage	V <sub>VIN</sub> = 12V		4.5		V
	BP5 dropout voltage	$V_{VIN} - V_{BP5}, V_{VIN} = 3.8V$			350	mV
	BP5 short-circuit current limit	V <sub>VIN</sub> = 12V		75		mA
REFERENCE VOL						
V <sub>FB</sub>	Feedback Voltage	T <sub>J</sub> = -40°C to 125°C	495	500	505	mV
		V <sub>FB</sub> = 500mV, non-switching, V <sub>VIN</sub> = 12V,				
I <sub>FB(LKG)</sub>	Input leakage current into FB pin	V <sub>EN</sub> = 0V		1		nA
SWITCHING FREE	QUENCY AND OSCILLATOR					
f <sub>SW</sub>	Switching frequency	RFSEL = 24.3kΩ	450	500	550	kHz
f <sub>SW</sub>	Switching frequency	$R_{FSEL} = 17.4k\Omega$	675	750	825	kHz
f <sub>SW</sub>	Switching frequency	RFSEL = 11.8kΩ	900	1000	1100	kHz
f <sub>SW</sub>	Switching frequency	R <sub>FSEL</sub> = 8.06kΩ	1350	1500	1650	kHz
f <sub>SW</sub>	Switching frequency	$R_{FSEL} = 4.99k\Omega$	1980	2200	2420	kHz
SYNCHRONIZATION	ON					
V <sub>IH(sync)</sub>	High-level input voltage		1.8			V
V <sub>IL(sync)</sub>	Low-level input voltage				0.8	V
SOFT-START	'			,	'	
t <sub>SS1</sub>	Soft-start time	$R_{MODE} = 1.78k\Omega$		0.5		ms
t <sub>SS2</sub>	Soft-start time	$R_{MODE} = 2.21k\Omega$		1		ms
t <sub>SS3</sub>	Soft-start time	$R_{MODE} = 2.74k\Omega$		2		ms
t <sub>SS4</sub>	Soft-start time	$R_{MODE} = 3.32k\Omega$		4		ms
POWER STAGE						
R <sub>DS(on)HS</sub>	High-side MOSFET on-resistance	T <sub>J</sub> = 25°C, V <sub>VIN</sub> = 12V, V <sub>BOOT-SW</sub> = 4.5V		25		mΩ
R <sub>DS(on)LS</sub>	Low-side MOSFET on-resistance	T <sub>J</sub> = 25°C, V <sub>BP5</sub> = 4.5V		6.5		mΩ
V <sub>BOOT-SW(UV_r)</sub>	BOOT-SW UVLO rising threshold	V <sub>BOOT-SW</sub> rising		3.2		V
V <sub>BOOT-SW(UV_f)</sub>	BOOT-SW UVLO falling threshold	V <sub>BOOT-SW</sub> falling		2.8		V
T <sub>ON(min)</sub>	Minimum ON pulse width	I <sub>OUT</sub> > ½ I <sub>L PK-PK</sub>		30	37	ns
T <sub>OFF(min)</sub>	Minimum OFF pulse width (1)	_		115	140	ns
	AND OVERCURRENT PROTECTION					
I <sub>OC_HS_pk1</sub>	High-side peak current limit (8A)	$R_{MODE} = 1.78k\Omega$	11.7	12.2	12.7	Α
I <sub>OC_HS_pk2</sub>	High-side peak current limit (8A)	$R_{MODE} = 22.1k\Omega$	8.6	9	9.6	Α
I <sub>OC_LS_src1</sub>	Low-side sourcing current limit(8A)	$R_{MODE} = 1.78k\Omega$	9.4	10.4	11.3	Α
I <sub>OC_LS_src2</sub>	Low-side sourcing current limit(8A)	$R_{MODE} = 22.1k\Omega$	6.2	7.4	8.5	Α
I <sub>OC_LS_snk</sub>	Low-side sinking current limit	Current into SW pin	2.95			A
	DLTAGE AND UNDERVOLTAGE PROTECTION	· ·				
	Overvoltage-protection (OVP) threshold			40-		0/ 1/
V <sub>OVP</sub>	voltage	V <sub>FB</sub> rising		120		$\% V_{REF}$

# 5.5 Electrical Characteristics (Module) (continued)

 $T_J = -40$ °C to +125°C,  $V_{VIN} = 4V - 18V$  (unless otherwise noted)


	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V <sub>UVP</sub>	Undervoltage-protection (UVP) threshold voltage	V <sub>FB</sub> falling		80		% V <sub>REF</sub>
POWER GOOD	)					
	PGOOD threshold	V <sub>FB</sub> rising (Fault)	113	116	119	% V <sub>REF</sub>
	PGOOD threshold	V <sub>FB</sub> falling (Good)	105	108	111	% V <sub>REF</sub>
	PGOOD threshold	V <sub>FB</sub> rising (Good)	89	92	95	% V <sub>REF</sub>
	PGOOD threshold	V <sub>FB</sub> falling (Fault)	81	84	87	% V <sub>REF</sub>
I <sub>PGOOD(LKG)</sub>	Leakage current into PGOOD pin when open drain output is high	V <sub>PGOOD</sub> = 4.7V			5	μΑ
V <sub>PG(low)</sub>	PGOOD low-level output voltage	I <sub>PGOOD</sub> = 2mA, V <sub>IN</sub> = 12V			0.5	V
	Min VIN for valid PGOOD output			0.9	1	V
HICCUP						
	Hiccup time before re-start			7*t <sub>SS</sub>		ms
OUTPUT DISC	HARGE					
R <sub>Dischg</sub>	Output discharge resistance	V <sub>VIN</sub> = 12V, V <sub>SW</sub> = 0.5V, power conversion disabled.		100		Ω
THERMAL SHU	JTDOWN					
T <sub>SDN</sub>	Thermal shutdown threshold <sup>(1)</sup>	Temperature rising		165	175	°C
T <sub>HYST</sub>	Thermal shutdown hysteresis (1)			12		°C

<sup>(1)</sup> Specified by design. Not production tested.

Submit Document Feedback




# 5.6 Typical Characteristics

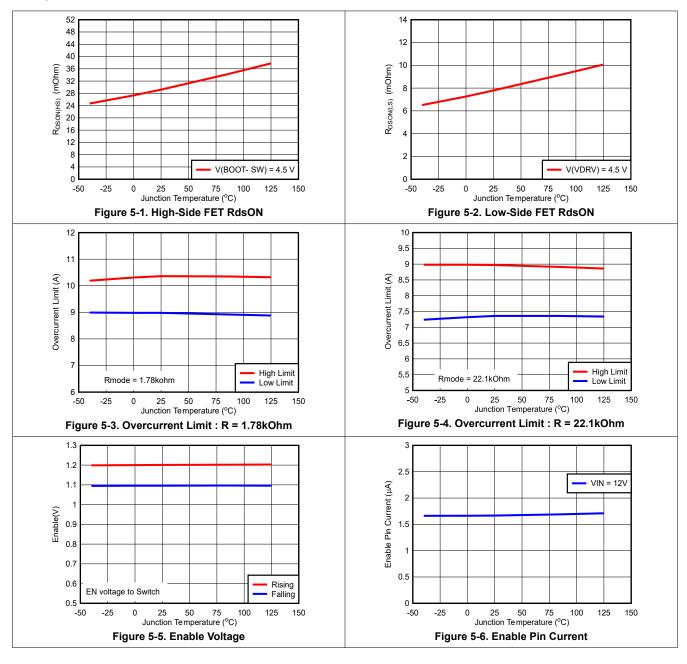




# **5.6 Typical Characteristics (continued)**

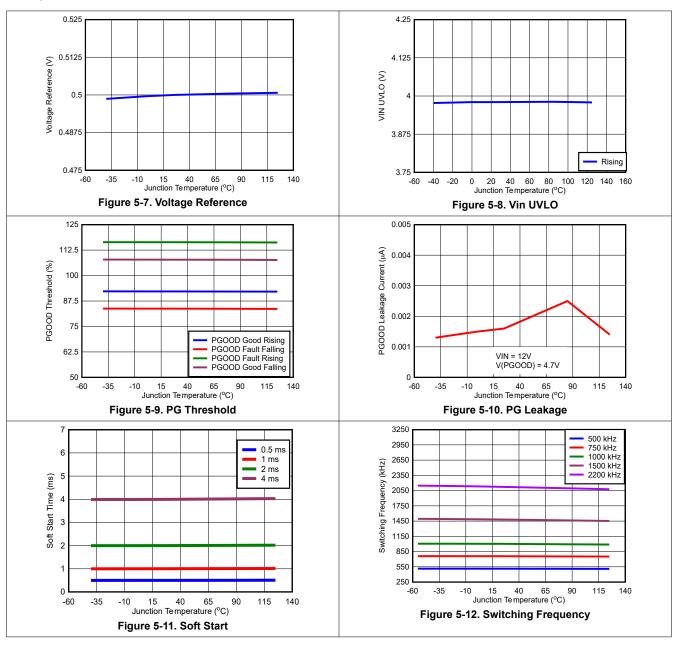



# **5.6 Typical Characteristics (continued)**

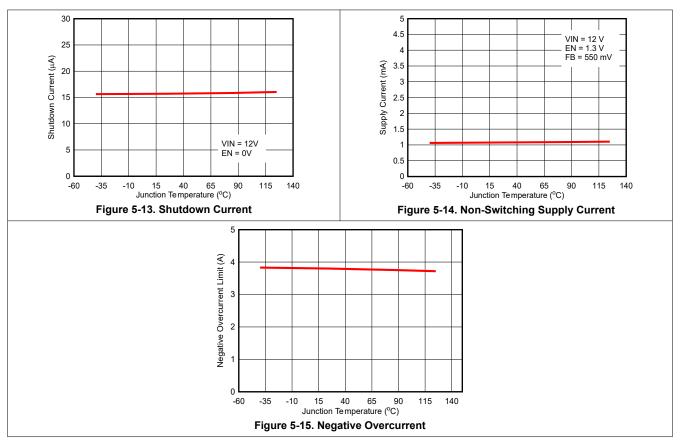


# **6 Detailed Description**

### 6.1 Overview

The TPSM843820 device is a 8A, high-performance, synchronous buck converter module with integrated inductor and discretes. The TPSM843820 has a maximum operating junction temperature of 125°C, making the device an excellent choice for high-ambient temperature applications such as wireless infrastructure. The input voltage range is 4V to 18V and the output voltage range is 0.5V to 1.8V. The device features a fixed-frequency Advanced Current Mode control with a switching frequency of 500kHz to 2.2MHz, allowing for efficiency and size optimization when selecting output filter components. The switching frequency of the device can be synchronized to an external clock applied to the SYNC pin.

Advanced Current Mode (ACM) is an emulated peak current control topology. Advanced Current Mode supports stable static and transient operation without complex external compensation design. This control architecture includes an internal ramp generation network that emulates inductor current information, enabling the use of low-ESR output capacitors such as multi-layered ceramic capacitors (MLCC). The internal ramp also creates a high signal-to-noise ratio for good noise immunity. The TPSM843820 has three ramp options (see Section 6.3.6 for details) to optimize the internal loop for various inductor and output capacitor combinations with only a single resistor to AGND. The TPSM843820 is easy-to-use and allows low external component count with fast load transient response. Fixed-frequency operation also provides ease-of-filter design to overcome EMI noise.

## 6.2 Functional Block Diagram

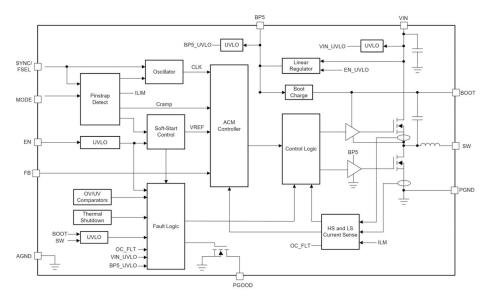

### 6.3 Feature Description

#### 6.3.1 VIN Pins and VIN UVLO

The VIN pin voltage supplies the internal control circuits of the device and provides the input voltage to the power stage. The input voltage for VIN can range from 4V to 18V. The device implements internal UVLO circuitry on the VIN pin. The device is disabled when the VIN pin voltage falls below the internal VIN UVLO threshold. The internal VIN UVLO threshold has a hysteresis of 150mV. A voltage divider connected to the EN pin can adjust the input voltage UVLO as appropriate. See Section 6.3.2 for more details.

# 6.3.2 Enable and Adjustable UVLO

The EN pin provides on and off control of the device. After the EN pin voltage exceeds the threshold voltage, the device begins the start-up sequence. If the EN pin voltage is pulled below the threshold voltage, the regulator stops switching and enters a low operating current state. The EN pin has an internal pullup current source, Ip, allowing the pin to be floated to enable the device by default. Make that leakage currents of anything connected

Submit Document Feedback

to the EN pin do not exceed the minimum EN pullup current or the device can not be able to start. If an application requires controlling the EN pin, an open drain or open collector output logic can be interfaced with the pin.

When the EN pin voltage exceeds the threshold voltage and the VIN pin voltage exceeds the VIN UVLO threshold, the device begins the start-up sequence. First, the BP5 LDO is enabled and charges the external BP5 capacitor. After the voltage on the BP5 pin exceeds the UVLO threshold, the device enters a power-on delay. During the power-on delay, the values of the pinstrap resistors on the MODE pin (see Section 6.3.8) and SYNC/FSEL pin (see Section 6.3.4) are determined and the control loop is initialized. The power-on delay is typically 600µs. After the power-on delay, soft start begins.

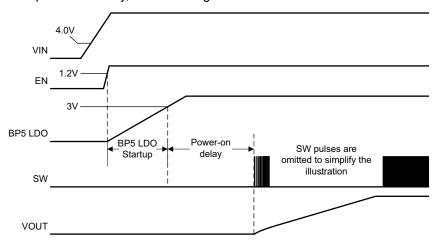


Figure 6-1. Start-Up Sequence

An external resistor divider can be added from VIN to the EN pin for adjustable UVLO and hysteresis as shown in Figure 6-2. The EN pin has a small pullup current, Ip, which sets the default state of the pin to enable when no external components are connected. The pullup current is also used to control the voltage hysteresis for the UVLO function because it increases by Ih after the EN pin crosses the enable threshold. The UVLO thresholds can be calculated using Equation 1 and Equation 2. When using the adjustable UVLO function, TI recommends 500mV or greater hysteresis. For applications with very slow input voltage slew rate, a capacitor can be placed from the EN pin to ground to filter any glitches on the input voltage.




Figure 6-2. Adjustable UVLO Using EN



$$R_{ENT} = \frac{V_{START} \times \left(\frac{V_{ENFALLING}}{V_{ENRISING}}\right) - V_{STOP}}{I_{p} \times \left(1 - \frac{V_{ENFALLING}}{V_{ENRISING}}\right) + I_{h}}$$

$$(1)$$

$$R_{ENB} = \frac{R_{ENT} \times V_{ENFALLING}}{V_{STOP} - V_{ENFALLING} + R_{ENT} \times (I_p + I_h)}$$
(2)

### 6.3.3 Adjusting the Output Voltage

The output voltage is programmed with a resistor divider from the output ( $V_{OUT}$ ) to the FB pin shown in Figure 6-3. TI recommends to use 1% tolerance or better divider resistors. Starting with a fixed value for the bottom resistor, typically  $10k\Omega$ , use Equation 3 to calculate the top resistor in the divider.




Figure 6-3. FB Resistor Divider

$$R_{FBT} = R_{FBB} \times \left(\frac{V_{OUT}}{V_{REF}} - 1\right)$$
(3)

### 6.3.4 Switching Frequency Selection

The switching frequency of the device can be selected by connecting a resistor (R<sub>FSEL</sub>) between the SYNC/FSEL pin and AGND. The frequency options and the corresponding programming resistors are listed in Table 6-1. Use a 1% tolerance resistor or better.

Submit Document Feedback

Table 6-1. Switching Fr	equency Selection
-------------------------	-------------------

R <sub>FSEL</sub> ALLOWED NOMINAL RANGE (1%) (kΩ)	RECOMMENDED E96 STANDARD VALUE (1%) (kΩ)	RECOMMENDED E12 STANDARD VALUE (1%) (kΩ)	Fsw (kHz)
≥ 24.0	24.3	27	500
17.4-18.0	17.4	18	750
11.8-12.1	11.8	12	1000
8.06-8.25	8.06	8.2	1500
≤ 5.11	4.99	4.7	2200

### 6.3.5 Switching Frequency Synchronization to an External Clock

The device can be synchronized to an external clock by applying a square wave clock signal to the SYNC/FSEL pin with a duty cycle from 20% to 80%. The clock can either be applied before the device starts up or during operation. If the clock is to be applied before the device starts, a resistor between SYNC/FSEL and AGND is not needed. If the clock is to be applied after the device starts, then the clock frequency must be within ±20% of the frequency set by the SYNC/FSEL resistor. When the clock is applied after the device starts, the device begins synchronizing to this clock after counting four consecutive switching cycles with a clock pulse present. This is shown in Figure 6-4.

#### 6.3.5.1 Internal PWM Oscillator Frequency

When the external clock is present, the device synchronizes the switching frequency to the clock. Any time the external clock is not present, the device defaults to the internal PWM oscillator frequency.

If the device starts up before an external clock signal is applied, then the internal PWM oscillator frequency is set by the R<sub>FSEL</sub> resistor according to Table 6-1. The device switches at this frequency until the external clock is applied or anytime the external clock is not present.

If the external clock is applied before the device starts up, then the R<sub>FSEL</sub> resistor is not needed. The device determines the internal clock frequency by decoding the external clock frequency. Table 6-2 shows the decoding of the internal PWM oscillator frequency based on the external clock frequency.

Table 6-2. Internal Oscillator Frequency Decode

· · · · · · · · · · · · · · · · · · ·								
EXTERNAL SYNC CLOCK FREQUENCY (kHz)	DECODED INTERNAL PWM OSCILLATOR FREQUENCY (kHz)							
400 - 600	500							
600 - 857	750							
857 - 1200	1000							
1200 - 1810	1500							
1810 - 2640	2200							

The thresholds for the external SYNC clock frequency ranges have approximately a ±5% tolerance. If the external clock frequency must be within that tolerance range, decoding the internal PWM oscillator frequency as either the frequency above or below that threshold is possible. Because the internal frequency is what is used in case of the loss of the synchronization clock, TI recommends that the output LC filter and ramp selection are chosen to be stable for either frequency. Table 6-3 shows the tolerance range of the decode thresholds. If the external clock is to be within any of these ranges, TI recommends to make sure converter stability for both possible internal PWM oscillator frequencies.

Table 6-3. Frequency Decode Thresholds

MINIMUM (kHz)	TYPICAL (kHz)	MAXIMUM (kHz)							
570	600	630							
814	857	900							
1140	1200	1260							
1736	1810	1884							

#### 6.3.5.2 Loss of Synchronization

If at any time during operation, there is a loss of synchronization, the device defaults to the internal PWM oscillator frequency until the synchronization clock returns. After the clock is no longer present, the device switches at 70% of the internal clock frequency for four consecutive cycles. After four consecutive cycles without clock pulses, the device operates at the normal internal PWM oscillator frequency. This action is demonstrated in Figure 6-4.




Figure 6-4. Clock Synchronization Transitions

### 6.3.5.3 Interfacing the SYNC/FSEL Pin

If an application requires synchronizing to a SYNC clock but the clock is unavailable before the device is enabled, TI recommends a high impedance buffer to make sure of proper detection of the  $R_{FSEL}$  value. Figure 6-5 shows the recommended implementation. The leakage current into the buffer output must be less than 5 $\mu$ A to make sure of proper detection of the  $R_{FSEL}$  value. Power the buffer from the BP5 output of the device to make sure the VCC voltage is available and the buffers output is high impedance before the device tries to detect the  $R_{FSEL}$  value. When powering the buffer from the BP5 pin, the external load on the BP5 pin must be less than 2 mA.





Figure 6-5. Interfacing the SYNC/FSEL Pin With a Buffer

Submit Document Feedback

## 6.3.6 Ramp Amplitude Selection

The TPSM843820 uses  $V_{IN}$ , duty cycle, and low-side FET current information to generate an internal ramp. The ramp amplitude is determined by an internal ramp generation capacitor,  $C_{RAMP}$ . Three different values for  $C_{RAMP}$  can be selected with a resistor to AGND on the MODE pin (see *Section 6.3.8*). The capacitor options are 1pF, 2pF, and 4pF. A larger ramp capacitor results in a smaller ramp amplitude, which results in a higher control loop bandwidth. Figure 6-6 and Figure 6-7 show how the loop changes with each ramp setting for the schematic in *Typical Applications*.

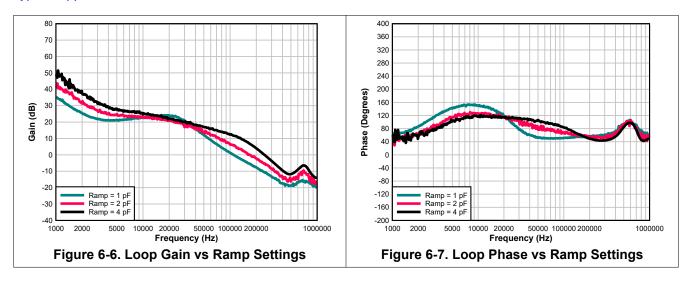

### 6.3.7 Soft Start and Prebiased Output Start-Up

During start-up, the device softly ramps the reference voltage to reduce inrush currents. There are four options for the soft-start time, which is the time the reference takes to ramp to 0.5V: 0.5ms, 1ms, 2ms, and4 ms. The soft-start time is selected with a resistor to AGND on the MODE pin (see Section 6.3.8).

The device prevents current from being discharged from the output during start-up when a prebiased output condition exists. The device does this by operating in discontinuous conduction mode (DCM) during the first 16 cycles to prevent the device from sinking current. This action makes sure the output voltage is smooth and monotonic during soft start.

#### 6.3.8 Mode Pin

The ramp amplitude, soft-start time, and current limit settings are programmed with a single resistor,  $R_{MODE}$ , between MODE and AGND. Table 6-4 lists the resistor values for the available options. Use a 1% tolerance resistor or better. See Section 6.3.10 for the corresponding current limit thresholds for the "High" and "Low" settings.

**Table 6-4. MODE Pin Selection** 

R <sub>MODE</sub> (kΩ)	CURRENT LIMITS	C <sub>RAMP</sub> (pF)	SOFT-START TIME (ms)
1.78	High	1	0.5
2.21	High	1	1
2.74	High	1	2
3.32	High	1	4
4.02	High	2	0.5
4.87	High	2	1
5.9	High	2	2
7.32	High	2	4
9.09	9 High 4		0.5
11.3	High	4	1



### Table 6-4. MODE Pin Selection (continued)

R <sub>MODE</sub> (kΩ)	CURRENT LIMITS	C <sub>RAMP</sub> (pF)	SOFT-START TIME (ms)
14.3	High	4	2
18.2	High	4	4
22.1	Low	1	0.5
26.7	Low	1	1
33.2	Low	1	2
40.2	Low	1	4
49.9	Low	2	0.5
60.4	Low	2	1
76.8	Low	2	2
102	Low	2	4
137	Low	4	0.5
174	Low	4	1
243	Low	4	2
412	Low	4	4

### 6.3.9 Power Good (PGOOD)

The PGOOD pin is an open-drain output requiring an external pullup resistor to output a high signal. After the FB pin is between 92% and 108% of the internal voltage reference, soft start is complete, and after a 256 $\mu$ s deglitch time, the PGOOD pin is de-asserted and the pin floats. TI recommends a pullup resistor between the values of  $10k\Omega$  and  $100k\Omega$  to a voltage source that is 5.5V or less. PGOOD is in a defined state after the VIN input voltage is greater than 1V but with reduced current sinking capability. When the FB is lower than 84% or greater than 116% of the nominal internal reference voltage, after a 8 $\mu$ s deglitch time, the PGOOD pin is pulled low. PGOOD is immediately pulled low if VIN falls below the UVLO, the EN pin is pulled low or the device enters thermal shutdown.

#### 6.3.10 Current Protection

The protects against overcurrent events by cycle-by-cycle current limiting both the high-side MOSFET and low-side MOSFET. In an extended overcurrent condition, the device enters hiccup. Different protections are active during positive inductor current and negative inductor current conditions.

#### 6.3.10.1 Positive Inductor Current Protection

The current is sensed in the high-side MOSFET while conducting after a short blanking time to allow noise to settle. Whenever the high-side overcurrent threshold is exceeded, the high-side MOSFET is immediately turned off and the low-side MOSFET is turned on. The high-side MOSFET does not turn back on until the current falls below the low-side MOSFET overcurrent threshold. This action effectively limits the peak current in the case of a short circuit condition. If a high-side overcurrent is detected for 15 consecutive cycles, the device enters hiccup.

The current is also sensed in the low-side MOSFET while it is conducting after a short blanking time to allow noise to settle. If the low-side overcurrent threshold is exceeded when the next incoming PWM signal is received from the controller, the device skips processing that PWM pulse. The device does not turn the high-side MOSFET on again until the low-side overcurrent threshold is no longer exceeded. If the low-side overcurrent threshold remains exceeded for 15 consecutive cycles, the device enters hiccup. There are two separate counters for the high-side and low-side overcurrent events. If the off-time is too short, the low-side overcurrent can not trip. The low-side overcurrent, however, begins tripping after the high-side peak overcurrent limit is hit as hitting the peak current limit shortens the on-time and lengthens the off-time.

Both the high-side and low-side positive overcurrent thresholds are programmable using the MODE pin. Two sets of thresholds are available ("High" and "Low"), which are summarized in Table 6-5. The values for these thresholds are obtained using open-loop measurements with a DC current to accurately specify the values. In real applications, the inductor current ramps and the ramp rate is a function of the voltage across the inductor

Submit Document Feedback

 $(V_{\text{IN}} - V_{\text{OUT}})$  as well as the inductance value. This ramp rate combined with delays in the current sense circuitry can result in slightly different values than specified. The current at which the high-side overcurrent limit takes effect can be slightly higher than specified, and the current at which the low-side overcurrent limit takes effect can be slightly lower than specified.

Table 6-5. Overcurrent Thresholds

MODE PIN CURRENT LIMIT SETTING	HIGH-SIDE OVERCURRENT TYPICAL VALUE (A)	LOW-SIDE OVERCURRENT TYPICAL VALUE (A)
High	12.2	10.4
Low	9.0	7.4

#### 6.3.10.2 Negative Inductor Current Protection

Negative current is sensed in the low-side MOSFET while it is conducting after a short blanking time to allow noise to settle. Whenever the low-side negative overcurrent threshold is exceeded, the low-side MOSFET is immediately turned off. The next high-side MOSFET turn-on is determined by the clock and PWM comparator. The negative overcurrent threshold minimum value is 2.95 A. Similar to the positive inductor current protections, the actual value of the inductor current when the current sense comparators trip is a function of the current ramp rate. As a result the current at which the negative inductor current limit takes effect can be slightly more negative than specified.

### 6.3.11 Output Overvoltage and Undervoltage Protection

The device incorporates both output overvoltage and undervoltage protection. If an overvoltage is detected, the device tries to discharge the output voltage to a safe level before attempting to restart. When the overvoltage threshold is exceeded, the low-side MOSFET is turned on until the low-side negative overcurrent threshold is reached. At this point, the high-side MOSFET is turned on until the inductor current reaches zero. Then, the low-side MOSFET is turned back on until the low-side negative overcurrent threshold is reached. This process repeats until the output voltage falls back into the PGOOD window. After this happens, the device restarts and goes through a soft start cycle. The device does not wait the hiccup time before restarting.

When an undervoltage condition is detected, the device enters hiccup where the device waits seven soft-start cycles before restarting. Undervoltage protection is enabled after soft start is complete.

## 6.3.12 Overtemperature Protection

When the die temperature exceeds 165°C, the device turns off. After the die temperatures falls below the hysteresis level, typically 12°C, the device restarts. While waiting for the temperature to fall below the hysteresis level, the device does not switch or attempt to hiccup to restart. After the temperature falls below this level, the device restarts without going through hiccup.

### 6.3.13 Output Voltage Discharge

When the device is enabled, but the high-side FET and low-side FET are disabled due to a fault condition, the output voltage discharge mode is enabled. This mode turns on the discharge FET from SW to PGND to discharge the output voltage. The discharge FET is turned off when the converter is ready to resume switching, either after the fault clears or after the wait time before hiccup is over.

The output voltage discharge mode is activated by any of below fault events:

- 1. High-side or low-side positive overcurrent
- 2. Thermal shutdown
- 3. Output voltage undervoltage
- 4. VIN UVLO

# **6.4 Device Functional Modes**

#### 6.4.1 Forced Continuous-Conduction Mode

The TPSM843820 operates in forced continuous-conduction mode (FCCM) throughout normal operation.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



# 6.4.2 Discontinuous Conduction Mode During Soft Start

During soft start, the converter operates in discontinuous conduction mode (DCM) during the first 16 PWM cycles. During this time, a zero-cross detect comparator is used to turn off the low-side MOSFET when the current reaches zero amps. This prevents the discharge of any prebiased conditions on the output. After 16 cycles of DCM, the converter enters FCCM mode.

# 7 Application and Implementation

#### **Note**

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

# 7.1 Application Information

The TPSM843820 is a synchronous buck regulator designed for 4V to 18V input and 8A load. This procedure illustrates the design of a high-frequency switching regulator using ceramic output capacitors.

# 7.2 Typical Applications

### 7.2.1 1.0V Output, 1.5MHz Application

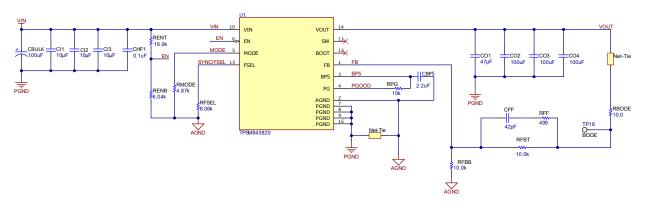


Figure 7-1. 12V Input, 1.0V Output, 1.5MHz Schematic

### 7.2.1.1 Design Requirements

For this design example, use the parameters shown in Table 7-1.

Table 7-1. Design Parameters

PARAMETER	EXAMPLE VALUE
Input voltage range (V <sub>IN</sub> )	4V to 18V, 12V nominal
Output voltage (V <sub>OUT</sub> )	1.0V
Output current rating (I <sub>OUT</sub> )	8A
Switching frequency (f <sub>SW</sub> )	1500kHz
Steady state output ripple voltage	10mV
Output current load step	4A
Transient response	± 30mV (± 3%)

### 7.2.1.2 Detailed Design Procedure

### 7.2.1.2.1 Switching Frequency

The first step is to decide on a switching frequency. The TPSM843820 can operate at five different frequencies from 500kHz to 2.2MHz. The  $f_{SW}$  is set by the resistor value from the FSEL pin to ground. Typically, the highest switching frequency possible is desired because this switching frequency produces the smallest design size. A high switching frequency allows for smaller inductors and output capacitors compared to a power supply that switches at a lower frequency. The main tradeoff made with selecting a higher switching frequency is extra switching power loss, which hurts the efficiency of the regulator.

The maximum switching frequency for a given application can be limited by the minimum on-time of the regulator. The maximum  $f_{SW}$  can be estimated with Equation 4. Using the minimum on-time of 40 ns and 15V maximum input voltage for this application, the maximum switching frequency is 1666kHz. The selected switching frequency must also consider the tolerance of the switching frequency. A switching frequency of 1500kHz was selected for a good balance of design size and efficiency. To set the frequency to 1500kHz, the selected FSEL resistor is  $8.06k\Omega$  per Table 6-1.

$$f_{SW}(max) = \frac{1}{tonmin} \times \frac{V_{OUT}}{V_{IN}(max)}$$
(4)

Figure 7-2 shows the maximum recommended input voltage versus output voltage for each FSEL frequency. This graph uses a minimum on-time of 40ns and includes the 10% tolerance of the switching frequency. A minimum on-time of 40ns is used in this graph to provide margin to the minimum controllable on-time to make sure pulses are not skipped at no load. At light loads, the dead-time between the low-side MOSFET turning off and high-side MOSFET turning on contributes to the minimum SW node pulse-width.




Figure 7-2. Maximum Input Voltage vs Output Voltage

In high output voltage applications, the minimum off-time must also be considered when selecting the switching frequency. When hitting the minimum off-time limits, the operating duty cycle maxes out and the output voltage begins to drop with the input voltage. Equation 5 calculates the maximum switching frequency to avoid this limit. This equation requires the DC resistance of the inductor,  $R_{DCR}$ , selected in the following step. A preliminary estimate of  $10m\Omega$  can be used but this must be recalculated based on the specifications of the inductor selected. If operating near the maximum  $f_{SW}$  limited by the minimum off-time, the increase in resistance at higher temperature must be considered.

$$f_{SW} (max) = \frac{V_{IN} (min) - V_{OUT} - I_{OUT} (max) \times (R_{DCR} + R_{DS(ON)\_HS})}{t_{OFF\_MIN} (max) \times (V_{IN} (min) - I_{OUT} (max) \times (R_{DS(ON)\_HS} - R_{DS(ON)\_LS}))}$$
(5)

Submit Document Feedback

#### 7.2.1.2.2 Output Inductor Selection

An optimized 220nF inductor is integrated inside the module.

### 7.2.1.2.3 Output Capacitor

The output voltage ripple and how the regulator responds to a large change in load current are the two primary considerations for selecting the value of the output capacitor. The output capacitance must be selected based on the more stringent of these criteria.

The desired response to a large change in the load current is the first criteria and is typically the most stringent. A regulator does not respond immediately to a large, fast increase or decrease in load current. The output capacitor supplies or absorbs charge until the regulator responds to the load step. The control loop must sense the change in the output voltage then adjust the peak switch current in response to the change in load. The minimum output capacitance is selected based on an estimate of the loop bandwidth. Typically the loop bandwidth is near  $f_{SW}$  / 10. Equation 6 estimates the minimum output capacitance necessary, where  $\Delta I_{OUT}$  is the change in output current and  $\Delta V_{OUT}$  is the allowable change in the output voltage.

For this example, the transient load response is specified as a 3% change in  $V_{OUT}$  for a load step of 4A. Therefore,  $\Delta I_{OUT}$  is 4A and  $\Delta V_{OUT}$  is 30mV. Using this target gives a minimum capacitance of 141 $\mu$ F. This value does not take the ESR of the output capacitor into account in the output voltage change. For ceramic capacitors, the effect of the ESR can be small enough to be ignored. Aluminum electrolytic and tantalum capacitors have higher ESR that must be considered for load step response.

$$C_{OUT} > \frac{\Delta I_{OUT}}{\Delta V_{OUT}} \times \frac{1}{2\pi \times \frac{f_{SW}}{10}}$$
(6)

In addition to the loop bandwidth, the inductor current slew rate limiting how quickly the regulator responds to the load step is possible. For low duty cycle applications, the time the inductor current takes to ramp down after a load step down can be the limiting factor. Equation 7 estimates the minimum output capacitance necessary to limit the change in the output voltage after a load step down. Using the  $0.22\mu H$  inductance selected gives a minimum capacitance of  $59\mu F$ .

$$C_{OUT} > \frac{L_{OUT} \times \Delta I_{OUT}^2}{2 \times \Delta V_{OUT} \times V_{OUT}}$$
(7)

Equation 8 calculates the minimum output capacitance needed to meet the output voltage ripple specification. In this case, the target maximum steady state output voltage ripple is 10mV. Under this requirement, Equation 8 yields 29μF.

$$Co > \frac{1}{8 \times fsw} \times \frac{1}{\frac{Voripple}{Iripple}}$$
(8)

where

- ΔI<sub>OUT</sub> is the change in output current
- ΔV<sub>OUT</sub> is the allowable change in the output voltage
- fsw is the regulators switching frequency
- Voripple is the maximum allowable steady state output voltage ripple
- Iripple is the inductor ripple current

Lastly, if an application does not have a strict load transient response or output ripple requirement, a minimum amount of capacitance is still required to make sure the control loop is stable with the lowest gain ramp setting on the MODE pin. Equation 9 estimates the minimum capacitance needed for loop stability. This equation sets



the minimum amount of capacitance by keeping the LC frequency relative to the switching frequency at a minimum value. See Figure 7-3 for the limit versus output voltage with the lowest gain ramp setting of 1pF. With a 1V output, the minimum ratio is 35 and with this ratio, Equation 9 gives a minimum capacitance of 63 µF.

$$C_{OUT} > \left(\frac{\text{Ratio}}{2\pi \times f_{SW}}\right)^2 \times \frac{1}{L_{OUT}}$$
(9)

Equation 10 calculates the maximum combined ESR the output capacitors can have to meet the output voltage ripple specification and this shows the ESR must be less than  $6m\Omega$ . In this case, ceramic capacitors are used and the combined ESR of the ceramic capacitors in parallel is much less than is needed to meet the ripple. Capacitors also have limits to the amount of ripple current capacitors can handle without producing excess heat and failing. An output capacitor that can support the inductor ripple current must be specified. The capacitor data sheet specifies the RMS value of the maximum ripple current. Equation 11 can be used to calculate the RMS ripple current the output capacitor needs to support. For this application, Equation 11 yields 826mA and ceramic capacitors typically have a ripple current rating much higher than this.

$$Resr < \frac{Voripple}{Iripple}$$
 (10)

$$Icorms = \frac{Vout \times (Vinmax - Vout)}{\sqrt{12} \times Vinmax \times L1 \times fsw}$$
(11)

Select X5R and X7R ceramic dielectrics or equivalent for power regulator capacitors because they have a high capacitance-to-volume ratio and are fairly stable over temperature. The output capacitor must also be selected with the DC bias and AC voltage derating taken into account. The derated capacitance value of a ceramic capacitor due to DC voltage bias and AC RMS voltage is usually found on the capacitor manufacturer website. For this application example, one  $47\mu\text{F}$ , 10V, X5R, 0805 and three  $100\mu\text{F}$ , 10V, X5R, 1206 ceramic capacitors each with  $2m\Omega$  of ESR are used. The one  $47\mu\text{F}$  capacitor is used because the  $47\mu\text{F}$  capacitor has a higher resonance frequency and can help reduce the output ripple caused by parasitic inductance. With the four parallel capacitors, the estimated effective output capacitance after derating using the capacitor manufacturer website is  $327\mu\text{F}$ . There is about a -7% DC bias derating at 1V. This design was able to use less than the calculated minimum because the loop crossover frequency was above the  $f_{SW}$  / 10 estimate as shown in the Load Transient graph in the *Application Curves*.

Submit Document Feedback

#### 7.2.1.2.4 Input Capacitor

Input decoupling ceramic capacitors type X5R, X7R, or similar from VIN to PGND that are placed as close as possible to the IC are required. A total of at least  $10\mu\text{F}$  of capacitance is required and some applications can require a bulk capacitance. TI recommends at least  $1\mu\text{F}$  of bypass capacitance as close as possible to the VIN pin to minimize the input voltage ripple. A  $0.1\mu\text{F}$  to  $1-\mu\text{F}$  capacitor must be placed as close as possible to VIN pin 10 on the same side of the board of the device to provide high frequency bypass to reduce the high frequency overshoot and undershoot on VIN and SW pins. The voltage rating of the input capacitor must be greater than the maximum input voltage. The capacitor must also have a ripple current rating greater than the maximum RMS input current can be calculated using Equation 12.

For this example design, a ceramic capacitor with at least a 16V voltage rating is required to support the maximum input voltage. Three 10 $\mu$ F, 0805, X7S, 25V and one 0.1 $\mu$ F, 0402, X7R 25-V capacitors in parallel have been selected to be placed the sides of the IC near the VIN and PGND pins. Based on the capacitor manufacturer website, the total ceramic input capacitance derates to  $8\mu$ F at the nominal input voltage of 12V. A 100 $\mu$ F bulk capacitance is also used to bypass long leads when connected a lab bench top power supply.

The input capacitance value determines the input ripple voltage of the regulator. The input voltage ripple can be calculated using Equation 13. The maximum input ripple occurs when operating nearest to 50% duty cycle. Using the nominal design example values of loutmax = 8A,  $C_{IN} = 8\mu F$ , and  $f_{SW} = 1500 kHz$ , the input voltage ripple with the 12V nominal input is 51mV and the RMS input ripple current with the 4V minimum input is 6.9A.

$$Icirms = Iout \times \sqrt{\frac{Vout}{Vinmin}} \times \frac{(Vinmin - Vout)}{Vinmin}$$
(12)

$$\Delta Vin = \frac{Iout max \times \left(1 - \frac{Vout}{Vin}\right) \times \frac{Vout}{Vin}}{Cin \times f_{SW}}$$
(13)

#### 7.2.1.2.5 Adjustable Undervoltage Lockout

The undervoltage lockout (UVLO) is adjusted using the external voltage divider network of  $R_{ENT}$  and  $R_{ENB}$ . The UVLO has two thresholds: one for power up when the input voltage is rising and one for power down or brownouts when the input voltage is falling. For the example design, the supply is set to turn on and start switching after the input voltage increases above 4V (UVLO start or enable). After the regulator starts switching, the regulator continues to do so until the input voltage falls below 3.95V (UVLO stop or disable). In this example, these start and stop voltages set by the EN resistor divider were selected to have more hysteresis than the internally fixed VIN UVLO.

Equation 1 and Equation 2 can be used to calculate the values for the upper and lower resistor values. For these equations to work,  $V_{START}$  must be 1.1 ×  $V_{STOP}$  due to the EN pin voltage hysteresis. For the voltages specified, the standard resistor value used for  $R_{ENT}$  is 16.9k $\Omega$  and for  $R_{ENB}$  is 6.04k $\Omega$ .

#### 7.2.1.2.6 Output Voltage Resistors Selection

The output voltage is set with a resistor divider created by  $R_{FBT}$  and  $R_{FBB}$  from the output node to the FB pin. TI recommends to use 1% tolerance or better resistors. For this example design,  $10k\Omega$  was selected for  $R_{FBB}$ . Using Equation 14,  $R_{FBT}$  is calculated as 10  $k\Omega$ . This is a standard 1% resistor.

$$R_{FBT} = R_{FBB} \times \left(\frac{V_{OUT}}{V_{REF}} - 1\right)$$
 (14)

If the PCB layout does not use the recommended AGND to PGND connection in Section 7.4.1, noise on the feedback pin can degrade the output voltage regulation at maximum load. Using a smaller  $R_{FBB}$  of  $1.00 k\Omega$  minimizes the impact of this noise.

#### 7.2.1.2.7 Bootstrap Capacitor Selection

A 0.1uF ceramic capacitor is integrated inside the module connected between the BOOT and SW pin.

#### 7.2.1.2.8 BP5 Capacitor Selection

A 2.2µF ceramic capacitor must be connected between the BP5 pin and AGND for proper operation. The capacitor must be rated for at least 10V to minimize DC bias derating.

#### 7.2.1.2.9 PGOOD Pullup Resistor

A  $10k\Omega$  resistor is used to pull up the power good signal when FB conditions are met. The pullup voltage source must be less than the 6V absolute maximum of the PGOOD pin.

#### 7.2.1.2.10 Current Limit Selection

The MODE pin is used to select between two current limit settings. Select the current limit setting whose minimum is greater than at least 1.1 times the maximum steady state peak current. This selection is to provide margin for component tolerance and load transients. For this design, the minimum current limit must be greater than 9.64A so the high current limit setting is selected.

### 7.2.1.2.11 Soft-Start Time Selection

The MODE pin is used to select between four different soft-start times. This selection is useful if a load has specific timing requirements for the output voltage of the regulator. A longer soft-start time is also useful if the output capacitance is very large and requires large amounts of current to quickly charge the output capacitors to the output voltage level. The large currents necessary to charge the capacitor can reach the current limit or cause the input voltage rail to sag due excessive current draw from the input power supply. Limiting the output voltage slew rate solves both of these problems. The example design has the soft-start time set to 1.0ms. With this soft-start time the current required to charge the output capacitors to the nominal output voltage is only 0.14A.

Submit Document Feedback

### 7.2.1.2.12 Ramp Selection and Control Loop Stability

The MODE pin is used to select between three different ramp settings. The most optimal ramp setting depends on  $V_{OUT}$ ,  $f_{SW}$ ,  $L_{OUT}$ , and  $C_{OUT}$ . To get started, calculate LC double pole frequency using Equation 15. The ratio between  $f_{SW}$  and  $f_{LC}$  must then be calculated. Based on this ratio and the output voltage, the recommended ramp setting must be selected using Figure 7-3. With a 1V output, TI recommends the 1pF ramp for ratios between approximately 35 and 58, TI recommends the 2pF ramp for ratios between approximately 58 and 86, and TI recommends the 4pF ramp for ratios greater than approximately 86. In general, use the largest ramp capacitor the design supports. Increasing the ramp capacitor improves transient response but can reduce stability margin or increase on-time jitter.

For this design, f<sub>LC</sub> is 18.2kHz and the ratio is 55 which is on the border of the 1pF and 2pF ramp settings. Through bench evaluation, the design having sufficient stability margin with the 2pF ramp was discovered, so this setting was selected for the best transient response. The recommended ramp settings given by Figure 7-3 include margin to account for potential component tolerances and variations across operating conditions, using a higher ramp setting as shown in this example is possible.

$$f_{LC} = \frac{1}{2 \times \pi \times \sqrt{L_{OUT} \times C_{OUT}}}$$

$$\begin{array}{c} 5.5 \\ 4 \\ 9.5 \\ 3.5 \\ 2.5 \\ 1.5 \\ 0.5 \\ 20 \\ 30 \\ 40 \\ 50 \\ 60 \\ 70 \\ 80 \\ 90 \\ 100 \\ \end{array}$$

$$(15)$$

Figure 7-3. Recommended Ramp Settings

Use a feedforward capacitor ( $C_{FF}$ ) in parallel with the upper feedback resistor ( $R_{FBT}$ ) to add a zero into the control loop to provide phase boost. Include a placeholder for this capacitor as the zero this capacitor provides can be required to meet phase margin requirements. This capacitor also adds a pole at a higher frequency than the zero. The pole and zero frequency are not independent so as a result, after the zero location is chosen, the pole is fixed as well. The zero is placed at 1/4 the  $f_{SW}$  by calculating the value of  $C_{FF}$  with Equation 16. The calculated value is 42pF.

$$C_{FF} = \frac{1}{\pi \times R_{FBT} \times \frac{f_{SW}}{2}}$$
(16)

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback



Using larger feedforward capacitors to further improve the transient response but take care to make sure there is a minimum of -9dB gain margin in all operating conditions is possible. The feedforward capacitor injects noise on the output into the FB pin. This added noise can result in increased on-time jitter at the switching node. Too little gain margin can cause a repeated wide and narrow pulse behavior. Adding a  $499\Omega$  resistor in series with the feedforward capacitor can help reduce the impact of noise on the FB pin in case of non-ideal PCB layout. The value of this resistor must be kept small as larger values bring the feedforward pole and zero closer together degrading the phase boost the feedforward capacitor provides.

When using higher ESR output capacitors, such as polymer or tantalum, the ESR zero ( $f_{ESR}$ ) must be accounted for. The ESR zero can be calculated using Equation 17. If the ESR zero frequency is less than the estimated bandwidth of 1/10th the  $f_{SW}$ , the gain margin and phase margin are affected. A series R-C from the FB pin to ground can be used to add a pole into the control loop if necessary. All ceramic capacitors are used in this design so the effect of the ESR zero is ignored.

$$f_{ESR} = \frac{1}{2 \times \pi \times C_{OUT} \times R_{ESR}}$$
 (17)


#### 7.2.1.2.13 MODE Pin

The MODE resistor is set to  $4.87k\Omega$  to select the high current limit setting, 1.0ms soft start and the 2pF ramp. See Table 6-4 for the full list of the MODE pin settings.


Submit Document Feedback




### 7.2.1.3 Application Curves

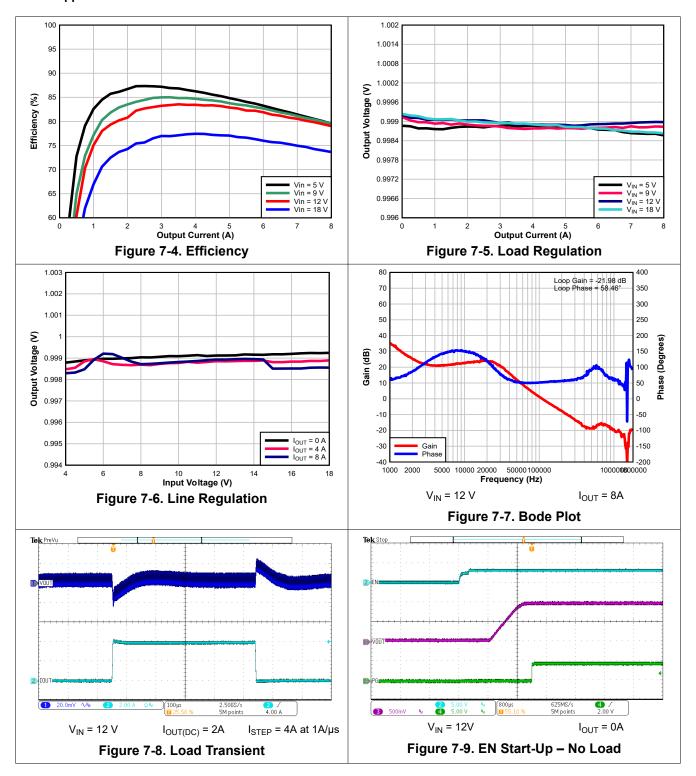



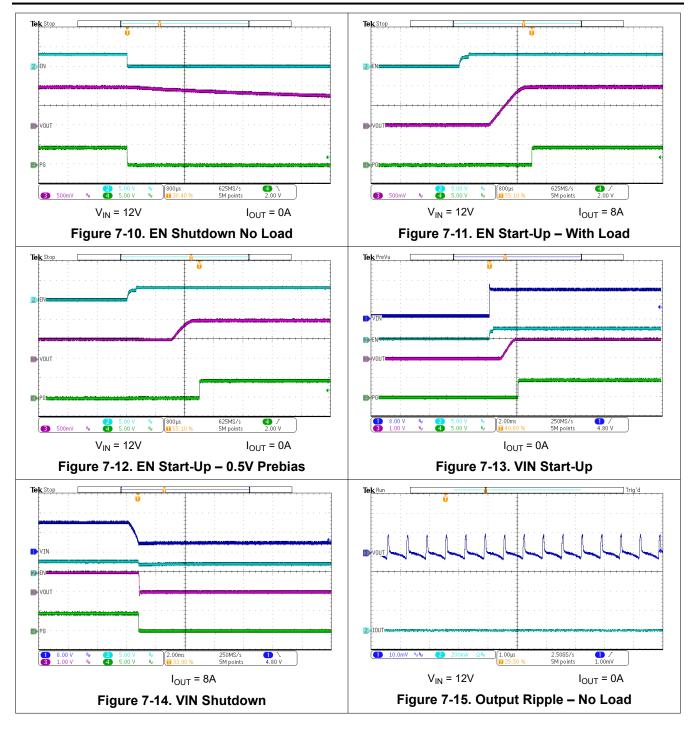



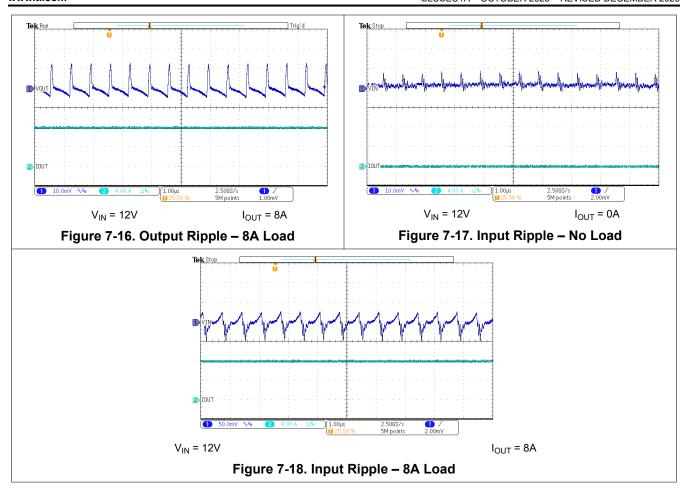

## 7.3 Power Supply Recommendations

The TPSM843820 is designed to operate from an input voltage supply range between 4V and 18V. This supply voltage must be well regulated. Proper bypassing of the input supply is critical for proper electrical performance, as is the PCB layout and the grounding scheme. A minimum of 4µF (after derating) ceramic capacitance, type X5R or better, must be placed near the device. TI recommends splitting the ceramic input capacitance equally between the VIN and PGND pins on each side of the device resulting in at least 2µF of ceramic capacitance on each side of the device.

#### 7.4 Layout

#### 7.4.1 Layout Guidelines

Layout is a critical portion of good power supply design. See Figure 7-19 for a PCB layout example. Key guidelines to follow for the layout are:

- Make VIN, PGND, and SW traces as wide as possible to reduce trace impedance and improve heat dissipation.
- Place a 10nF to 100nF capacitor at the VIN pin to PGND as close as possible to the device on the same side of the PCB. Place the remaining ceramic input capacitance next to these high frequency bypass capacitors. The remaining input capacitance can be placed on the other side of the board but use as many vias as possible to minimize impedance between the capacitors and the pins of the IC.
- Use multiple vias near the PGND pins and use the layer directly below the device to connect them together. This action helps to minimize noise and can help heat dissipation.
- Use vias near the VIN pin and provide a low impedance connection between them through an internal layer.
- Place the BP5 capacitor as close as possible to the BP5 and AGND pins.



- Place the bottom resistor in the FB divider as close as possible to the FB and AGND pins of the IC. Also keep
  the upper feedback resistor and the feedforward capacitor near the IC. Connect the FB divider to the output
  voltage at the desired point of regulation.
- Use multiple vias in the AGND island to connect back to internal PGND layers. Do not place these vias between the BP5 capacitor and the AGND pin. These vias conduct switching currents between the BP5 capacitor and PGND. Placing the vias near the AGND pin can add noise to the FB divider.
- Return the FSEL and MODE resistors to a guiet AGND island.

### 7.4.2 Layout Example

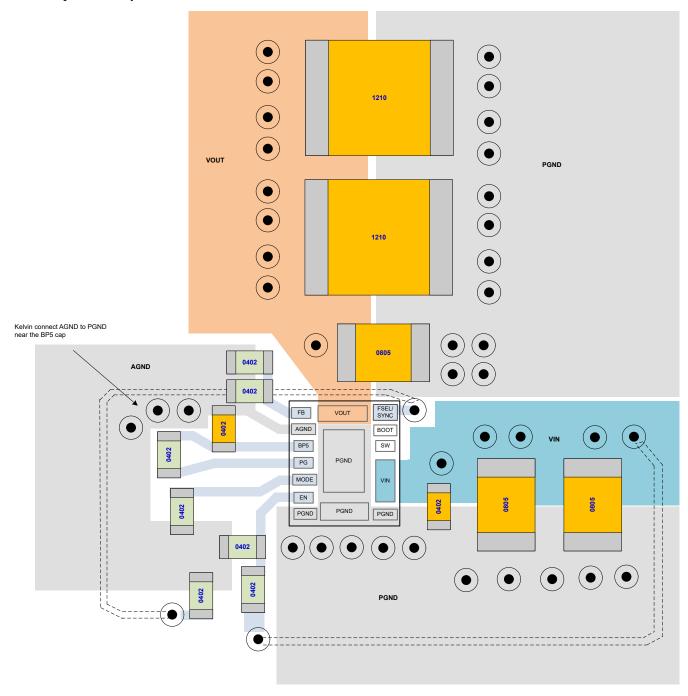


Figure 7-19. Example PCB Layout

#### 7.4.2.1 Thermal Performance

Test Conditions:  $f_{SW}$  = 1.5 MHz, Vin = 12V, Vout = 1V, lout = 8A, Ambient temperature = 25°C

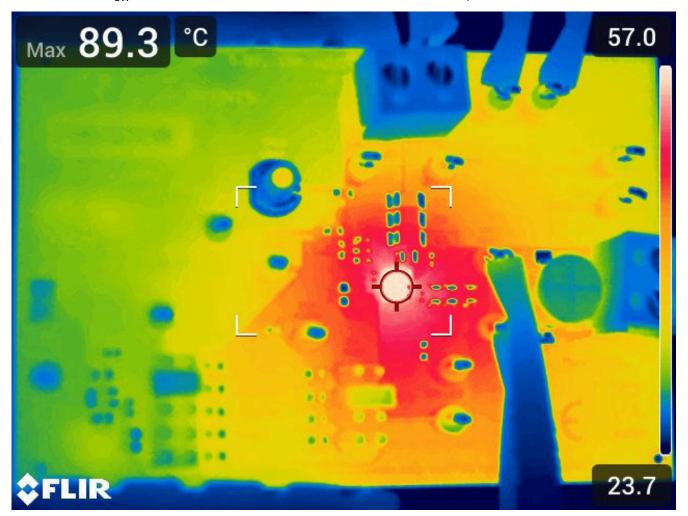


Figure 7-20. Thermal Image at 25°C Ambient

# 8 Device and Documentation Support

# 8.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

# 8.2 Support Resources

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 8.3 Trademarks

SWIFT<sup>™</sup>, and MicroSiP<sup>™</sup>, and TI E2E<sup>™</sup> are trademarks of Texas Instruments. All trademarks are the property of their respective owners.

# 8.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

# 8.5 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

## 9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

### Changes from Revision \* (October 2023) to Revision A (December 2023)

**Page** 

Changed document status from Advance Information to Production Data......



# 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2024 Texas Instruments Incorporated

Submit Document Feedback

www.ti.com 9-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
TPSM843820SITR	Active	Production	uSiP (SIT)   15	3000   LARGE T&R	Yes	NIAU	Level-2-260C-1 YEAR	-40 to 125	T43820
TPSM843820SITR.A	Active	Production	uSiP (SIT)   15	3000   LARGE T&R	Yes	NIAU	Level-2-260C-1 YEAR	-40 to 125	T43820
TPSM843820SITR.B	Active	Production	uSiP (SIT)   15	3000   LARGE T&R	-	Call TI	Call TI	-40 to 125	

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 21-Apr-2024

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPSM843820SITR	uSiP	SIT	15	3000	330.0	12.4	3.75	3.75	2.2	8.0	12.0	Q1

www.ti.com 21-Apr-2024




## \*All dimensions are nominal

Ì	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
ı	TPSM843820SITR	uSiP	SIT	15	3000	383.0	353.0	58.0	



MICRO SYSTEM IN PACKAGE

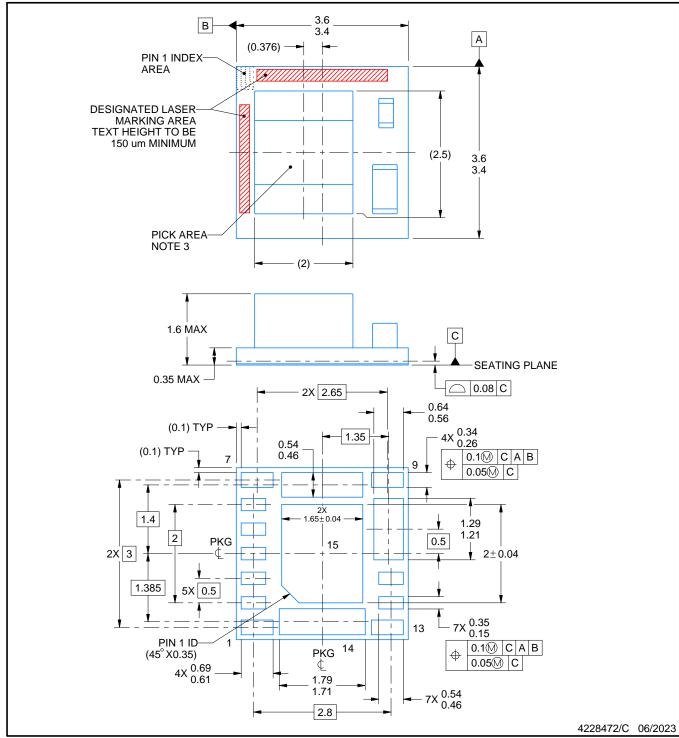


#### NOTES:

MicroSiP is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. Pick and place nozzle Ø 1.3 mm or smaller recommended.
- 4. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.



MICRO SYSTEM IN PACKAGE

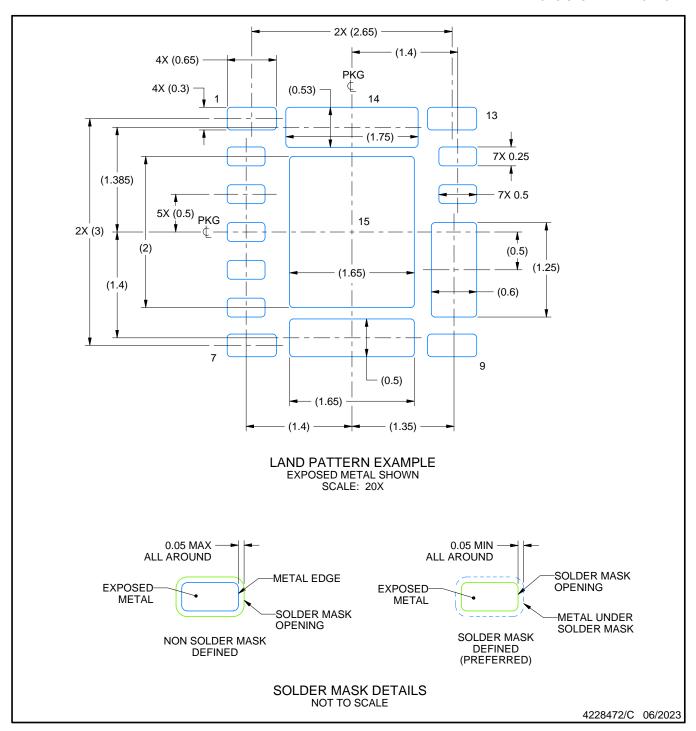


NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).



MICRO SYSTEM IN PACKAGE

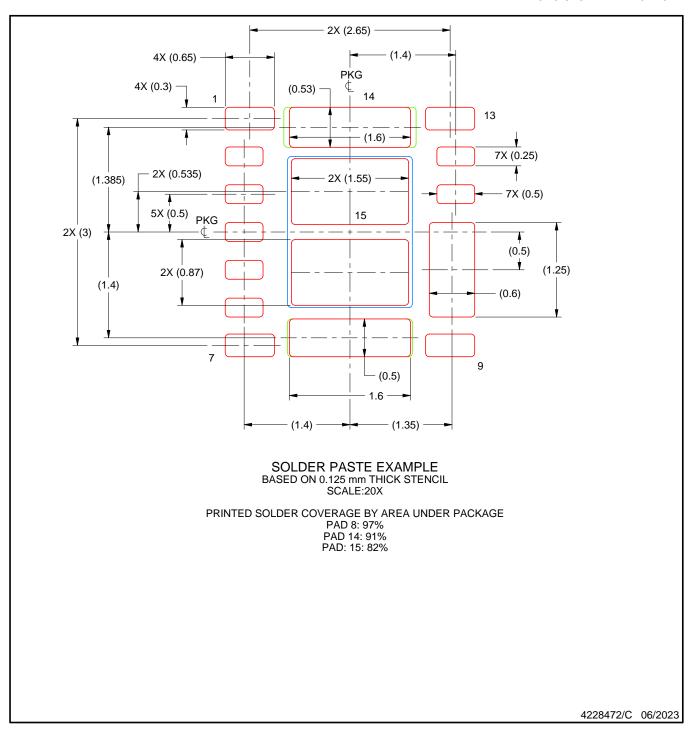

NOTES: (continued)

Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025