





TSM24CA SLVSH75A - AUGUST 2023 - REVISED JANUARY 2024

TSM24CA ±24V Low Capacitance Surge Diode for Industrial Networks in SOT-23 Package

1 Features

- Protection against 1kV, 42Ω IEC 61000-4-5 surges for automotive signal lines
- Robust surge protection:
 - IEC 61000-4-5 (8/20µs): 30A
- Low clamping voltage of 40V at 24A for 8/20µs surge current protects downstream components
- Bidirectional polarity to support positive and negative voltage swings and miswiring conditions
- ± 24V working voltage for protecting signals on 12V systems
- Low I/O Capacitance: 12pF (typical)
- Low leakage current of 75nA (maximum)
- Integrated IEC 61000-4-2 ESD protection:
 - ±30kV contact discharge
 - ±30kV air-gap discharge
- Small SOT-23 leaded package to minimize board space and allow for automatic optical inspection (AOI)

2 Applications

- Automotive hybrid, electric, and power train systems
- HEV/EV on-board charger
- EV battery charging communication
 - CHAdeMO
 - CCS
 - GB/T
- Automotive in-vehicle networks
 - Controller area network (CAN)
 - Local interconnect network (LIN)
- 24V power lines or digital input or output lines

3 Description


The TSM24CA is a low-capacitance TVS diode and is part of TI's surge protection device family. The TSM24CA robustly shunts up to 30A of IEC 61000-4-5 (8/20 µs) fault current to protect systems from high power transients or lightning strikes. The device offers a solution to the common industrial signal line EMC requirement to survive up to 1kV IEC 61000-4-5 open circuit voltage coupled through a 42Ω impedance, clamping that surge at 40V (I $_{PP}$ = 24A). The TSM24CA also has a very low line capacitance of 12pF which allows it to protect common automotive communication networks like CAN from surges in EV charging applications.

Additionally, the TSM24CA is available in a small leaded SOT-23 (DBZ) package which is reduced in size by approximately 50 percent compared to the industry standard SMA package. The extremely low device leakage and capacitance provide a minimal effect on the protected line.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
TSM24CA	DBZ (SOT-23, 3)	2.92mm × 2.37mm

- For more information, see Section 9.
- The package size (length × width) is a nominal value and includes pins, where applicable.



EV Charging CAN Bus Application



Table of Contents

1 Features 1 2 Applications 1 3 Description 1 4 Pin Configuration and Functions 3 5 Specifications 4 5.1 Absolute Maximum Ratings 4 5.2 ESD Ratings - JEDEC Specifications 4 5.3 ESD Ratings - IEC Specifications 4 5.4 Recommended Operating Conditions 4 5.5 Thermal Information 4	7.2 Receiving Notification of Documentation Updates
5.5 Thermal Information	8 Revision History
• •	



4 Pin Configuration and Functions




Figure 4-1. DBZ Package, 3-Pin SOT-23 (Top View)

Table 4-1. Pin Functions

PIN		TYPE ⁽¹⁾	DESCRIPTION	
NAME	NO.	ITPE		
IO	1,2	I/O	Surge and ESD protected IO. Connect other pin to ground.	
NC	3	NC	Leave this pin floating for proper performance.	

(1) I = Input, O = Output, I/O = Input or Output, NC = No connect



5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

	Parameter	MAX	UNIT	
P _{PPM}	IEC 61000-4-5 Surge (t _p = 8/20μs) Peak Pulse Power at 25 °C ⁽²⁾		1200	W
I _{PPM}	IEC 61000-4-5 Surge (t_p = 8/20 μ s) Peak Pulse Current at 25 °C ⁽²⁾		30	Α
T _A	Operating free-air temperature	-40	125	°C
T _{stg}	Storage temperature	-65	155	°C

⁽¹⁾ Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If briefly operating outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.

(2) Voltages are with respect to GND unless otherwise noted.

5.2 ESD Ratings - JEDEC Specifications

	Parameter	Test Conditions VALUE		UNIT
V	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/ JEDEC JS-001, all pins ⁽¹⁾	±2500	V
V _(ESD)	Electrostatic discharge	Charged device model (CDM), per JEDEC specification JS-002, all pins ⁽²⁾	±1000	V

⁽¹⁾ JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.

5.3 ESD Ratings - IEC Specifications

	Parameter	Test Conditions	VALUE	UNIT
V		IEC 61000-4-2 Contact Discharge, all pins	±30000	V
V _(ESD)	Electrostatic discharge	IEC 61000-4-2 Air Discharge, all pins	±30000	

5.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
V _{IN}	Input voltage	-24	24	V
T _A	Operating Free Air Temperature	-40	125	°C

5.5 Thermal Information

		TSM24CA	
	THERMAL METRIC ⁽¹⁾	DBZ (SOT-23)	UNIT
		3 PINS	_
$R_{\theta JA}$	Junction-to-ambient thermal resistance	203.8	°C/W
R _{0JC(top)}	Junction-to-case (top) thermal resistance	104.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	39.4	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	8.7	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	38.9	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	NA	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

Product Folder Links: TSM24CA

⁽²⁾ JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

5.6 Electrical Characteristics

At T_A = 25°C unless otherwise noted


	PARAMETER	TEST CONDITIONS	MIN	MIN TYP MAX		
V_{RWM}	Reverse stand-off voltage	I _{IO} < 100nA	-24		24	V
I _{LEAK}	Leakage current at V _{RWM}	VIO = 24V, I/O to GND and GND to I/O		25	75	nA
V _{BR}	Breakdown voltage, I/O to GND and GND to I/O ⁽¹⁾	I _{IO} = 10mA	25.5			V
V _{CLAMP}	Surge clamping voltage, t _p = 8/20µs ⁽³⁾	I _{PP} = 24A, I/O to GND and GND to I/O	-	40		V
C _{LINE}	Line capacitance, IO to GND	V _{IO} = 0V, f = 1MHz		12		pF

 V_{BR} is defined as the voltage obtained at 10mA when sweeping the voltage up, before the device latches into the snapback state Device stressed with 8/20 μ s exponential decay waveform according to IEC 61000-4-5

Copyright © 2024 Texas Instruments Incorporated Product Folder Links: TSM24CA 5



5.7 Typical Characteristics

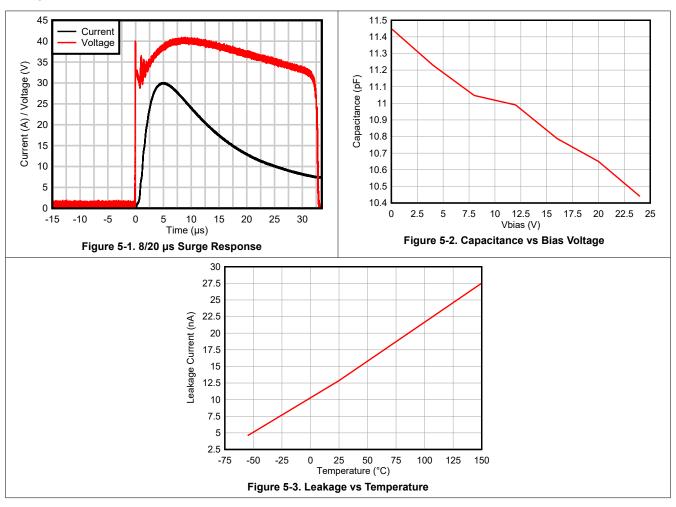



6 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

6.1 Application Information

The TSM24CA is a TVS diode which provides a path to ground for dissipating transient voltage spikes, such as ESD or surge, on signal lines and power lines. The device should be connected in parallel to the down stream circuitry it is protecting. As the current from the transient passes through the TVS, only a small voltage drop is present across the diode. This is the voltage presented to the protected IC. The low RDYN of the triggered TVS holds this voltage (VCLAMP) to a safe level for the protected IC. For more information on how to properly use this device, refer to the *ESD Packaging and Layout Guide*.

Copyright © 2024 Texas Instruments Incorporated

Product Folder Links: TSM24CA



7 Device and Documentation Support

7.1 Documentation Support

7.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, TI's IEC 61000-4-x Testing application note
- Texas Instruments, ESD Layout Guide user's guide
- Texas Instruments, ESD Protection Diodes EVM user's guide
- Texas Instruments, Generic ESD Evaluation Module user's guide
- · Texas Instruments, Reading and Understanding an ESD Protection Data Sheet user's guide

7.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

7.3 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

7.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

7.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

7.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

8 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

C	hanges from Revision * (August 2023) to Revision A (January 2024)	Page
•	Changed capacitance from: 14pF to: 12pF	1
•	Changed leakage current from: 100nA to: 75nA	
•	Changed clamping voltage from 35V to 40V	1
•	Updated the Integrated IEC 61000-4-2 ESD protection information	1
•	Changed leakage current: typ 50nA to 25nA, max 100nA to 75nA	5
•	Changed clamping voltage: 35V to 40V	5
	Changed capacitance: 14pF to 12pF	

9 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: TSM24CA

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
TSM24CADBZR	Active	Production	SOT-23 (DBZ) 3	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	35P8
TSM24CADBZR.B	Active	Production	SOT-23 (DBZ) 3	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	35P8

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TSM24CA:

Automotive: TSM24CA-Q1

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

NOTE: Qualified Version Definiti	on:	efinitio	Defin	ersion	٧	Qualified	F:	IO.	١
----------------------------------	-----	----------	-------	--------	---	-----------	----	-----	---

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

PACKAGE MATERIALS INFORMATION

www.ti.com 10-Jan-2024

TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TSM24CADBZR	SOT-23	DBZ	3	3000	180.0	8.4	2.9	3.35	1.35	4.0	8.0	Q3

PACKAGE MATERIALS INFORMATION

www.ti.com 10-Jan-2024



*All dimensions are nominal

	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
ı	TSM24CADBZR	SOT-23	DBZ	3	3000	210.0	185.0	35.0	



SMALL OUTLINE TRANSISTOR



NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 This drawing is subject to change without notice.
 Reference JEDEC registration TO-236, except minimum foot length.

- 4. Support pin may differ or may not be present.
- 5. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025