

SLUS212F - NOVEMBER 1999 - REVISED MAY 2009

- Fast Transient Response
- 10-mA to 5-A Load Current
- Short Circuit Protection
- Maximum Dropout of 500-mV at 5-A Load Current
- Separate Bias (VB) and VIN Pins
- Available in Adjustable or Fixed Output Voltages
- 5-Pin Package Allows Kelvin Sensing of Load Voltage
- Reverse Current Protection

5-PIN TO-220 T PACKAGE (TOP VIEW)



5-PIN TO-263 TD PACKAGE (TOP VIEW)



Note: Tab = Ground


description

The UC385 is a low dropout linear regulator providing a quick response to fast load changes. Combined with its precision onboard reference, the UC385 excels at driving GTL and BTL buses. Due to its fast response to load transients, the total capacitance required to decouple the regulator's output can be significantly decreased when compared to standard LDO linear regulators.

Dropout voltage (VIN to VOUT) is only 490 mV maximum and 350 mV typical at 5-A load (0°C to 100°C).

The onboard bandgap reference is stable with temperature and scaled for a 1.2 V input to the internal power amplifier. The UC385 is available in fixed output voltages of 1.5 V, 2.1 V, or 2.5 V. The output voltage of the adjustable version can be set with two external resistors. If the external resistors are omitted, the output voltage defaults to 1.2 V.

block diagram

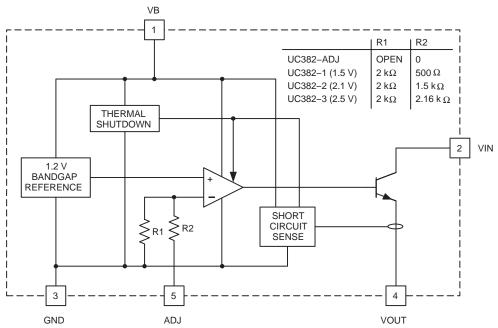



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners



UC285-1, UC285-2, UC285-3, UC285-ADJ, UC385-1, UC385-2, UC385-3, UC385-ADJ FAST TRANSIENT RESPONSE 5-A LOW-DROPOUT REGULATOR

SLUS212F - NOVEMBER 1999 - REVISED MAY 2009

absolute maximum ratings over operati	ng free-air temperature (unless otherwise noted)†
---------------------------------------	---

VB	V
VIN	V
Output voltage	
Storage temperature—65°C to 150°	°C
Junction temperature	$^{\circ}C$
Lead temperature (soldering, 10 seconds)	°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

AVAILABLE OPTIONS(1)

	PACKAGED DEVICES											
TJ		TO-2	20 (T)		TO-263 (TD) ⁽²⁾							
		OUTPUT	VOLTAGE		OUTPUT VOLTAGE							
	1.5 V	2.1 V	2.5 V	1.2 V or ADJ	1.5 V	2.1 V	2.5 V	1.2 V or ADJ				
-40°C to 100°C	285T-1	285T-2	285T-3	285T-ADJ	285TD-1	285TD-2	285TD-3	285TD-ADJ				
0°C to 100°C	385T-1	385T-1 385T-2 385T-3 385T-ADJ 385TD-1 385TD-2 385TD-3 38										

- 1. For more package and ordering information, see the Package Option Addendum located at the end of this data sheet.
- 2. For 50 piece reel, add KTTT (e.g., UC285TDKTTT-1); for 500 piece reel, add TR (e.g., UC285TDTR-1).

electrical characteristics unless otherwise stated, these parameters apply for $T_A = -40^{\circ}C$ to $100^{\circ}C$ for the UC385-x, VB = 5 V; VIN = 3.3 V, VOUT = 2.5 V, $T_A = T_J$.

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
UC385-3 Fixed 2.5 V, 5-A Family						
Output voltage	UC385-3	I _{VOUT} = 100 mA	2.475	2.5	2.525	V
	UC285-3	I _{VOUT} = 100 mA	2.45	2.5	2.525	V
Load regulation		IVOUT = 10 mA to 5 A		0.5	4	mV
VIN PSRR			80	110		dB
VB PSRR			50	65		dB
VIN dropout voltage (VIN - VOUT)		I _{VOUT} = 5 A, T _J = 25°C		350	425	mV
	UC385-3	I _{VOUT} = 5 A		350	490	mV
	UC285-3	I _{VOUT} = 5 A		350	500	mV
VB dropout (VB - VOUT)	UC385-3	I _{VOUT} = 5 A		1.8	2.1	V
	UC285-3	I _{VOUT} = 5 A		1.8	2.2	V
Short circuit current limit			5.1		7.5	Α
VB current		I _{VOUT} = 10 mA		8	15	mA
		I _{VOUT} = 5 A		40	100	mA
VIN current		I _{VOUT} = 5 A	4.9	4.96		Α
UC385-2 Fixed 2.1 V, 5-A Family			<u>.</u>			
Output voltage	UC385-2	I _{VOUT} = 100 mA	2.079	2.1	2.121	V
	UC285-2	I _{VOUT} = 100 mA	2.058	2.1	2.121	V
Load regulation		I _{VOUT} = 10 mA to 5 A		0.5	4	mV
VIN PSRR			80	110		dB
VB PSRR			50	67		dB



UC285-1, UC285-2, UC285-3, UC285-ADJ, UC385-1, UC385-2, UC385-3, UC385-ADJ FAST TRANSIENT RESPONSE 5-A LOW-DROPOUT REGULATOR

SLUS212F - NOVEMBER 1999 - REVISED MAY 2009

electrical characteristics unless otherwise stated, these parameters apply for $T_A = -40^{\circ}C$ to $100^{\circ}C$ for the UC285-x series and $0^{\circ}C$ to $100^{\circ}C$ for the UC385-x, VB = 5 V; VIN = 3.3 V, VOUT = 2.5 V, $T_A = T_J$.

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
UC385-2 Fixed 2.1 V, 5-A Family (cont	inued)					
VIN dropout voltage (VIN - VOUT)		I _{VOUT} = 5 A, T _J = 25°C		350	425	mV
	UC385-2	I _{VOUT} = 5 A		350	490	mV
	UC285-2	I _{VOUT} = 5 A		350	500	mV
VB dropout (VB - VOUT)	UC385-2	I _{VOUT} = 5 A		1.8	2.1	V
	UC285-2	I _{VOUT} = 5 A		1.8	2.2	V
Short circuit current limit	-		5.1		7.5	Α
VB current		I _{VOUT} = 10 mA		8	15	mA
		I _{VOUT} = 5 A		40	100	mA
VIN current		I _{VOUT} = 5 A	4.9	4.96		Α
UC385-1 Fixed 1.5 V, 5-A Family			·			
Output voltage	UC385-1	I _{VOUT} = 100 mA	1.485	1.5	1.515	V
	UC285-1	I _{VOUT} = 100 mA	1.470	1.5	1.515	V
Load regulation	-	I _{VOUT} = 10 mA to 5 A		0.5	4	mV
VIN PSRR			80	110		dB
VB PSRR			50	65		dB
VIN dropout voltage (VIN - VOUT)		I _{VOUT} = 5 A, T _J = 25°C		350	425	mV
	UC285-1	I _{VOUT} 5 A		350	490	mV
	UC285-2	I _{VOUT} = 5 A		350	500	mV
VB dropout (VB - VOUT)	UC385-1	I _{VOUT} = 5 A		1.8	2.1	V
	UC285-1	I _{VOUT} = 5 A		1.8	2.2	V
Short circuit current limit			5.1		7.5	Α
VB current		I _{VOUT} = 10 mA		8	15	mA
		I _{VOUT} = 5 A		40	100	mA
VIN = current		I _{VOUT} = 5 A	4.9	4.96		Α
UC385-ADJ Adjustable, 5-A Family			·			
ADJ voltage	UC385-ADJ	I _{VOUT} - 100 mA	1.188	1.2	1.212	V
	UC285-ADJ	I _{VOUT} - 100 mA	1.176	1.2	1.212	V
Load regulation		I _{VOUT} = 10 mA to 5 A		0.5	4	mV
VIN PSRR		VOUT programmed for 2.5 V	80	110		dB
VB PSRR VOUT		Programmed for 2.5 V	50	65		dB
VIN dropout voltage (VIN - VOUT)		I _{VOUT} = 5 A, T _J = 25°C		350	425	mV
	UC385-ADJ	I _{VOUT} = 5 A		350	490	mV
	UC285-ADJ	I _{VOUT} = 5 A		350	500	mV
VB dropout (VB - VOUT)	UC385-ADJ	I _{VOUT} = 5 A		1.8	2.1	V
	UC285-ADJ	I _{VOUT} = 5 A		1.8	2.2	٧
Short circuit current limit			5.1		7.5	Α
VB current		I _{VOUT} = 10 mA		8	15	mA
		I _{VOUT} = 5 A		40	100	mA
VIN current		I _{VOUT} = 5 A	4.9	4.96		Α



UC285-1, UC285-2, UC285-3, UC285-ADJ, UC385-1, UC385-2, UC385-3, UC385-ADJ FAST TRANSIENT RESPONSE 5-A LOW-DROPOUT REGULATOR

SLUS212F - NOVEMBER 1999 - REVISED MAY 2009

pin descriptions


ADJ: In the adjustable version, the user programs the output voltage with two external resistors. The resistors should be 0.1% for high accuracy. The output amplifier is configured as a noninverting operational amplifier. The resistors should meet the criteria of R3 || R4 < 100 Ω . Connect ADJ to VOUT for an output voltage of 1.2 V. Note that the point at which the feedback network is connected to the output is the Kelvin sense point.

GND: For accurate results, the GND pin should be referenced to the load ground.

VB: Supplies power to all circuits of the regulator except the output power transistor. The 2-V headroom from VB to VOUT allows the use of a Darlington output stage for inherently low output impedance and fast response. (Dropout is derated for junction temperatures below 0°C.)

VIN: Supplies the current to the collector of the output power transistor only. The dropout (VIN-VOUT) is under 100 mV for light loads; maximum dropout is 490 mV at 5 A for $T_J = 0^{\circ}C$ to $100^{\circ}C$. (Dropout is derated for junction temperatures over $100^{\circ}C$.)

VOUT: This pin should be connected to the load via a low impedance path. Avoid connectors which add significant inductance and resistance. Note that even though a Kelvin sense is available through a 5-pin package, care must be taken since voltage drops along wire traces add to the dropout voltage.

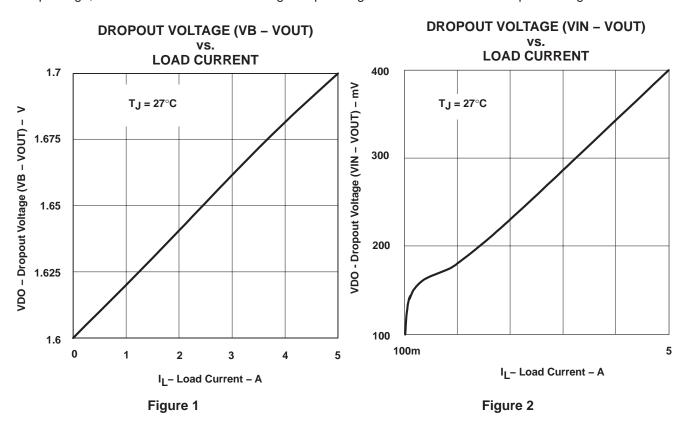




SLUS212F - NOVEMBER 1999 - REVISED MAY 2009

APPLICATION INFORMATION

The UC385 is easy to use. The adjustable version requires two resistors to set the output voltage. The fixed versions of the UC385 require no external resistors. All versions of the UC385 require decoupling capacitors on the input and output. In a typical application, VB and VIN are driven from switching power supplies which may have large filter capacitors at their outputs. If the UC385 is further than 12 inches from the power supply, it is recommended to add local decoupling as close as possible to the linear regulator.

Decouple the output of the UC385 with at least 100 μ F of high quality tantalum or Sanyo OSCON capacitors close to the VOUT pin for maximum stability. Many applications involving ultrafast GTL or BTL applications require additional capacitance close to the load. The exact amount will vary according to speed and magnitude of the load transients and the tolerance allowed for transients on VOUT. When specifying the decoupling capacitors, the series resistance of the capacitor bank is an important factor in its ability to filter load transients.

The UC385 allows for Kelvin sensing the voltage at the load. This improves regulation performance and eliminates the voltage drops due to wire trace resistance. This voltage drop must be added to the headroom (VIN to VOUT and VB to VOUT). The dropout of 350 mV is measured at the pins and does not include additional drops due to trace resistance.

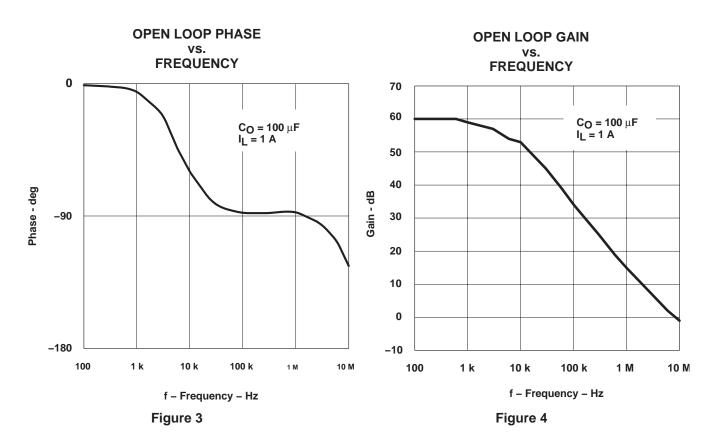



APPLICATION INFORMATION

POWER SUPPLY REJECTION RATIO (VB INPUT)

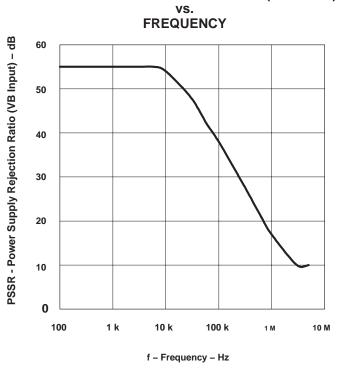


Figure 5

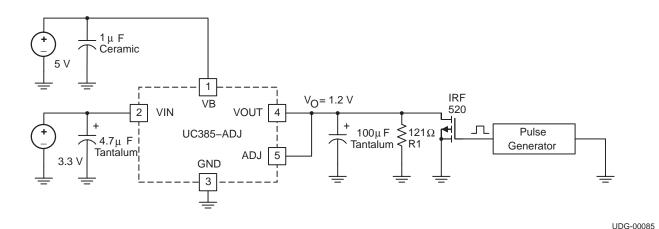


Figure 6. Transient Test Circuit



APPLICATION INFORMATION

10 mA to 3 A/μs Load Transient Response


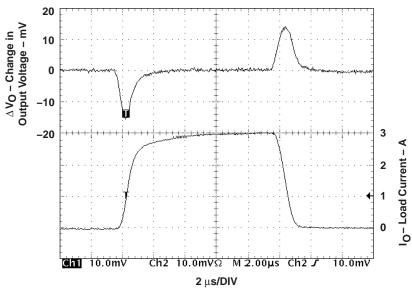


Figure 7



UDG-00086

Figure 8. Typical UC385-ADJ Application

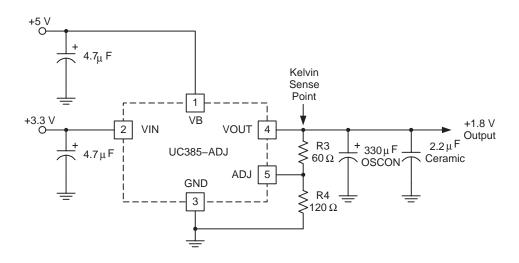

SLUS212F - NOVEMBER 1999 - REVISED MAY 2009

APPLICATION INFORMATION

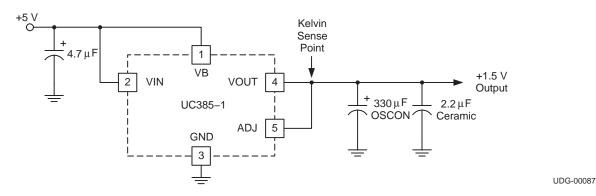


Figure 9. Typical UC385-1, -2, or -3 Application



UC285-1, UC285-2, UC285-3, UC285-ADJ, UC385-1, UC385-2, UC385-3, UC385-ADJ **FAST TRANSIENT RESPONSE 5-A** LOW-DROPOUT REGULATOR SLUS212F - NOVEMBER 1999 - REVISED MAY 2009

Revision History

	DATE	REV	PAGE	SECTION	DESCRIPTION					
ı	5/09	F	2	Absolute Maximum Ratings	Added VB.					

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



www.ti.com

11-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
UC285T-3	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-40 to 85	UC285T-3
UC285T-3.A	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-40 to 85	UC285T-3
UC285T-ADJ	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-40 to 100	UC285T-ADJ
UC285T-ADJ.A	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-40 to 100	UC285T-ADJ
UC285TDKTTT-1	Active	Production	DDPAK/ TO-263 (KTT) 5	50 TUBE	Yes	SN	Level-2-260C-1 YEAR	-40 to 85	UC285TD-1
UC285TDKTTT-1.A	Active	Production	DDPAK/ TO-263 (KTT) 5	50 TUBE	Yes	SN	Level-2-260C-1 YEAR	-40 to 85	UC285TD-1
UC285TDKTTT-3	Active	Production	DDPAK/ TO-263 (KTT) 5	50 TUBE	Yes	SN	Level-2-260C-1 YEAR	-40 to 85	UC285TD-3
UC285TDKTTT-3.A	Active	Production	DDPAK/ TO-263 (KTT) 5	50 TUBE	Yes	SN	Level-2-260C-1 YEAR	-40 to 85	UC285TD-3
UC285TDKTTT-ADJ	Active	Production	DDPAK/ TO-263 (KTT) 5	50 TUBE	Yes	SN	Level-2-260C-1 YEAR	-40 to 100	UC285TD-ADJ
UC285TDKTTT-ADJ.A	Active	Production	DDPAK/ TO-263 (KTT) 5	50 TUBE	Yes	SN	Level-2-260C-1 YEAR	-40 to 100	UC285TD-ADJ
UC385T-1	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-	UC385T-1
UC385T-1.A	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	0 to 70	UC385T-1
UC385T-2	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-	UC385T-2
UC385T-2.A	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	0 to 70	UC385T-2
UC385T-3	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-	UC385T-3
UC385T-3.A	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	0 to 70	UC385T-3
UC385T-ADJ	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	-	UC385T-ADJ
UC385T-ADJ.A	Active	Production	TO-220 (KC) 5	50 TUBE	Yes	SN	N/A for Pkg Type	0 to 70	UC385T-ADJ
UC385TDTR-1	Active	Production	DDPAK/ TO-263 (KTT) 5	500 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	0 to 70	UC385TD-1
UC385TDTR-1.A	Active	Production	DDPAK/ TO-263 (KTT) 5	500 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	0 to 70	UC385TD-1
UC385TDTR-3	Active	Production	DDPAK/ TO-263 (KTT) 5	500 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	0 to 70	UC385TD-3
UC385TDTR-3.A	Active	Production	DDPAK/ TO-263 (KTT) 5	500 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	0 to 70	UC385TD-3

11-Nov-2025



www.ti.com

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
UC385TDTR-ADJ	Active	Production	DDPAK/ TO-263 (KTT) 5	500 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	0 to 70	UC385TD-ADJ
UC385TDTR-ADJ.A	Active	Production	DDPAK/ TO-263 (KTT) 5	500 LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	0 to 70	UC385TD-ADJ

⁽¹⁾ Status: For more details on status, see our product life cycle.

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

PACKAGE MATERIALS INFORMATION

www.ti.com 19-Aug-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
UC385TDTR-1	DDPAK/ TO-263	KTT	5	500	330.0	24.4	10.9	16.1	4.9	16.0	24.0	Q2
UC385TDTR-3	DDPAK/ TO-263	KTT	5	500	330.0	24.4	10.9	16.1	4.9	16.0	24.0	Q2
UC385TDTR-ADJ	DDPAK/ TO-263	KTT	5	500	330.0	24.4	10.9	16.1	4.9	16.0	24.0	Q2



www.ti.com 19-Aug-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
UC385TDTR-1	DDPAK/TO-263	ктт	5	500	356.0	356.0	45.0
UC385TDTR-3	DDPAK/TO-263	ктт	5	500	356.0	356.0	45.0
UC385TDTR-ADJ	DDPAK/TO-263	KTT	5	500	356.0	356.0	45.0

PACKAGE MATERIALS INFORMATION

www.ti.com 19-Aug-2025

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
UC285T-3	KC	TO-220	5	50	546	31	11930	3.17
UC285T-3.A	KC	TO-220	5	50	546	31	11930	3.17
UC285T-ADJ	KC	TO-220	5	50	546	31	11930	3.17
UC285T-ADJ.A	KC	TO-220	5	50	546	31	11930	3.17
UC385T-1	KC	TO-220	5	50	546	31	11930	3.17
UC385T-1.A	KC	TO-220	5	50	546	31	11930	3.17
UC385T-2	KC	TO-220	5	50	546	31	11930	3.17
UC385T-2.A	KC	TO-220	5	50	546	31	11930	3.17
UC385T-3	KC	TO-220	5	50	546	31	11930	3.17
UC385T-3.A	KC	TO-220	5	50	546	31	11930	3.17
UC385T-ADJ	кс	TO-220	5	50	546	31	11930	3.17
UC385T-ADJ.A	кс	TO-220	5	50	546	31	11930	3.17



TO-220



NOTES:

- All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 This drawing is subject to change without notice.
- 3. Shape may vary per different assembly sites.



TO-220



KTT (R-PSFM-G5)

PLASTIC FLANGE-MOUNT PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion. Mold flash or protrusion not to exceed 0.005 (0,13) per side.
- Falls within JEDEC T0—263 variation BA, except minimum lead thickness, maximum seating height, and minimum body length.





NOTES: A.

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-SM-782 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release.

 Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.
- F. This package is designed to be soldered to a thermal pad on the board. Refer to the Product Datasheet for specific thermal information, via requirements, and recommended thermal pad size. For thermal pad sizes larger than shown a solder mask defined pad is recommended in order to maintain the solderable pad geometry while increasing copper area.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025