











#### UCC27423-EP, UCC27424-EP

SLUS704C - FEBRUARY 2007 - REVISED DECEMBER 2014

# UCC2742x-EP Dual 4-A High-Speed Low-Side MOSFET Driver With Enable

#### **Features**

- **Industry-Standard Pinout**
- **Enable Functions for Each Driver**
- High Current-Drive Capability of ±4 A
- Unique Bipolar and CMOS True-Drive Output Stage Provides High Current at MOSFET Miller Thresholds
- TTL-/CMOS-Compatible Inputs Independent of Supply Voltage
- 20-ns Typical Rise and 15-ns Typical Fall Times With 1.8-nF Load
- Typical Propagation Delay Times of 25 ns With Input Falling and 35 ns With Input Rising
- 4.5-V to 15-V Supply Voltage
- Dual Outputs can be Paralleled for Higher Drive Current
- Available in Thermally-Enhanced MSOP PowerPAD™ Package With 4.7°C/W R<sub>BJC</sub>
- Supports Defense, Aerospace, and Medical Applications
  - Controlled Baseline
  - One Assembly/Test Site
  - One Fabrication Site
  - Extended Product Life Cycle
  - **Extended Product-Change Notification**
  - **Product Traceability**

# **Applications**

- Switch-Mode Power Supplies
- DC/DC Converters
- Motor Controllers
- Line Drivers
- Class-D Switching Amplifiers

# 3 Description

The UCC27423 and UCC27424 high-speed MOSFET drivers can deliver large peak currents into capacitive loads. Two standard logic options are offered - dual inverting and dual noninverting drivers. The UCC27424 thermally-enhanced 8-pin PowerPAD™ MSOP package (DGN) drastically lowers the thermal resistance to improve long-term reliability. The UCC27423 is offered in a standard SOIC-8 (D) package.

Using a design that inherently minimizes shootthrough current, this driver delivers 4 A of current where it is needed most – at the Miller plateau region during the MOSFET switching transition. A unique bipolar and MOSFET hybrid output stage in parallel also allows efficient current sourcing and sinking at low supply voltages.


The UCC27423 and UCC27424 provide enable (ENB) functions to better control the operation of the applications. ENBA and **ENBB** implemented on pins 1 and 8, which previously were left unused in the industry-standard pinout. ENBA and ENBB are pulled up internally to V<sub>DD</sub> for active-high logic and can be left open for standard operation.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
UCC27423-EP	D (8)	3.91 mm × 4.90 mm
UCC27424-EP	DGN (8)	3.00 mm × 3.00 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

#### **Simplified Schematic**

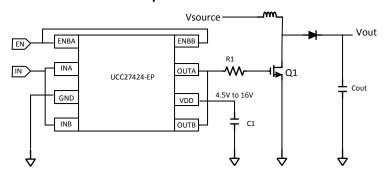



#### **Table of Contents**

Features 1	8 Application and Implementation	15
Applications 1	8.1 Application Information	15
	8.2 Typical Application	15
	9 Power Supply Recommendations	18
	9.1 Drive Current and Power Requirements	. 18
_	10 Layout	19
•	10.1 Layout Guidelines	. 19
· · · · · · · · · · · · · · · · · · ·	10.2 Layout Example	. 19
S .	10.3 Thermal Considerations	20
. 5	11 Device and Documentation Support	21
	11.1 Device Support	21
	11.2 Documentation Support	. 21
	11.3 Related Links	21
**	11.4 Trademarks	21
•	11.5 Electrostatic Discharge Caution	. 21
	11.6 Glossary	21
7.3 Feature Description	12 Mechanical, Packaging, and Orderable	24
7.4 Device Functional Modes	iniormation	21
	Applications         1           Description         1           Revision History         2           Pin Configuration and Functions         3           Specifications         3           6.1 Absolute Maximum Ratings         3           6.2 ESD Ratings         4           6.3 Recommended Operating Conditions         4           6.4 Thermal Information         4           6.5 Power Dissipation Ratings         4           6.6 Electrical Characteristics         5           6.7 Typical Characteristics         8           Detailed Description         12           7.1 Overview         12           7.2 Functional Block Diagram         12           7.3 Feature Description         12	Applications18.1 Application InformationDescription18.2 Typical ApplicationRevision History29 Power Supply RecommendationsPin Configuration and Functions39.1 Drive Current and Power RequirementsSpecifications310.1 Layout6.1 Absolute Maximum Ratings310.1 Layout Guidelines6.2 ESD Ratings410.2 Layout Example6.3 Recommended Operating Conditions410.3 Thermal Considerations6.4 Thermal Information411 Device and Documentation Support6.5 Power Dissipation Ratings411.1 Device Support6.6 Electrical Characteristics511.2 Documentation Support6.7 Typical Characteristics811.3 Related LinksDetailed Description1211.4 Trademarks7.1 Overview1211.5 Electrostatic Discharge Caution7.2 Functional Block Diagram1211.6 Glossary7.3 Feature Description1212 Mechanical, Packaging, and Orderable

#### 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

#### Changes from Revision B (April 2012) to Revision C

**Page** 

Added ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and Mechanical, Packaging, and Orderable Information section

# Changes from Revision A (November, 2009) to Revision B

Page


•	Changed minimum supply voltage from 4-V to 4.5-V in Features section	. 1
	Changed Figure 11, Rise Time vs Supply Voltage	
•	Changed Figure 12 Fall Time vs Supply Voltage	. 8
	Changed first paragraph of Operational Waveforms and Circuit Layout section	
•	Changed Figure 25, Current Sinking	16
	Changed Figure 26. Current Sourcing	

Submit Documentation Feedback

Copyright © 2007–2014, Texas Instruments Incorporated



# Pin Configuration and Functions



**Pin Functions** 

PI	PIN		DESCRIPTION
NAME	NO.	1/0	DESCRIPTION
ENBA	1	I	Enable for driver A with logic-compatible threshold and hysteresis. The driver output can be enabled and disabled with this pin. It is pulled up internally to $V_{DD}$ with a 100-k $\Omega$ resistor for active-high operation. When the device is disabled, the output state is low, regardless of the input state.
ENBB 8 I Enable for driver B with logic-compatible threshold and hysteresis. The driver output can be enabled and disabled with this pin. It is pulled up internally to VDD with a 100-kΩ resistor for active-high operation. The state when the device is disabled is low, regardless of the input state.			
GND	3	I	Common ground. This ground should be connected very closely to the source of the power MOSFET that the driver is driving.
INA	2	1	Input A. Input signal of the A driver, which has logic-compatible threshold and hysteresis. If not used, this input should be tied to either VDD or GND. Do not leave floating.
INB	Input B. Input signal of the A driver, which has logic-compatible threshold and hysteresis. If not used, this should be tied to either VDD or GND. Do not leave floating.		Input B. Input signal of the A driver, which has logic-compatible threshold and hysteresis. If not used, this input should be tied to either VDD or GND. Do not leave floating.
OUTA	7	0	Driver output A. The output stage is capable of providing 4-A drive current to the gate of a power MOSFET.
OUTB	5	0	Driver output B. The output stage is capable of providing 4-A drive current to the gate of a power MOSFET.
VDD	6	ı	Supply. Supply voltage and the power input connection for this device.

# 6 Specifications

# 6.1 Absolute Maximum Ratings<sup>(1)</sup> (2)

over operating free-air temperature range (unless otherwise noted)

				MN	MAX	UNIT
$V_{DD}$	Supply voltage			-0.3	16	V
		OUTA OUTB	DC, I <sub>OUT_DC</sub>		0.2	۸
	Output current	OUTA, OUTB	Pulsed (0.5 µs), I <sub>OUT_PULSED</sub>		4.5	Α
$V_{IN}$	Input voltage	INA, INB		<b>-</b> 5	6 or V <sub>DD</sub> + 0.3 <sup>(3)</sup>	V
	Enable voltage	ENBA, ENBB		-0.3	6 or V <sub>DD</sub> + 0.3 <sup>(3)</sup>	V
	Power dissipation at T <sub>A</sub> = 25°C	D package			650	mW
		DGN package			3	W
$T_J$	Junction operating temperature	re		-55	150	°C
	Lead temperature (soldering, 10 s)				300	°C
T <sub>stg</sub>	Storage temperature	-			150	°C

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Product Folder Links: UCC27423-EP UCC27424-EP

All voltages are with respect to GND. Currents are positive into and negative out of the specified terminal.

Whichever is larger



#### 6.2 ESD Ratings

				VALUE	UNIT
V <sub>(ESD)</sub> Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	±4000	\ <u>'</u>		
	<sup>(ESD)</sup> dischar	discharge	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins (2)	±1000	\ \ \

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

## 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
T <sub>J</sub> Operating junction temperature	-55	125	°C

#### 6.4 Thermal Information

		UCC27423-EP	UCC27424-EP	
	THERMAL METRIC <sup>(1)</sup>	D	DGN	UNIT
		8 1	PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	1	111.4	
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	7	70.8	
R <sub>θJB</sub> Junction-to-board thermal resistance		5	56.6	
ΨЈТ	Junction-to-top characterization parameter	1	0.9	
ΨЈВ	Junction-to-board characterization parameter	5	6.1	

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.

#### 6.5 Power Dissipation Ratings

PACKAGE	SUFFIX	R <sub>θJC</sub> (°C/W)	R <sub>eJA</sub> (°C/W)	POWER RATING (mW) T <sub>A</sub> = 70°C	DERATING FACTOR ABOVE 70°C (mW/°C)
MSOP-8 PowerPAD <sup>(1)</sup>	DGN	4.7	50 to 59	1370 <sup>(2)</sup>	17.1 <sup>(2)</sup>
SOIC 8	D	42	84 to 160	344 to 655 <sup>(3)(4)</sup>	6.25 to 11.9 <sup>(3)(4)</sup>

<sup>(1)</sup> The PowerPAD package is not directly connected to any leads of the package. However, it is electrically and thermally connected to the substrate, which is the ground of the device.

(2) 150°C operating junction temperature is used for power-rating calculations.

(4) 125°C operating junction temperature is used for power-rating calculation.

Submit Documentation Feedback

Copyright © 2007–2014, Texas Instruments Incorporated

<sup>(3)</sup> The range of values indicates the effect of PCB. These values are intended to give the system designer an indication of the best- and worst-case conditions. In general, the system designer should attempt to use larger traces on the PCB where possible, in order to spread the heat away from the device more effectively. For information on the PowerPAD package, refer to technical brief, PowerPad™ Thermally-Enhanced Package, SLMA002, and application brief, PowerPad™ Made Easy, SLMA004.



#### 6.6 Electrical Characteristics

 $V_{DD}$  = 4.5 V to 15 V,  $T_A$  = -55°C to 125°C,  $T_A$  =  $T_J$  (unless otherwise noted)

	DADAMETED		TEST CONDITIONS		UCC27423			UCC27424			LINUT
	PARAMETER		TEST CONDITIO	NS .	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
INPUT	(INA, INB)										
$V_{IN\_H}$	Logic 1 input threshold				2			2			V
$V_{IN\_L}$	Logic 0 input threshold						1			1	V
	Input current	0 V ≤ V <sub>IN</sub> ≤ V	$0 \text{ V} \leq \text{V}_{\text{IN}} \leq \text{V}_{\text{DD}}$		-10	0	10	-10	0	10	μΑ
OUTPU	JT (OUTA, OUTB)										
	Output current	$V_{DD} = 14 V^{(1)}$	) (2)			4			4		Α
$V_{OH}$	High-level output voltage	$V_{OH} = V_{DD}$ -	$-V_{OUT}$ , $I_{OUT} = -10$	mA		330	450		330	450	mV
$V_{OL}$	Low-level output level	I <sub>OUT</sub> = 10 m.	A			22	40		22	40	mV
	Output registance high	l – 10 m	nA, $V_{DD} = 14 V^{(3)}$	$T_A = 25^{\circ}C$	25	30	35	25	30	35	Ω
	Output resistance high	10UT = -101	IIA, VDD = 14 V	T <sub>A</sub> = full range	14		45	18		45	
	Output resistance low	 	nA, $V_{DD} = 14 V^{(3)}$	$T_A = 25^{\circ}C$	1.9	2.2	2.5	1.9	2.2	2.5	Ω
	Output resistance low 1 <sub>OUT</sub> = -10 II		III., VDD — 14 V 17	T <sub>A</sub> = full range	0.95		4	1.2		4	77
	Latch-up protection <sup>(1)</sup>				500			500			mA
SWITC	HING TIME										
$t_R$	Rise time (OUTA, OUTB)	$C_{LOAD} = 1.8$				20	40		20	40	ns
$t_{F}$	Fall time (OUTA, OUTB)	$C_{LOAD} = 1.8$	nF <sup>(1)</sup>			15	40		15	40	ns
t <sub>D1</sub>	Delay, IN rising (IN to OUT)	$C_{LOAD} = 1.8$	$C_{LOAD} = 1.8 \text{ nF}^{(1)}$			35	55		35	50	ns
t <sub>D2</sub>	Delay, IN falling (IN to OUT)	C <sub>LOAD</sub> = 1.8	nF <sup>(1)</sup>			25	60		25	45	ns
ENABI	E (ENBA, ENBB)										
$V_{IN\_H}$	High-level input voltage	Low-to-high t	transition		1.7	2.4	3.1	1.7	2.4	2.9	V
$V_{IN\_L}$	Low-level input voltage	High-to-low t	ransition		1.1	1.8	2.3	1.1	1.8	2.2	V
	Hysteresis				0.13	0.55	1.1	.10	0.55	0.9	V
R <sub>ENBL</sub>	Enable impedance	V <sub>DD</sub> = 14 V,	ENBL = GND		75	100	160	75	100	140	kΩ
t <sub>D3</sub>	Propagation delay time <sup>(4)</sup>	$C_{LOAD} = 1.8$	nF <sup>(1)</sup>			30	60		30	60	ns
t <sub>D4</sub>	Propagation delay time <sup>(4)</sup>	$C_{LOAD} = 1.8$	nF <sup>(1)</sup>			100	150		100	150	ns
OVER	ALL										
	Static operating current	INIA - 0.1/	INB = 0 V			900	1350		300	450	
	Static operating current, V <sub>DD</sub> = 15 V,	INA = 0 V	INB = High			750	1100		750	1100	
	ENBA =	INA = HIGH	INB = 0 V			750	1100		750	1100	
	ENBB = 15 V	IIVA = HIGH	INB = High			600	900		1200	1800	
I <sub>DD</sub>	Disabled	INA = 0 V	INB = 0 V			300	450		300	450	μA
	Disabled, V <sub>DD</sub> = 15 V,	IINA = U V	INA = High			450	700		450	700	
	ENBA =	INIA LUCCI	INB = 0 V			450	700		450	700	
	ENBB = 0 V	INA = HIGH				600	900		600	900	1

<sup>(1)</sup> Specified by design. Not tested in production.


See Figure 2.

Product Folder Links: UCC27423-EP UCC27424-EP

The pullup/pulldown circuits of the driver are bipolar and MOSFET transistors in parallel. The pulsed output current rating is the combined current from the bipolar and MOSFET transistors.


The pullup/pulldown circuits of the driver are bipolar and MOSFET transistors in parallel. The output resistance is the R<sub>DS(ON)</sub> of the MOSFET transistor when the voltage on the driver output is less than the saturation voltage of the bipolar transistor.



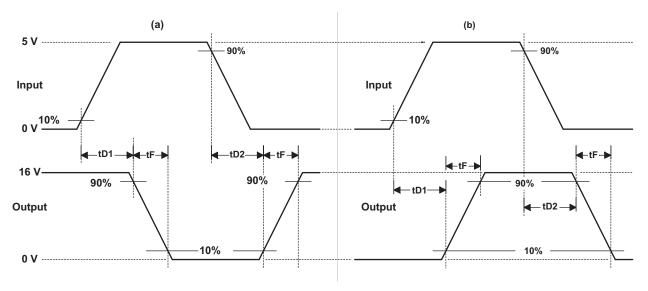

A. The 10% and 90% thresholds depict the dynamics of the bipolar output devices that dominate the power MOSFET transition through the Miller regions of operation.


Figure 1. Switching Waveforms for (a) Inverting Driver and (b) Noninverting Driver



A. The 10% and 90% thresholds depict the dynamics of the bipolar output devices that dominate the power MOSFET transition through the Miller regions of operation.

Figure 2. Switching Waveform for Enable to Output



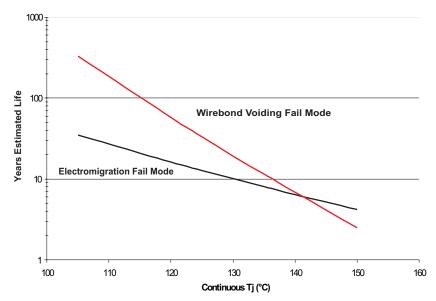


- A. See data sheet for absolute maximum and minimum recommended operating conditions.
- B. Silicon operating life design goal is 10 years at 105°C junction temperature (does not include package interconnect life).
- C. Enhanced plastic product disclaimer applies

Figure 3. UCC27424MDGNREP Operating Life Derating Chart





## 6.7 Typical Characteristics



100 80 10 nF 4.7 nF 40 40 40 40 2.2 nF 470 pF 0 500 K 1 M 1.5 M 2 M f, Frequency (Hz)

Figure 4. Supply Current vs Frequency ( $V_{DD} = 4.5 \text{ V}$ )









Figure 6. Supply Current vs Frequency (V<sub>DD</sub> = 12 V)

Figure 7. Supply Current vs Frequency (V<sub>DD</sub> = 15 V)







Figure 8. Supply Current vs Supply Voltage  $(C_{LOAD} = 2.2 \text{ nF})$ 

Figure 9. Supply Current vs Supply Voltage  $(C_{LOAD} = 4.7 \text{ nF})$ 



# **Typical Characteristics (continued)**







Figure 10. Supply Current vs Supply Voltage









Figure 12. Fall Time vs Supply Voltage

Figure 13. Enable Threshold and Hysteresis vs Temperature






Figure 14. Enable Resistance vs Temperature

Figure 15. Output Behavior vs Supply Voltage (Inverting)

# TEXAS INSTRUMENTS

# **Typical Characteristics (continued)**




Figure 16. Output Behavior vs Supply Voltage (Inverting)




Figure 17. Output Behavior vs  $V_{DD}$  (Inverting)




Figure 18. Output Behavior vs V<sub>DD</sub> (Inverting)




Figure 19. Output Behavior vs V<sub>DD</sub> (Noninverting)




Figure 20. Output Behavior vs V<sub>DD</sub> (Noninverting)





Figure 21. Output Behavior vs V<sub>DD</sub> (Noninverting)



# **Typical Characteristics (continued)**



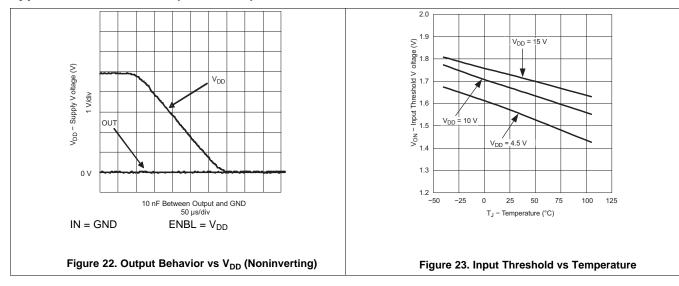


# 7 Detailed Description

#### 7.1 Overview

High-frequency power supplies often require high-speed, high-current drivers such as the UCC2742x. A leading application of the UCC2742x provides a high-power buffer stage between the pulse-duration modulation (PWM) output of the control IC and the gates of the primary power MOSFET or insulated gate bipolar transistor (IGBT) switching devices. In other cases, the driver IC is used to drive the power-device gates through a drive transformer. Synchronous rectification supplies also have the need to simultaneously drive multiple devices, which can present an extremely-large load to the control circuitry.

Driver ICs are used when it is not feasible to have the primary PWM regulator IC directly drive the switching devices, for one or more reasons. The PWM IC may not have the brute drive capability required for the intended switching MOSFET, limiting the switching performance in the application. In other cases, there may be a desire to minimize the effect of high-frequency switching noise by placing the high-current driver physically close to the load. Also, newer ICs that target the highest operating frequencies may not incorporate onboard gate drivers at all. Their PWM outputs are intended to drive only the high-impedance input to drivers such as the UCC2742x. Finally, the control IC may be under thermal stress due to power dissipation, and an external driver can help by moving the heat from the controller to an external package.

#### 7.2 Functional Block Diagram

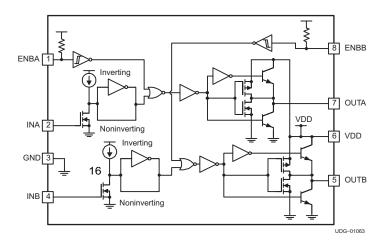

#### 7.3 Feature Description

#### 7.3.1 Input Stage

The input thresholds have a 3.3-V logic sensitivity over the full range of  $V_{DD}$  voltages. However, they are equally compatible with 0 to  $V_{DD}$  signals. The inputs of the UCC2742x are designed to withstand 500-mA reverse current without either damage to the IC or logic upset. The input stage of each driver should be driven by a signal with a short rise or fall time. This condition is satisfied in typical power-supply applications, where the input signals are provided by a PWM controller or logic gates with fast transition times (<200 ns). The input stages to the drivers function as a digital gate, and they are not intended for applications where a slow-changing input voltage is used to generate a switching output when the logic threshold of the input section is reached. While this may not be harmful to the driver, the output of the driver may switch repeatedly at a high frequency.

Users should not attempt to shape the input signals to the driver in an effort to slow down (or delay) the signal at the output. If limiting the rise or fall times to the power device is desired, limit the rise or fall times to the power device. Then, the user can add an external resistance between the output of the driver and the load device, which is generally a power MOSFET gate. The external resistor also may help remove power dissipation from the device package, as discussed in *Thermal Considerations*.



#### Feature Description (continued)

#### 7.3.2 Output Stage

Inverting outputs of the UCC27423 are intended to drive external P-channel MOSFETs. Noninverting outputs of the UCC27424 are intended to drive external N-channel MOSFETs.

Each output stage is capable of supplying ±4-A peak current pulses and swings to both VDD and GND. The pullup/ pulldown circuits of the driver are constructed of bipolar and MOSFET transistors in parallel. The peak output current rating is the combined current from the bipolar and MOSFET transistors. The output resistance is the R<sub>DS(on)</sub> of the MOSFET transistor when the voltage on the driver output is less than the saturation voltage of the bipolar transistor. Each output stage also provides a very-low impedance to overshoot and undershoot, due to the body diode of the external MOSFET. This means that, in many cases, external Schottky clamp diodes are not required.

The UCC27423 family delivers the 4-A gate drive where it is most needed during the MOSFET switching transition, at the Miller plateau region, providing efficiency gains. A unique bipolar and MOSFET hybrid output stage in parallel also allows efficient current sourcing at low supply voltages.

#### 7.3.3 Operational Waveforms and Circuit Layout

Sink and source currents of the driver depend on VDD value and the output capacitive load. The larger the VDD value, the higher the current capability. Also, the larger the capacitive load, the higher the current and source capabilities.

See Figure 28 for pulse response.

Trace resistance and inductance, including wires and cables for testing, slow down the rise and fall times of the outputs. Thus, the driver's current capabilities are reduced. See Layout Guidelines for more information on how to achieve higher current results.

In a power driver operating at high frequency, it is a significant challenge to get clean waveforms without much overshoot/undershoot and ringing. The low output impedance of these drivers produces waveforms with high di/dt. This tends to induce ringing in the parasitic inductances. See *Layout Guidelines* for more information.

#### 7.3.4 VDD

Although quiescent VDD current is very low, total supply current will be higher, depending on OUTA and OUTB current and the programmed oscillator frequency. Total VDD current is the sum of quiescent VDD current and the average OUT current. Knowing the operating frequency and the MOSFET gate charge (Q<sub>0</sub>), calculate the average OUT current with Equation 1.

$$I_{OUT} = Q_g \times f$$

where

(1)

For the best high-speed circuit performance, TI recommends two V<sub>DD</sub> bypass capacitors to prevent noise problems. TI highly recommends the use of surface-mount components. A 0.1-µF ceramic capacitor should be located closest to the VDD-to-ground connection. In addition, a larger capacitor (such as 1 µF) with relatively-low ESR should be connected in parallel, to help deliver the high-current peaks to the load. The parallel combination of capacitors should present a low-impedance characteristic for the expected current levels in the driver application.

# **7.3.5** Enable

The UCC2742x provides dual-enable inputs for improved control of each driver channel operation. The inputs incorporate logic-compatible thresholds with hysteresis. They are pulled internally up to  $V_{DD}$  with a 100-k $\Omega$ resistor for active-high operation. When ENBA and ENBB are driven high, the drivers are enabled, and when ENBA and ENBB are low, the drivers are disabled. The default state of the enable pin is to enable the driver, and therefore, can be left open for standard operation. When the drivers are disabled, the output states are low, regardless of the input state. See Table 1 for a truth table of the operation using enable logic.

Enable inputs are compatible with both logic signals and slow-changing analog signals. They can be driven directly or a power-up delay can be programmed with a capacitor between ENBA, ENBB, and AGND. ENBA and ENBB control input A and input B, respectively.



## 7.4 Device Functional Modes

**Table 1. Pin Inputs and Outputs** 

		INPUTS (VI	N_L, VIN_H)	OUTI	PUTS
ENBA	ENBB	INA	INA INB		OUTB
Н	Н	L	L	L	L
Н	Н	L	Н	L	Н
Н	Н	Н	L	Н	L
Н	Н	Н	Н	Н	Н
L	L	X	X	L	L



# 8 Application and Implementation

#### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## 8.1 Application Information

UCC2742x-EP is designed for high-speed and high-operating reliability. UCC2742x family of gate driver is capable of delivering 4 A into capacitive load. Inverting outputs of UCC27423 are intended to drive external P-Channel MOSFETs and noninverting outputs of UCC27424 are intended to drive external N-channel MOSFETs.

#### 8.2 Typical Application

Figure 24 shows typical application of UCC2742x device when used as a gate driver for the power MOSFET in boost converter application.

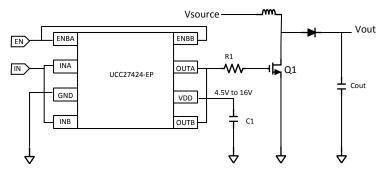


Figure 24. Typical Application Schematic

#### 8.2.1 Design Requirements

When selecting the proper gate driver device for an end application, some design considerations must be evaluated first in order to make the most appropriate selection. Among these considerations are input-to-output configuration, input threshold type, bias supply voltage, peak source and sink current, availability of independent enable and disable function, propagation delay, power dissipation and package type.

 Parameters
 Value

 Supply voltage
 4.5 to 15 V

 Output source current
 4 A

 Output sink current
 4 A

 Propagation delay
 25 ns

 Rise time
 20 ns

 Fall time
 15 ns

**Table 2. Design Parameters** 

# 8.2.2 Detailed Design Procedure

#### Propagation Delay:

The acceptable propagation delay from the gate driver is dependent on the switching frequency at which it is used and the acceptable level of pulse distortion to the system. The UCC2742x-EP device features 25 ns (typical) propagation delay which ensures very little pulse distortion and allows operation at high frequencies.

Product Folder Links: UCC27423-EP UCC27424-EP



#### 8.2.2.1 Source/Sink Capabilities During Miller Plateau

Large power MOSFETs present a large load to the control circuitry. Proper drive is required for efficient, reliable operation. The UCC2742x drivers are optimized to provide maximum drive to a power MOSFET during the Miller plateau region of the switching transition. This interval occurs while the drain voltage is swinging between the voltage levels dictated by the power topology, requiring the charging/discharging of the drain-gate capacitance with current supplied or removed by the driver device. [1]

Two circuits are used to test the current capabilities of the UCC27423 driver. In each case, external circuitry is added to clamp the output near 5 V while the IC is sinking or sourcing current. An input pulse of 250 ns is applied at a frequency of 1 kHz in the proper polarity for the respective test. Each test showed a transient period where the current peaked up and then settled down to a steady-state value. The noted current measurements are made 200 ns after the input pulse is applied, following the initial transient.

The first circuit in Figure 25 is used to verify the current sink capability when the output of the driver is clamped around 5 V (a typical value of gate-source voltage during the Miller plateau region). The UCC27423 is found to sink 4.5 A at  $V_{DD}$  = 15 V and 4.28 A at  $V_{DD}$  = 12 V.

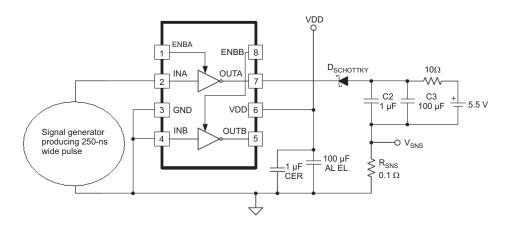


Figure 25. Current Sinking

The circuit shown in Figure 26 is used to test the current source capability, with the output clamped to around 5 V with a string of Zener diodes. The UCC27423 is found to source 4.8 A at  $V_{DD}$  = 15 V and 3.7 A at  $V_{DD}$  = 12 V.

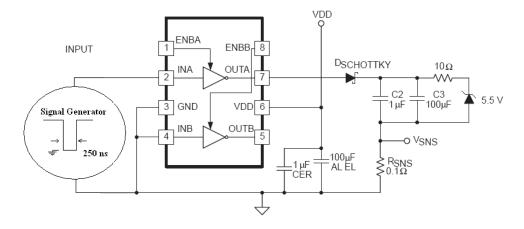


Figure 26. Current Sourcing

Note that the current sink capability is slightly stronger than the current source capability at lower  $V_{DD}$ . This is due to the differences in the structure of the bipolar-MOSFET power output section, where the current source is a P-channel MOSFET, and the current sink has an N-channel MOSFET.

Submit Documentation Feedback

Copyright © 2007–2014, Texas Instruments Incorporated



In most applications, it is advantageous that the turn-off capability of a driver is stronger than the turn-on capability. This helps ensure that the MOSFET is held OFF during common power-supply transients, which may turn the device back ON.

#### 8.2.2.2 Parallel Outputs

The A and B drivers may be combined into a single driver by connecting the INA/INB inputs together and the OUTA/OUTB outputs together. Then, a single signal can control the paralleled combination as shown in Figure 27.

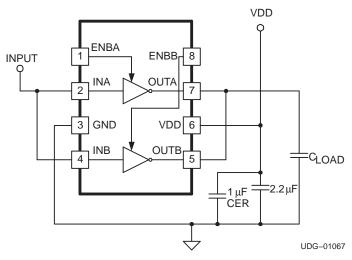


Figure 27. Parallel Outputs

#### 8.2.3 Application Curve




Figure 28. Pulse Response

(2)



# 9 Power Supply Recommendations

## 9.1 Drive Current and Power Requirements

The UCC2742x is capable of delivering 4 A of current to a MOSFET gate for a period of several-hundred nanoseconds. High-peak current is required to turn the device ON quickly. To turn the device OFF, the driver is required to sink a similar amount of current to ground. This repeats at the operating frequency of the power device. This discussion uses a MOSFET because it is the most common type of switching device used in high-frequency power-conversion equipment.

References (1) and (2) discuss the current required to drive a power MOSFET and other capacitive-input switching devices. Reference (2) includes information on the previous generation of bipolar IC gate drivers.

When a driver IC is tested with a discrete, capacitive load, it is a fairly simple matter to calculate the power that is required from the bias supply. The energy that must be transferred from the bias supply to charge the capacitor is given by Equation 2.

$$E = \frac{1}{2}CV^2$$

where

- C is the load capacitor
- V is the bias voltage feeding the driver

An equal amount of energy is transferred to ground when the capacitor is discharged. This leads to a power loss, given by Equation 3.

$$P = 2 \times \frac{1}{2}CV^2 f$$

where

This power is dissipated in the resistive elements of the circuit. Thus, with no external resistor between the driver and gate, this power is dissipated inside the driver. Half of the total power is dissipated when the capacitor is charged, and the other half is dissipated when the capacitor is discharged. An actual example using the conditions of the previous gate drive waveform should help clarify this.

With  $V_{DD} = 12 \text{ V}$ ,  $C_{LOAD} = 10 \text{ nF}$ , and f = 300 kHz, the power loss can be calculated as in Equation 4.

$$P = 10 \text{ nF} \times (12)^2 \times (300 \text{ kHz}) = 0.432 \text{ W}$$
(4)

With a 12-V supply, this equates to a current of:

$$I = \frac{P}{V} = \frac{0.432 \text{ W}}{12 \text{ V}} = 0.036 \text{ A}$$
 (5)

The actual current measured from the supply was 0.037 A, and is very close to the predicted value. But, the  $I_{DD}$  current that is due to the IC internal consumption should be considered. With no load, the IC current draw is 0.0027 A. Under this condition, the output rise and fall times are faster than with a load. This could lead to an almost insignificant, yet measurable, current due to cross conduction in the output stages of the driver. However, these small current differences are buried in the high-frequency switching spikes and are beyond the measurement capabilities of a basic laboratory setup. The measured current with a 10-nF load is reasonably close to that which is predicted.

The switching load presented by a power MOSFET can be converted to an equivalent capacitance by examining the gate charge required to switch the device. This gate charge includes the effects of the input capacitance, plus the added charge needed to swing the drain of the device between the ON and OFF states. Most manufacturers provide specifications that provide the typical and maximum gate charge, in nC, to switch the device under specified conditions. Using the gate charge,  $Q_g$ , one can determine the power that must be dissipated when charging a capacitor. This is done by using the equivalence,  $Q_g = \text{CeffV}$ , to provide the following equation for power.

$$P = C \times V^2 \times f = Q_0 \times f \tag{6}$$

Equation 6 allows a power designer to calculate the bias power required to drive a specific MOSFET gate at a specific bias voltage.



# 10 Layout

#### 10.1 Layout Guidelines

Circuit layout is extremely critical in gate drive circuit. As shows in graphics below there might be considerable distance between the PWM controller and the MOSFET. This distance introduces parasitics inductance due to the loop formed by the gate drive and ground return trace, which can slow down the switching speed and can cause ringing at the gate drive waveform. To reduce the inductance linked to the gate drive connection, a wider PCB trace is desirable. Gate driver incorporates short propagation delays and powerful output stage capable of delivering large current peaks with fast rise and fall times at the gate of the power switch to facilitate voltage transition very quickly. Very high peak current result in high di/dt which can cause unacceptable ringing if the trace lengths and impedances are not well controlled.

- Locate the device driver as close as possible to power device in order to minimize the length of high-current traces between the output pins and the gate of the power device.
- Locate the VDD bypass capacitors between VDD and GND as close as possible to the driver with minimal trace length to improve the noise filtering. These capacitors support high-peak current being drawn from VDD during turnon of power MOSFET. The use of low inductance SMD components such as chip resistors and chip capacitors is highly recommended.
- The turn-on and turn-off current loop paths (driver device, power MOSFET and VDD bypass capacitor) should be minimized as much as possible in order to keep the stray inductance to a minimum. High di/dt is established in these loops at two instances - during turn-on and turn-off transients, which will induce significant voltage transients on the output pin of the driver device and gate of the power switch.
- Wherever possible parallel the source and return traces, such as output and input signals.
- Star-point grounding is a good way to minimize noise coupling from one current loop to another. The GND of the driver should be connected to the other circuit nodes such as source of power switch and ground of PWM controller at one point. The connected paths should be as short as possible to reduce inductance and be as wide as possible to reduce resistance.
- Use a ground plane to provide noise shielding. Fast rise and fall times at OUT may corrupt the input signals during transition. The ground plane must not be a conduction path for any current loop. Instead the ground plane must be connected to the star-point with one single trace to establish the ground potential. In addition to noise shielding, the ground plane can help in power dissipation as well.

#### 10.2 Layout Example




Figure 29. Noise Shielding Example Layout




Figure 30. PCB Layout Example



#### 10.3 Thermal Considerations

The useful range of a driver is greatly affected by the drive power requirements of the load and the thermal characteristics of the IC package. For a power driver to be useful over a particular temperature range, the package must allow for the efficient removal of the heat produced, while keeping the junction temperature within rated limits.

As shown in *Power Dissipation Ratings*, the SOIC-8 (D) package has a power rating of around 0.5 W with  $T_A = 70^{\circ}$ C. This limit is imposed in conjunction with the power derating factor also given in the table. Note that the power dissipation in the earlier example is 0.432 W with a 10-nF load, 12 VDD, switched at 300 kHz. Thus, only one load of this size could be driven using the D package, even if the two onboard drivers are paralleled. The difficulties with heat removal limit the drive available in the older packages.

The MSOP-8 PowerPAD (DGN) package significantly relieves this concern by offering an effective means of removing the heat from the semiconductor junction. As shown in reference (3), the PowerPAD packages offer a leadframe die pad that is exposed at the base of the package. This pad is soldered to the copper on the PCB directly underneath the IC package, reducing the  $R_{\theta JC}$  to  $4.7^{\circ}$ C/W. Data is presented in reference (3) to show that the power dissipation can be quadrupled in the PowerPAD package configuration when compared to the standard packages. The PCB must be designed with thermal lands and thermal vias to complete the heat-removal subsystem, as summarized in reference (4). This allows a significant improvement in heatsinking over that available in the D package and is shown to more than double the power capability of the D package. Note that the PowerPAD package is not directly connected to any leads of the package. However, it is electrically and thermally connected to the substrate, which is the ground of the device.



# 11 Device and Documentation Support

#### 11.1 Device Support

#### 11.1.1 Development Support

#### **Table 3. Related Products**

PRODUCT	DESCRIPTION	PACKAGES
UCC37324	Dual 4-A low-side drivers	MSOP-8 PowerPAD, SOIC-8, PDIP-8

#### 11.2 Documentation Support

#### 11.2.1 Related Documentation

- (1) Power Supply Seminar SEM-1400 Topic 2: Design and Application Guide For High-Speed MOSFET Gate Drive Circuits, by Laszlo Balogh, SLUP133.
- (2) Application note, Practical Considerations in High-Performance MOSFET, IGBT, and MCT Gate Drive Circuits, by Bill Andreycak, SLUA105.
- (3) Technical brief, PowerPad™ Thermally-Enhanced Package, SLMA002.
- (4) Application brief, PowerPad™ Made Easy, SLMA004.

#### 11.3 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

#### **Table 4. Related Links**

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY	
UCC27423-EP	Click here	Click here	Click here	Click here	Click here	
UCC27424-EP	Click here	Click here	Click here	Click here	Click here	

#### 11.4 Trademarks

PowerPAD is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

#### 11.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

# 11.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

# 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2007–2014, Texas Instruments Incorporated

www.ti.com 10-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
UCC27423MDREP	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	27423EP
UCC27423MDREP.A	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	27423EP
UCC27424MDGNREP	Active	Production	HVSSOP (DGN)   8	2500   LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-55 to 125	424E
UCC27424MDGNREP.A	Active	Production	HVSSOP (DGN)   8	2500   LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-55 to 125	424E
V62/07624-01XE	Active	Production	HVSSOP (DGN)   8	2500   LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-55 to 125	424E
V62/07624-02YE	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	27423EP

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

#### OTHER QUALIFIED VERSIONS OF UCC27423-EP, UCC27424-EP:

Catalog : UCC27423, UCC27424

• Automotive : UCC27423-Q1, UCC27424-Q1

NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 18-Jul-2025

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
UCC27423MDREP	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
UCC27424MDGNREP	HVSSOP	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 18-Jul-2025



## \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
UCC27423MDREP	SOIC	D	8	2500	353.0	353.0	32.0	
UCC27424MDGNREP	HVSSOP	DGN	8	2500	350.0	350.0	43.0	

3 x 3, 0.65 mm pitch

SMALL OUTLINE PACKAGE

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



INSTRUMENTS www.ti.com

# PowerPAD<sup>™</sup> HVSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



#### NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 11. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE INTEGRATED CIRCUIT



#### NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025