



These schematics are provided for reference only. For any designs based on these schematics always contact National Semiconductor Corporation BEFORE initiating PCB manufacturing and ask for your design to be reviewed. Copyright (c) 2005 National Semiconductor Corporation. All Rights Reserved. Unpublished rights reserved under the copyright laws of the United States of America, other countries and international treaties. These schematics are provided without fee. Permission to use, copy, store, modify, disclose, transmit or distribute the schematics is granted, provided that this copyright notice must appear in any copy, modification, disclosure, transmission or distribution of the schematics. National Semiconductor Corporation retains all ownership, copyright, trade secret and proprietary rights in the schematics. THESE SCHEMATICS HAVE BEEN PROVIDED "AS IS", WITHOUT EXPRESS OR IMPLIED WARRANTY INCLUDING, WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR USE AND NON-INFRINGEMENT.

Revisions note:


- Rev 1.0: Initial release.
- Rev 1.1:
- Replaced D2, D3, D4, D5, D6, D7 with different LEDs
 - Removed D1 and R62
 - Changed R231 to 100 ohms

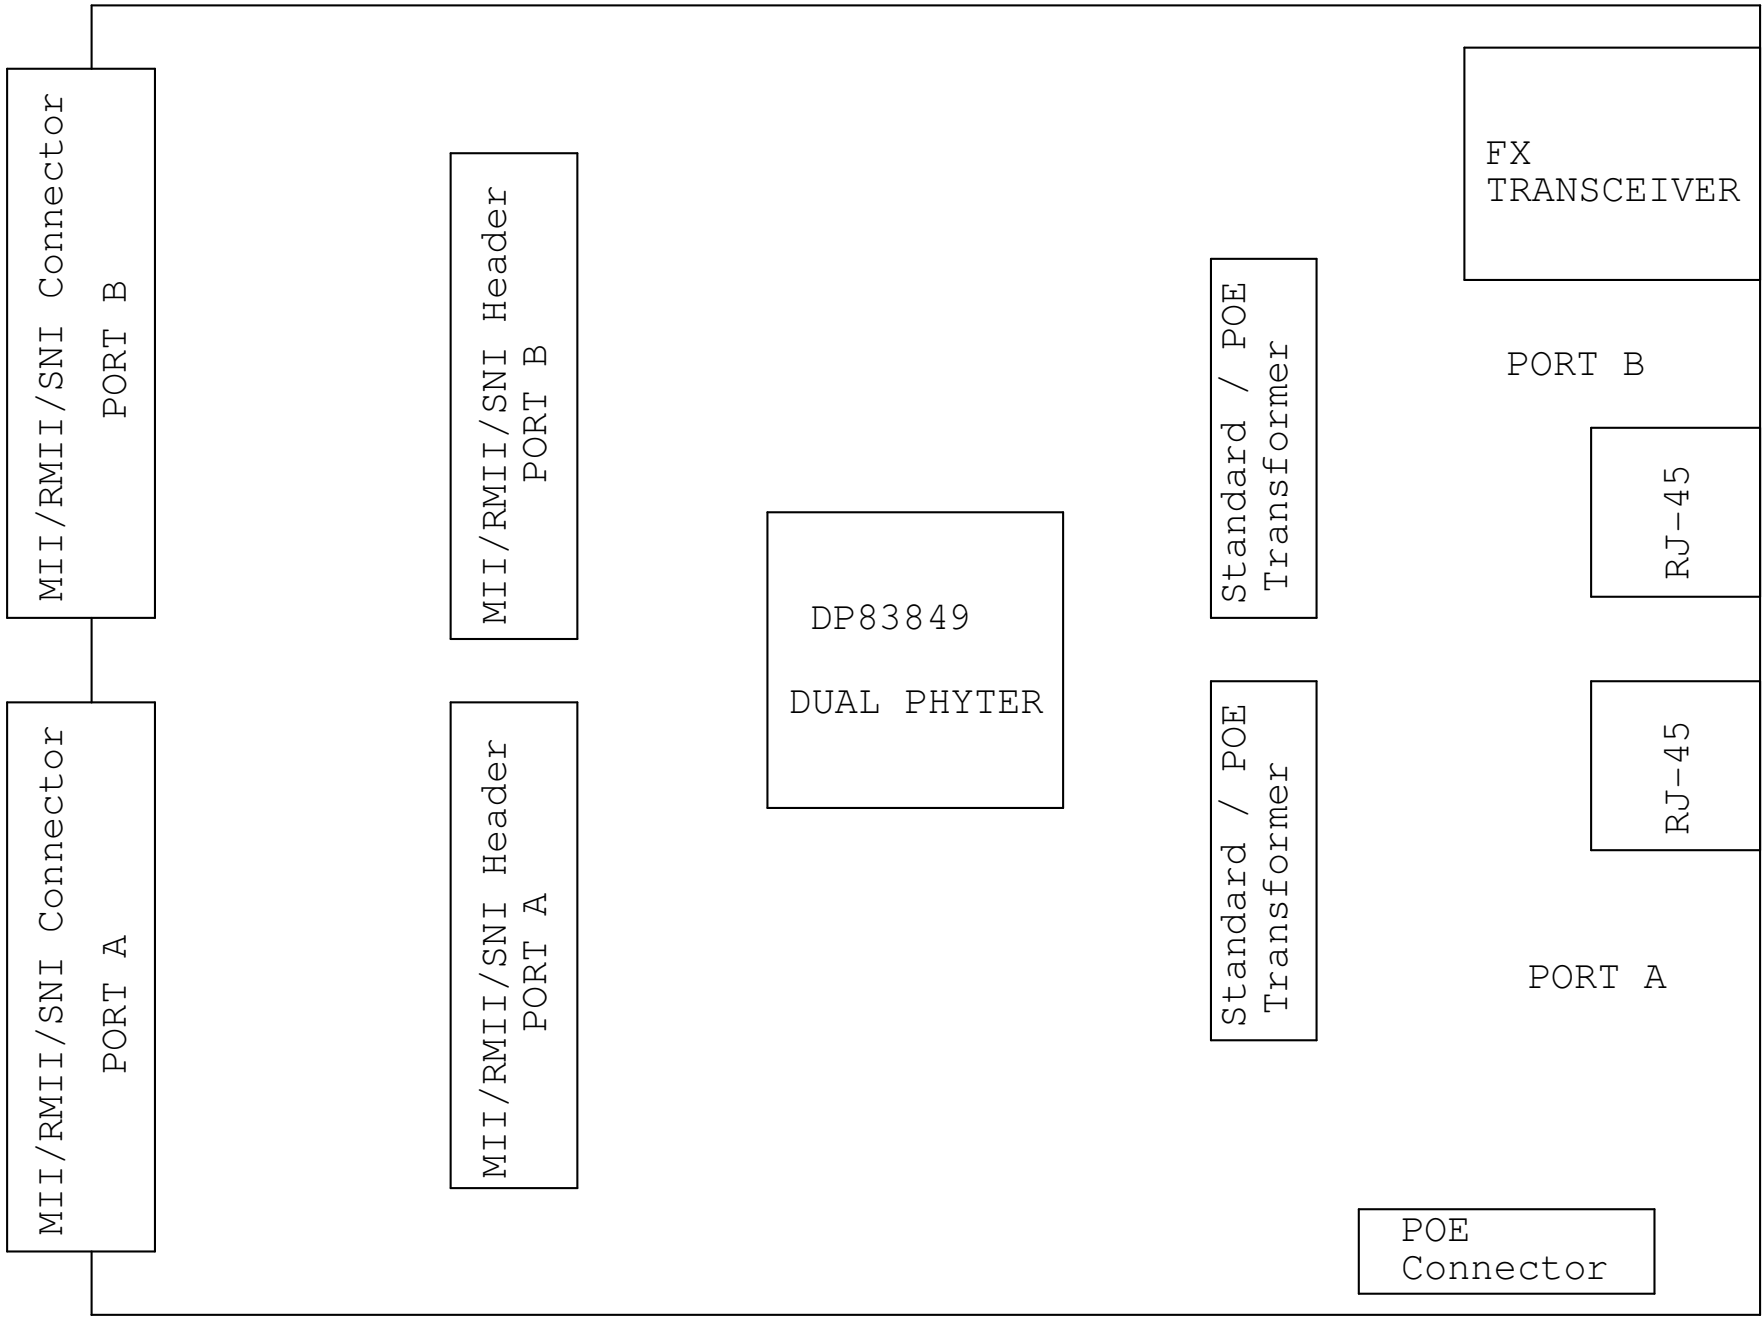

Title		
DP83849 DUAL PHYTER DEMO II (Stump Jumper) - Cover		
Size B	Document Number 870012704-100	Rev 1.1
Date:	Thursday, December 15, 2005	Sheet 1 of 8

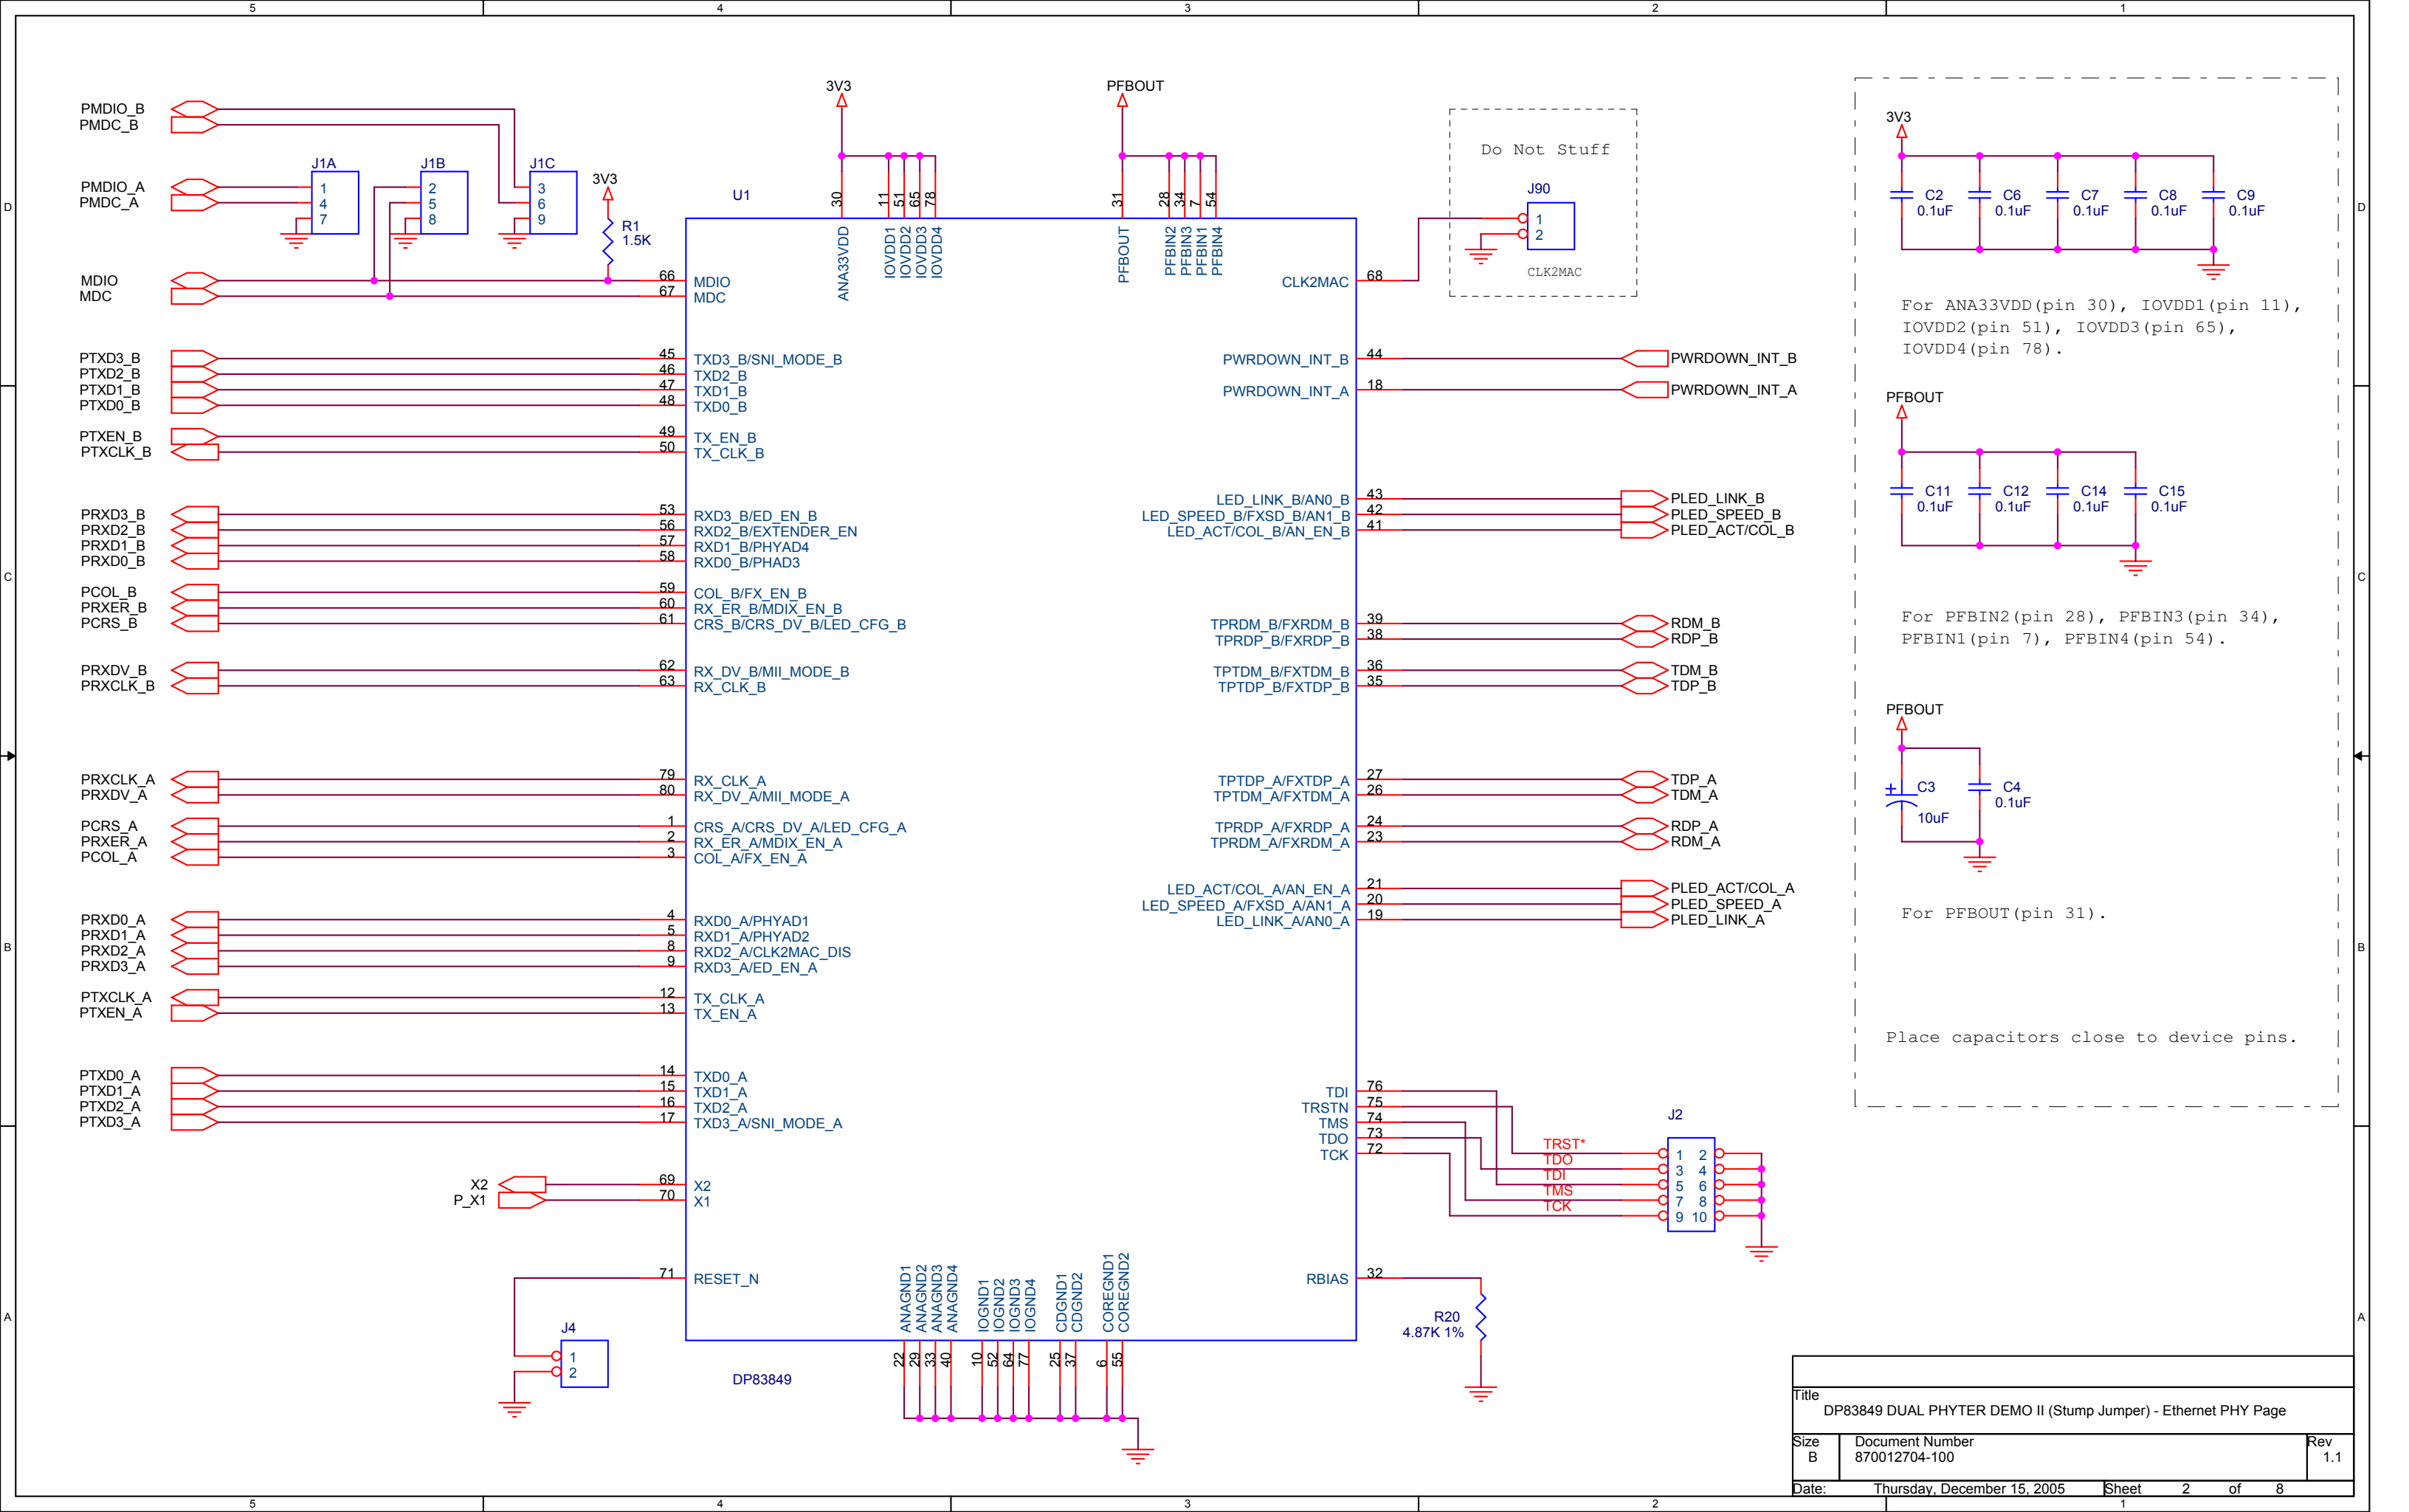

NOTE:
If using POE switch, use port A.
The operation also requires baby board (to that effect).

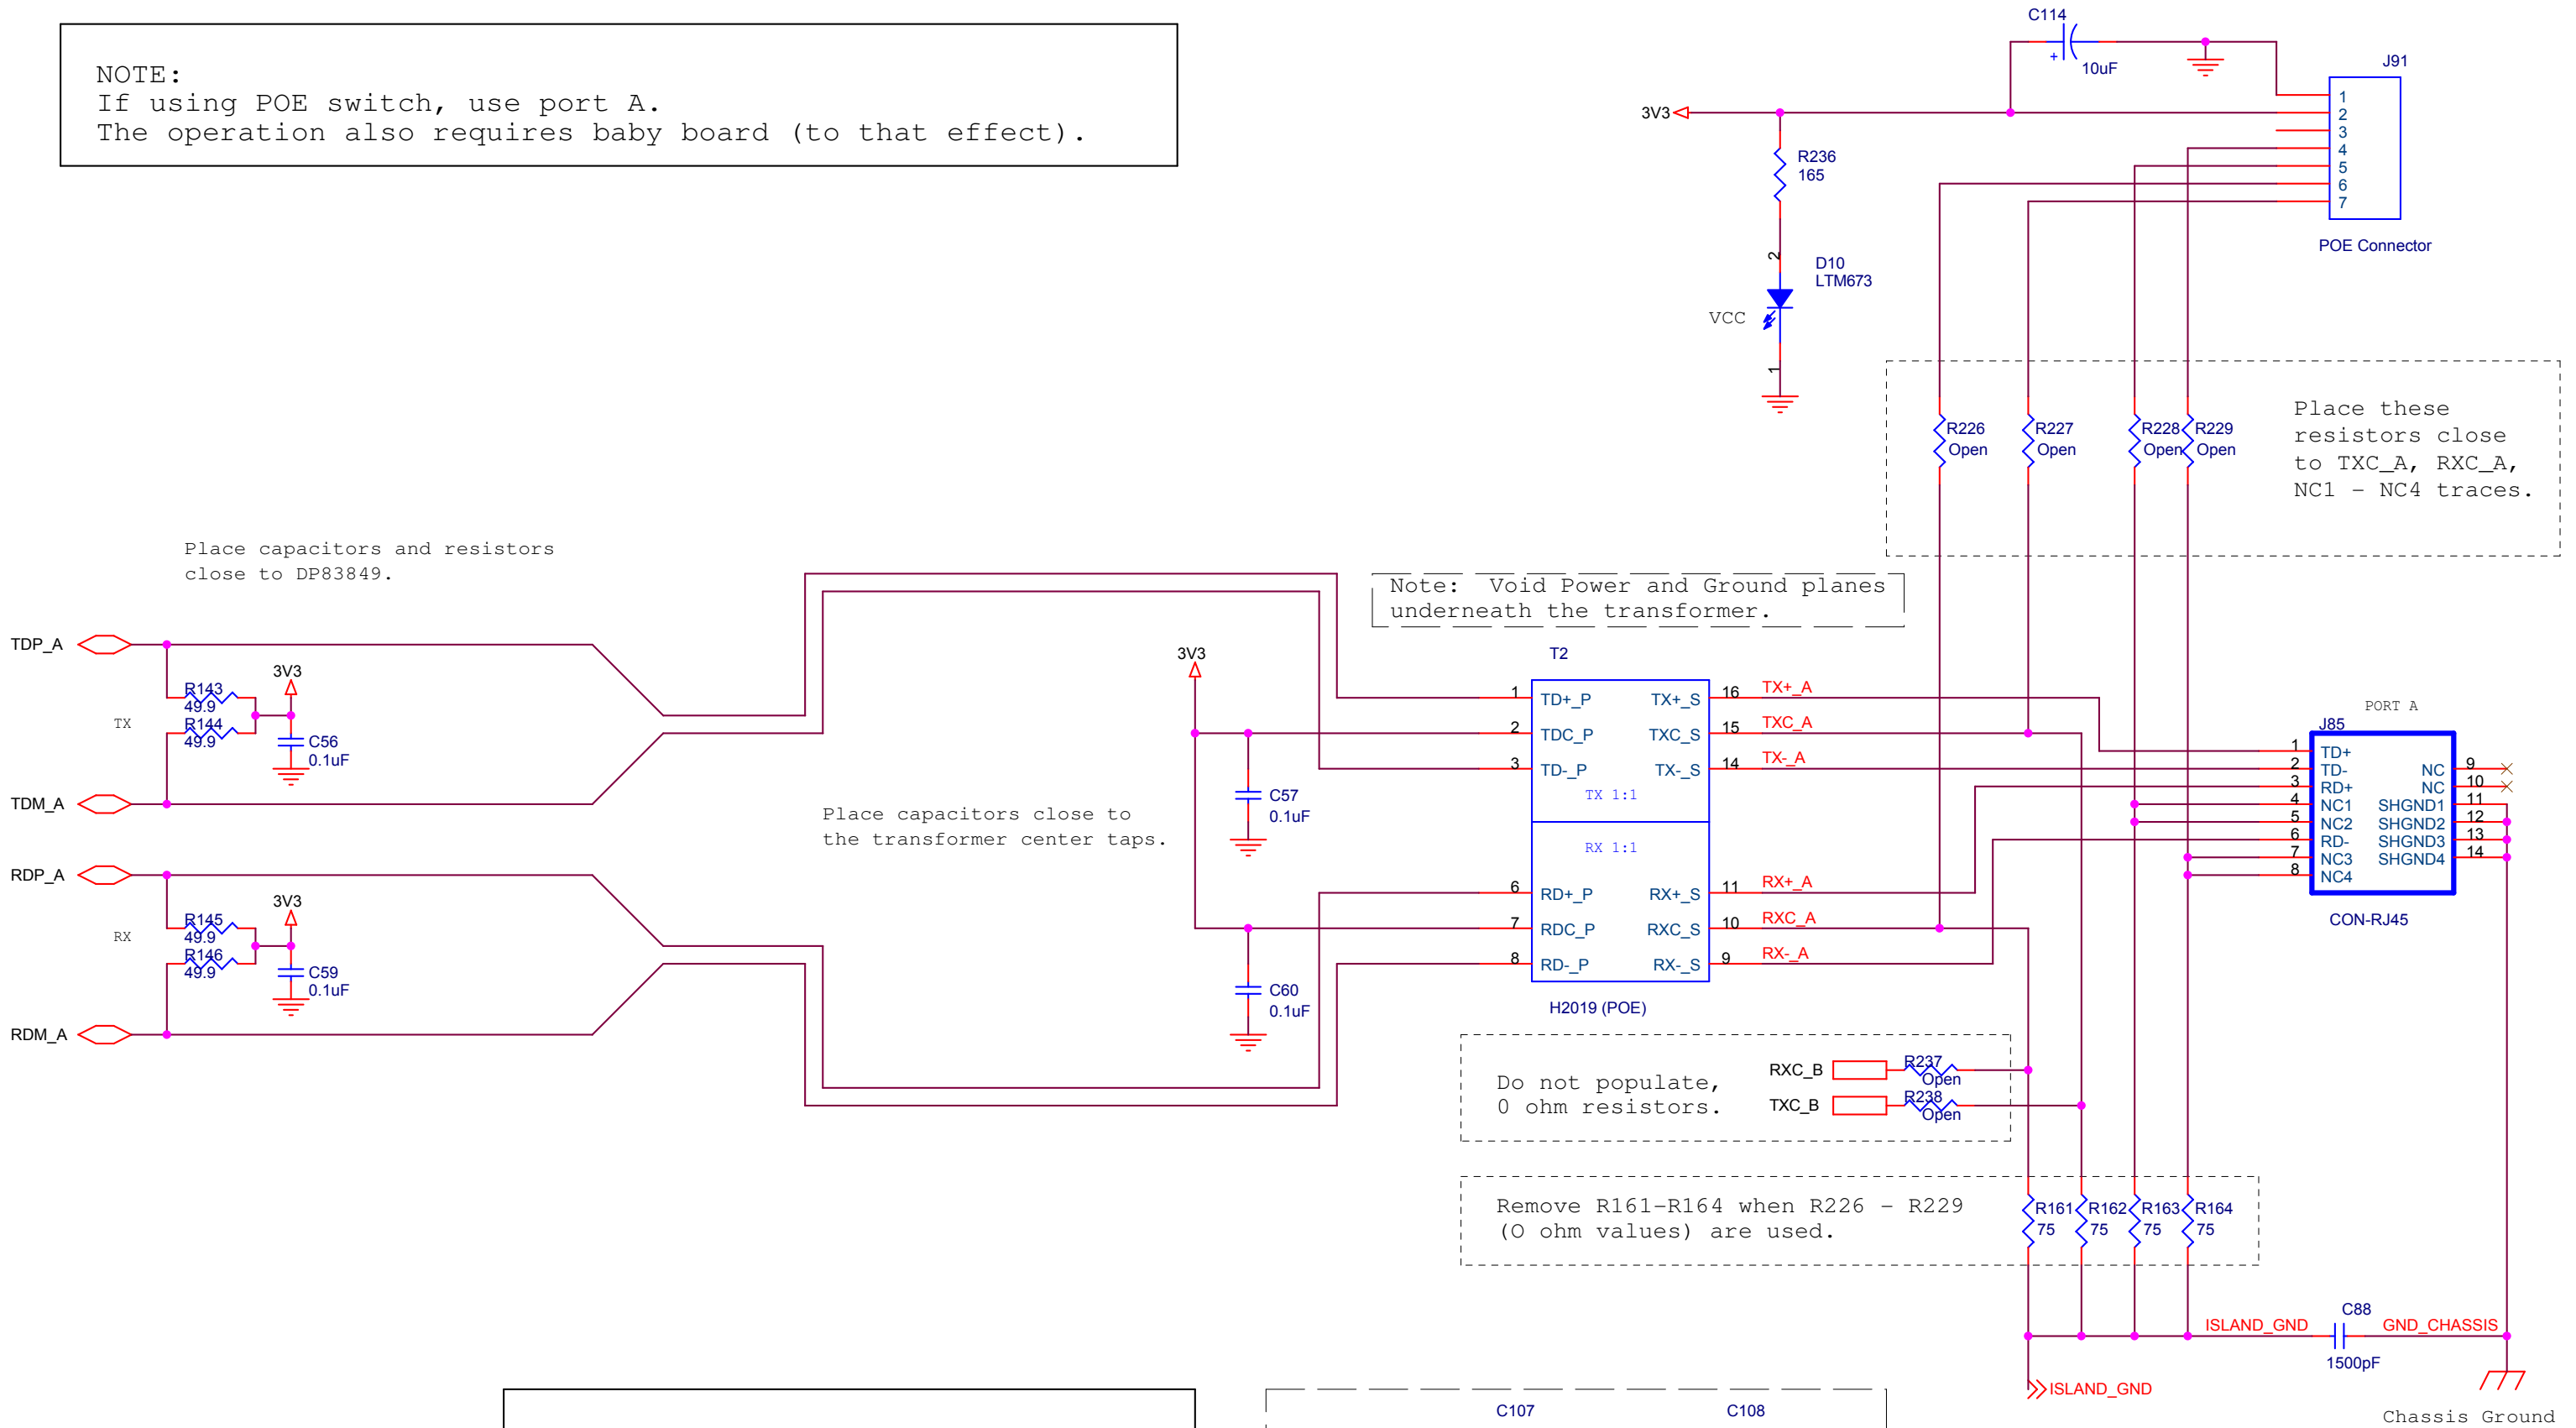


For magnetic:
- Use H1102 for normal application
- Use H2019 for POE application

Place on either side of RJ-45 connector.



NOTE:

- For fiber operation, populate all items on this page.
- For copper operation, do not populate all items on this page.

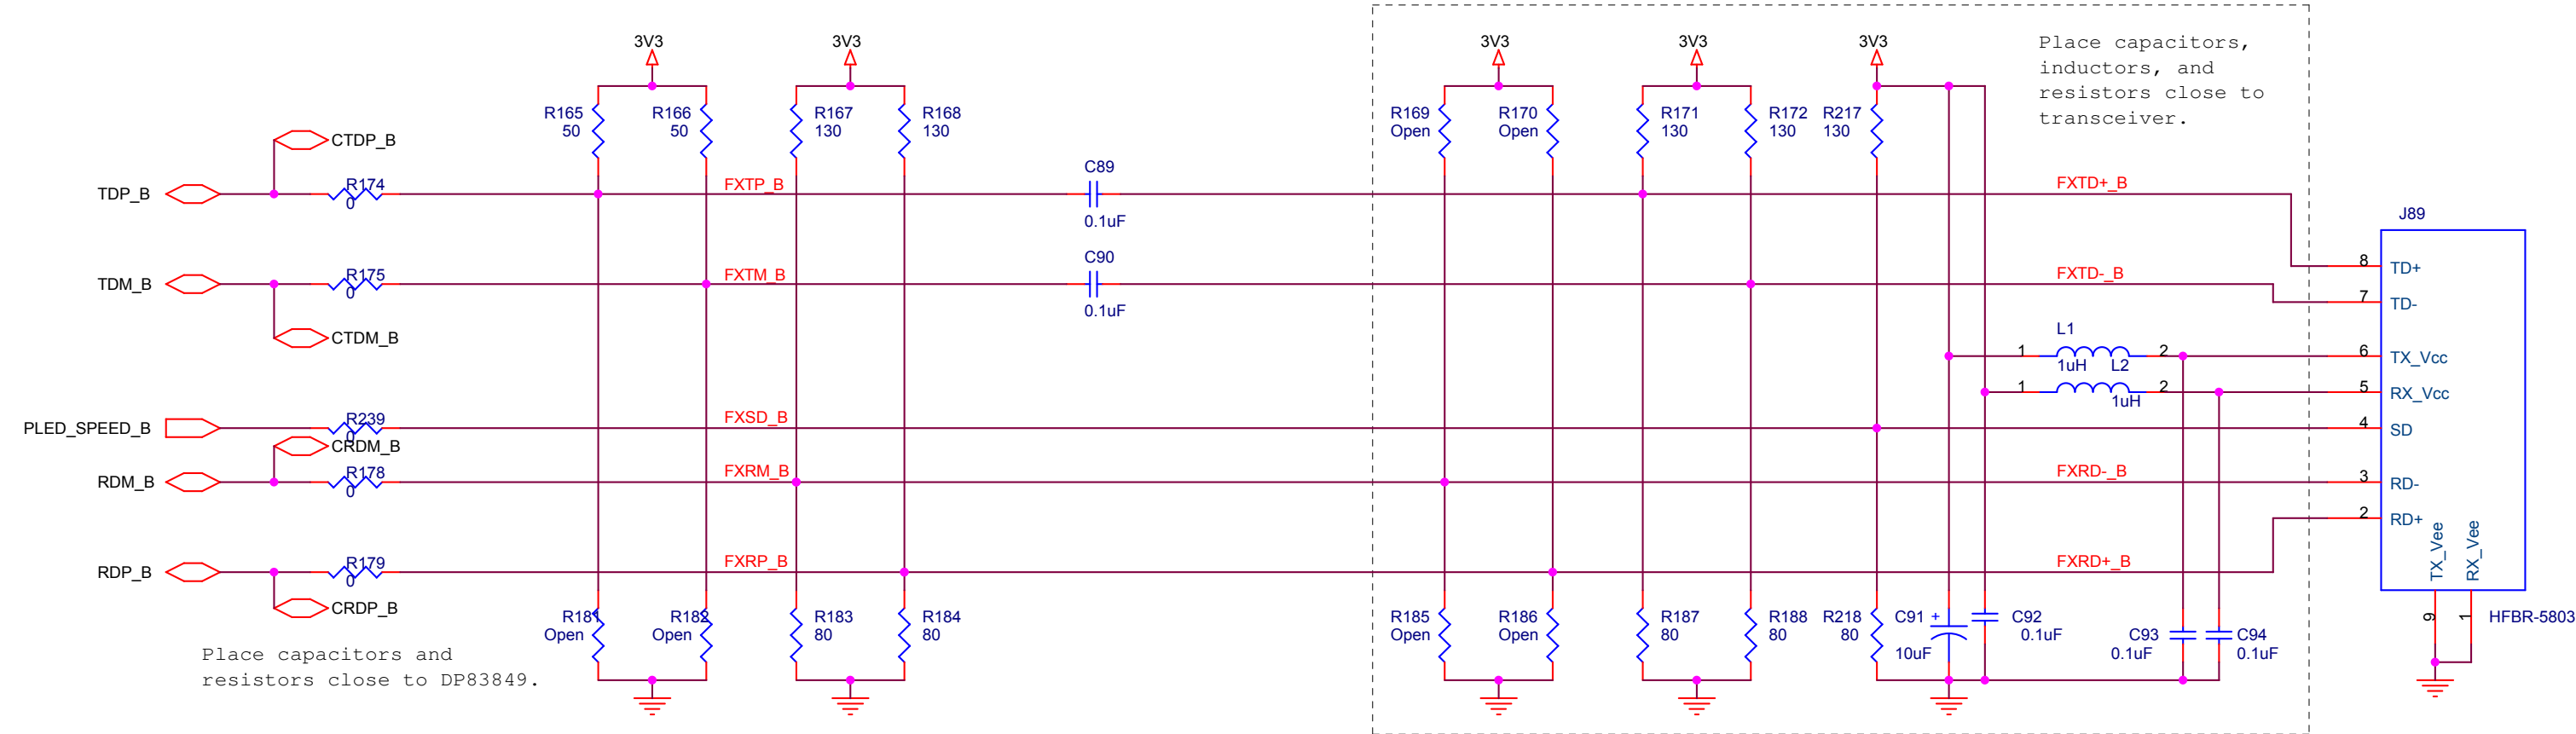

Title		
DP83849 DUAL PHYTER DEMO II (Stump Jumper) - Port B FX Page		
Size	Document Number	Rev
B	870012704-100	1.1
Date:	Thursday, December 15, 2005	Sheet 5 of 8



- For copper operation, populate all items on this page.
- For fiber operation, do not populate all items on this page.

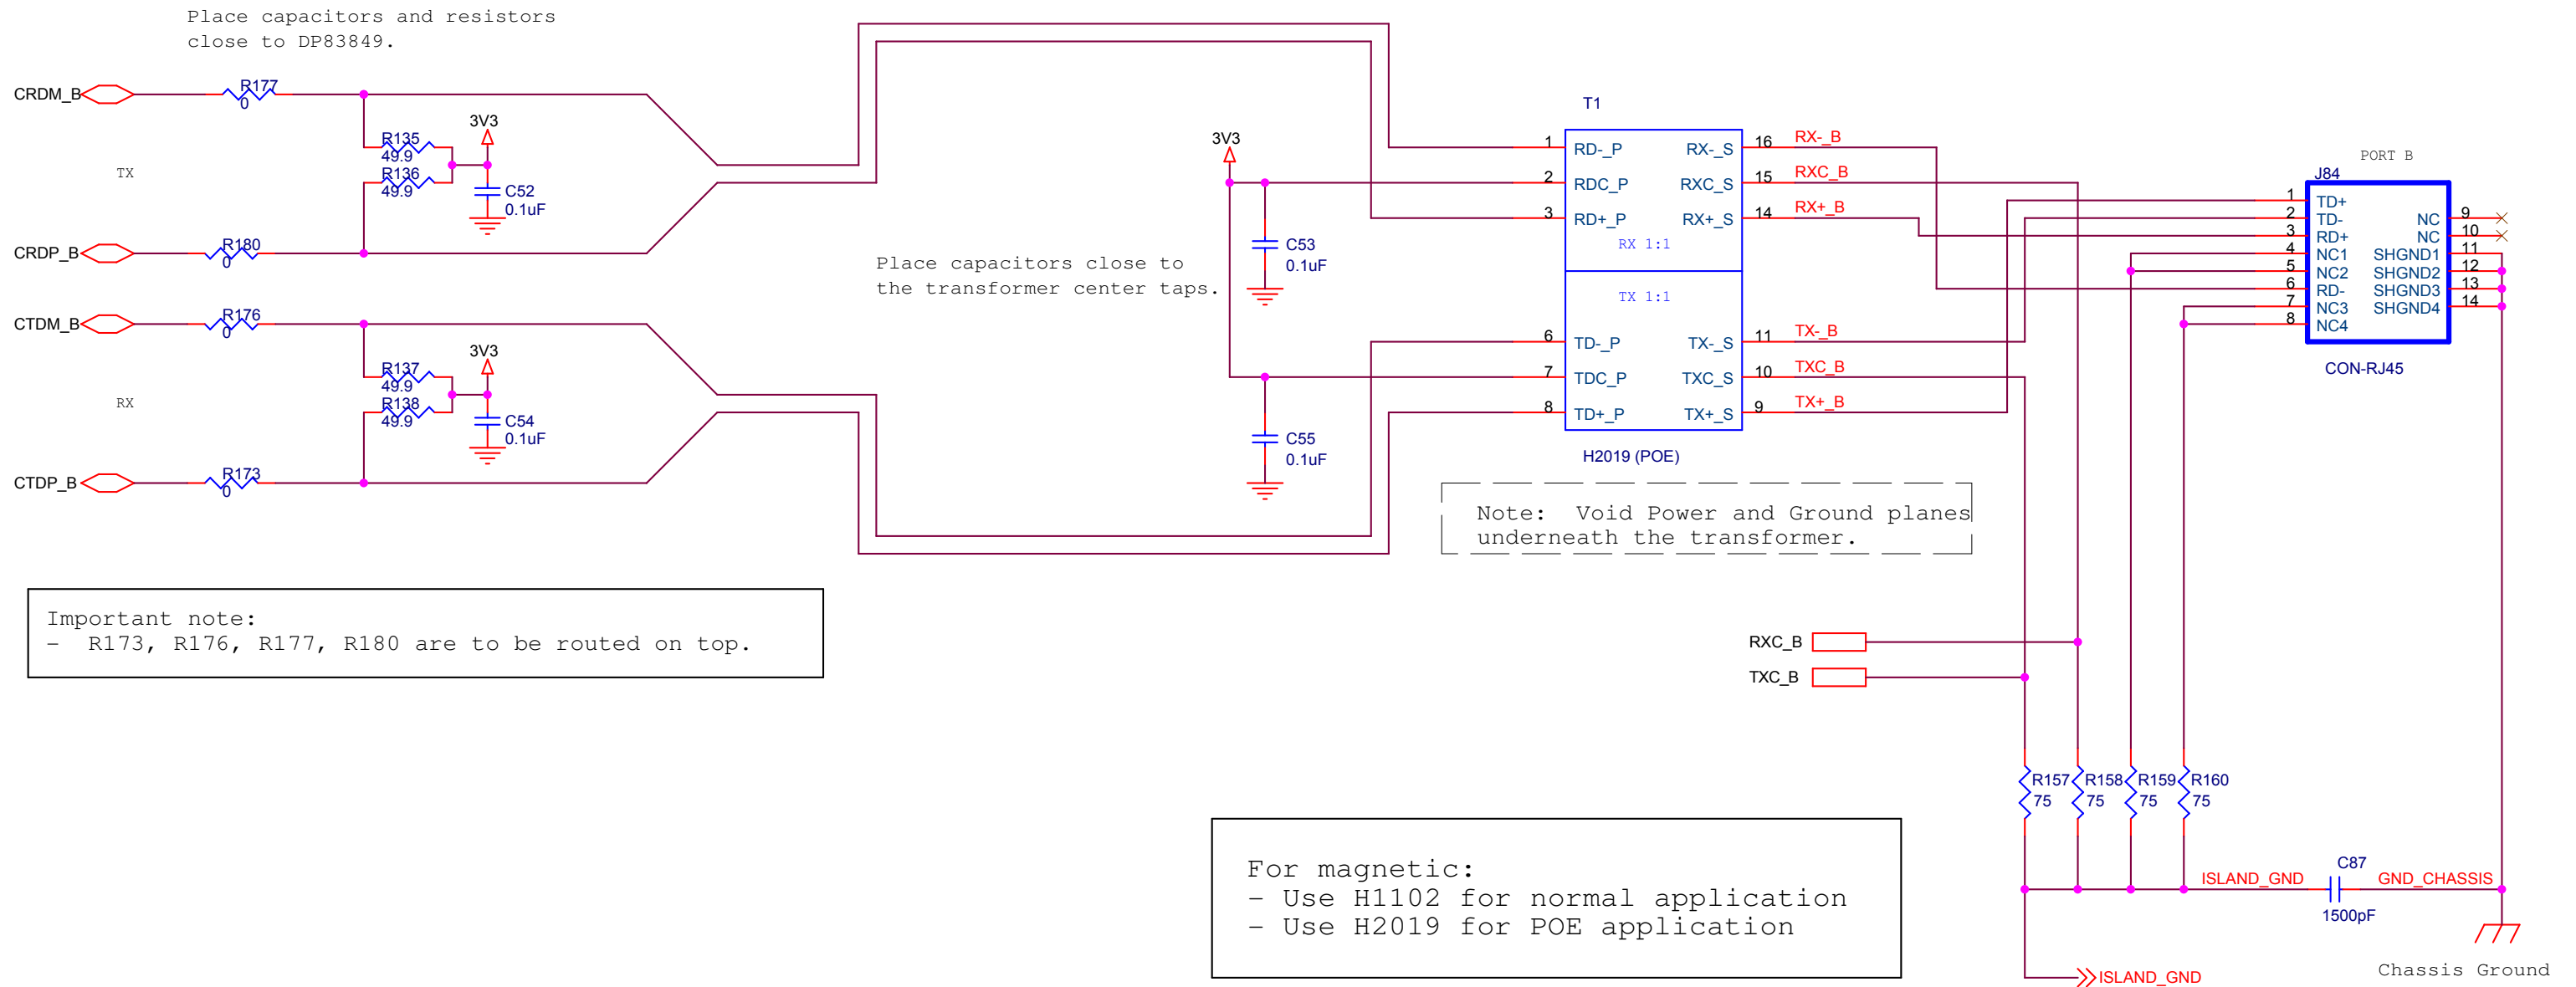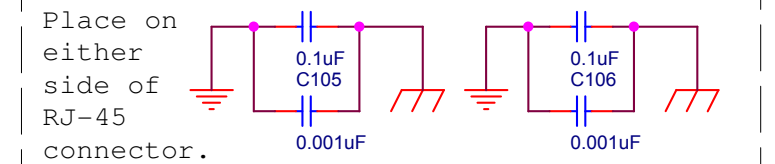

- R173, R176, R177, R180 are to be routed on top.

- Use H1102 for normal application
- Use H2019 for POE application

Title DP83849 DUAL PHYTER DEMO II (Stump Jumper) - Port B TP Page			
Size B	Document Number 870012704-100		Rev 1.1
Date:	Thursday, December 15, 2005	Sheet	6 of 8

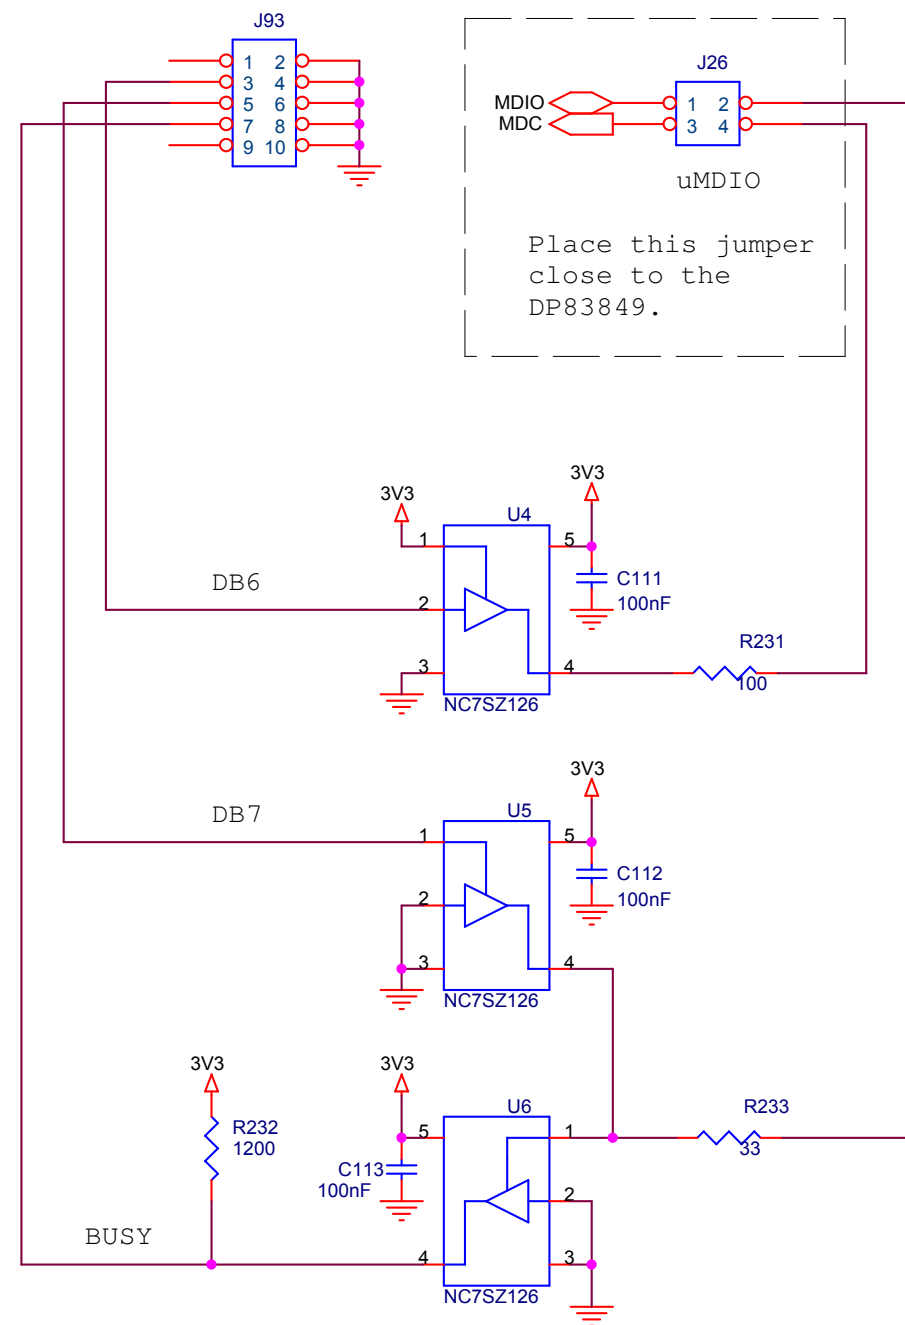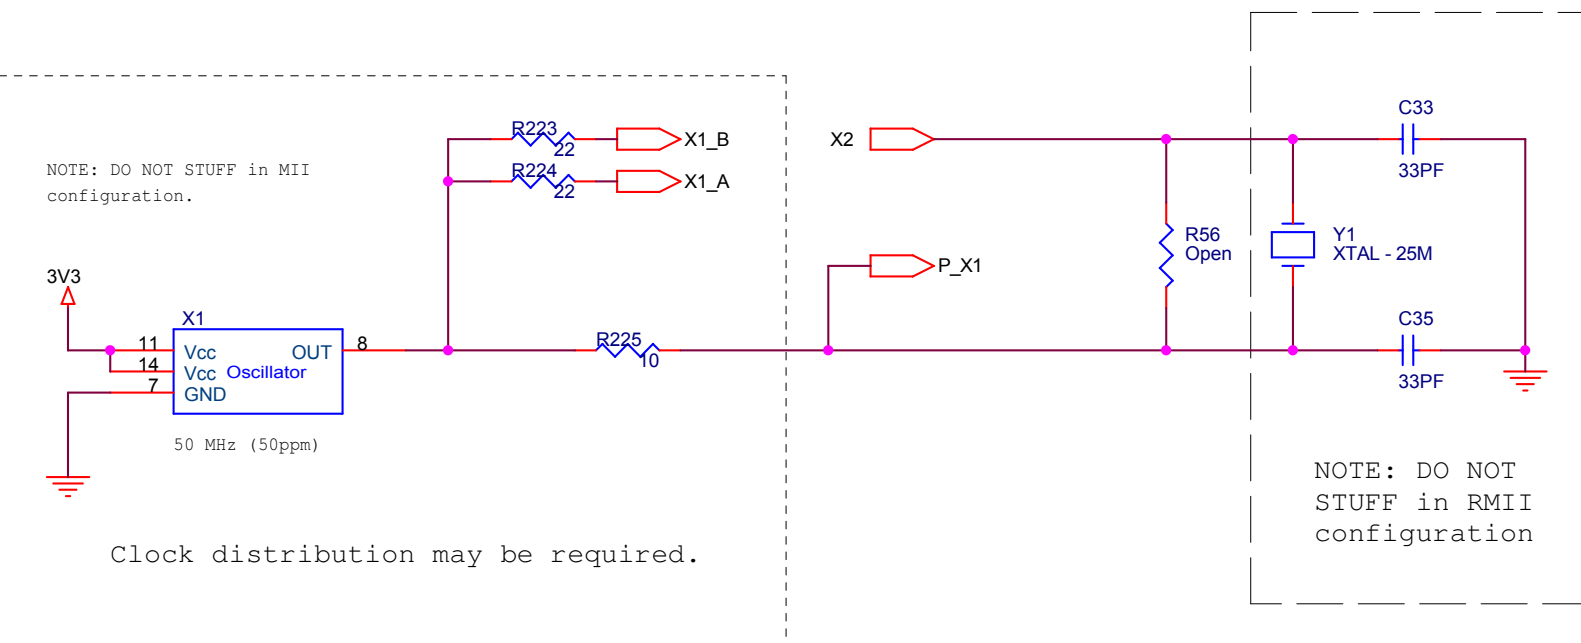

Title DP83849 DUAL PHYTER DEMO II (Stump Jumper) - Power, Clock, uMDIO Page			
Size B	Document Number 870012704-100		Rev 1.1
Date:	Thursday, December 15, 2005	Sheet	7 of 8

