











### SN54AHCT16373, SN74AHCT16373

SCLS336I - JANUARY 2000 - REVISED AUGUST 2014

# SNx4AHCT16373 16-Bit Transparent D-Type Latches With 3-State Outputs

#### 1 Features

- Members of the Texas Instruments Widebus™ Family
- EPIC<sup>™</sup> (Enhanced-Performance Implanted CMOS) Process
- Inputs are TTL-Voltage Compatible
- Distributed V<sub>CC</sub> and GND Pins Minimize High-Speed Switching Noise
- Flow-Through Architecture Optimizes PCB Layout
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Package Options Include:
  - Plastic Shrink Small-Outline (DL) Package
  - Thin Shrink Small-Outline (DGG) Package
  - Thin Very Small-Outline (DGV) Package
  - 80-mil Fine-Pitch Ceramic Flat (WD) Package Using 25-mil Center-to-Center Spacings

### 2 Applications

- Wearable Health and Fitness Devices
- Toys
- PCs and Notebooks
- Power Infrastructures
- Servers

### 3 Description


The SNxAHCT16373 devices are 16-bit transparent D-type latches with 3-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. They are particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

### **Device Information**(1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)		
	TSSOP (48)	12.50 mm × 6.10 mm		
SNx4AHC16373	TVSOP (48)	9.70 mm × 4.40 mm		
	SSOP (48)	15.88 mm × 7.49 mm		

 For all available packages, see the orderable addendum at the end of the data sheet.

## 4 Simplified Schematic



2DE 2LE 2D1 2Q1

To Seven Other Channels



## **Table of Contents**

1	Features 1	9 Detailed Description	10
2	Applications 1	9.1 Overview	10
3	Description 1	9.2 Functional Block Diagrams	10
4	Simplified Schematic 1	9.3 Feature Description	11
5	Revision History2	9.4 Device Functional Modes	11
6	Pin Configuration and Functions	10 Application and Implementation	12
7	Specifications5	10.1 Application Information	12
•	7.1 Absolute Maximum Ratings	10.2 Typical Application	12
	7.1 Absolute Maximum Ratings	11 Power Supply Recommendations	13
	7.3 Recommended Operating Conditions	12 Layout	13
	7.3 Recommended Operating Conditions	12.1 Layout Guidelines	
	7.5 Electrical Characteristics	12.2 Layout Example	
	7.6 Timing Requirements	13 Device and Documentation Support	14
	7.7 Switching Characteristics	13.1 Related Links	14
	7.8 Noise Characteristics	13.2 Trademarks	14
	7.9 Operating Characteristics	13.3 Electrostatic Discharge Caution	14
	7.10 Typical Characteristics	13.4 Glossary	
8	Parameter Measurement Information 9	14 Mechanical, Packaging, and Orderable Information	14

## **5 Revision History**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

CI	hanges from Revision H (January 2000) to Revision I	Page
•	Updated document to new TI data sheet format	1
•		
•	Added Applications.	1
•		
•	Added Handling Ratings table	5
•	Changed MAX operating temperature to 125°C in Recommended Operating Conditions table	5
•	Added Thermal Information table.	6
•	Added -40°C to 125°C for SN74AHCT16373 in Electrical Characteristics table	6
•	Added $T_A = -40$ °C to 125°C for SN74AHCT16373 in the Timing Requirements table	6
•	Added $T_A = -40$ °C to 125°C for SN74AHCT16373 in the Switching Characteristics table	7
•	Added Typical Characteristics	8
•		
•	, idada , ippination and improve a control of the c	
•	Added Power Supply Recommendations and Layout sections	13


Submit Documentation Feedback

Copyright © 2000–2014, Texas Instruments Incorporated



## 6 Pin Configuration and Functions

SN54AHCT16373 . . . WD PACKAGE SN74AHCT16373 . . . DGG, DGV, OR DL PACKAGE (TOP VIEW)

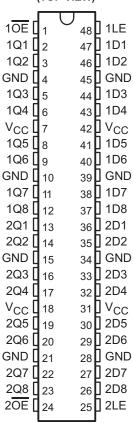

#### **Pin Functions**

ı	PIN	I/O	DESCRIPTION
NO.	NAME	1/0	DESCRIPTION
1	1 <del>OE</del>	I	Output Enable 1
2	1Q1	0	1Q1 Output
3	1Q2	0	1Q2 Output
4	GND	_	Ground Pin
5	1Q3	0	1Q3 Output
6	1Q4	0	1Q4 Output
7	V <sub>CC</sub>	_	Power Pin
8	1Q5	0	1Q5 Output
9	1Q6	0	1Q6 Output
10	GND	_	Ground Pin
11	1Q7	0	1Q7 Output
12	1Q8	0	1Q8 Output
13	2Q1	0	2Q1 Output
14	2Q2	0	2Q2 Output
15	GND	_	Ground Pin
16	2Q3	0	2Q3 Output
17	2Q4	0	2Q4 Output
18	V <sub>CC</sub>	_	Power Pin

Copyright © 2000–2014, Texas Instruments Incorporated



## Pin Functions (continued)

F	PIN		DECODINE
NO.	NAME	1/0	DESCRIPTION
19	2Q5	0	2Q5 Output
20	2Q6	0	2Q6 Output
21	GND	_	Ground Pin
22	2Q7	0	2Q7 Output
23	2Q8	0	2Q8 Output
24	2 <del>OE</del>	I	Output Enable 2
25	2LE	I	Latch Enable 2
26	2D8	I	2D8 Input
27	2D7	I	2D7 Input
28	GND	_	Ground Pin
29	2D6	I	2D6 Input
30	2D5	I	2D5 Input
31	V <sub>CC</sub>	_	Power Pin
32	2D4	I	2D4 Input
33	2D3	I	2D3 Input
34	GND	_	Ground Pin
35	2D2	I	2D2 Input
36	2D1	I	2D1 Input
37	1D8	I	1D8 Input
38	1D7	I	1D7 Input
39	GND	_	Ground Pin
40	1D6	I	1D6 Input
41	1D5	I	1D5 Input
42	V <sub>CC</sub>	_	Power Pin
43	1D4	I	1D4 Input
44	1D3	I	1D3 Input
45	GND	_	Ground Pin
46	1D2	I	1D2 Input
47	1D1	I	1D1 Input
48	1LE	I	Latch Enable 1



## 7 Specifications

### 7.1 Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	7	V
$V_{I}$	Input voltage range <sup>(2)</sup>		-0.5	7	V
Vo	Output voltage range <sup>(2)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
$I_{IK}$	Input clamp current	V <sub>I</sub> < 0		-20	mA
I <sub>OK</sub>	Output clamp current	$V_O < 0$ or $V_O > V_{CC}$		±20	mA
IO	Continuous output current	$V_O = 0$ to $V_{CC}$		±25	mA
	Continuous current through V <sub>CC</sub> or GND			±75	mA

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 Handling Ratings

			MIN	MAX	UNIT
T <sub>stg</sub>	Storage temperature rang	e	<del>-</del> 65	150	ů
V	Floatrootatio discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins (1)	0	2000	\/
V <sub>(ESD)</sub>	Electrostatic discharge	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins (2)	0	1000	V

<sup>(1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

#### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)(1)

		SN54AHCT1	6373 <sup>(2)</sup>	SN74AHCT	16373	UNIT
		MIN	MAX	MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage	4.5	5.5	4.5	5.5	V
$V_{IH}$	High-level input voltage	2		2		V
V <sub>IL</sub>	Low-level input voltage		0.8		0.8	٧
VI	Input voltage	0	5.5	0	5.5	٧
Vo	Output voltage	0	$V_{CC}$	0	$V_{CC}$	٧
I <sub>OH</sub>	High-level output current		-8		-8	mA
I <sub>OL</sub>	Low-level output current		8		8	mA
Δt/Δν	Input transition rise or fall rate		20		20	ns/V
T <sub>A</sub>	Operating free-air temperature	-55	125	-40	125	°C

All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs (SCBA004).

(2) Product Preview

Copyright © 2000–2014, Texas Instruments Incorporated

<sup>(2)</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(2)</sup> JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



#### 7.4 Thermal Information

			SN74AHCT1637	3				
	THERMAL METRIC <sup>(1)</sup>	DGG	DGV	DL	UNIT			
			48 PINS					
$R_{\theta JA}$	Junction-to-ambient thermal resistance	69.9	80.9	61.4				
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	24.2	32.8	31.4				
$R_{\theta JB}$	Junction-to-board thermal resistance	26.9	44.0	33.2	°C/W			
$\Psi_{JT}$	Junction-to-top characterization parameter	1.9	3.3	9.0	C/VV			
ΨЈВ	Junction-to-board characterization parameter	36.6	43.4	32.9				
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	n/a	n/a	n/a				

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report (SPRA953).

#### 7.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V <sub>CC</sub>	T,	<sub>\(\)</sub> = 25°C	;	SN54AHCT	16373 <sup>(1)</sup>	-40°C to SN74AHC		-40°C to 1 SN74AHCT		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
V	I <sub>OH</sub> = -50 μA	4.5 V	4.4	4.5		4.4		4.4		4.4		V
V <sub>OH</sub>	$I_{OH} = -8 \text{ mA}$	4.5 V	3.94			3.8		3.8		3.8		V
V	I <sub>OL</sub> = 50 μA	4.5 V			0.1		0.1		0.1		0.1	V
V <sub>OL</sub>	I <sub>OL</sub> = 8 mA	4.5 V			0.36		0.44		0.44		0.44	V
I <sub>1</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	0 V to 5.5 V			±0.1		±1 <sup>(2)</sup>		±1		±1	μΑ
I <sub>OZ</sub>	V <sub>O</sub> = V <sub>CC</sub> or GND	5.5 V			±0.25		±2.5		±2.5		±2.5	μA
Icc	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			4		40		40		40	μA
ΔI <sub>CC</sub> <sup>(3)</sup>	One input at 3.4 V, Other inputs at V <sub>CC</sub> or GND	5.5 V			1.35		1.5		1.5		1.5	mA
C <sub>i</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		2.5	10				10			pF
C <sub>o</sub>	$V_O = V_{CC}$ or GND	5 V		4.5								pF

### 7.6 Timing Requirements

over recommended operating free-air temperature range,  $V_{CC}$  = 5 V ± 0.5 V (unless otherwise noted) (see Figure 2)

		T <sub>A</sub> = 25	°C	SN54AHCT163	73 <sup>(1)</sup>	SN74AHCT163	73	T <sub>A</sub> = -40°C to 125°C SN74AHCT16373	UNIT
		MIN M		MIN	MAX	MIN M	AX	MIN MA	(
t <sub>w</sub>	Pulse duration, LE high	6.5		6.5		6.5		6.5	ns
t <sub>su</sub>	Setup time, data before LE↓	1.5		1.5		1.5		1.5	ns
$t_h$	Hold time, data after LE↓	3.5		3.5		3.5		3.5	ns

(1) Product Preview

On products compliant to MIL-PRF-38535, this parameter is not production tested at  $V_{CC} = 0 \text{ V}$ . This is the increase in supply current for each input at one of the specified TTL voltage levels rather than 0 V or  $V_{CC}$ .



### 7.7 Switching Characteristics

over recommended operating free-air temperature range, V<sub>CC</sub> = 5 V ± 0.5 V (unless otherwise noted) (see Figure 2)

PARAMETER	FROM	TO	LOAD	T <sub>A</sub> = 25°C SN54			SN54AHCT1	SN54AHCT16373 <sup>(1)</sup> SN74AHCT16373			SN74AHC T <sub>A</sub> = -40°C		UNIT	
	(OUTPUT)	(INPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	MIN	MAX		
t <sub>PLH</sub>	D	Q	C 45 mF		5.1 <sup>(2)</sup>	8.5 <sup>(2)</sup>	1 <sup>(2)</sup>	9.5(2)	1	9.5	1	10.5		
t <sub>PHL</sub>	D	Q	C <sub>L</sub> = 15 pF		5.1 <sup>(2)</sup>	8.5 <sup>(2)</sup>	1 <sup>(2)</sup>	9.5(2)	1	9.5	1	10.5	ns	
t <sub>PLH</sub>	- LE Q		0 45 5		5 <sup>(2)</sup>	8.5 <sup>(2)</sup>	1 (2)	9.5(2)	1	9.5	1	10.5		
t <sub>PHL</sub>		Q	C <sub>L</sub> = 15 pF		5 <sup>(2)</sup>	8.5 <sup>(2)</sup>	1 (2)	9.5(2)	1	9.5	1	10.5	ns	
t <sub>PZH</sub>	- ŌĒ Q	0 15 5		5 <sup>(2)</sup>	9.5 <sup>(2)</sup>	1 (2)	10.5(2)	1	10.5	1	11.1			
t <sub>PZL</sub>		OE	Q	C <sub>L</sub> = 15 pF		5 <sup>(2)</sup>	9.5 <sup>(2)</sup>	1 (2)	10.5(2)	1	10.5	1	11.1	ns
t <sub>PHZ</sub>	ŌĒ	<del>0</del> -	_	0 15 5		6 <sup>(2)</sup>	10.2 <sup>(2)</sup>	1 (2)	11 <sup>(2)</sup>	1	11	1	11.6	
t <sub>PLZ</sub>		Q	C <sub>L</sub> = 15 pF		6.8 <sup>(2)</sup>	10.2 <sup>(2)</sup>	1 (2)	11 <sup>(2)</sup>	1	11	1	11.6	ns	
t <sub>PLH</sub>	- D	0	0 50 - 5		5.9	9.5	1	10.5	1	10.5	1	11.5		
t <sub>PHL</sub>		Q	C <sub>L</sub> = 50 pF		5.9	9.5	1	10.5	1	10.5	1	11.5	ns	
t <sub>PLH</sub>		0	0 50 - 5		6.4	9.5	1	10.5	1	10.5	1	11.5		
t <sub>PHL</sub>	LE	Q	C <sub>L</sub> = 50 pF		5.9	9.5	1	10.5	1	10.5	1	11.5	ns	
t <sub>PZH</sub>	ŌĒ	0	0 50 - 5		6	10.5	1	11.5	1	11.5	1	12.1		
t <sub>PZL</sub>	OE	Q	C <sub>L</sub> = 50 pF		6	10.5	1	11.5	1	11.5	1	12.1	ns	
t <sub>PHZ</sub>	OF.	0	0 50 - 5		6.8	11.2	1	12	1	12	1	12.6		
t <sub>PLZ</sub>	ŌE	Q	C <sub>L</sub> = 50 pF		7.8	11.2	1	12	1	12	1	12.6	ns	
t <sub>sk(o)</sub>			C <sub>L</sub> = 50 pF			1 <sup>(3)</sup>				1		1	ns	

<sup>(1)</sup> Product Preview

### 7.8 Noise Characteristics

 $V_{CC} = 5 \text{ V}, C_L = 50 \text{ pF}, T_A = 25^{\circ}C^{(1)}$ 

	PARAMETER	SN74	UNIT		
	PARAMETER	MIN	TYP	MAX	UNIT
$V_{OL(P)}$	Quiet output, maximum dynamic V <sub>OL</sub>		0.32	0.8	V
$V_{OL(V)}$	Quiet output, minimum dynamic V <sub>OL</sub>		-0.1	-0.8	V
V <sub>OH(V)</sub>	Quiet output, minimum dynamic V <sub>OH</sub>		4.7		V
V <sub>IH(D)</sub>	High-level dynamic input voltage	2			V
$V_{IL(D)}$	Low-level dynamic input voltage			0.8	V

<sup>(1)</sup> Characteristics are for surface-mount packages only.

### 7.9 Operating Characteristics

 $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}\text{C}$ 


	PARAMETER	TEST C	CONDITIONS	TYP	UNIT
$C_{pd}$	Power dissipation capacitance	No load,	f = 1 MHz	22	pF

<sup>(2)</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

<sup>(3)</sup> On products compliant to MIL-PRF-38535, this parameter does not apply.




## 7.10 Typical Characteristics

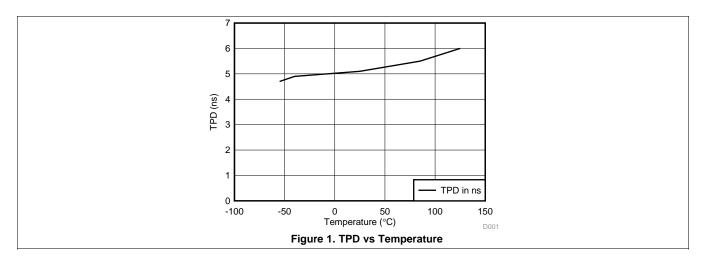



#### 8 Parameter Measurement Information

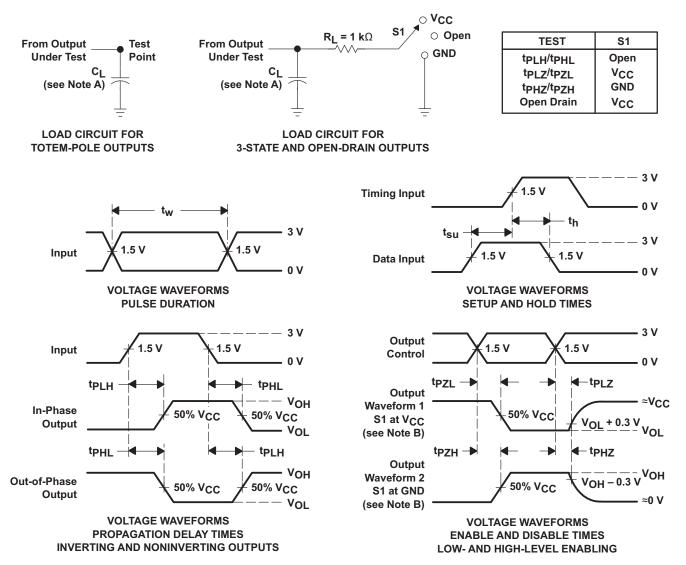

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_Q = 50 \Omega$ ,  $t_f \leq$  3 ns.  $t_f \leq$  3 ns.
- D. The outputs are measured one at a time with one input transition per measurement.

Figure 2. Load Circuit and Voltage Waveforms



#### **Detailed Description**

#### 9.1 Overview

The SNxAHCT16373 devices are 16-bit transparent D-type latches with 3-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. They are particularly suitable for implementing buffer registers, IO ports, bidirectional bus drivers, and working registers.

These devices can be used as two 8-bit latches or one 16-bit latch. When the latch-enable (LE) input is high, the Q outputs follow the data (D) inputs. When LE is taken low, the Q outputs are latched at the levels set up at the D inputs.

A buffered output-enable (OE) input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and the increased drive provide the capability to drive bus lines without need for interface or pullup components.

OE does not affect internal operations of the latch. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

#### 9.2 Functional Block Diagrams


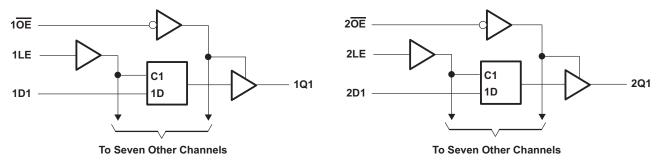


Figure 3. Logic Diagram (Positive Logic)



### **Functional Block Diagrams (continued)**

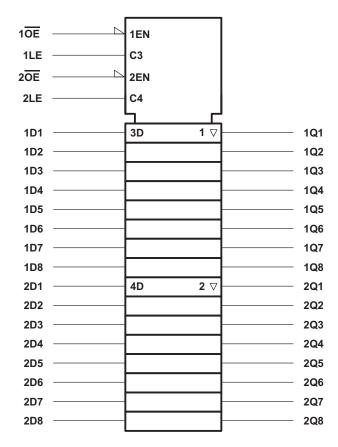

<sup>&</sup>lt;sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Figure 4. Logic Symbol

### 9.3 Feature Description

- TTL inputs
  - Lowered switching threshold allows up translation from 3.3 V to 5 V
- Slow edges reduce output ringing

### 9.4 Device Functional Modes

Table 1. Function Table (Each 8-bit Latch)

	INPUTS	OUTPUT	
ŌĒ	LE	D	Q
L	Н	Н	Н
L	Н	L	L
L	L	X	$Q_0$
Н	Χ	Χ	Z

Copyright © 2000–2014, Texas Instruments Incorporated

### 10 Application and Implementation

#### 10.1 Application Information

The SN74AHCT16373 is a low-drive CMOS device that can be used for a multitude of bus interface type applications where output ringing is a concern. The low drive and slow edge rates will minimize overshoot and undershoot on the outputs. The input switching levels have been lowered to accommodate TTL inputs of 0.8-V  $V_{IL}$  and 2-V  $V_{IH}$ . This feature makes it ideal for translating up from 3.3 V to 5 V. Figure 6 shows this type of translation.

#### 10.2 Typical Application

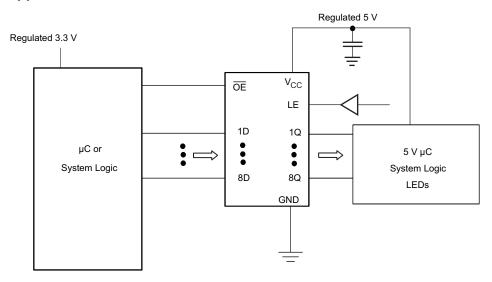


Figure 5. Typical Application Schematic

#### 10.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Care should be taken to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads so routing and load conditions should be considered to prevent ringing.


#### 10.2.2 Detailed Design Procedure

- 1. Recommended input conditions
  - Rise time and fall time specs: See (Δt/ΔV) in the Recommended Operating Conditions table.
  - Specified High and low levels: See (V<sub>IH</sub> and V<sub>IL</sub>) in the Recommended Operating Conditions table.
  - Inputs are overvoltage tolerant allowing them to go as high as 5.5 V at any valid V<sub>CC</sub>
- 2. Recommend output conditions
  - Load currents should not exceed 25 mA per output and 75 mA total for the part
  - Outputs should not be pulled above V<sub>CC</sub>



### **Typical Application (continued)**

#### 10.2.3 Application Curves

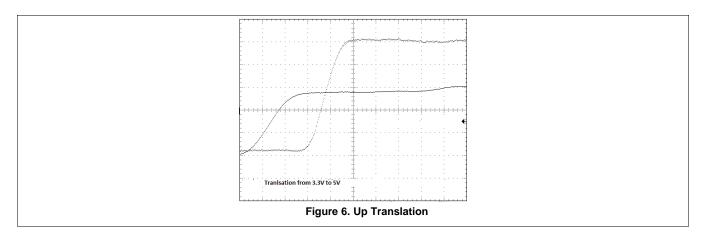

### 11 Power Supply Recommendations

The power supply can be any voltage between the MIN and MAX supply voltage rating located in the Recommended Operating Conditions table.

Each  $V_{CC}$  pin should have a good bypass capacitor to prevent power disturbance. For devices with a single supply, 0.1  $\mu F$  is recommended. If there are multiple  $V_{CC}$  pins, 0.01  $\mu F$  or 0.022  $\mu F$  is recommended for each power pin. It is acceptable to parallel multiple bypass caps to reject different frequencies of noise. A 0.1  $\mu F$  and 1  $\mu F$  are commonly used in parallel. The bypass capacitor should be installed as close to the power pin as possible for best results.

#### 12 Layout

#### 12.1 Layout Guidelines

When using multiple bit logic devices inputs should not ever float.

In many cases, functions or parts of functions of digital logic devices are unused, for example, when only two inputs of a triple-input-AND gate are used or only 3 of the 4 buffer gates are used. Such input pins should not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. Specified in Figure 7 are the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or  $V_{CC}$ ; whichever makes more sense or is more convenient. It is generally acceptable to float outputs unless the part is a transceiver.

#### 12.2 Layout Example

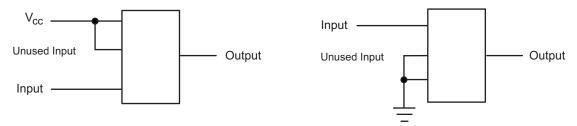


Figure 7. Layout Diagram



### 13 Device and Documentation Support

#### 13.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 2. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
SN54AHCT16373	Click here	Click here	Click here	Click here	Click here
SN74AHCT16373	Click here	Click here	Click here	Click here	Click here

#### 13.2 Trademarks

Widebus is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

#### 13.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 13.4 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

### 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking
	(1)	(2)			(3)	(4)	(5)		(6)
SN74AHCT16373DGGR	Active	Production	TSSOP (DGG)   48	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHCT16373
SN74AHCT16373DGGR.A	Active	Production	TSSOP (DGG)   48	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHCT16373
SN74AHCT16373DGVR	Active	Production	TVSOP (DGV)   48	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HF373
SN74AHCT16373DGVR.A	Active	Production	TVSOP (DGV)   48	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HF373
SN74AHCT16373DL	Obsolete	Production	SSOP (DL)   48	-	-	Call TI	Call TI	-40 to 125	AHCT16373
SN74AHCT16373DLR	Active	Production	SSOP (DL)   48	1000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHCT16373
SN74AHCT16373DLR.A	Active	Production	SSOP (DL)   48	1000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHCT16373

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



## **PACKAGE OPTION ADDENDUM**

www.ti.com 10-Nov-2025

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AHCT16373DGGR	TSSOP	DGG	48	2000	330.0	24.4	8.6	13.0	1.8	12.0	24.0	Q1
SN74AHCT16373DGVR	TVSOP	DGV	48	2000	330.0	16.4	7.1	10.2	1.6	12.0	16.0	Q1
SN74AHCT16373DLR	SSOP	DL	48	1000	330.0	32.4	11.35	16.2	3.1	16.0	32.0	Q1

www.ti.com 24-Jul-2025



### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AHCT16373DGGR	TSSOP	DGG	48	2000	356.0	356.0	45.0
SN74AHCT16373DGVR	TVSOP	DGV	48	2000	353.0	353.0	32.0
SN74AHCT16373DLR	SSOP	DL	48	1000	356.0	356.0	53.0

# DL (R-PDSO-G48)

# PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.



### DGV (R-PDSO-G\*\*)

### 24 PINS SHOWN

#### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194



SMALL OUTLINE PACKAGE



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
  4. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



### DGG (R-PDSO-G\*\*)

### PLASTIC SMALL-OUTLINE PACKAGE

#### **48 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025