SDAS227A - JUNE 1984 - REVISED JANUARY 1995

- 3-State I/O-Type Read-Back Inputs
- Bus-Structured Pinout
- Choice of True or Inverting Logic
  - SN74ALS666 . . . True Outputs
  - SN74ALS667 . . . Inverted Outputs
- Preset and Clear Inputs
- Package Options Include Plastic Small-Outline (DW) Packages and Standard Plastic (NT) 300-mil DIPs

#### description


These 8-bit D-type transparent latches are designed specifically for storing the contents of the input data bus, plus reading back the stored data onto the input data bus. In addition, they provide a 3-state buffer-type output and are easily utilized in bus-structured applications.

While the latch enable (LE) is high, the Q outputs of the SN74ALS666 follow the data (D) inputs. The  $\overline{Q}$  outputs of the SN74ALS667 provide the inverse of the data applied to its D inputs. The Q or  $\overline{Q}$  output of both devices is in the high-impedance state if either output-enable ( $\overline{OE1}$  or  $\overline{OE2}$ ) input is at a high logic level.


Read back is provided through the read-back control (OERB) input. When OERB is taken low, the data present at the output of the data latches passes back onto the input data bus. When OERB is taken high, the output of the data latches is isolated from the D inputs. OERB does not affect the internal operation of the latches; however, caution should be exercised to avoid a bus conflict.

The SN74ALS666 and SN74ALS667 are characterized for operation from 0°C to 70°C.

# SN74ALS666 . . . DW OR NT PACKAGE (TOP VIEW)




# SN74ALS667 . . . DW OR NT PACKAGE (TOP VIEW)




SDAS227A - JUNE 1984 - REVISED JANUARY 1995

### logic symbols†

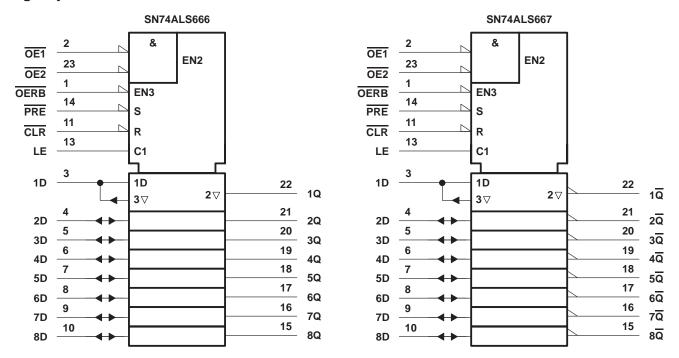


<sup>†</sup> These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

# logic diagrams (positive logic)

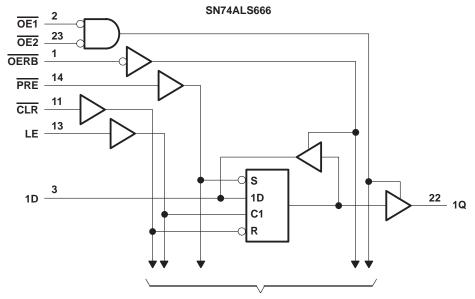


To Seven Other Channels

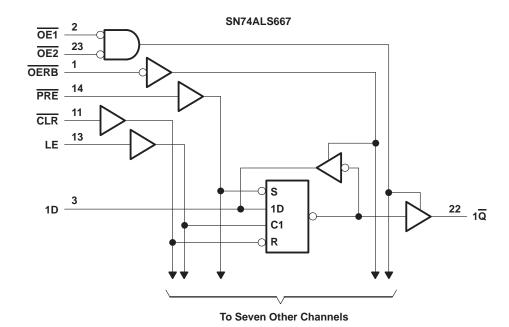

SDAS227A - JUNE 1984 - REVISED JANUARY 1995

#### timing diagram

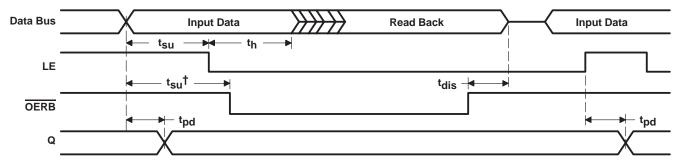

 $\overline{\text{CLR}} = \text{H}, \overline{\text{PRE}} = \text{H}, \overline{\text{OE1}} = \text{L}, \overline{\text{OE2}} = \text{L}.$ 

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

Supply voltage, V <sub>CC</sub>	7 V
Input voltage, V <sub>I</sub> (all inputs except D inputs)	7 V
Voltage applied to D inputs and to disabled 3-state outputs	5.5 V
Operating free-air temperature range, T <sub>A</sub> : SN74ALS666, SN74ALS667	0°C to 70°C
Storage temperature range	-65°C to 150°C

<sup>‡</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## recommended operating conditions

		SN SN	UNIT			
			MIN	NOM	MAX	
VCC	Supply voltage	4.5	5	5.5	V	
٧ıH	High-level input voltage		2			V
V <sub>IL</sub>	Low-level input voltage				0.8	V
1	High lovel cutout current	Q			-2.6	mA
IOH High-	High-level output current	D			-0.4	mA
	Low lovel output ourroat	Q			24	A
IOL	Low-level output current	D			8	mA
		LE high	10			
$t_W$	Pulse duration	CLR low	10			ns
		PRE low	10			
	Cotton time	Data before LE↓	10			
t <sub>SU</sub> Setu	Setup time	etup time  Data before OERB↓				ns
t <sub>h</sub>	Hold time, data after LE↓		5			ns
TA	Operating free-air temperature				70	°C

<sup>†</sup> This setup time ensures the read-back circuit does not create a conflict on the input data bus.

SDAS227A - JUNE 1984 - REVISED JANUARY 1995

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CON	TEST CONDITIONS			SN74ALS666 SN74ALS667		
٧ıK		V <sub>CC</sub> = 4.5 V,	$I_{I} = -18 \text{ mA}$			-1.2	V	
V	All outputs	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$	$I_{OH} = -0.4 \text{ mA}$	V <sub>CC</sub> -2			V	
VOH	Q or Q	$V_{CC} = 4.5 V,$	$I_{OH} = -2.6 \text{ mA}$	2.4	3.2		V	
	D inputs	V <sub>CC</sub> = 4.5 V	I <sub>OL</sub> = 4 mA		0.25	0.4		
\/ a.	Dilipuis	∨CC = 4.5 V	$I_{OL} = 8 \text{ mA}$		0.35	0.5	V	
VOL	0 0 0	V <sub>CC</sub> = 4.5 V	I <sub>OL</sub> = 12 mA		0.25	0.4	V	
	Q or Q	∨CC = 4.5 V	I <sub>OL</sub> = 24 mA		0.35	0.5		
lozh	Q or Q	$V_{CC} = 5.5 V$ ,	$V_0 = 2.7 \text{ V}$			20	μΑ	
lozL	Q or Q	$V_{CC} = 5.5 V$ ,	V <sub>O</sub> = 0.4 V			-20	μΑ	
1.	D inputs	V <sub>CC</sub> = 5.5 V	V <sub>I</sub> = 5.5 V			0.1	mA	
'	All others	vCC = 2:2 v	V <sub>I</sub> = 7 V				IIIA	
1	D inputs‡	V <sub>CC</sub> = 5.5 V,	V <sub>I</sub> = 2.7 V			20		
lН	All others	vCC = 5.5 v,	V   = 2.7 V			20	μΑ	
1	D inputs‡	D inputs <sup>‡</sup>				-0.1	m A	
II∟	All others	V <sub>CC</sub> = 5.5 V,	V <sub>I</sub> = 0.4 V		-0.		mA mA	
IO§		$V_{CC} = 5.5 V$ ,	V <sub>O</sub> = 2.25 V	-30		-112	mA	
			Q outputs high		25	50		
	SN74ALS666	SN74ALS666 $\frac{V_{CC} = 5.5 \text{ V,}}{\text{OERB high}}$	Q outputs low		40	73		
			Q outputs disabled		30	55	A	
ICC		V 55V	Q outputs high		25	50	mA	
	SN74ALS667	ALS667 $\frac{V_{CC} = 5.5 \text{ V},}{\text{OERB high}}$	Q outputs low		45	79		
			Q outputs disabled		30	60		

<sup>†</sup> All typical values are at  $V_{CC}$  = 5 V,  $T_A$  = 25°C. ‡ For I/O ports (Q<sub>A</sub> through Q<sub>H</sub>), the parameters I<sub>IH</sub> and I<sub>IL</sub> include the off-state output current.

<sup>§</sup> The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, IOS.

SDAS227A - JUNE 1984 - REVISED JANUARY 1995

### switching characteristics (see Figure 1)

PARAMETER	FROM	то	V <sub>CC</sub> = 4.5 C <sub>L</sub> = 50 pF T <sub>A</sub> = MIN to	UNIT	
	(INPUT)	(OUTPUT)	SN74A		
			MIN	MAX	
t <sub>PLH</sub>	D		3	14	ns
<sup>t</sup> PHL	ט	Q	4	18	115
t <sub>PLH</sub>	LE		6	21	ns
<sup>t</sup> PHL	LL	Q	8	27	115
<b>+</b>	CLR	Q	9	29	ns
<sup>t</sup> PHL		D	11	32	
t <sub>PLH</sub>	PRE	Q	7	22	ns
<sup>t</sup> PHL	PRE	D	9	28	115
. +	OERB	D	4	21	
t <sub>en</sub> ‡	OE1, OE2	Q	4	21	ns
48	OERB	D	1		
t <sub>dis</sub> §	OE1, OE2	Q	1	14	ns

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

# switching characteristics (see Figure 1)

PARAMETER	FROM	то	V <sub>CC</sub> = 4.5 C <sub>L</sub> = 50 pF T <sub>A</sub> = MIN to	UNIT	
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	(INPUT)	(OUTPUT)	SN74A		
			MIN	MAX	
t <sub>PLH</sub>	D	Q	6	20	ns
<sup>t</sup> PHL	U	Q	4	15	113
t <sub>PLH</sub>	LE	ā	9	28	ns
t <sub>PHL</sub>	LL	Q	7	22	
4	<del></del>	ā	7	24	
<sup>t</sup> PHL	CLR	D	8	26	ns
t <sub>PLH</sub>	PRE	Q	8	25	ns
t <sub>PHL</sub>	PRE	D	9	28	115
. +	OERB	D	4	21	
t <sub>en</sub> ‡	OE1, OE2	Q	4	21	ns
t <sub>dis</sub> §	OERB	D	1	14	20
<sup>t</sup> dis <sup>3</sup>	OE1, OE2	Q	1	14	ns

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.




 $t_{en} = t_{PZH} \text{ or } t_{PZL}$   $t_{dis} = t_{PHZ} \text{ or } t_{PLZ}$ 

 $t_{en} = t_{PZH} \text{ or } t_{PZL}$  $t_{dis} = t_{PHZ} \text{ or } t_{PLZ}$ 

**VOLTAGE WAVEFORMS** 

**ENABLE AND DISABLE TIMES, 3-STATE OUTPUTS** 

#### PARAMETER MEASUREMENT INFORMATION

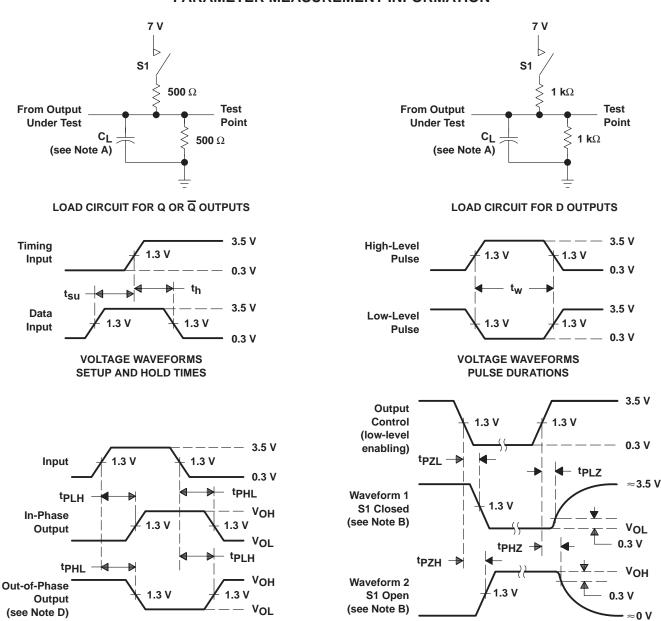

NOTES: A.  $C_L$  includes probe and jig capacitance.

**VOLTAGE WAVEFORMS** 

PROPAGATION DELAY TIMES

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses have the following characteristics: PRR  $\leq$  1 MHz,  $t_r = t_f = 2$  ns, duty cycle = 50%.
- D. When measuring propagation delay times of 3-state outputs, switch S1 is open.

Figure 1. Load Circuits and Voltage Waveforms



11-Nov-2025

www.ti.com

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
SN74ALS666DW	Active	Production	SOIC (DW)   24	25   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	ALS666
SN74ALS666DW.A	Active	Production	SOIC (DW)   24	25   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	ALS666
SN74ALS667DW	Active	Production	SOIC (DW)   24	25   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	ALS667
SN74ALS667DW.A	Active	Production	SOIC (DW)   24	25   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	ALS667

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents Tl's knowledge and belief as of the date that it is provided. Tl bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. Tl has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. Tl and Tl suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 23-May-2025

#### **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74ALS666DW	DW	SOIC	24	25	506.98	12.7	4826	6.6
SN74ALS666DW.A	DW	SOIC	24	25	506.98	12.7	4826	6.6
SN74ALS667DW	DW	SOIC	24	25	506.98	12.7	4826	6.6
SN74ALS667DW.A	DW	SOIC	24	25	506.98	12.7	4826	6.6

DW (R-PDSO-G24)

# PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AD.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025