

www.ti.com SCES632 – JUNE 2010


OCTAL EDGE-TRIGGERED D-TYPE FLIP-FLOP WITH 3-STATE OUTPUTS

Check for Samples: SN74LV374AT


FEATURES

- Inputs Are TTL-Voltage Compatible
- 4.5-V to 5.5-V V_{CC} Operation
- Typical t_{nd} of 4.9 ns at 5 V
- Typical V_{OLP} (Output Ground Bounce) <0.8 V at V_{CC} = 5 V, T_A = 25°C
- Typical V_{OHV} (Output V_{OH} Undershoot) >2.3 V at V_{CC} = 5 V, T_A = 25°C
- Support Mixed-Mode Voltage Operation on All Ports

DB, DW, NS, OR PW PACKAGE (TOP VIEW)



- I_{off} Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)



DESCRIPTION

The SN74LV374AT is an octal edge-triggered D-type flip-flop. This device features 3-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. The device is particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

On the positive transition of the clock (CLK) input, the Q outputs are set to the logic levels set up at the data (D) inputs.

A buffered output-enable (\overline{OE}) input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and the increased drive provide the capability to drive bus lines without need for interface or pullup components.

OE does not affect internal operations of the latch. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down, \overline{OE} should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

This device is fully specified for partial-power-down applications using I_{off}. The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SCES632 – JUNE 2010 www.ti.com


ORDERING INFORMATION

T _A	Р	ACKAGE	ORDERABLE PART NUMBER	TOP-SIDE MARKING	
	QFN – RGY	Reel of 1000	SN74LV374ATRGYR	VV374	
	COIC DW	Tube of 25	SN74LV374ATDW	L \ /07.4 A T	
	SOIC – DW	Reel of 2000	SN74LV374ATDWR	LV374AT	
40°C to 405°C	SOP - NS	Reel of 2000	SN74LV374ATNSR	74LV374AT	
-40°C to 125°C	SSOP - DB	Reel of 2000	SN74LV374ATDBR	LV374AT	
		Tube of 70	SN74LV374ATPW		
	TSSOP - PW	Reel of 2000	SN74LV374ATPWR	LV374AT	
		Tube of 250	SN74LV374ATPWT		

FUNCTION TABLE (EACH FLIP-FLOP)

	INPUTS								
ŌĒ	CLK	D	Q						
L	1	Н	Н						
L	↑	L	L						
L	L	X	Q_0						
Н	X	X	Z						

LOGIC DIAGRAM (POSITIVE LOGIC)

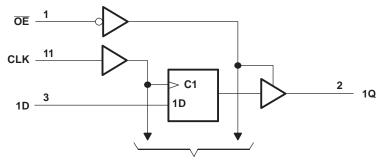

To Seven Other Channels

Submit Documentation Feedback



www.ti.com SCES632 – JUNE 2010

ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_{CC}	Supply voltage range		-0.5	7	V
VI	Input voltage range ⁽²⁾		-0.5	7	V
Vo	Voltage range applied to any output in the	high-impedance or power-off state ⁽²⁾	-0.5	7	
Vo	Output voltage range (2) (3)		-0.5	V _{CC} + 0.5	V
I _{IK}	Input clamp current	$V_I < 0$ or $V_I > V_{CC}$		±20	mA
I _{OK}	Output clamp current	$V_1 < 0$ or $V_1 > V_{CC}$ $V_0 < 0$ or $V_0 > V_{CC}$		±50	mA
Io	Continuous output current		±35	mA	
	Continuous current through V _{CC} or GND			±70	mA
		DB package (4)		70	
		DW package ⁽⁴⁾		58	
θ_{JA}	Package thermal impedance	NS package (4)		60	°C/W
		PW package ⁽⁴⁾		83	
		RGY package ⁽⁵⁾		37	
T _{stg}	Storage temperature range		-65	150	°C

⁽¹⁾ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

- (4) The package thermal impedance is calculated in accordance with JESD 51-7
- (5) The package thermal impedance is calculated in accordance with JESD 51-5.

RECOMMENDED OPERATING CONDITIONS(1)

			MIN	MAX	UNIT
V_{CC}	Supply voltage		4.5	5.5	V
V_{IH}	High-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	2		V
V_{IL}	Low-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		0.8	V
VI	Input voltage	0	5.5	V	
V	Output valtage	High or low state	0	V_{CC}	V
Vo	Output voltage	3-state	0	5.5	V
I_{OH}	High-level output current	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		-16	mA
I_{OL}	Low-level output current	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		16	mA
Δt/Δν	Input transition rise or fall rate	V _{CC} = 4.5 V to 5.5 V		20	ns/V
T _A	Operating free-air temperature		-40	125	°C

⁽¹⁾ All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

³⁾ This value is limited to 5.5 V maximum.



SCES632 – JUNE 2010 www.ti.com

ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{cc}		T _A = 25°C			T _A = -40°C to 85°C		°C 0°C	UNIT	
			MIN	TYP	MAX	MIN	MAX	MIN	MAX		
V	$I_{OH} = -50 \mu A$	4.5 V	4.4	4.5		4.4		4.4		V	
V _{OH}	$I_{OH} = -16 \text{ mA}$	4.5 V	3.8			3.8		3.8		V	
V	$I_{OL} = 50 \mu A$	4.5 V		0	0.1		0.1		0.1	V	
V _{OL}	I _{OL} = 16 mA	4.5 V			0.55		0.55		0.55	V	
I_{l}	$V_I = 5.5 \text{ V or GND}$	0 to 5.5 V			±0.1		±1		±1	μΑ	
l _{OZ}	$V_O = V_{CC}$ or GND	5.5 V			±0.25		±2.5		±2.5	μΑ	
I _{CC}	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			2		20		20	μΑ	
ΔI _{CC} ⁽¹⁾	One input at 3.4 V, Other inputs at V _{CC} or GND	5.5 V			40		50		50	μА	
I _{off}	V_I or $V_O = 0$ to 5.5 V	0			0.5		5		5	μΑ	
C _i	$V_I = V_{CC}$ or GND			4						pF	

⁽¹⁾ This is the increase in supply current for each input at one of the specified TTL voltage levels rather than 0 V or V_{CC}.

TIMING REQUIREMENTS

over recommended operating free-air temperature range, $V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$ (unless otherwise noted) (see Figure 1)

i S	1 00		•						
	LOAD	T _A = 25°C					UNIT		
	CAPACITANCE	MIN	MAX	MIN	MAX	MIN	MAX		
f _{clock} Clock frequency	$C_L = 15 pF$		90		80		70	N 41 1-	
Clock frequency	C _L = 50 pF		85		75		65	MHz	
Pulse duration, CLK high or low		6.5		8.5		8.5		ns	
Setup time, data before CLK↑		2.5		2.5		5		ns	
Hold time, data after CLK↑		2.5		2.5		2.5		ns	
	Setup time, data before CLK↑		$ \begin{array}{c} LOAD \\ CAPACITANCE \\ \hline \hline MIN \\ \hline \\ Clock \ frequency \\ \hline \\ Clock \ fre$	$ \begin{array}{c c} LOAD \\ \hline CAPACITANCE \\ \hline \hline & MIN & MAX \\ \hline \\ Clock \ frequency \\ \hline \\$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \frac{\text{LOAD}}{\text{CAPACITANCE}} \qquad \frac{T_{A} = 25^{\circ}\text{C}}{\text{MIN}} \qquad \frac{T_{A} = -40^{\circ}\text{C}}{\text{to } 85^{\circ}\text{C}} \qquad \frac{T_{A} = -40^{\circ}\text{C}}{\text{to } 125^{\circ}\text{C}} \\ \hline \frac{\text{MIN}}{\text{MAX}} \qquad \frac{\text{MAX}}{\text{MIN}} \qquad \frac{\text{MAX}}{\text{MAX}} \qquad \frac{\text{MIN}}{\text{MAX}} \qquad \frac{\text{MAX}}{\text{MIN}} \qquad \frac{\text{MAX}}{\text{MAX}} \\ \hline C_{\text{L}} = 15 \text{ pF} \qquad \qquad 90 \qquad \qquad 80 \qquad \qquad 70 \\ \hline C_{\text{L}} = 50 \text{ pF} \qquad \qquad 85 \qquad \qquad 75 \qquad \qquad 65 \\ \hline \text{Pulse duration, CLK high or low} \qquad \qquad 6.5 \qquad \qquad 8.5 \qquad \qquad 8.5 \\ \hline \text{Setup time, data before CLK} \uparrow \qquad \qquad 2.5 \qquad \qquad 2.5 \qquad \qquad 5 \\ \hline \end{tabular} $	

SWITCHING CHARACTERISTICS

over recommended operating free-air temperature range, V_{CC} = 5 V \pm 0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	TO	LOAD	T _A = 25°C			T _A = -		T _A = -40°C to 125°C		UNIT
	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	
ı.			C _L = 15 pF	90	140		80		70		N 41 1-
f_{max}			$C_{L} = 50 \text{ pF}$	85	150		75		65		MHz
t _{pd}	CLK	Q		3	4.9	8.1	1	10.5	1	11	
t _{en}	ŌĒ	Q	$C_{L} = 15 \text{ pF}$	3.2	4.6	7.6	1	11.5	1	12	ns
t _{dis}	ŌE	Q		1.7	3.4	6.8	1	8	1	9	
t _{pd}	CLK	Q		4.2	5.9	10.1	1	11.5	1	13	
t _{en}	ŌĒ	Q	C _L = 50 pF	4.5	5.5	9.6	1	12.5	1	13	
t _{dis}	ŌĒ	Q		2.4	4	8.8	1	12	1	12.5	ns
t _{sk(o)}						1		1		1	

Submit Documentation Feedback

Copyright © 2010, Texas Instruments Incorporated



www.ti.com SCES632 – JUNE 2010

NOISE CHARACTERISTICS(1)

 $V_{CC} = 5 \text{ V}, C_L = 50 \text{ pF}, T_A = 25^{\circ}\text{C}$

	PARAMETER	MIN	TYP	MAX	UNIT
V _{OL(P)}	Quiet output, maximum dynamic V _{OL}		1.3	1.6	V
V _{OL(V)}	Quiet output, minimum dynamic V _{OL}		-0.3	-1.65	V
V _{OH(V)}	Quiet output, minimum dynamic V _{OH}		4.6		V
V _{IH(D)}	High-level dynamic input voltage	2			V
$V_{IL(D)}$	Low-level dynamic input voltage			0.8	V

⁽¹⁾ Characteristics are for surface-mount packages only.

OPERATING CHARACTERISTICS

 $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}\text{C}$


	PARAMETER	TEST	TYP	UNIT		
C_{pd}	Power dissipation capacitance	Outputs enabled	$C_L = 50 \text{ pF},$	f = 10 MHz	42.5	pF

Product Folder Link(s): SN74LV374AT



SCES632 – JUNE 2010 www.ti.com

PARAMETER MEASUREMENT INFORMATION

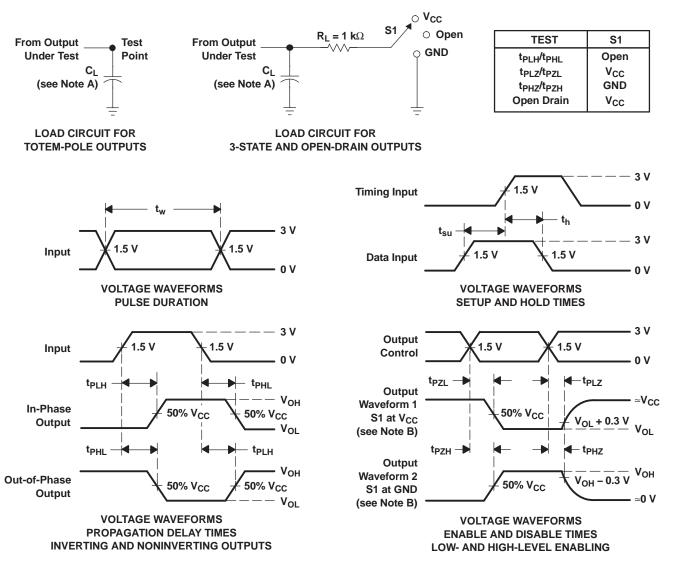

NOTES: A. C_L includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, $Z_O = 50~\Omega$, $t_r \leq$ 3 ns, $t_f \leq$ 3 ns.
- D. The outputs are measured one at a time, with one input transition per measurement.
- E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- F. t_{PZL} and t_{PZH} are the same as t_{en}.
- G. t_{PHL} and t_{PLH} are the same as t_{pd} .
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuits and Voltage Waveforms

Submit Documentation Feedback

www.ti.com 31-Oct-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
SN74LV374ATDWR	Active	Production	SOIC (DW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV374AT
SN74LV374ATDWR.A	Active	Production	SOIC (DW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV374AT
SN74LV374ATNSR	Active	Production	SOP (NS) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	74LV374AT
SN74LV374ATNSR.A	Active	Production	SOP (NS) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	74LV374AT
SN74LV374ATPWR	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV374AT
SN74LV374ATPWR.A	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV374AT

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 31-Oct-2025

PACKAGE MATERIALS INFORMATION

www.ti.com 24-Jul-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LV374ATDWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
SN74LV374ATNSR	SOP	NS	20	2000	330.0	24.4	8.4	13.0	2.5	12.0	24.0	Q1
SN74LV374ATPWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1

www.ti.com 24-Jul-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LV374ATDWR	SOIC	DW	20	2000	356.0	356.0	45.0
SN74LV374ATNSR	SOP	NS	20	2000	356.0	356.0	45.0
SN74LV374ATPWR	TSSOP	PW	20	2000	353.0	353.0	32.0



SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



MECHANICAL DATA

NS (R-PDSO-G**)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.





SOIC



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025