SCAS354J - FEBRUARY 1994 - REVISED SEPTEMBER 2003


- Supports Mixed-Mode Signal Operation (5-V Input and Output Voltages With 3.3-V V<sub>CC</sub>)
- Supports Unregulated Battery Operation Down to 2.7 V
- Typical V<sub>OLP</sub> (Output Ground Bounce)
   <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C

DB, DW, NS, OR PW PACKAGE (TOP VIEW)

		U	L
1 <del>0E</del>	1	20	] v <sub>cc</sub>
1A1	2	19	] 2 <del>OE</del>
2Y4	<b>3</b>	18	] 1Y1
1A2	4	17	] 2A4
2Y3	5	16	] 1Y2
1A3		15	] 2A3
2Y2	7	14	] 1Y3
1A4	8	13	] 2A2
2Y1	9	12	] 1Y4
GND	10	11	2A1

- I<sub>off</sub> and Power-Up 3-State Support Hot Insertion
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

#### RGY PACKAGE (TOP VIEW)



# description/ordering information

This octal buffer and line driver is designed specifically for low-voltage (3.3-V)  $V_{CC}$  operation, but with the capability to provide a TTL interface to a 5-V system environment.

The SN74LVT244B is organized as two 4-bit line drivers with separate output-enable ( $\overline{OE}$ ) inputs. When  $\overline{OE}$  is low, the device passes data from the A inputs to the Y outputs. When  $\overline{OE}$  is high, the outputs are in the high-impedance state.

#### **ORDERING INFORMATION**

T <sub>A</sub>	PACKAGE	t	ORDERABLE PART NUMBER	TOP-SIDE MARKING	
	QFN – RGY	Tape and reel	SN74LVT244BRGYR	LX244B	
	COIC DW	Tube	SN74LVT244BDW	LVTOAAD	
	SOIC – DW	Tape and reel	SN74LVT244BDWR	LVT244B	
	SOP - NS	Tape and reel	SN74LVT244BNSR	LVT244B	
-40°C to 85°C	SSOP – DB	Tape and reel	SN74LVT244BDBR	LX244B	
	TOCOD DW	Tube	SN74LVT244BPW	LVOAAB	
	TSSOP – PW	Tape and reel	SN74LVT244BPWR	LX244B	
	VFBGA – GQN	Tone and real	SN74LVT244BGQNR	LX244B	
	VFBGA – ZQN (Pb-free)	Tape and reel	SN74LVT244BZQNR	LX244B	

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.




SCAS354J - FEBRUARY 1994 - REVISED SEPTEMBER 2003

## description/ordering information (continued)

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

This device is fully specified for hot-insertion applications using Ioff and power-up 3-state. The Ioff circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down. The power-up 3-state circuitry places the outputs in the high-impedance state during power up and power down, which prevents driver conflict.

#### **GQN OR ZQN PACKAGE** (TOP VIEW)




# terminal assignments


	1	2	3	4
Α	1A1	1 <del>OE</del>	$V_{CC}$	2 <del></del> <del>O</del> E
В	1A2	2A4	2Y4	1Y1
С	1A3	2Y3	2A3	1Y2
D	1A4	2A2	2Y2	1Y3
E	GND	2Y1	2A1	1Y4

#### **FUNCTION TABLE** (each 4-bit buffer)

INP	UTS	OUTPUT
OE	Α	Υ
L	Н	Н
L	L	L
Н	Χ	Z

# logic diagram (positive logic)

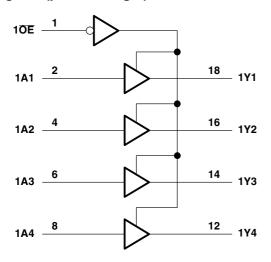

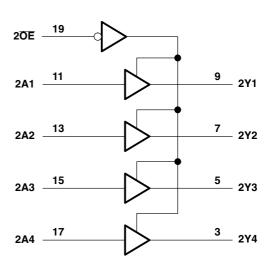

Pin numbers shown are for the DB, DW, NS, PW, and RGY packages.



SCAS354J - FEBRUARY 1994 - REVISED SEPTEMBER 2003

# absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	0.5 V to 4.6 V
Input voltage range, V <sub>I</sub> (see Note 1)	
Voltage range applied to any output in the high-impedance	
or power-off state, V <sub>O</sub> (see Note 1)	–0.5 V to 7 V
Voltage range applied to any output in the high state, V <sub>O</sub> (see Note 1)	. $-0.5 \text{ V}$ to $V_{CC} + 0.5 \text{ V}$
Current into any output in the low state, I <sub>O</sub>	128 mA
Current into any output in the high state, I <sub>O</sub> (see Note 2)	64 mA
Input clamp current, $I_{IK}$ ( $V_I < 0$ )	–50 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0)	–50 mA
Package thermal impedance, $\theta_{JA}$ (see Note 3): DB package	70°C/W
(see Note 3): DW package	58°C/W
(see Note 3): GQN/ZQN package	78°C/W
(see Note 3): NS package	60°C/W
(see Note 3): PW package	83°C/W
(see Note 4): RGY package	37°C/W
Storage temperature range, T <sub>stg</sub>	–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

- 2. This current flows only when the output is in the high state and  $V_O > V_{CC}$ .
- 3. The package thermal impedance is calculated in accordance with JESD 51-7.
- 4. The package thermal impedance is calculated in accordance with JESD 51-5.

## recommended operating conditions (see Note 5)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage		2.7	3.6	V
V <sub>IH</sub>	High-level input voltage		2		V
$V_{IL}$	Low-level input voltage			8.0	V
VI	Input voltage			5.5	V
I <sub>OH</sub>	High-level output current			-32	mA
I <sub>OL</sub>	Low-level output current			64	mA
Δt/Δν	Input transition rise or fall rate	Outputs enabled		10	ns/V
$\Delta t/\Delta V_{CC}$	Power-up ramp rate		200		μs/V
T <sub>A</sub>	Operating free-air temperature		-40	85	°C

NOTE 5: All unused inputs of the device must at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.



# SN74LVT244B 3.3-V ABT OCTAL BUFFER/DRIVER WITH 3-STATE OUTPUTS

SCAS354J - FEBRUARY 1994 - REVISED SEPTEMBER 2003

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER	TES	CONDITIONS	MIN	TYP†	MAX	UNIT	
$V_{IK}$		$V_{CC} = 2.7 V$ ,	I <sub>I</sub> = −18 mA			-1.2	V	
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V},$	I <sub>OH</sub> = -100 μA	V <sub>CC</sub> -0.2				
$V_{OH}$		$V_{CC} = 2.7 V$ ,	$I_{OH} = -8 \text{ mA}$	2.4			V	
		$V_{CC} = 3 V$ ,	$I_{OH} = -32 \text{ mA}$	2				
		V 0.7.V	$I_{OL} = 100 \mu\text{A}$			0.2		
		$V_{CC} = 2.7 \text{ V}$	$I_{OL} = 24 \text{ mA}$			0.5		
$V_{OL}$			I <sub>OL</sub> = 16 mA			0.4	V	
		$V_{CC} = 3 V$	$I_{OL} = 32 \text{ mA}$			0.5		
			$I_{OL} = 64 \text{ mA}$			0.55		
	O and well in months	$V_{CC} = 0 \text{ or } 3.6 \text{ V},$	V <sub>I</sub> = 5.5 V			10		
١.	Control inputs	$V_{CC} = 3.6 \text{ V},$						
tı	Data immuta	V -26V	$V_I = V_{CC}$			1	μΑ	
	Data inputs	$V_{CC} = 3.6 \text{ V}$	V <sub>I</sub> = 0		-5			
I <sub>off</sub>		$V_{CC} = 0$ ,	$V_I$ or $V_O = 0$ to 4.5 $V$			±100	μΑ	
I <sub>OZH</sub>		$V_{CC} = 3.6 \text{ V},$	V <sub>O</sub> = 3 V			5	μΑ	
I <sub>OZL</sub>		$V_{CC} = 3.6 \text{ V},$	V <sub>O</sub> = 0.5 V			-5	μΑ	
I <sub>OZPU</sub>		$V_{CC} = 0 \text{ to } 1.5 \text{ V}, V_{O} = 0.5 \text{ V}$	to 3 V, $\overline{OE}$ = don't care			±100	μΑ	
I <sub>OZPD</sub>		$V_{CC} = 1.5 \text{ V to } 0, V_{O} = 0.5 \text{ V}$	to 3 V, OE = don't care			±100	μΑ	
		V <sub>CC</sub> = 3.6 V,	Outputs high			0.19		
I <sub>CC</sub>		$I_{O}=0$ ,	Outputs low			5	mA	
		$V_I = V_{CC}$ or GND	Outputs disabled			0.19		
Δl <sub>CC</sub> ‡		V <sub>CC</sub> = 3 V to 3.6 V, One inpu Other inputs at V <sub>CC</sub> or GND	t at V <sub>CC</sub> – 0.6 V,			0.2	mA	
C <sub>i</sub>		V <sub>I</sub> = 3 V or 0			4		pF	
Co		V <sub>O</sub> = 3 V or 0			7		pF	

 $<sup>^{\</sup>dagger}$  All typical values are at  $V_{CC}$  = 3.3 V,  $T_{A}$  = 25°C.

# switching characteristics over recommended operating free-air temperature range, $C_L = 50$ pF (unless otherwise noted) (see Figure 1)


PARAMETER	FROM	TO	$V_{CC}$ = 3.3 V $\pm$ 0.3 V			V <sub>CC</sub> = 2.7 V		UNIT
	(INPUT)	(OUTPUT)	MIN	TYP†	MAX	MIN	MAX	
t <sub>PLH</sub>		V	1.1	2.3	3.5		3.8	
t <sub>PHL</sub>	A	Y	1.3	2.1	3.3		3.6	ns
t <sub>PZH</sub>	OF.	V	1.1	2.5	4.5		5.3	
t <sub>PZL</sub>	ŌĒ	Y	1.4	2.7	4.4		4.9	ns
t <sub>PHZ</sub>	OF.	V	1.9	2.8	4.4		4.5	
t <sub>PLZ</sub>	ŌĒ	Y	1.8	2.9	4.4		4.4	ns

<sup>&</sup>lt;sup>†</sup> All typical values are at  $V_{CC} = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .



<sup>&</sup>lt;sup>‡</sup> This is the increase in supply current for each input that is at the specified TTL voltage level, rather than V<sub>CC</sub> or GND.

#### PARAMETER MEASUREMENT INFORMATION

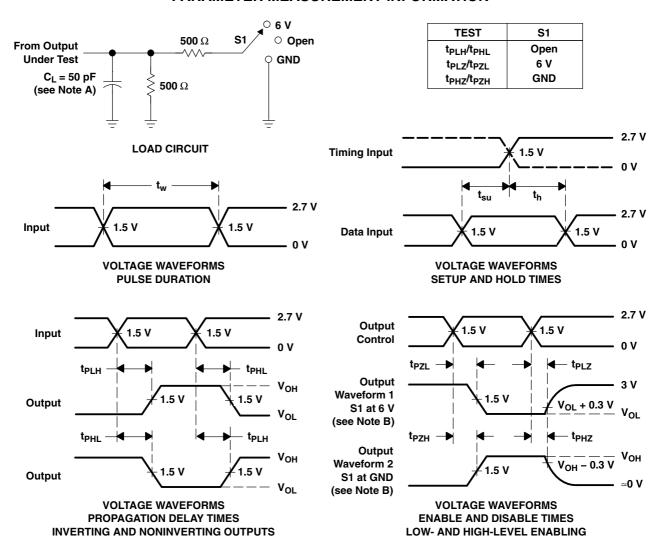

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O$  = 50  $\Omega$ ,  $t_r \leq$  2.5 ns,  $t_f \leq$  2.5 ns.
- D. The outputs are measured one at a time with one transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms

www.ti.com

11-Nov-2025

### **PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
SN74LVT244BDBR	Active	Production	SSOP (DB)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BDBR.B	Active	Production	SSOP (DB)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BDBRG4	Active	Production	SSOP (DB)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BDBRG4.B	Active	Production	SSOP (DB)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BDW	Active	Production	SOIC (DW)   20	25   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BDW.B	Active	Production	SOIC (DW)   20	25   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BDWG4	Active	Production	SOIC (DW)   20	25   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BDWR	Active	Production	SOIC (DW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BDWR.B	Active	Production	SOIC (DW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BDWRE4	Active	Production	SOIC (DW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BNSR	Active	Production	SOP (NS)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BNSR.B	Active	Production	SOP (NS)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVT244B
SN74LVT244BPW	Active	Production	TSSOP (PW)   20	70   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BPW.B	Active	Production	TSSOP (PW)   20	70   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BPWE4	Active	Production	TSSOP (PW)   20	70   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BPWG4	Active	Production	TSSOP (PW)   20	70   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BPWR	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BPWR.B	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BPWRE4	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BPWRG4	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LX244B
SN74LVT244BRGYR	Active	Production	VQFN (RGY)   20	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	LX244B
SN74LVT244BRGYR.B	Active	Production	VQFN (RGY)   20	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	LX244B
SN74LVT244BRGYRG4	Active	Production	VQFN (RGY)   20	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	LX244B
SN74LVT244BRGYRG4.B	Active	Production	VQFN (RGY)   20	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	LX244B

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

# **PACKAGE OPTION ADDENDUM**

www.ti.com 11-Nov-2025

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVT244BDBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74LVT244BDBRG4	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74LVT244BDWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
SN74LVT244BNSR	SOP	NS	20	2000	330.0	24.4	8.4	13.0	2.5	12.0	24.0	Q1
SN74LVT244BPWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN74LVT244BRGYR	VQFN	RGY	20	3000	330.0	12.4	3.71	4.71	1.1	8.0	12.0	Q1
SN74LVT244BRGYRG4	VQFN	RGY	20	3000	330.0	12.4	3.71	4.71	1.1	8.0	12.0	Q1



www.ti.com 24-Jul-2025



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LVT244BDBR	SSOP	DB	20	2000	353.0	353.0	32.0
SN74LVT244BDBRG4	SSOP	DB	20	2000	353.0	353.0	32.0
SN74LVT244BDWR	SOIC	DW	20	2000	356.0	356.0	45.0
SN74LVT244BNSR	SOP	NS	20	2000	356.0	356.0	45.0
SN74LVT244BPWR	TSSOP	PW	20	2000	353.0	353.0	32.0
SN74LVT244BRGYR	VQFN	RGY	20	3000	353.0	353.0	32.0
SN74LVT244BRGYRG4	VQFN	RGY	20	3000	353.0	353.0	32.0

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

## **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74LVT244BDW	DW	SOIC	20	25	507	12.83	5080	6.6
SN74LVT244BDW.B	DW	SOIC	20	25	507	12.83	5080	6.6
SN74LVT244BDWG4	DW	SOIC	20	25	507	12.83	5080	6.6
SN74LVT244BPW	PW	TSSOP	20	70	530	10.2	3600	3.5
SN74LVT244BPW.B	PW	TSSOP	20	70	530	10.2	3600	3.5
SN74LVT244BPWE4	PW	TSSOP	20	70	530	10.2	3600	3.5
SN74LVT244BPWG4	PW	TSSOP	20	70	530	10.2	3600	3.5





- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-150.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# **MECHANICAL DATA**

# NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

## PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



3.5 x 4.5, 0.5 mm pitch

PLASTIC QUAD FGLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.





PLASTIC QUAD FLATPACK - NO LEAD



- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
  2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.





SOIC



- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025